
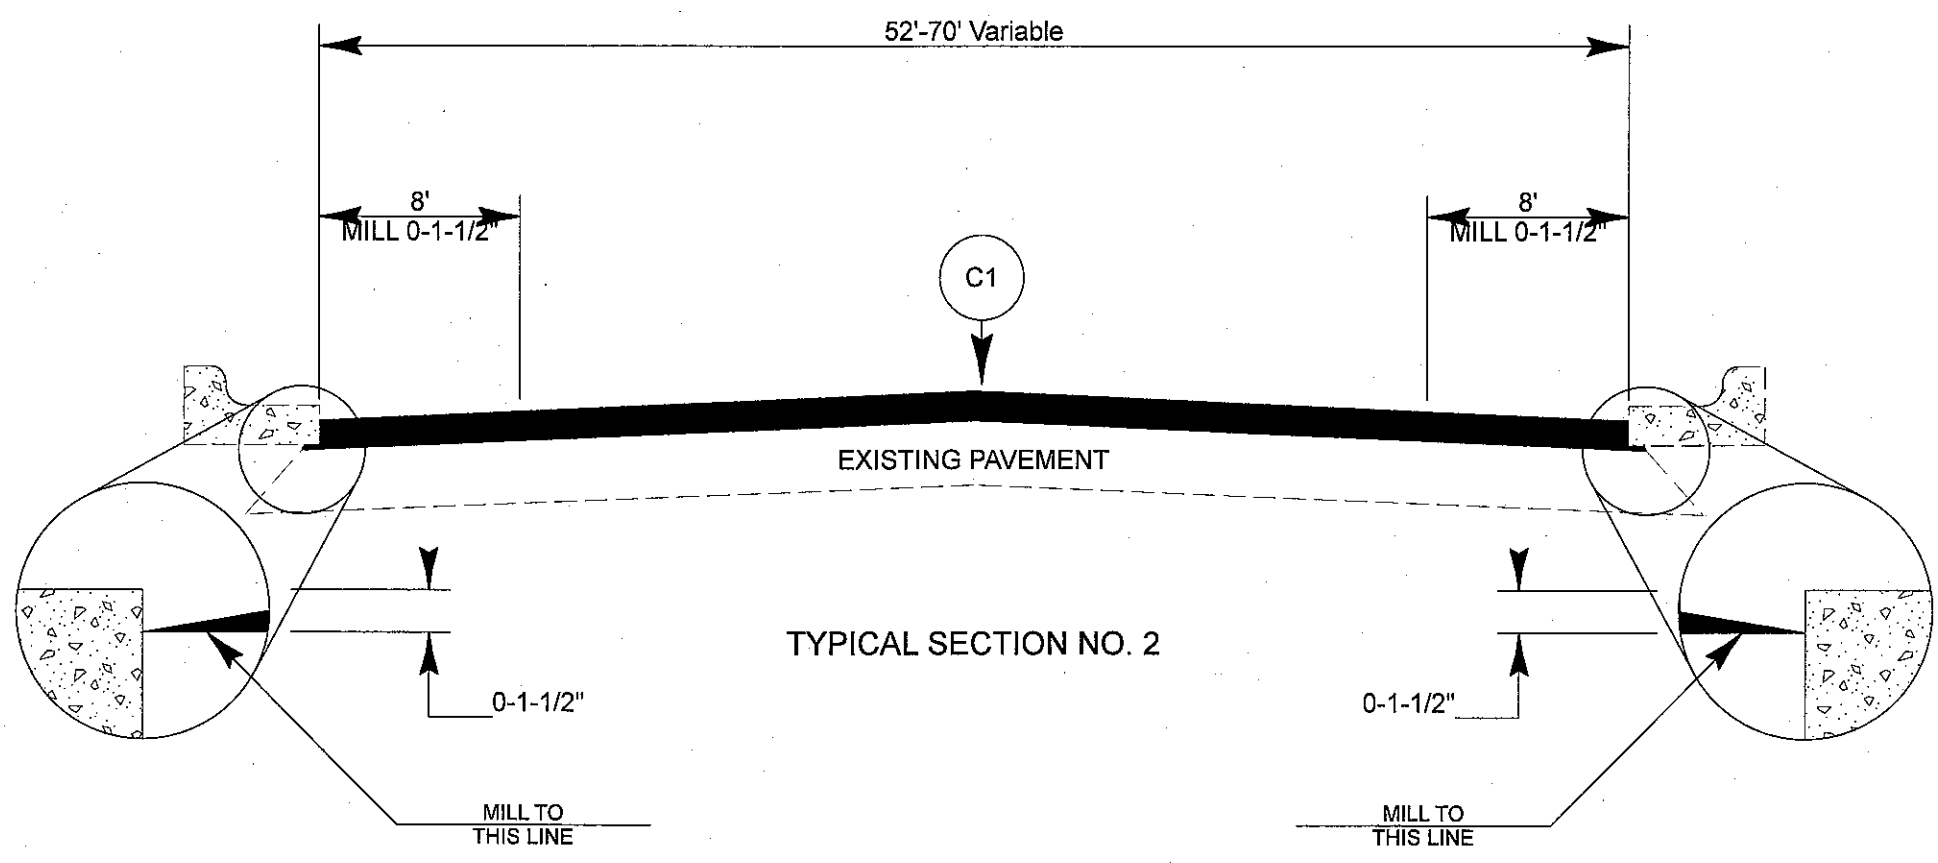


TYPICAL SECTION NO. 1

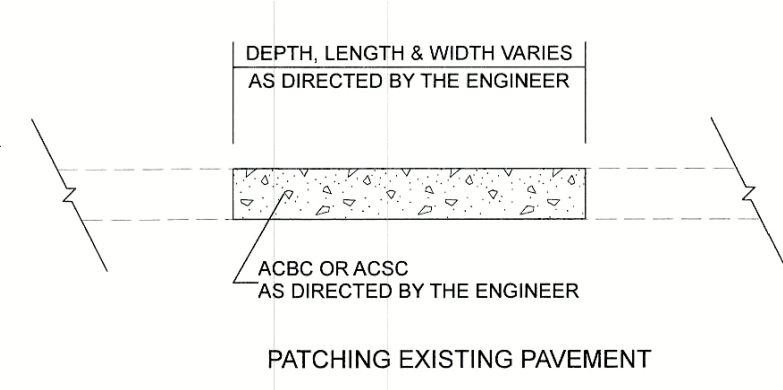

TYPICAL SECTION NO. 2

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
C2	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YARD
C3	PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YARD
F1	ASPHALT SURFACE TREATMENT, DOUBLE SEAL
F2	ASPHALT SURFACE TREATMENT, FOG SEAL
T1	SHOULDER RECONSTRUCTION
V1	MILLING ASPHALT PAVEMENT, 0 TO 1-1/2" DEPTH
V2	MILLING ASPHALT PAVEMENT, 1-1/2" DEPTH TO BE USED ON BRIDGE DECKS ONLY. SEE BRIDGE MILLING DETAIL SHEET FOR SPECIFICS
V3	INCIDENTAL MILLING
V4	MILLING ASPHALT PAVEMENT, 0 TO 1" DEPTH
Y1	LATEX MODIFIED MICRO-SURFACING, TYPE III
Y2	SEALING EXISTING PAVEMENT CRACKS