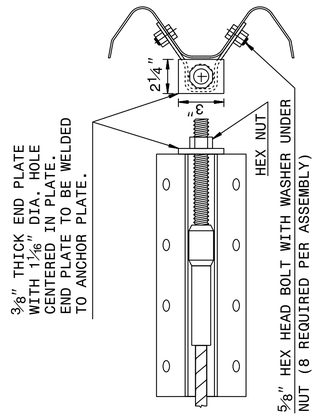

⅜" THICK END PLATE WITH 1⅛" DIA. HOLE CENTERED IN PLATE. END PLATE TO BE WELDED TO ANCHOR PLATE.

⅝" HEX HEAD BOLT WITH WASHER UNDER NUT (8 REQUIRED PER ASSEMBLY)

ANCHOR PLATE ASSEMBLY



SWAGED CABLE





⅜" THICK GALV. STEEL PLATE

ANCHOR PLATE

CABLE ASSEMBLY

SYSTEM PARTS



BREAKAWAY TERMINAL POST SLEEVE



DETAIL OF STANDARD WASHER

STANDARD WASHER: TYPICAL USE UNDER NUT WITH WOOD POST



DETAIL OF STANDARD HEX BOLT AND NUT



BEARING PLATE

⅝" THICK PLATE



SOIL PLATE

¼" THICK PLATE





DETAIL OF BUTTON HEAD BOLT AND NUT

SYSTEM PARTS - GENERAL USE

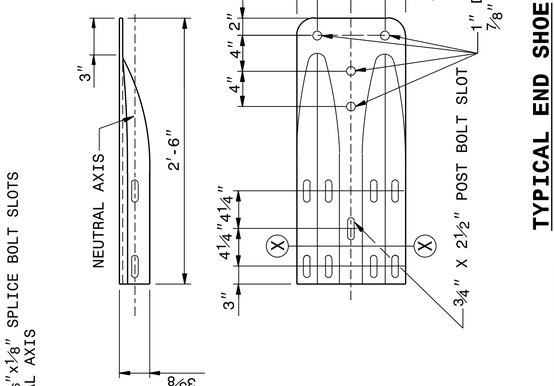

TYPICAL END SHOE

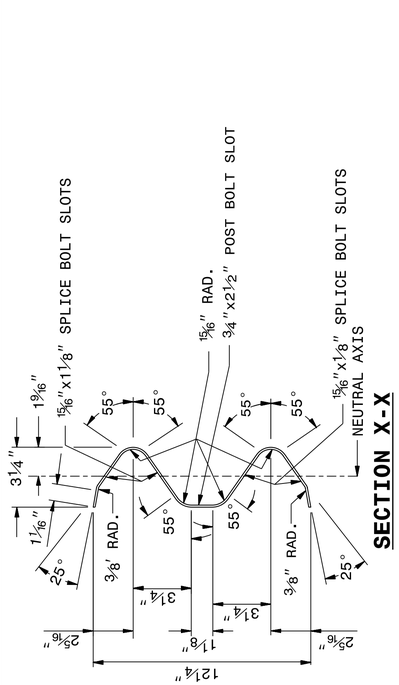

SECTION X-X

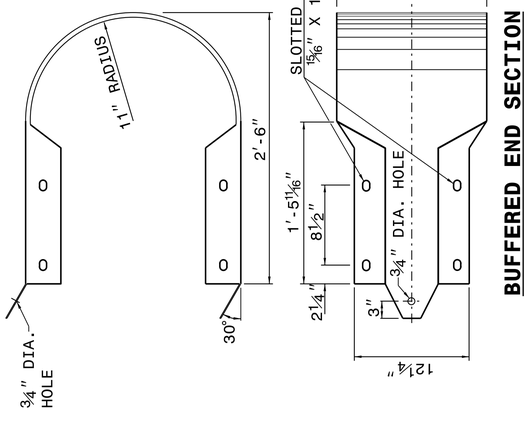

BUFFERED END SECTION

8/1/2017

NORTH CAROLINA PROFESSIONAL SEAL 022966 ENGINEER Joel S. Howerton

DocuSigned by: Joel S. Howerton 873F3D17DCDC45F...

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACT STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

SEE TITLE BLOCK

ORIGINAL BY: J HOWERTON DATE: 06-22-12
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC.: _____

14-JUN-2017 12:50
S:\Contracts\Contracts\Special Details\jhowerton\Standard Drawings\2012 Standard Drawings\Details in Lieu of Standards\Division 8\862d01 862d02 862d03 862d03\862d02.dgn
jhowerton AT CSD-292595