



5/14/99

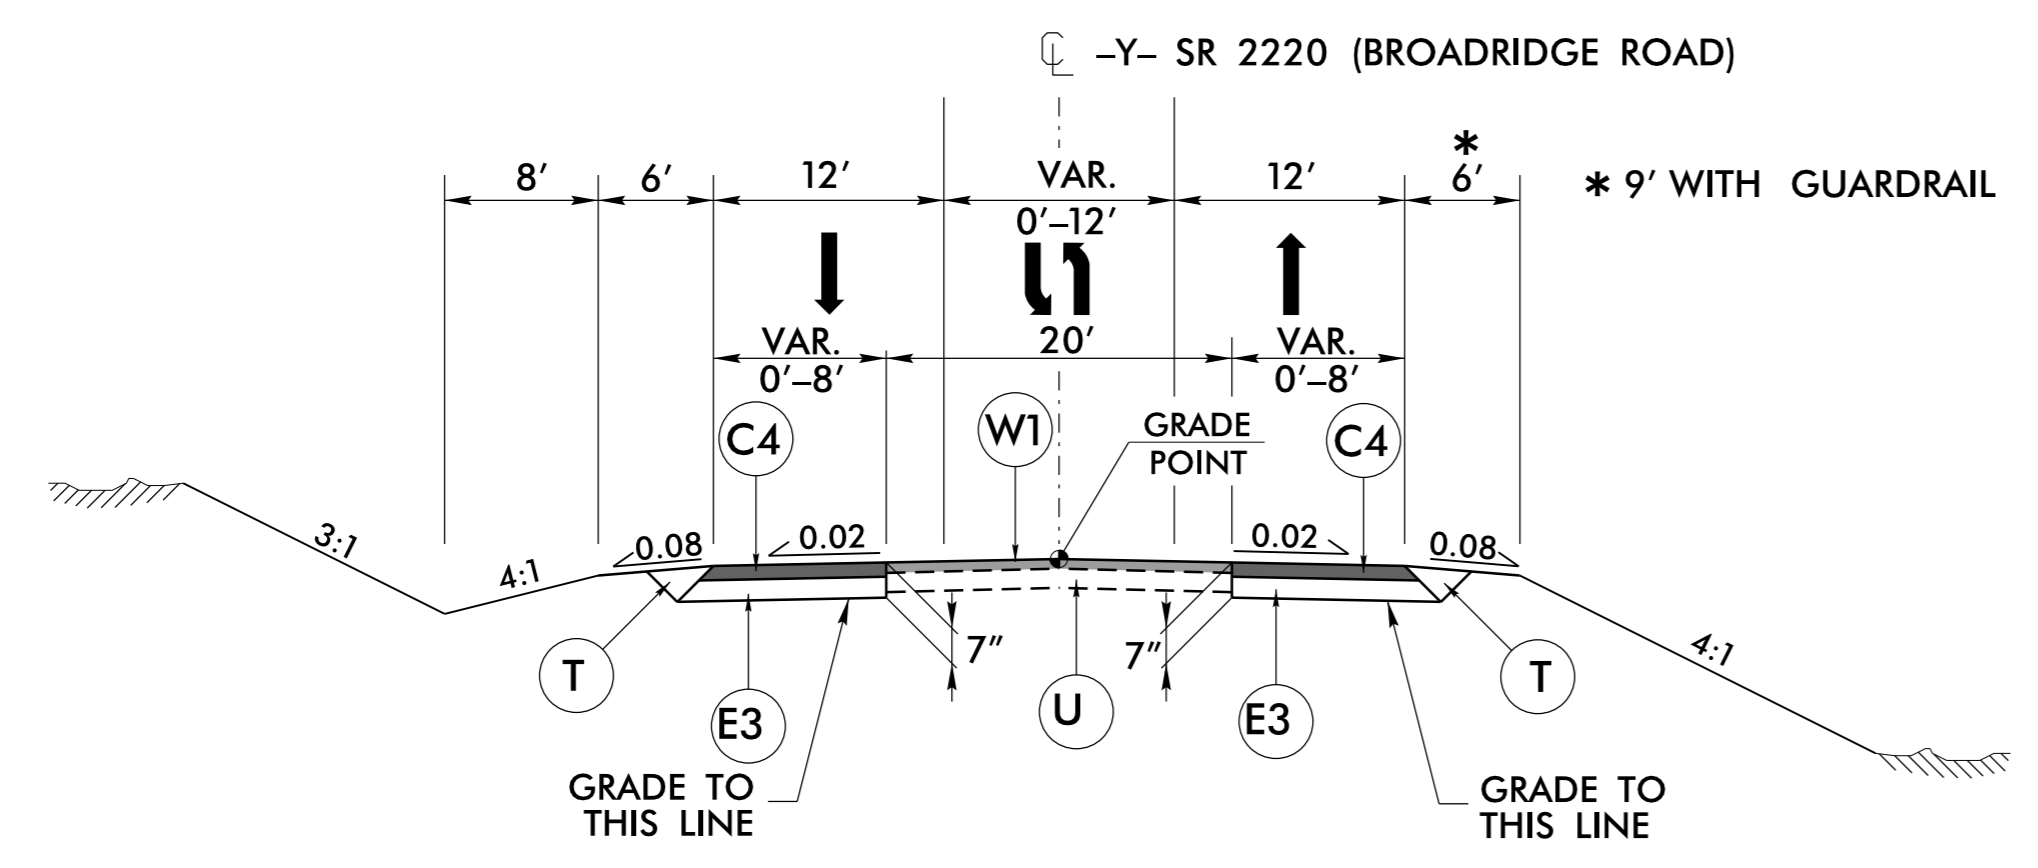


TYPICAL SECTION NO. 4

USE TYPICAL SECTION NO. 4
 -Y- STA. 19 + 35.00 TO STA. 21 + 00.00
 -Y- STA. 39 + 50.00 TO STA. 41 + 76.00

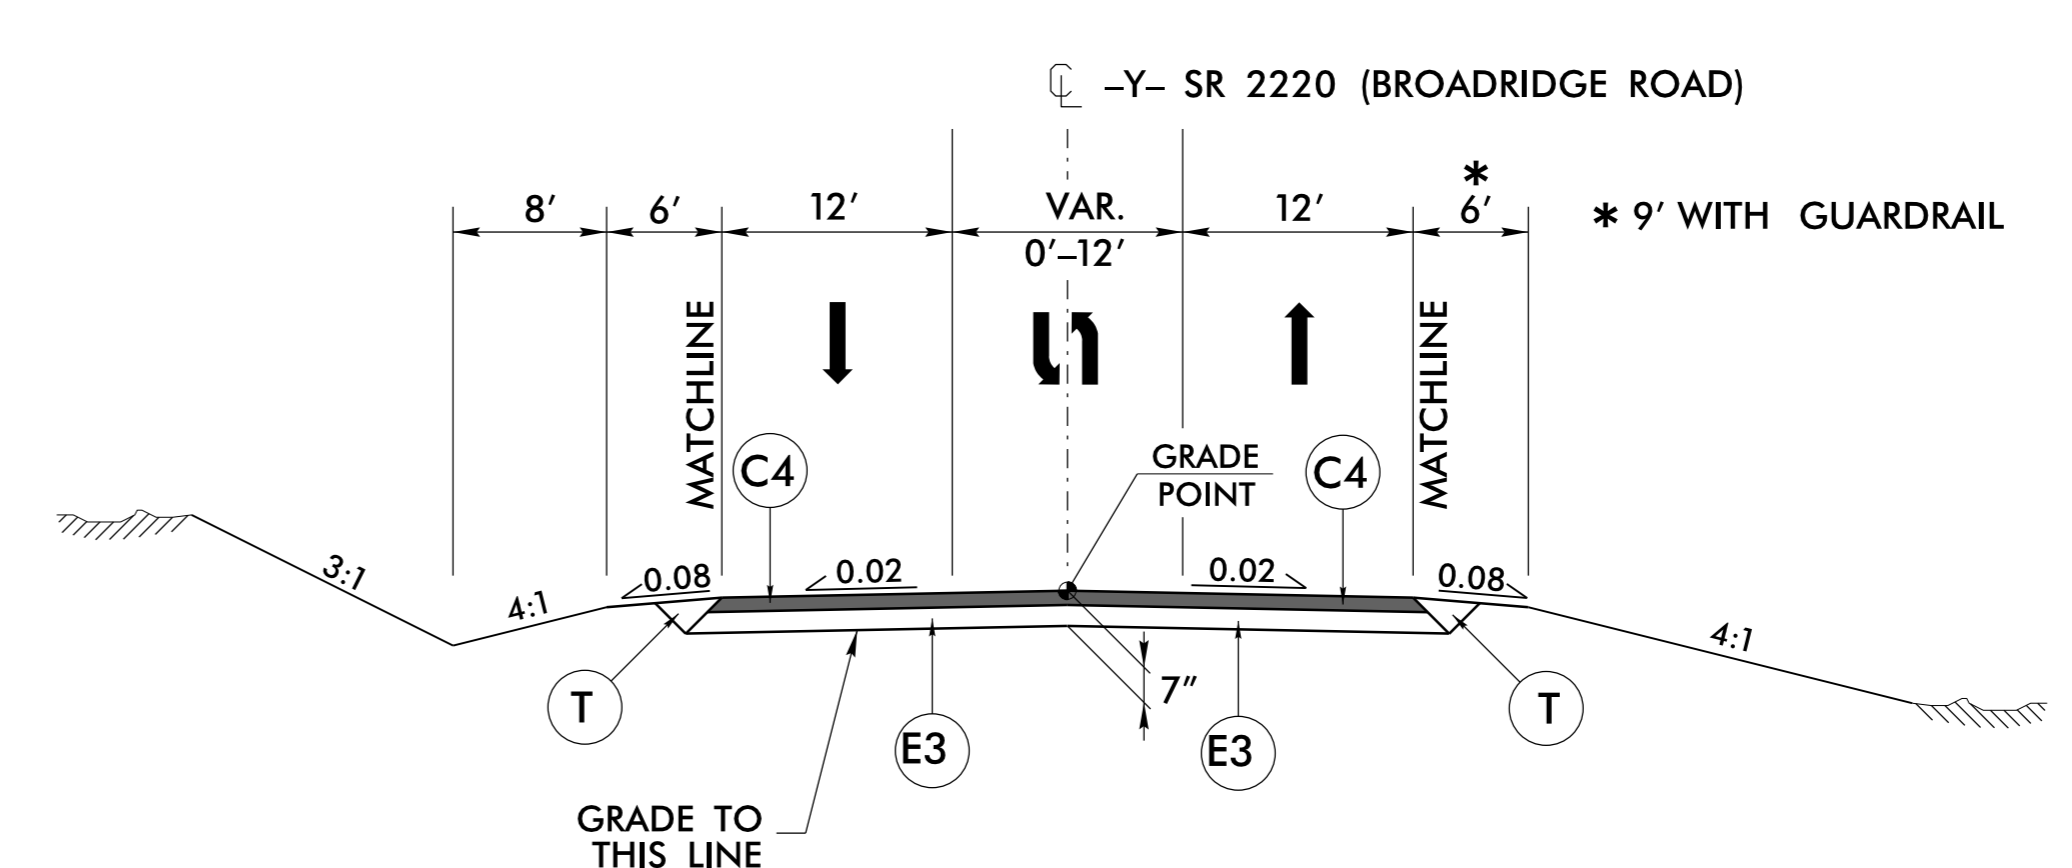


TYPICAL SECTION NO. 5

USE TYPICAL SECTION NO. 5
 -Y- STA. 21 + 00.00 TO STA. 29 + 46.23 (BEGIN BRIDGE)
 -Y- STA. 31 + 32.23 (END BRIDGE) TO STA. 39 + 50.00

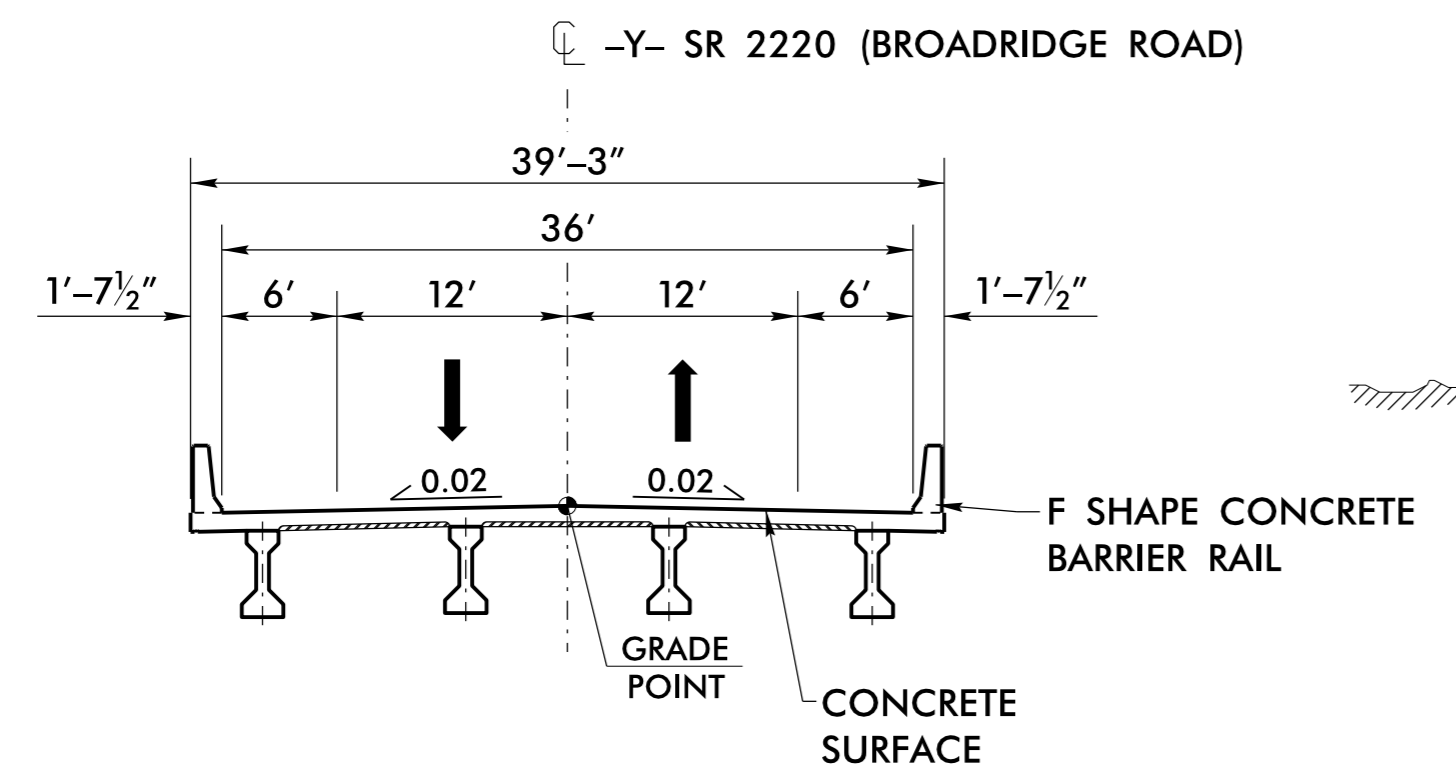


TYPICAL SECTION NO. 6

USE BRIDGE TYPICAL SECTION NO. 6
 -Y- STA. 29 + 46.23 (BEGIN BRIDGE) TO
 STA. 31 + 32.23 (END BRIDGE)

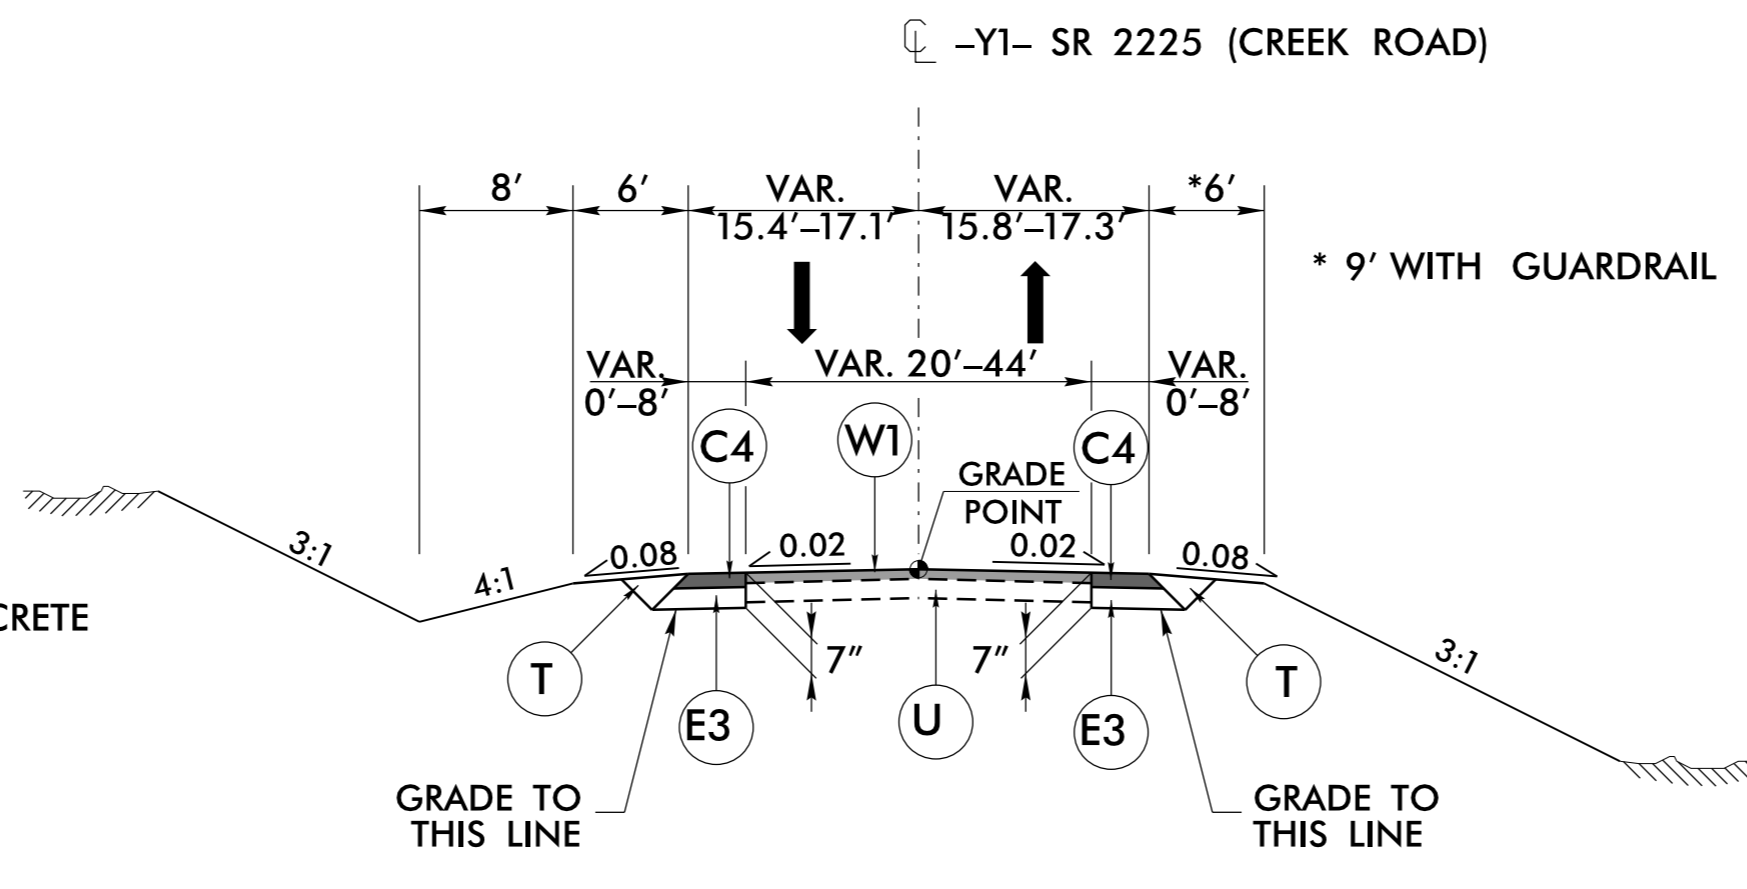

TYPICAL SECTION NO. 7


USE TYPICAL SECTION NO. 7
 -Y1- STA. 16 + 70.00 TO STA. 17 + 63.20
 -Y1- STA. 18 + 82.17 TO STA. 20 + 00.00

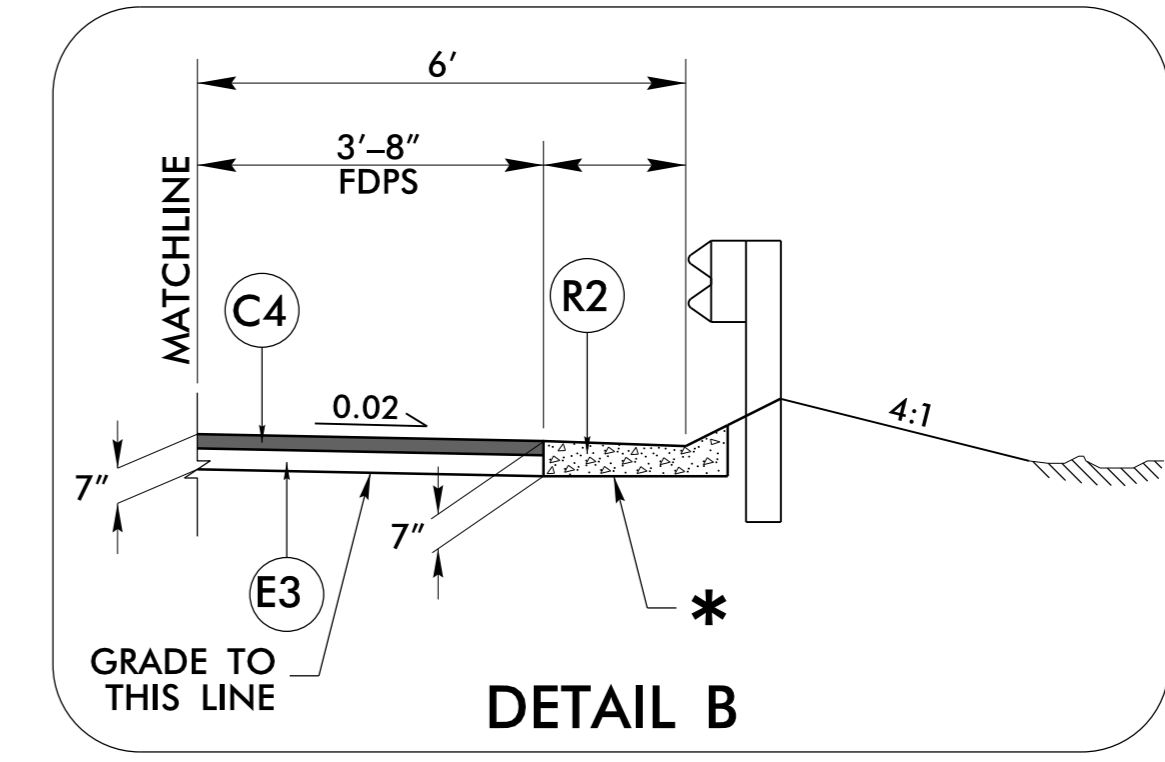

USE DETAIL B IN CONJUNCTION WITH TYPICAL SECTION NO. 5

*** SHOULDER BERM GUTTER TO BE PLACED ON SUBGRADE AT EXTRA DEPTH TO MATCH PAVEMENT STRUCTURE.**

-Y- STA. 27 + 82.00 TO STA. 29 + 26.86 (RT)
 -Y- STA. 29 + 16.00 TO STA. 29 + 38.36 (LT)
 -Y- STA. 31 + 40.10 TO STA. 31 + 62.00 (RT)
 -Y- STA. 31 + 51.60 TO STA. 32 + 93.00 (LT)

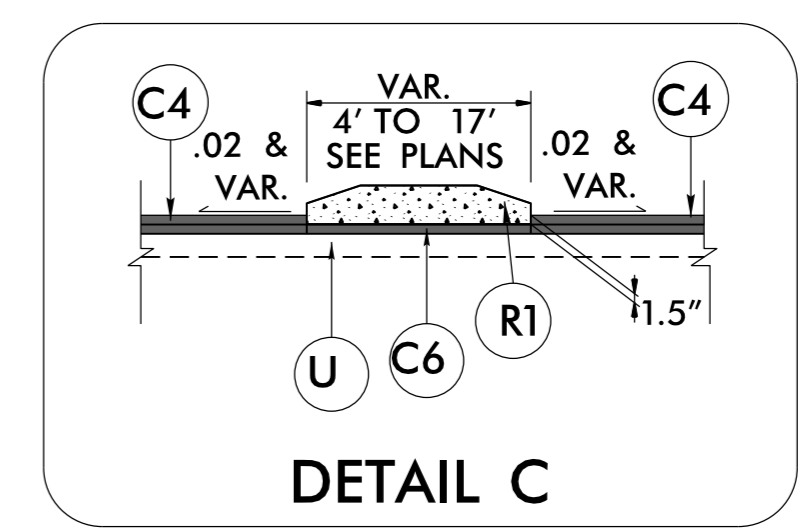

USE DETAIL C IN CONJUNCTION WITH TYPICAL SECTION NO. 7

-Y1- STA. 16 + 85.69 TO STA. 17 + 65.21
 -Y1- STA. 18 + 80.15 TO STA. 19 + 84.44

PROJECT REFERENCE NO. R-5752	SHEET NO. 2A-4
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
ROADWAY DESIGN ENGINEER 	PAVEMENT DESIGN ENGINEER
 CDM Smith Inc. 5400 Glenwood Avenue Raleigh, NC 27612-3228 NC Reg. No. P-1252	

PAVEMENT SCHEDULE

C1	3" S9.5C
C2	1.5" S9.5C
C3	VAR. S9.5C
C4	3" S9.5B
C5	VAR. S9.5B
C6	1.5" S9.5B
D1	4" I19.0C
D2	VAR. I19.0C
E1	4.5" B25.0C
E2	VAR. B25.0C
E3	4" B25.0B
E4	VAR. B25.0B
J1	8" ABC
P1	.35 PRIME COAT
R1	5" MONO. CONC. (KEYED IN)
R2	SHOULDER BERM GUTTER (SBG)
T	EARTH MATERIAL
U	EXIST. PAVEMENT
V	INCIDENTAL MILLING
W	WEDGING
W1	WEDGING
Y	MILLED RUMBLE STRIP

PAVEMENT EDGESLOPES 1:1 UNLESS NOTED OTHERWISE