
DocuSign Envelope ID: 4499DE70-7C8E-4AFD-8A49-2E8E3FE8D55A

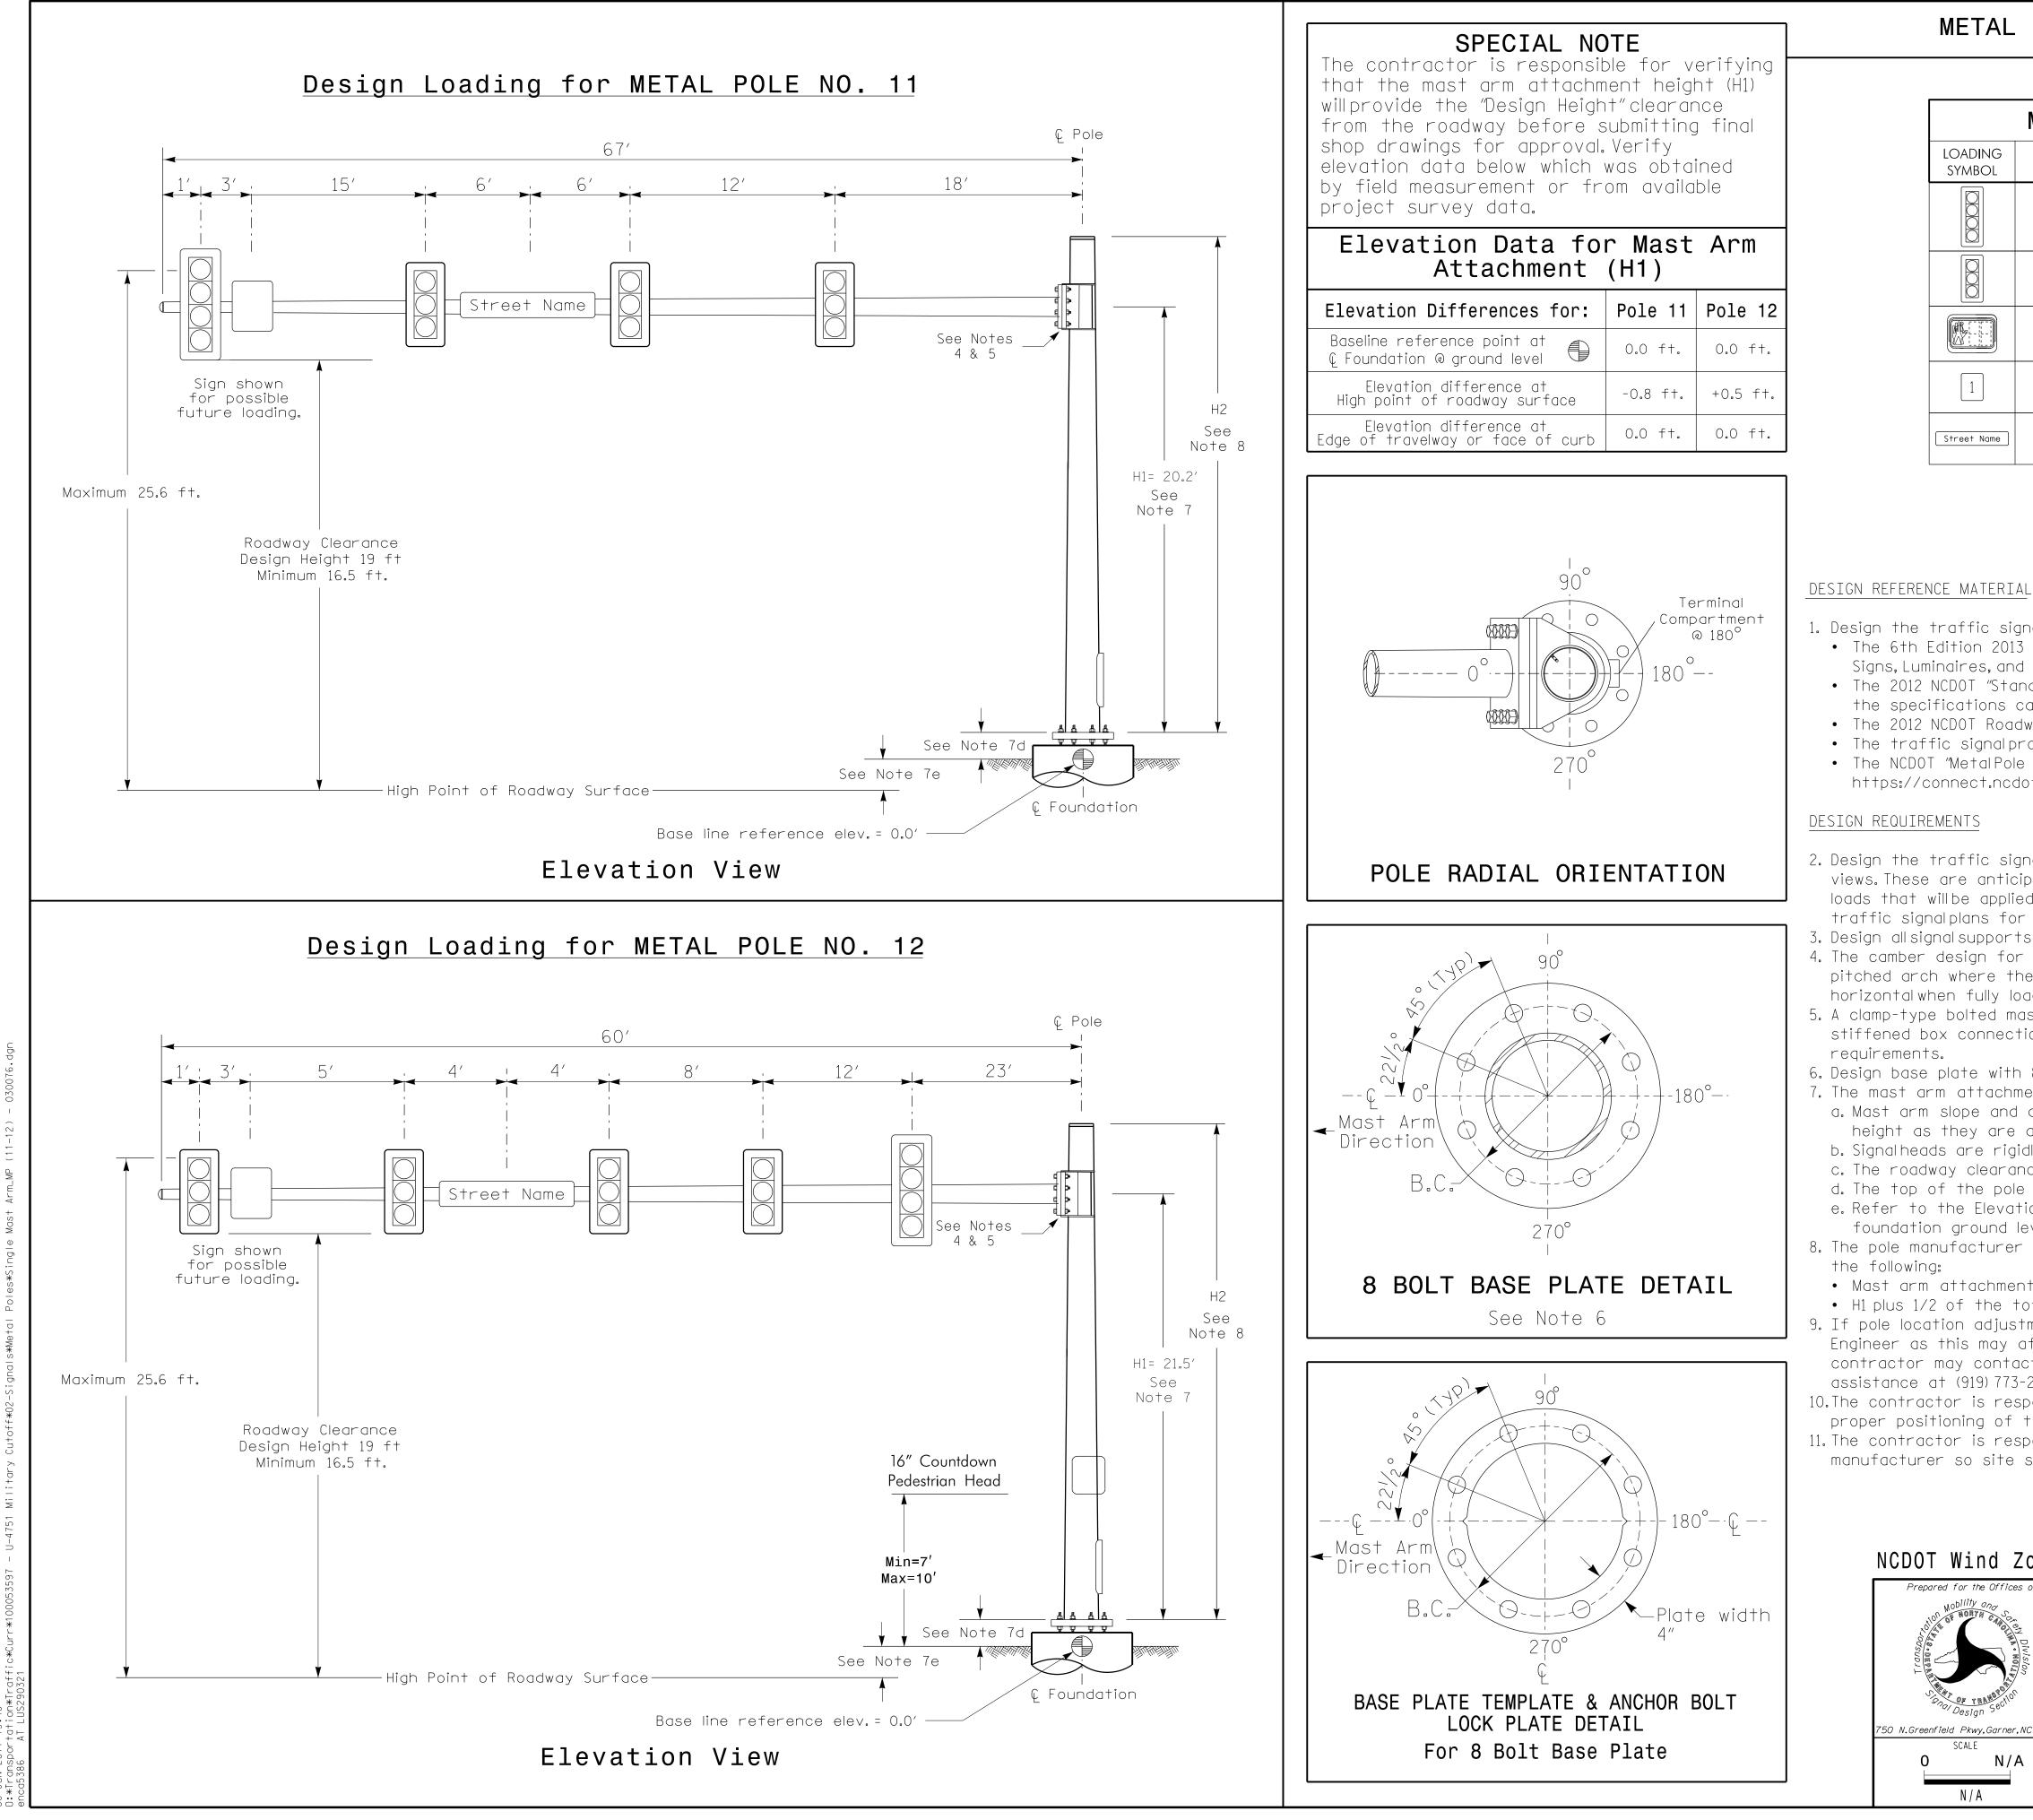

## METAL POLE No. 11 AND 12

U-4751	Sig. 8.1
PROJECT REFERENCE NO.	SHEET NO

1	S
---	---

)	ig	8	1	5

MAST ARM LOADING SCHEDULE				
loading symbol	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5″W X 66.0″L	74 LBS
000	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE PEDESTRIAN SIGNAL HEAD WITH MOUNTING HARDWARE		25.5″W X 52.5″L	60 LBS
			18.5″W X 17.0″L	21 LBS
1	SIGN RIGID MOUNTED	5.0 S.F.	24.0″W X 30.0″L	11 LBS
Street Name Street Name Street Name Street Name Street Name		16.0 S.F.	24.0″W X 96.0″L	36 LBS

## <u>NOTES</u>

- 1. Design the traffic signal structure and foundation in accordance with:
- The 6th Edition 2013 AASHTO "Standard Specifications for StructuralSupports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions. • The 2012 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to
- the specifications can be found in the traffic signalproject specialprovisions. • The 2012 NCDOT Roadway Standard Drawings.
- The traffic signal project plans and special provisions.
- The NCDOT "MetalPole Standards" located at the following NCDOT website:
- https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx

2. Design the traffic signalstructure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation. 3. Design all signal supports using stress ratios that do not exceed 0.9.

4. The camber design for the mast arm deflection should provide an appearance of a low pitched arch where the tip or the free end of the mast arm does not deflect below horizontal when fully loaded.

5. A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design

6. Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.

- 7. The mast arm attachment height (H1) shown is based on the following design assumptions: a. Mast arm slope and deflection are not considered in determining the arm attachment height as they are assumed to offset each other.
- b. Signalheads are rigidly mounted and vertically centered on the mast arm.
- c. The roadway clearance height for design is as shown in the elevation views.
- d. The top of the pole base plate is 0.75 feet above the ground elevation.

e. Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground leveland the high point of the roadway.

8. The pole manufacturer will determine the total height (H2) of each pole using the greater of

• Mast arm attachment height (H1) plus 2 feet, or

• H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot. 9. If pole location adjustments are required, the contractor must gain approval from the

Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the SignalDesign Section Senior StructuralEngineer for

assistance at (919)773-2800.

10. The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signalheads over the roadway.

11. The contractor is responsible for providing soilpenetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

T Wind Zone	2 (130 mph) <b>ATKI</b>	UNLESS ALL SIGI	CONSIDERED FINAL NATURES COMPLETEDMILLBROOK ROAD, SUITE 160NORTH CAROLINA 27609-6888NCBEES #F-0326
	SR 1409 (Military Cu at SR 1403(Middle Sound Division 03 New Hanover County		SEAL TH CAROL PROFESSION A SEAL 025892
onfield Pkwy.Garner,NC 27529	PLAN DATE: April 2017 REVIEWED BY	: MB Toth	TO SA B. MUMUMUM
SCALE N/A	REVISIONS	INIT. DATE	-DocuSigned by: Melissa B. Toth 6/15/2017 Despersionature Date
N/A			SIG. INVENTORY NO. 03-0076