TIP NO. SHEET NO.

U-5315 A&B SIGN-02B

APPROVED:

DATE:

SEAL

SEAL

O36073

SEAL

O36073

Docusigned by:

Barry Brandt

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Version: 3.0 Posted: 9/14/2016


	SIGN SIZE (in.) NUMBER TYPE w x h STATION SUPPORTS																										F00	OTINGS		FIELD	
SIGN				NUMBER	UMBER SUPPORT					HORIZONTAL	LENGTH (ft)										SUPPORT WEIGHTS			1			/ERIFIED				
			SIZE (in.)	ROADWAY		BEAM	TYPE	OMNI	ATTACHMENT	MOUNTING	1	SUPPORT	SNS HT	MTG HT	EMBED-	LEF	T SUPPOF	RT (ft)	CENT	ER SUPPO	ORT (ft)	RIGH	IT SUPPO	ORT (ft)	B/A	SIMPLE	DIAMETER	DEPTH	REINFORCED	1	
	NUMBER	TYPE	w x h	STATION	SUPPORTS	SECTION	BA or S	COUPLER	METHOD	METHOD	(ft.)	SPACING	"H"	"C"	MENT	S	L	LENGTH	S	L	LENGTH	S	L	LENGTH	(lbs.)	(lbs.)	(ft.)	(ft.)	(c.y.)	(c.y.) (m	nm/dd/yy)
	101	Α	132 x 66	-LPD- 22+18	2	W6x9	BA	N/A	N/A	N/A	18.00	6.45	5.50	7.00	3.0	1.80	14.30	17.30	0.00	0.00	0.00	3.41	15.91	18.91	389.89	0	1.5	3.5	0.46	0.00	
	102	Α	156 x 108	-LPD- 21+56	2	W6x16	BA	N/A	N/A	N/A	18.00	7.62	9.00	7.00	4.0	1.90	17.90	21.90	0.00	0.00	0.00	3.81	19.81	23.81	825.36	0	1.5	4.5	0.59	0.00	
	103	Α	132 x 66	-RPB- 17+00	2	W6x12	BA	N/A	N/A	N/A	25.00	6.45	5.50	7.00	3.0	4.44	16.94	19.94	0.00	0.00	0.00	6.05	18.55	21.55	575.88	0	1.5	3.5	0.46	0.00	
	104	Α	156 x 108	-RBP- 19+00	2	W6x16	BA	N/A	N/A	N/A	25.00	7.62	9.00	7.00	4.0	4.24	20.24	24.24	0.00	0.00	0.00	6.78	22.78	26.78	910.32	0	1.5	4.5	0.59	0.00	
	105	Α	180 x 72	-NC540- 519+0	0 2	W6x16	S	N/A	N/A	N/A	21.00	8.79	6.00	7.00	3.5	3.24	16.24	19.74	0.00	0.00	0.00	7.14	20.14	23.64	0.00	694.08	1.5	4	0.52	0.00	
	106	Α	180 x 72	-NC540- 640+0	0 2	W6x16	S	N/A	N/A	N/A	20.00	8.79	6.00	7.00	4.0	3.87	16.87	20.87	0.00	0.00	0.00	8.34	21.34	25.34	0.00	739.36	1.5	4.5	0.59	0.00	
	107	Α	162 x 78	-NC540- 719+0	0 2	W6x12	BA	N/A	N/A	N/A	20.00	7.91	6.50	7.00	3.5	0.76	14.26	17.76	0.00	0.00	0.00	4.34	17.84	21.34	547.20	0	1.5	4	0.52	0.00	
	201	A	78 x 60	-NC540- 556+7	0 2	S3x5.7	BA	YES	N/A	N/A	Δ	3.81	5.00	7.00	0.0	0.22	12.22	12.22	0.00	0.00	0.00	0.21	12.21	12.21	139.25	0	1.5	2.5	0.33	0.00	
	202	A	78 x 60	-NC540- 586+10	0 2	S3x5.7	BA	YES	N/A	N/A	Δ	3.81	5.00	7.00	0.0	0.99	12.99	12.99	0.00	0.00	0.00	0.35	12.35	12.35	144.44	0	1.5	2.5	0.33	0.00	


TOTAL TOTAL TOTAL TOTAL 3532.34 1433.44 4.39 0.00 5.00 0.00

PROJECT NOTES

NOTES

- 1. DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF PAVEMENT.
- 2. FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3.
 FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1.
 (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
- 3. PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

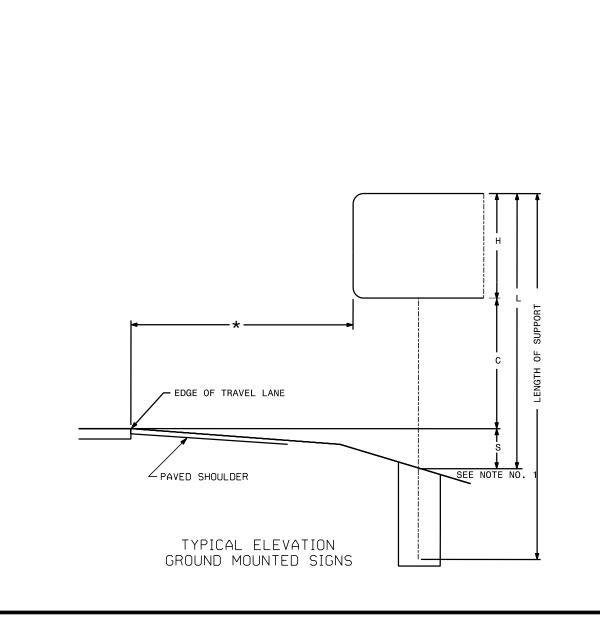

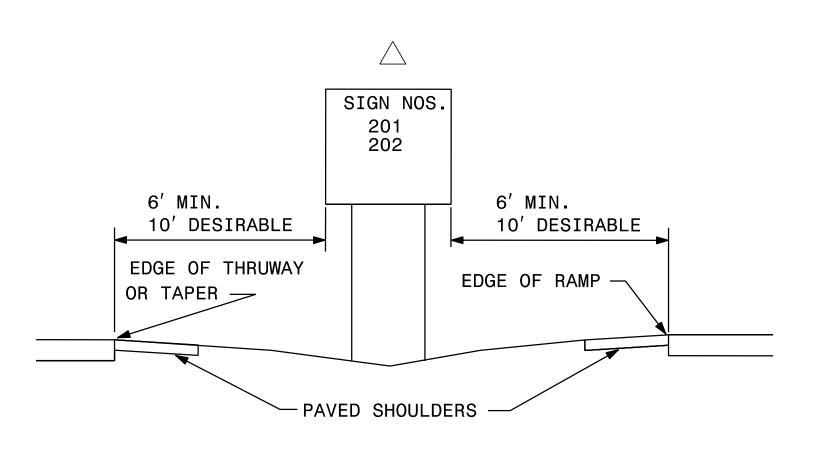



TYPE "A" AND "B"
GROUND MOUNTED
SIGN CHART