$$$$$$$SYSTIME$$$$$
$$$$$$$$$$$$$$$$$$DGN$$$$$$$$$$$$$$$$
$$$$USERNAME$$$$

5/14/99

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR
MINIMUM DEPTH BRICK CATCH BASIN
12" THRU 24" PIPE



PLAN



SECTION X-X

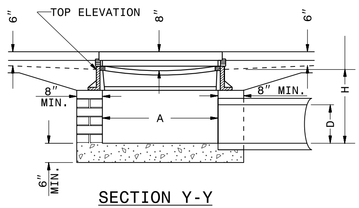

SECTION Y-Y

GENERAL NOTES:

MORTAR JOINTS ½" TO ⅛" THICK.
USE CLASS "B" CONCRETE THROUGHOUT.
USE FORMS FOR CONSTRUCTION OF THE BOTTOM SLAB.
DEDUCT FOR PIPE(S) FROM TOTAL CU. YDS. OF BRICK MASONRY.
USE TYPE "E", "F" AND "G" GRATES UNLESS OTHERWISE INDICATED.
USE BRICK OR CONCRETE BLOCK WHICH COMPLIES WITH THE REQUIREMENTS OF SECTION 840 OF THE STANDARD SPECIFICATIONS.
IF REINFORCED CONCRETE PIPE IS SET IN BOTTOM SLAB OF BOX, ADD TO SLAB AS SHOWN ON STD. NO. 840.00.
CONSTRUCT WITH PIPE CROWNS MATCHING.
CHAMFER ALL EXPOSED CORNERS 1".
DRAWING NOT TO SCALE.

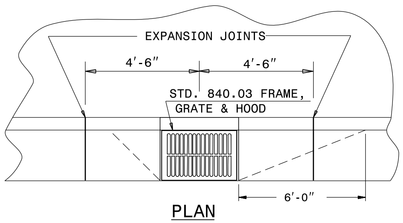

PLAN

CURB AND GUTTER WITH CATCH BASIN ON STEEP GRADES



ELEVATION

NORMAL CURB AND GUTTER ON LIGHT GRADES



ELEVATION

NORMAL CURB AND GUTTER ON STEEP GRADES

MINIMUM DIMENSIONS AND QUANTITIES FOR BRICK CATCH BASIN

DIMENSIONS OF BOX AND PIPE				CU. YDS. CONC. IN BOX		BRICK MASONRY		DEDUCTIONS ONE PIPE	
PIPE	SPAN	WIDTH	MIN. HEIGHT	BOTTOM SLAB	TOTAL CONC.	BRICK MSNR. IN WALLS	TOTAL BRICK AND CONCRETE	C.M.	R.C.
D	A	B	H						
12"	3'-0"	2'-2"	2'-0"	0.281	0.281	0.481	0.762	0.020	0.042
15"	3'-0"	2'-2"	2'-3"	0.281	0.281	0.562	0.843	0.031	0.047
18"	3'-0"	2'-2"	2'-6"	0.281	0.281	0.642	0.923	0.044	0.065
24"	3'-0"	2'-2"	3'-1"	0.281	0.281	0.828	1.109	0.078	0.121

SHEET 1 OF 1
840D01

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR
MINIMUM DEPTH BRICK CATCH BASIN
12" THRU 24" PIPE

SHEET 1 OF 1
840D01

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR
MINIMUM DEPTH CONCRETE CATCH BASIN
12" THRU 24" PIPE



PLAN



SECTION X-X

GENERAL NOTES:

USE CLASS "B" CONCRETE THROUGHOUT.
OPTIONAL CONSTRUCTION - MONOLITHIC POUR, 2" KEYWAY, OR #4 BAR DOWELS AT 12" CENTERS AS DIRECTED BY THE ENGINEER.
USE FORMS FOR THE CONSTRUCTION OF THE BOTTOM SLAB.
IF REINFORCED CONCRETE PIPE IS SET IN BOTTOM SLAB OF BOX, ADD TO SLAB AS SHOWN ON STD. NO. 840.00.
USE TYPE "E", "F" AND "G" GRATES UNLESS OTHERWISE INDICATED.
CONSTRUCT WITH PIPE CROWNS MATCHING.
CHAMFER ALL EXPOSED CORNERS 1".
DRAWING NOT TO SCALE.

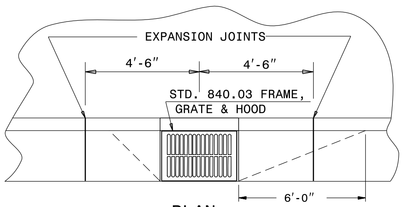

PLAN

CURB AND GUTTER WITH CATCH BASIN ON STEEP GRADES



ELEVATION

NORMAL CURB AND GUTTER ON LIGHT GRADES



ELEVATION

NORMAL CURB AND GUTTER ON STEEP GRADES

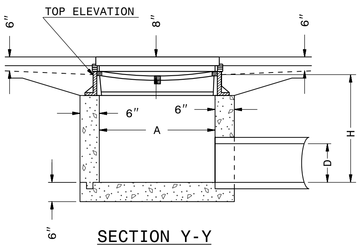

SECTION Y-Y

MINIMUM DIMENSIONS AND QUANTITIES FOR CONCRETE CATCH BASIN

DIMENSIONS OF BOX AND PIPE				CU. YDS. CONC. IN BOX			DEDUCTIONS ONE PIPE	
PIPE	SPAN	WIDTH	MIN. HEIGHT	BOTTOM SLAB	CONCRETE IN WALLS	TOTAL CONC.	C.M.	R.C.
D	A	B	H					
12"	3'-0"	2'-2"	2'-0"	0.235	0.343	0.578	0.015	0.026
15"	3'-0"	2'-2"	2'-3"	0.235	0.400	0.635	0.023	0.036
18"	3'-0"	2'-2"	2'-6"	0.235	0.457	0.692	0.033	0.049
24"	3'-0"	2'-2"	3'-1"	0.235	0.590	0.825	0.059	0.085

SHEET 1 OF 1
840D02

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR
MINIMUM DEPTH CONCRETE CATCH BASIN
12" THRU 24" PIPE

SHEET 1 OF 1
840D02

CONTRACT STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

SEE PLATE FOR TITLE

ORIGINAL BY: 2002 STD. 840.01 DATE:
MODIFIED BY: E.E. WARD DATE: 3-1-02
CHECKED BY:
FILE SPEC.: s:details/stand/840d01.dgn

NORTH CAROLINA PROFESSIONAL SEAL 029966 ENGINEER
Digitally signed by Mark Powerhide
Date: 2014.05.14 15:37:07 -04'00'
M.L. Powerhide 5/2014
KF3F0D170DDC49F

PROJECT REFERENCE NO.	SHEET NO.
B-4565	2C-1