


+

+

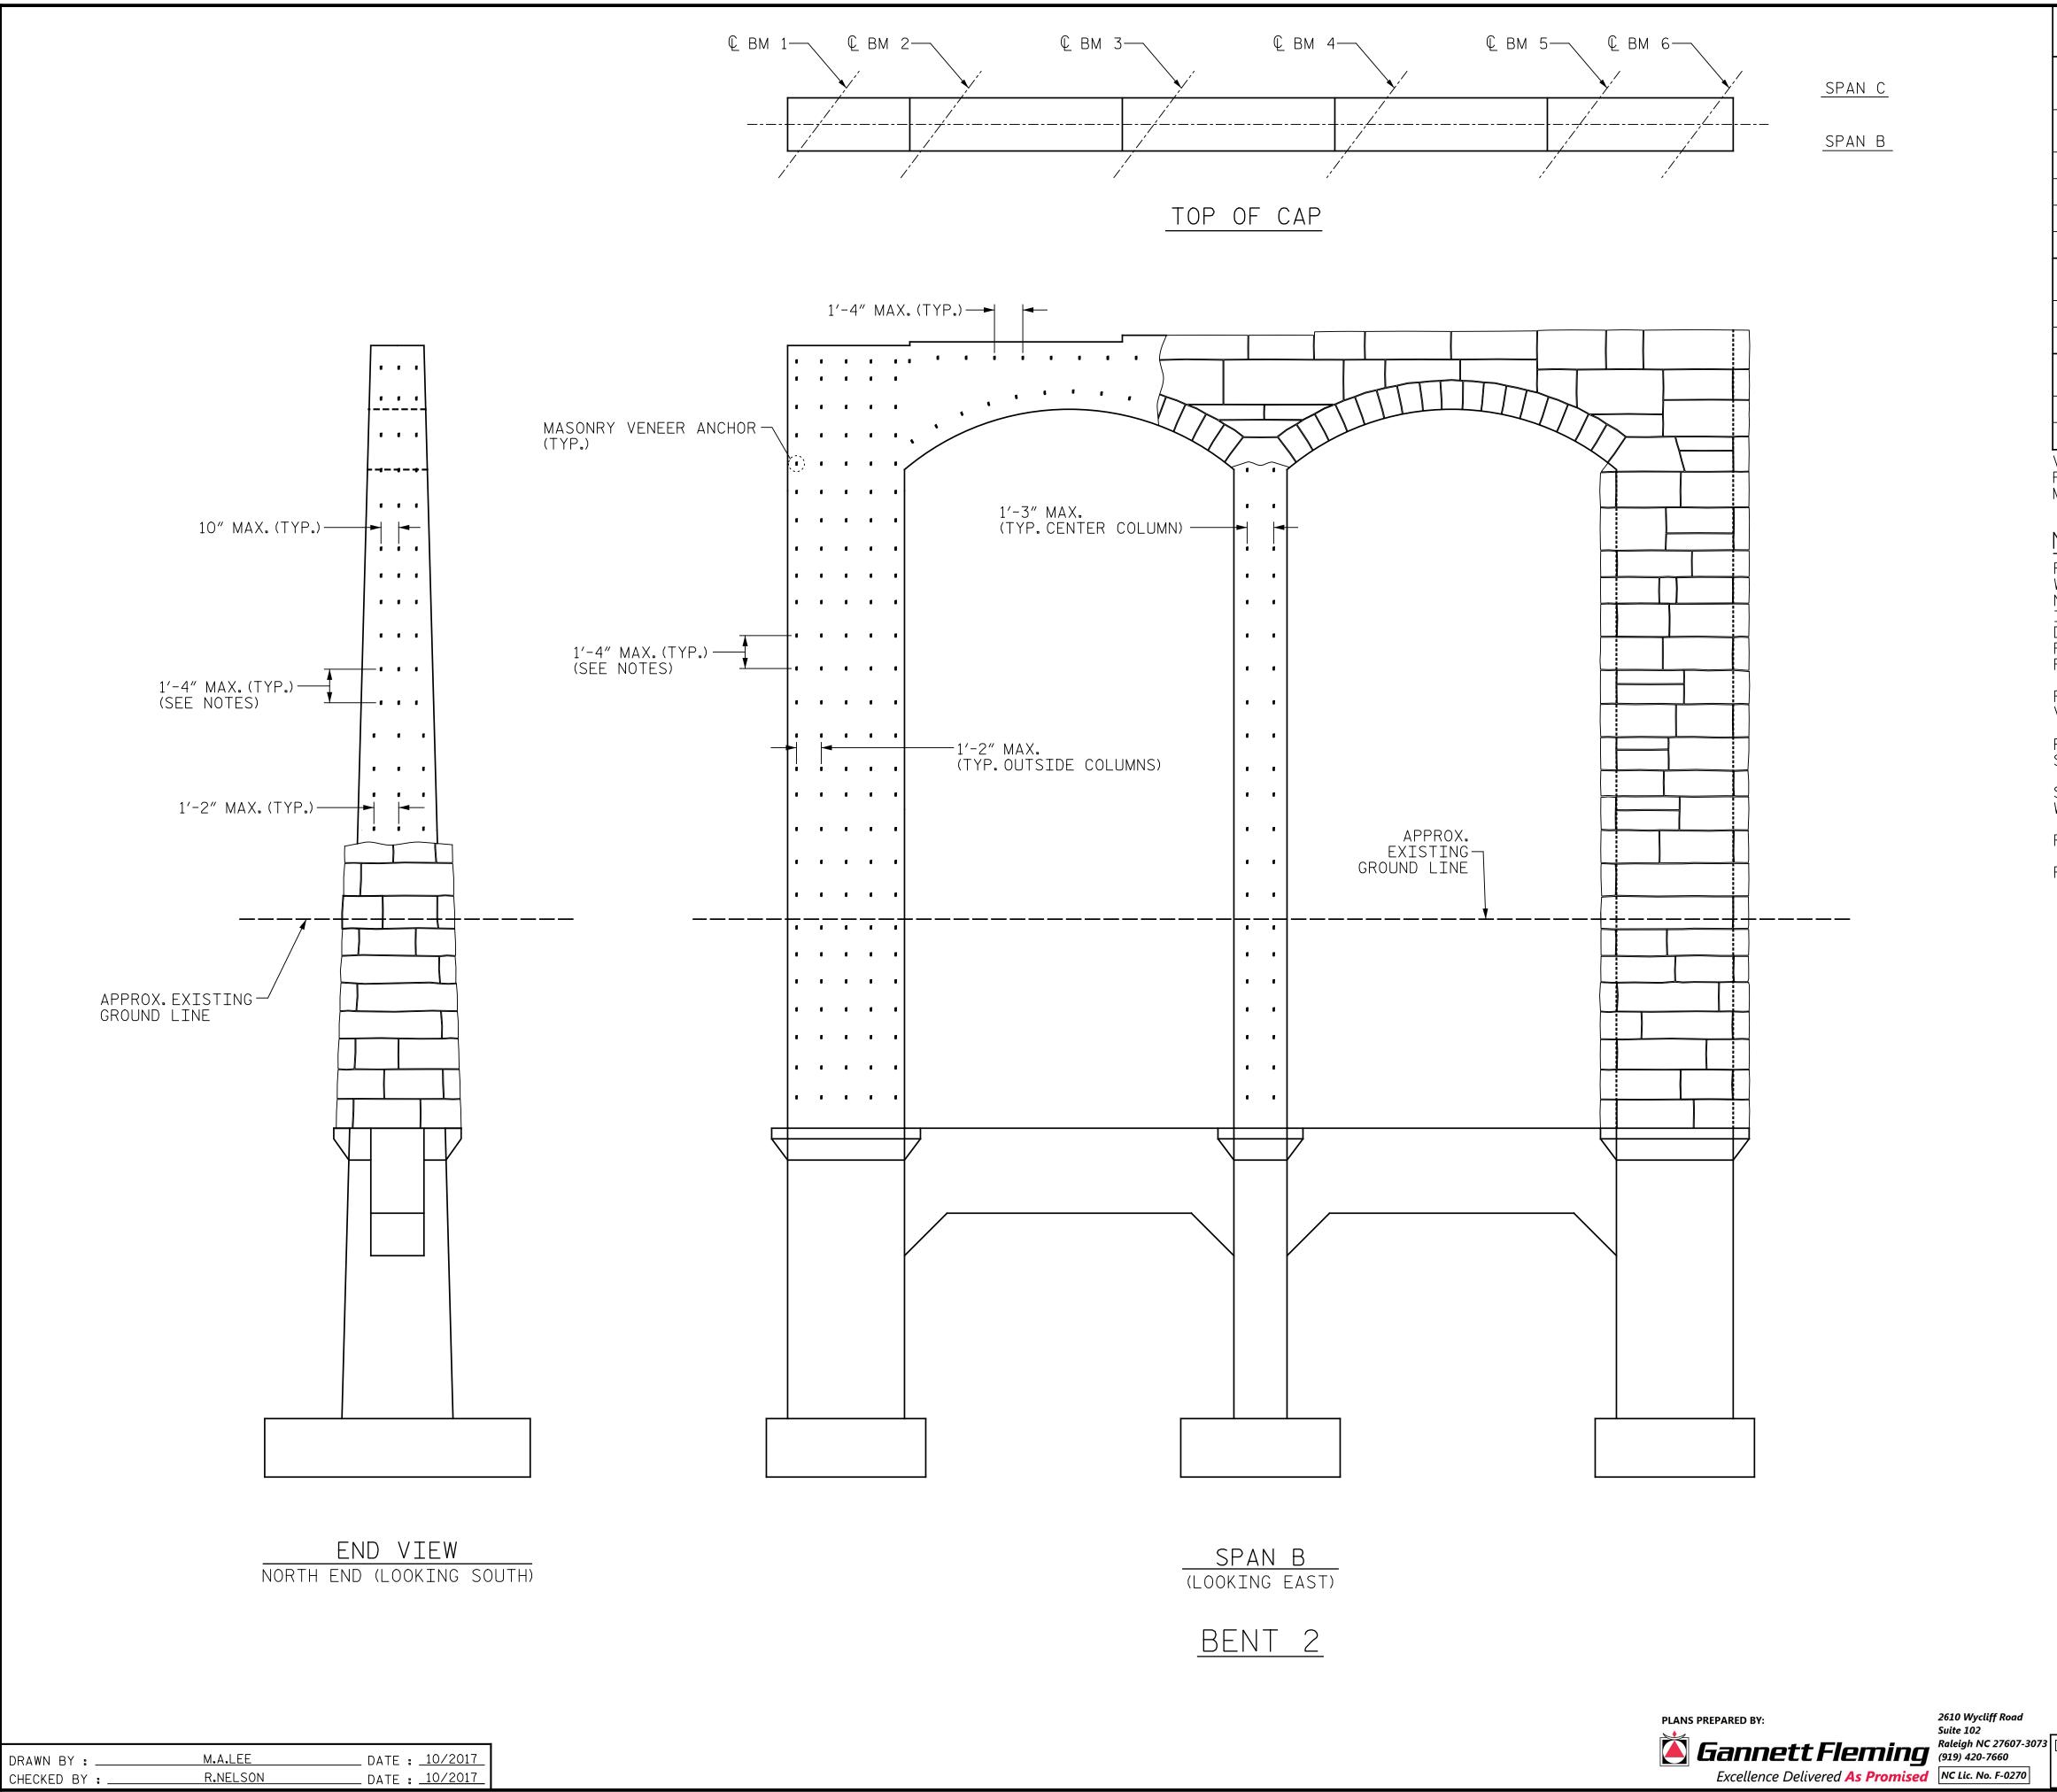

| AS- BUILT REPA | AIR QU | JANT | ITY | TAE | BLE | | | | | |
|---|-------------------------------|-------------------|-------------|------------|--------------|--|--|--|--|--|
| BENT 2 REPAIRS | QUANTITIES ESTIMATE ACTUAL | | | | | | | | | |
| SHOTCRETE REPAIRS | AREA SF 0 | VOLUME CF 0 | AREA SF | | VOLUME CF | | | | | |
| CAP (HORIZONTAL, CORNER) | 0 | 0 | | | | | | | | |
| COLUMN | 0 | 0 | | | | | | | | |
| ANCHORED VENEER | AREA SF | | | AREA SF | | | | | | |
| | 1493 | | | | | | | | | |
| EPOXY COATING | AREA SF | | | AREA SF | | | | | | |
| TOP OF CAP | 92.5 | | | | | | | | | |
| VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MIN. OF 1"BEHIND REBAR AND MIN. 2"CL TO SAWCUT. SEE REPAIR DETAILS. | | | | | | | | | | |
| NOTES: REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED INCOSSARY BY THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE REPAIR QUANTITY TABLE. FINAL REPAIR QUANTITIES WILL BE DETERMINED AFTER THE STONE VENEER IS REMOVED. QUANTITIES IN TABLE ARE ESTIMATED. FOR BENT REPAIRS, SEE "TYPICAL CAP AND COLUMN REPAIR DETAILS" SHOTCRETE REPAIRS MAY BE REPLACED WITH CONCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER. FOR SHOTCRETE REPAIRS, SEE SPECIAL PROVISIONS. FOR EPOXY COATING, SEE SPECIAL PROVISIONS. FOR EPOXY COATING, SEE SPECIAL PROVISIONS. \overrightarrow{W} - SHOTCRETE REPAIR | | | | | | | | | | |
| | DJECT N BUN(Edge NC | COMBE | _ - _ | | | | | | | |
| DOCUMENT NOT CONSIDERED | BENT 2 SPAN B FACE | | | | | | | | | |

| 507 5075 | DOCOMENT NOT CONSTDERED | ব | | TOTAL |
|----------|-------------------------|----|---|-----------------|
|) | FINAL UNLESS ALL | 11 | 3 | TOTAL SHEETS |
| 0270 | SIGNATURES COMPLETED | 2 | 倒 | 208 |
| | | _ | | |