


NAD 83/
NSRS 2007

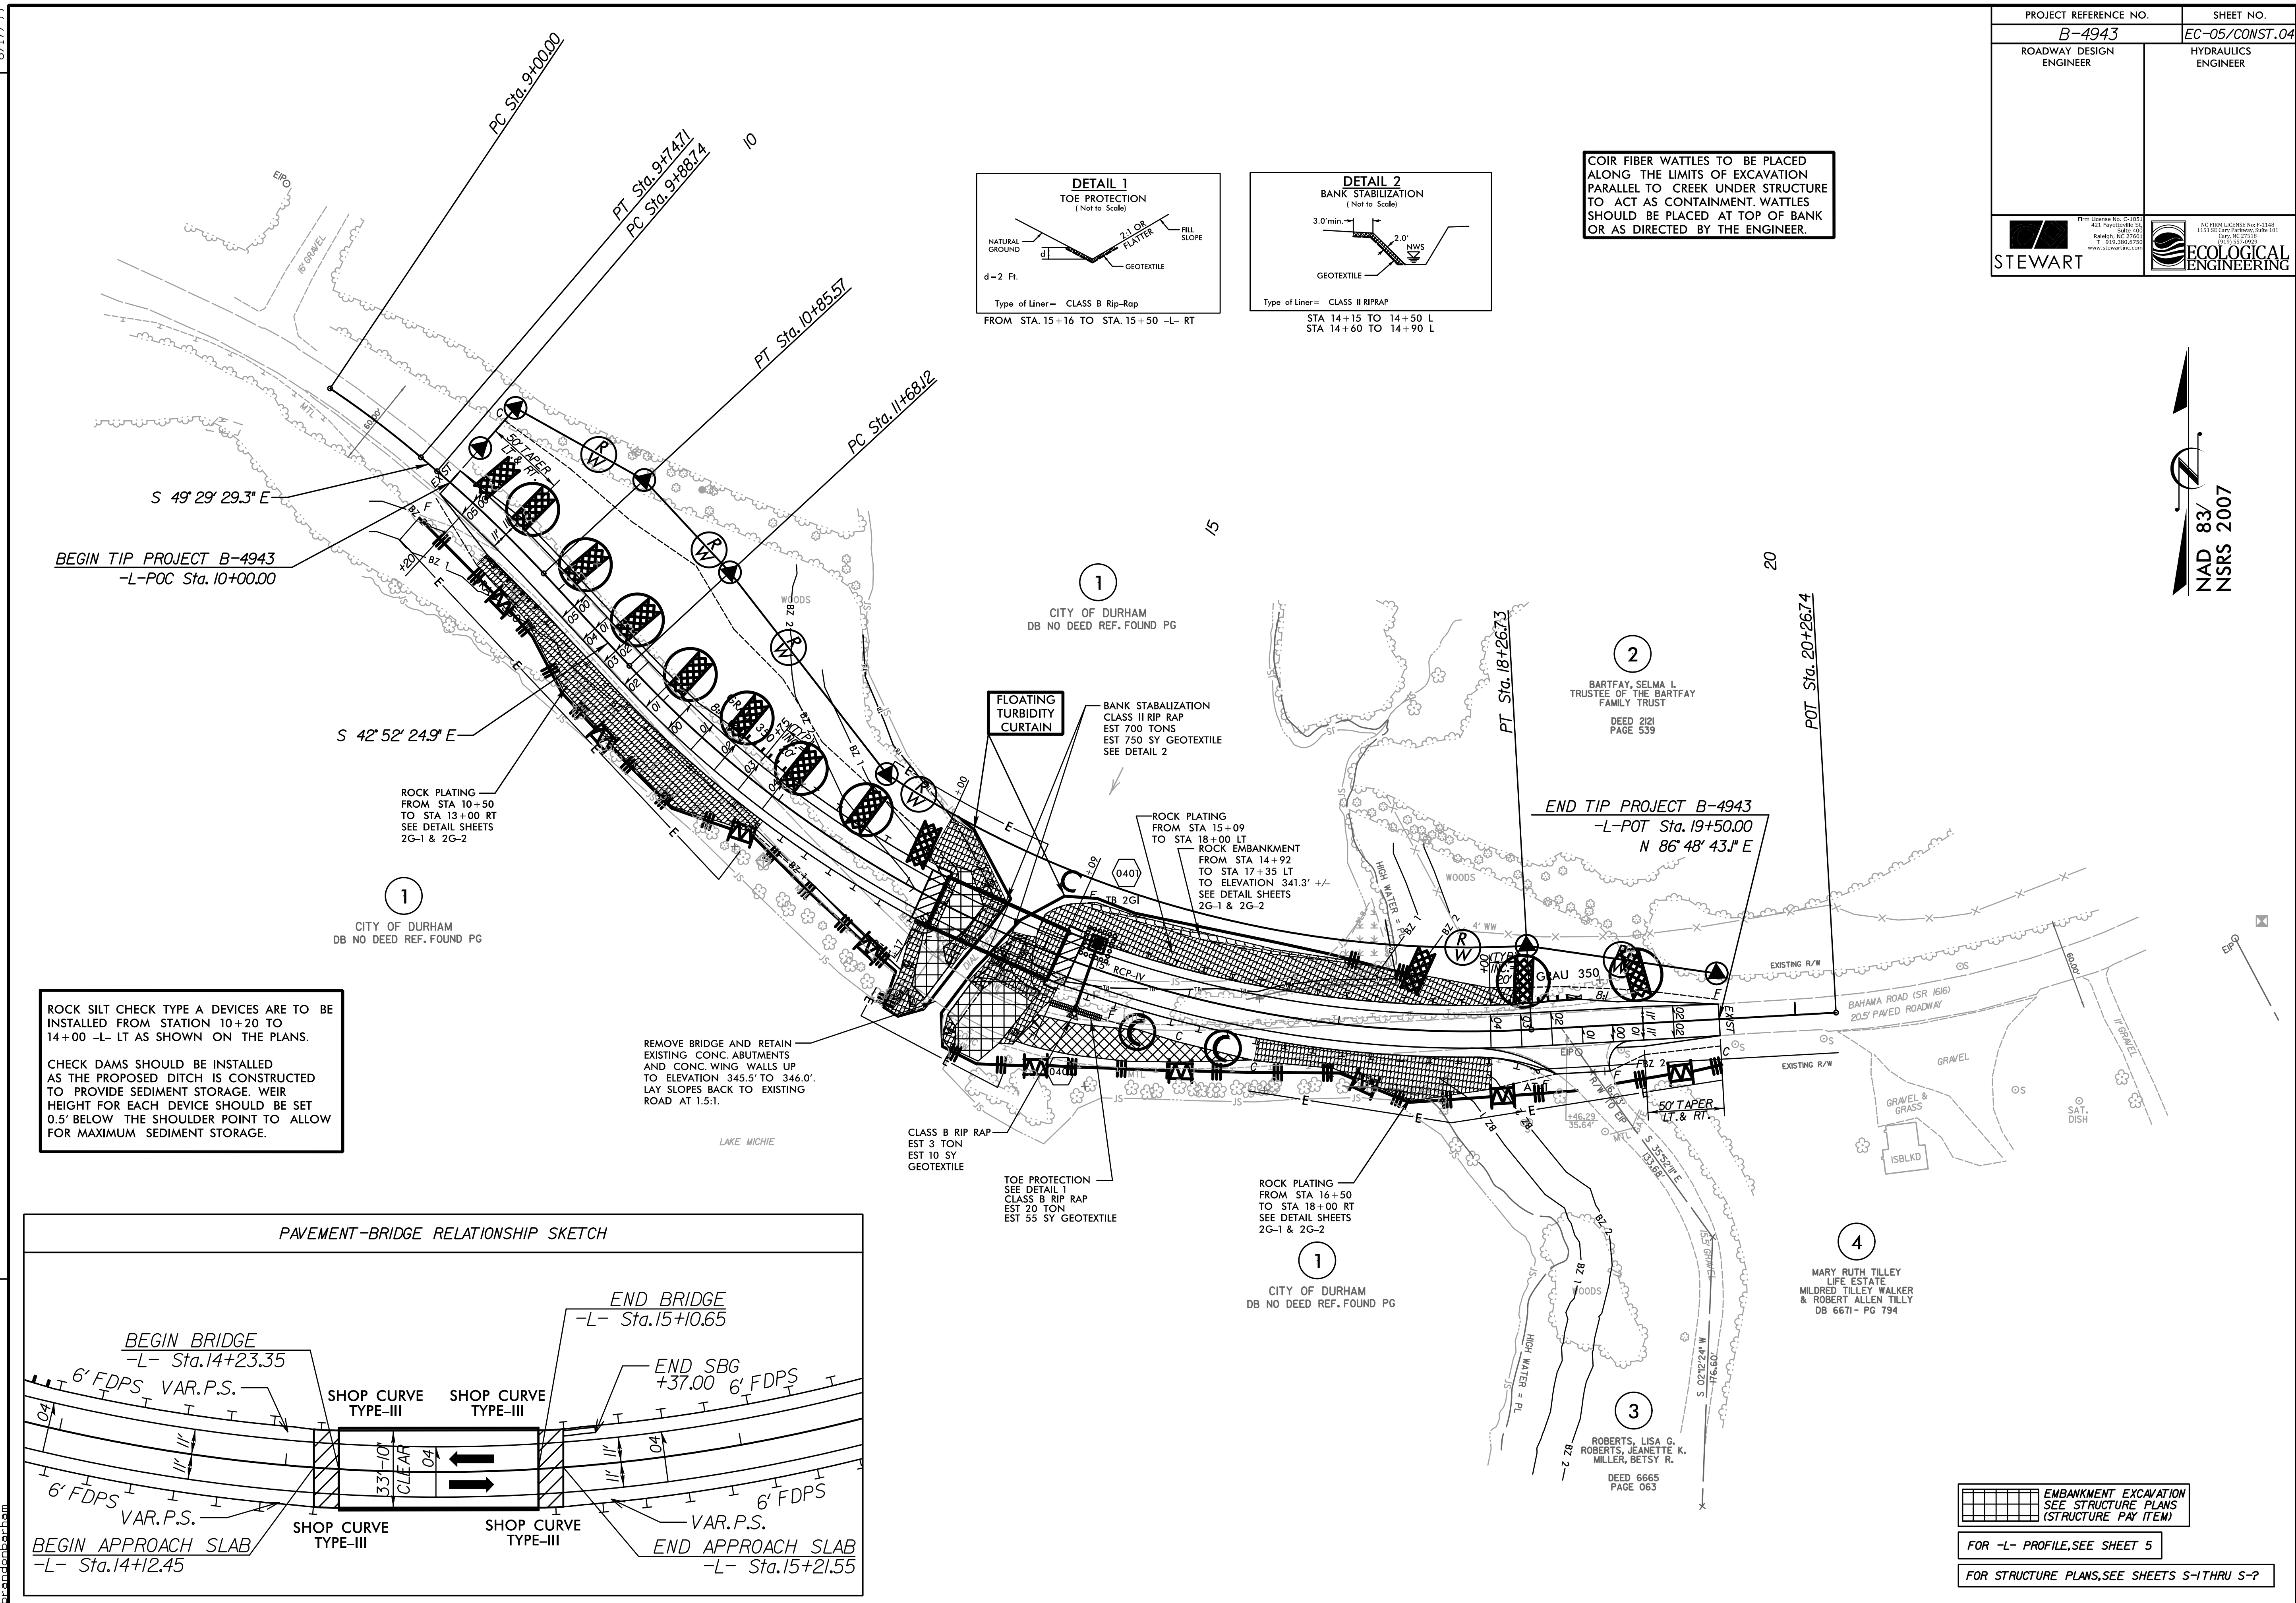

ROCK SILT CHECK TYPE A DEVICES ARE TO BE INSTALLED FROM STATION 10+20 TO 14+00 -L- LT AS SHOWN ON THE PLANS.

CHECK DAMS SHOULD BE INSTALLED AS THE PROPOSED DITCH IS CONSTRUCTED TO PROVIDE SEDIMENT STORAGE. WEIR HEIGHT FOR EACH DEVICE SHOULD BE SET 0.5' BELOW THE SHOULDER POINT TO ALLOW FOR MAXIMUM SEDIMENT STORAGE.

REMOVE BRIDGE AND RETAIN EXISTING CONC. ABUTMENTS AND CONC. WING WALLS UP TO ELEVATION 345.5' TO 346.0'. LAY SLOPES BACK TO EXISTING ROAD AT 1.5:1.

EMBANKMENT EXCAVATION SEE STRUCTURE PLANS (STRUCTURE PAY ITEM)

FOR -L- PROFILE, SEE SHEET 5

FOR STRUCTURE PLANS, SEE SHEETS S-1 THRU S-7

REVISIONS

B-17/99
 H5L06 PM
 H:\Projects\B4943\Design\B4943_REU\EC_PSH04_FINAL.dgn
 11/15/2007 10:58:11 AM