

6/2/19

# PAVEMENT SCHEDULE


(FINAL PAVEMENT DESIGN)

<b>C1</b>	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	<b>N</b>	GEOTEXTILE FOR SOIL STABILIZATION.
<b>C2</b>	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	<b>P</b>	PRIME COAT.
<b>C3</b>	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	<b>R1</b>	1'-6" CONCRETE CURB AND GUTTER.
<b>C4</b>	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	<b>R2</b>	2'-6" CONCRETE CURB AND GUTTER.
<b>D1</b>	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	<b>R3</b>	2'-9" CONCRETE CURB AND GUTTER.
<b>D2</b>	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	<b>S</b>	CONCRETE SIDEWALK.
<b>D3</b>	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.	<b>T</b>	EARTH MATERIAL.
<b>E1</b>	PROP. APPROX. 3" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	<b>U</b>	EXISTING PAVEMENT.
<b>E2</b>	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	<b>V1</b>	3" MILLING EXISTING PAVEMENT.
<b>E3</b>	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH.	<b>V2</b>	1½" MILLING EXISTING PAVEMENT.
<b>J1</b>	PROP. 6" AGGREGATE BASE COURSE.	<b>W1</b>	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL).
<b>J2</b>	PROP. 8" AGGREGATE BASE COURSE.	<b>W2</b>	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL).
<b>L</b>	CLASS IV SUBGRADE STABILIZATION.	NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.	



Stantec Consulting Services Inc.  
801 Jones Franklin Road  
Suite 300  
Raleigh, NC 27606  
Tel. (919) 851-6866  
Fax. (919) 851-7024  
www.stantec.com  
License No. F-0672


PROJECT REFERENCE NO. <i>U-3334B</i>	SHEET NO. <i>2A-1</i>
ROADWAY DESIGN ENGINEER <i>Stephen T. Smallwood</i> SEAL 022037	PAVEMENT DESIGN ENGINEER <i>Quinn S. Morrison</i> SEAL 022896
12/4/2017	12/4/2017
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	

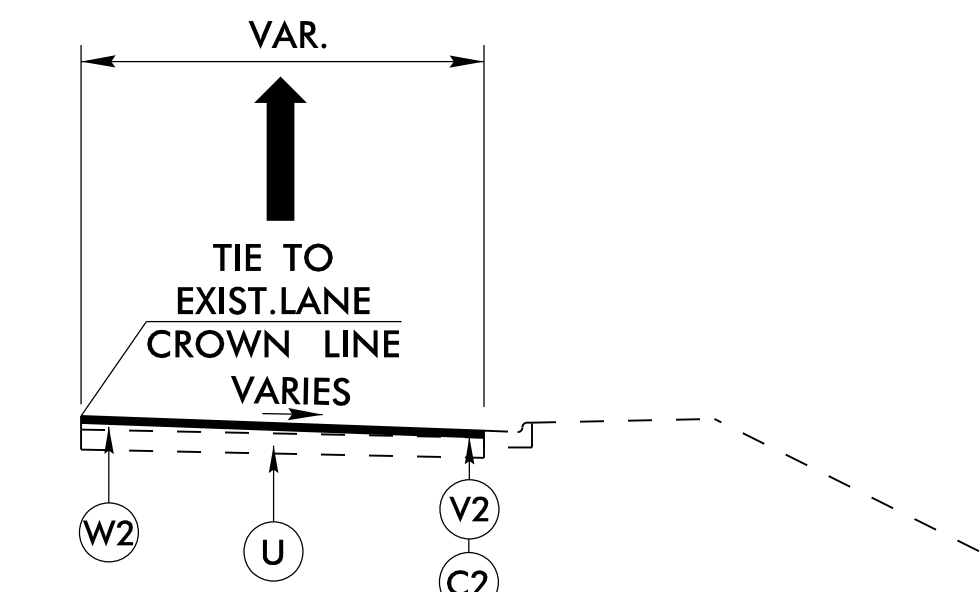


## CURB MILLING DETAIL

USE MILLING DETAIL AT THE FOLLOWING LOCATIONS:


- Y- STA. 18+07.09 LT TO -Y- STA. 19+36.39 LT
- Y- STA. 20+55.92 LT TO -Y- STA. 21+03.05 LT
- Y1- STA. 10+75.00 LT/RT TO -Y1- STA. 11+34.45 LT/RT
- Y1A REV- STA. 10+37.51 RT TO -Y1A REV- STA. 10+87.51 RT
- Y2- STA. 10+20.00 LT/RT TO -Y2- STA. 11+02.24 LT/RT
- Y2A- STA. 10+37.34 LT/RT TO -Y2A- STA. 11+13.00 LT/RT
- Y3- STA. 13+25.00 LT TO -Y3- STA. 13+82.38 LT
- Y3- STA. 13+25.00 RT TO -Y3- STA. 13+64.01 RT
- Y4- STA. 10+39.86 RT TO -Y4- STA. 11+09.64 RT
- DRW1- STA. 10+36.06 LT TO -DRW1- STA. 11+65.00 LT
- DRW1- STA. 10+48.31 RT TO -DRW1- STA. 11+65.00 RT

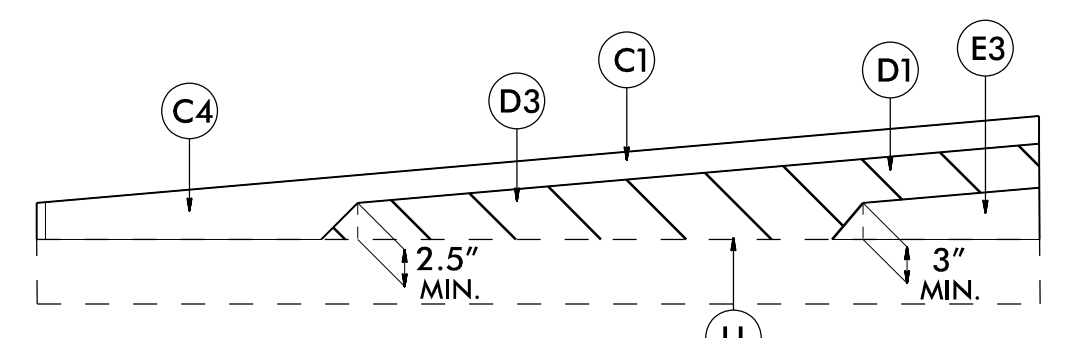

Detail W1 Wedging Detail For Resurfacing

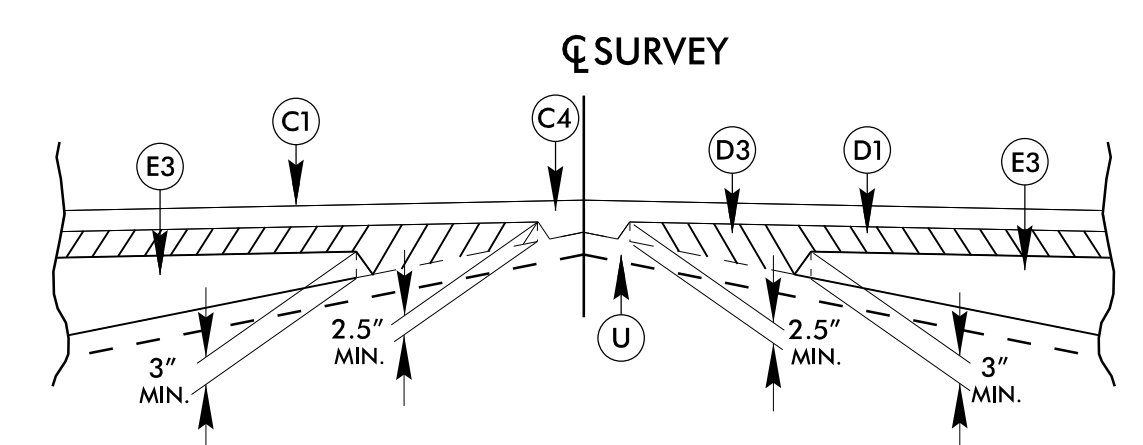

Detail W2 Showing Method of Wedging

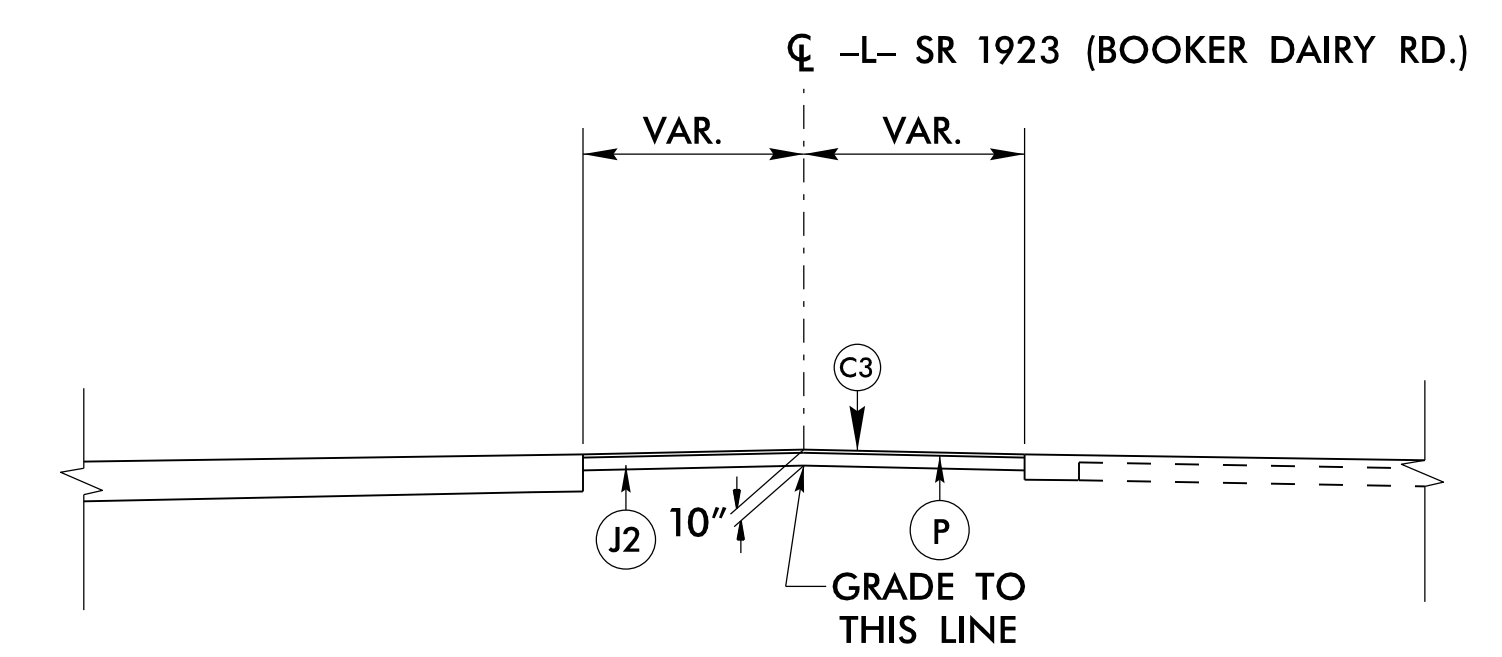

## TEMPORARY PAVEMENT DETAIL

USE TEMPORARY PAVEMENT DETAIL AT THE FOLLOWING LOCATION:

- L- STA. 42+82.04 TO -L- STA. 51+58.83
- L- STA. 70+36.81 TO -L- STA. 74+32.81
- L- STA. 122+45.99 TO -L- STA. 123+34.85

NOTE: SEE TRANSPORTATION MANAGEMENT PLANS FOR PAVEMENT LOCATIONS

12/4/2017  
U:\Roadway\Proj\U3334B\_RdJ-tyr.dgn  
cno/1100