




PAVEMENT SCHEDULE					
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	D2	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	V1	0 - 1 1/2" MILLING NEW ASPHALT TO BE PAVED BACK FLUSH.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS	D3	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	V2	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH
C3	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	R	EXISTING CURB AND GUTTER	V3	MILL ASPHALT PAVEMENT, 3" DEPTH
C4	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS	S	SHOULDER GRADING, ASB REQUIRED (EXCEPT AT RESIDENTIAL AREAS)	V4	MILL ASPHALT PAVEMENT, 4" DEPTH
D1	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	U	EXISTING PAVEMENT	V5	MILL ASPHALT PAVEMENT, 4 1/2" DEPTH

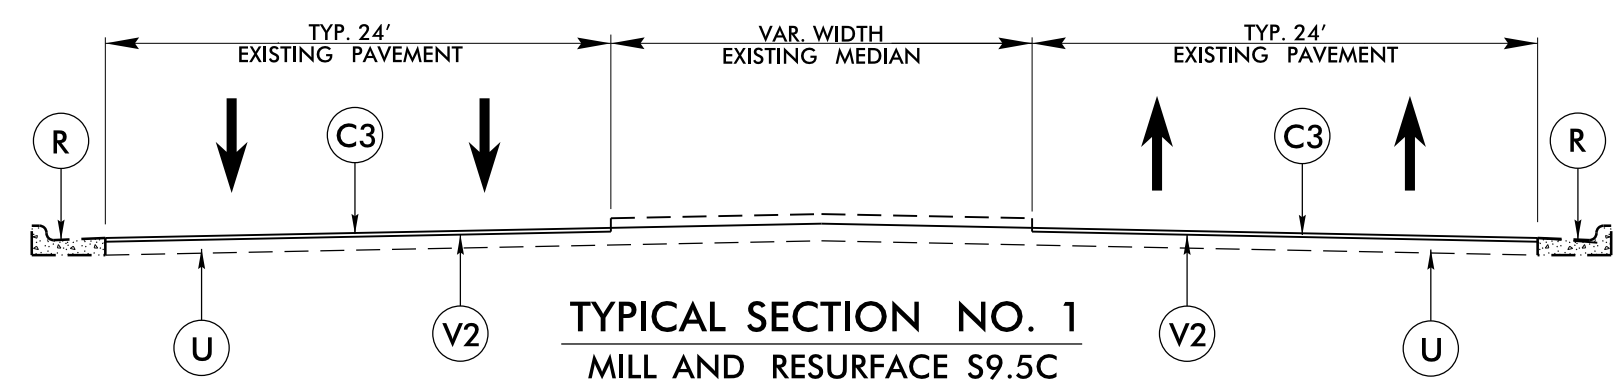

MAP NO. 1 (NC 54)
-from Chapel Hill Rd to Reedy Creek Rd
-from Grande Heights Dr to Chapel Hill Rd

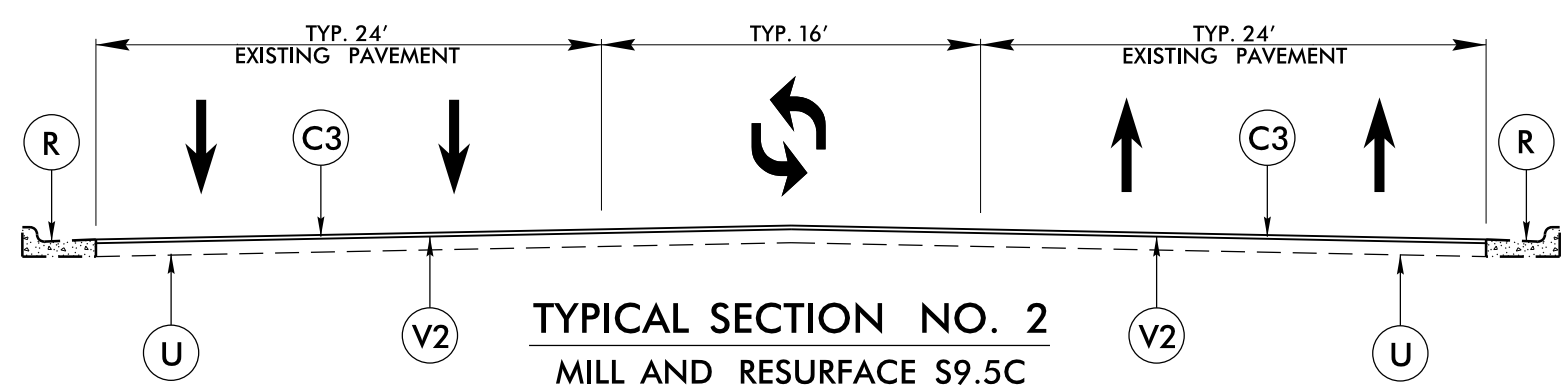

MAP NO. 1 (NC 54)
-from Reedy Creek Rd to Grande Heights Dr
MAP NO. 5 (Maynard Rd)
MAP NO. 7 (Maynard Rd)

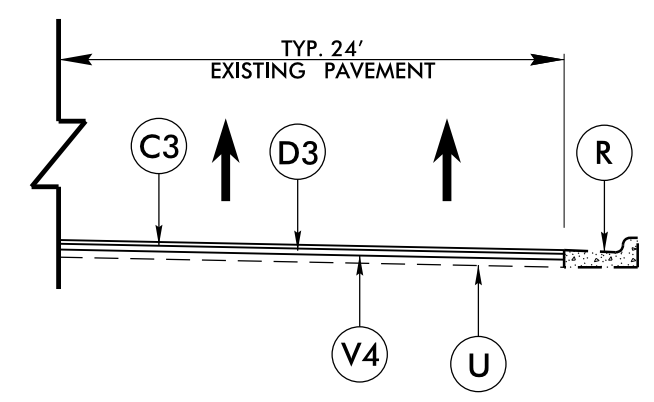

Use in conjunction with T.S. No. 2 on Map No. 5 (Maynard Rd)
- from 300' south of Chatham St intersection to Chatham St.

08-NOV-2017 10:59
 N:\INT\CS\Structure_Jobs\2017 Projects\17-0111.103 Wake West Resurfacing\Design\Roadway\Proj\2019 Wake West Rdj_Typ_4.dgn
 \$\$\$\$PRINTER\$\$\$\$