


5/14/99

PAVEMENT SCHEDULE
FINAL PAVEMENT DESIGN


C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	D3	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	R1	5" MONOLITHIC CONCRETE ISLAND (KEYED IN)
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	D4	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2.5" IN DEPTH OR GREATER THAN 4" IN DEPTH.	R2	SHOULDER BERM GUTTER (SBG)
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	T	EARTH MATERIAL
C4	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5.5" IN DEPTH.	U	EXIST. PAVEMENT
C5	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	J1	PROP. 8" AGGREGATE BASE COURSE	V	INCIDENTAL MILLING
C6	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	J2	PROP. 10" AGGREGATE BASE COURSE	W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE -L- WEDGING DETAIL)
C7	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	L1	CLASS IV SUBGRADE STABILIZATION	W1	VARIABLE DEPTH ASPHALT PAVEMENT (SEE -Y- WEDGING DETAIL)
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	N1	GEOTEXTILE FOR SOIL STABILIZATION	W2	VARIABLE DEPTH ASPHALT PAVEMENT (SEE -DET- WEDGING DETAIL)
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2.5" IN DEPTH OR GREATER THAN 4" IN DEPTH.	P1	PRIME COAT AT THE RATE OF .35 GAL. PER SQ. YD.	Y	MILLED RUMBLE STRIP

NOTE: ALL PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

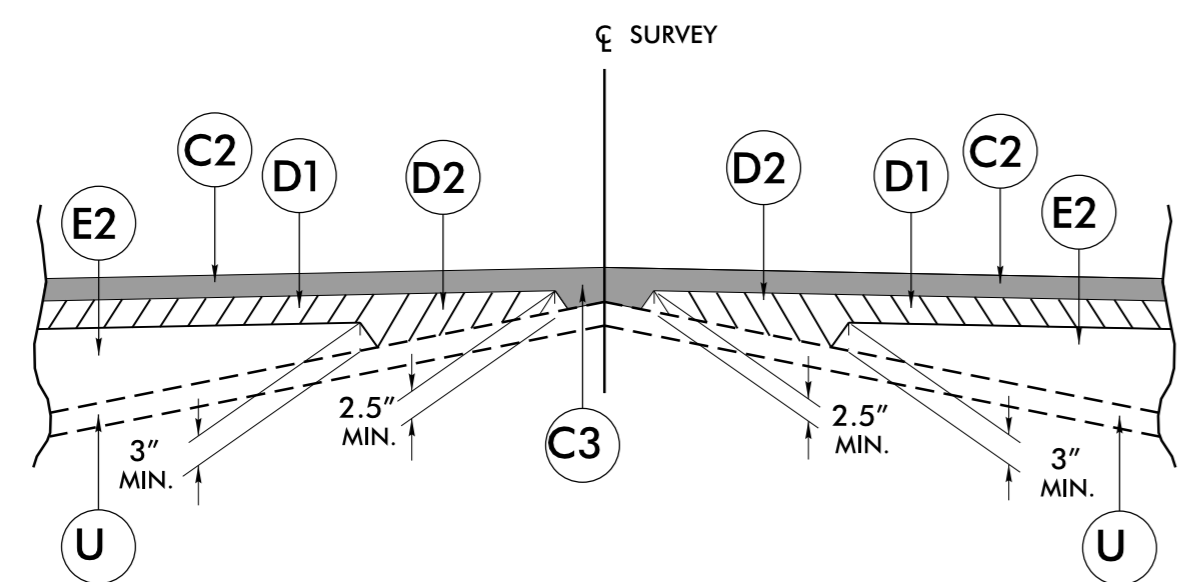


Detail Showing Method of Wedging - W

-L-

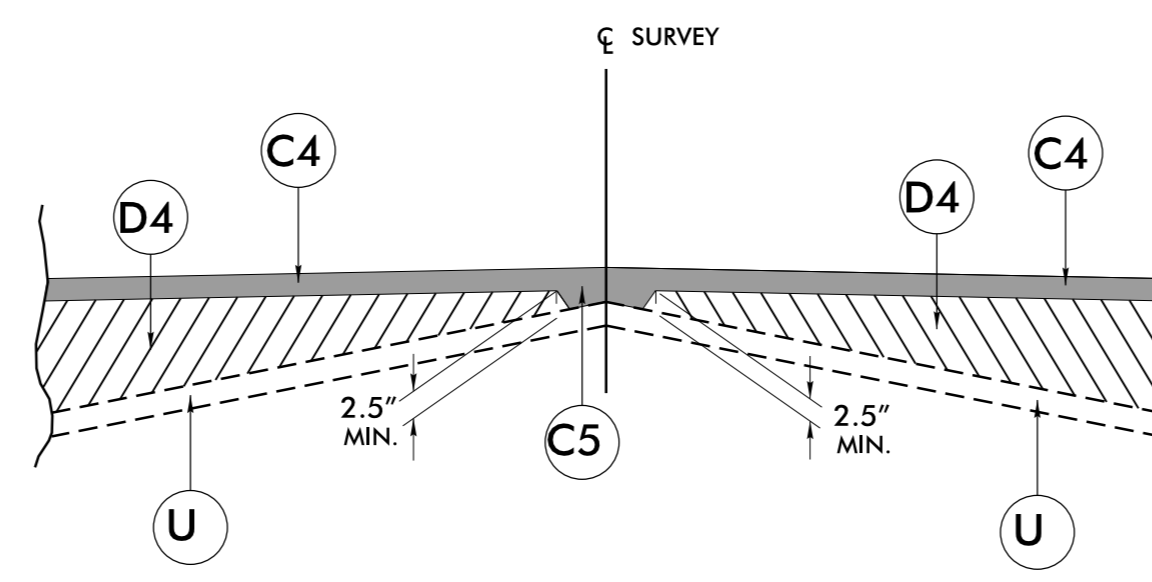



Detail Showing Method of Wedging - W1

-Y-

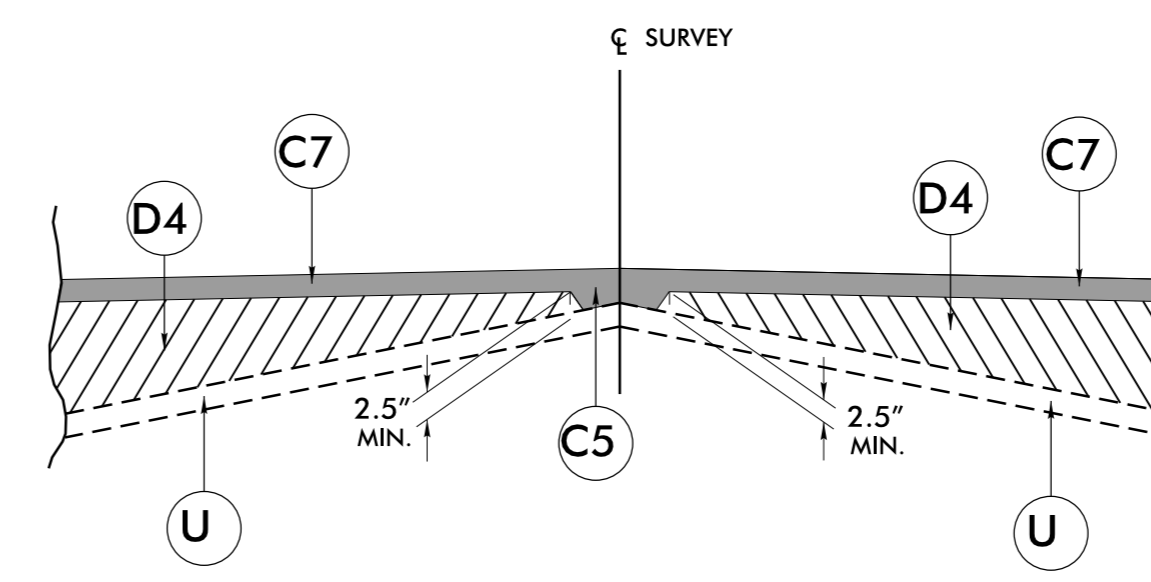


Detail Showing Method of Wedging - W2


-DET-

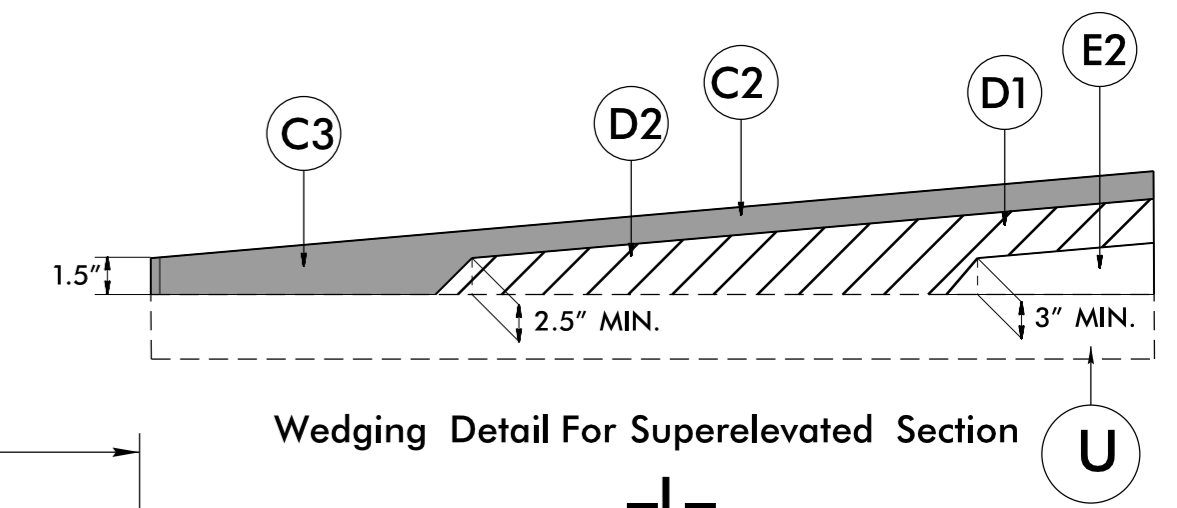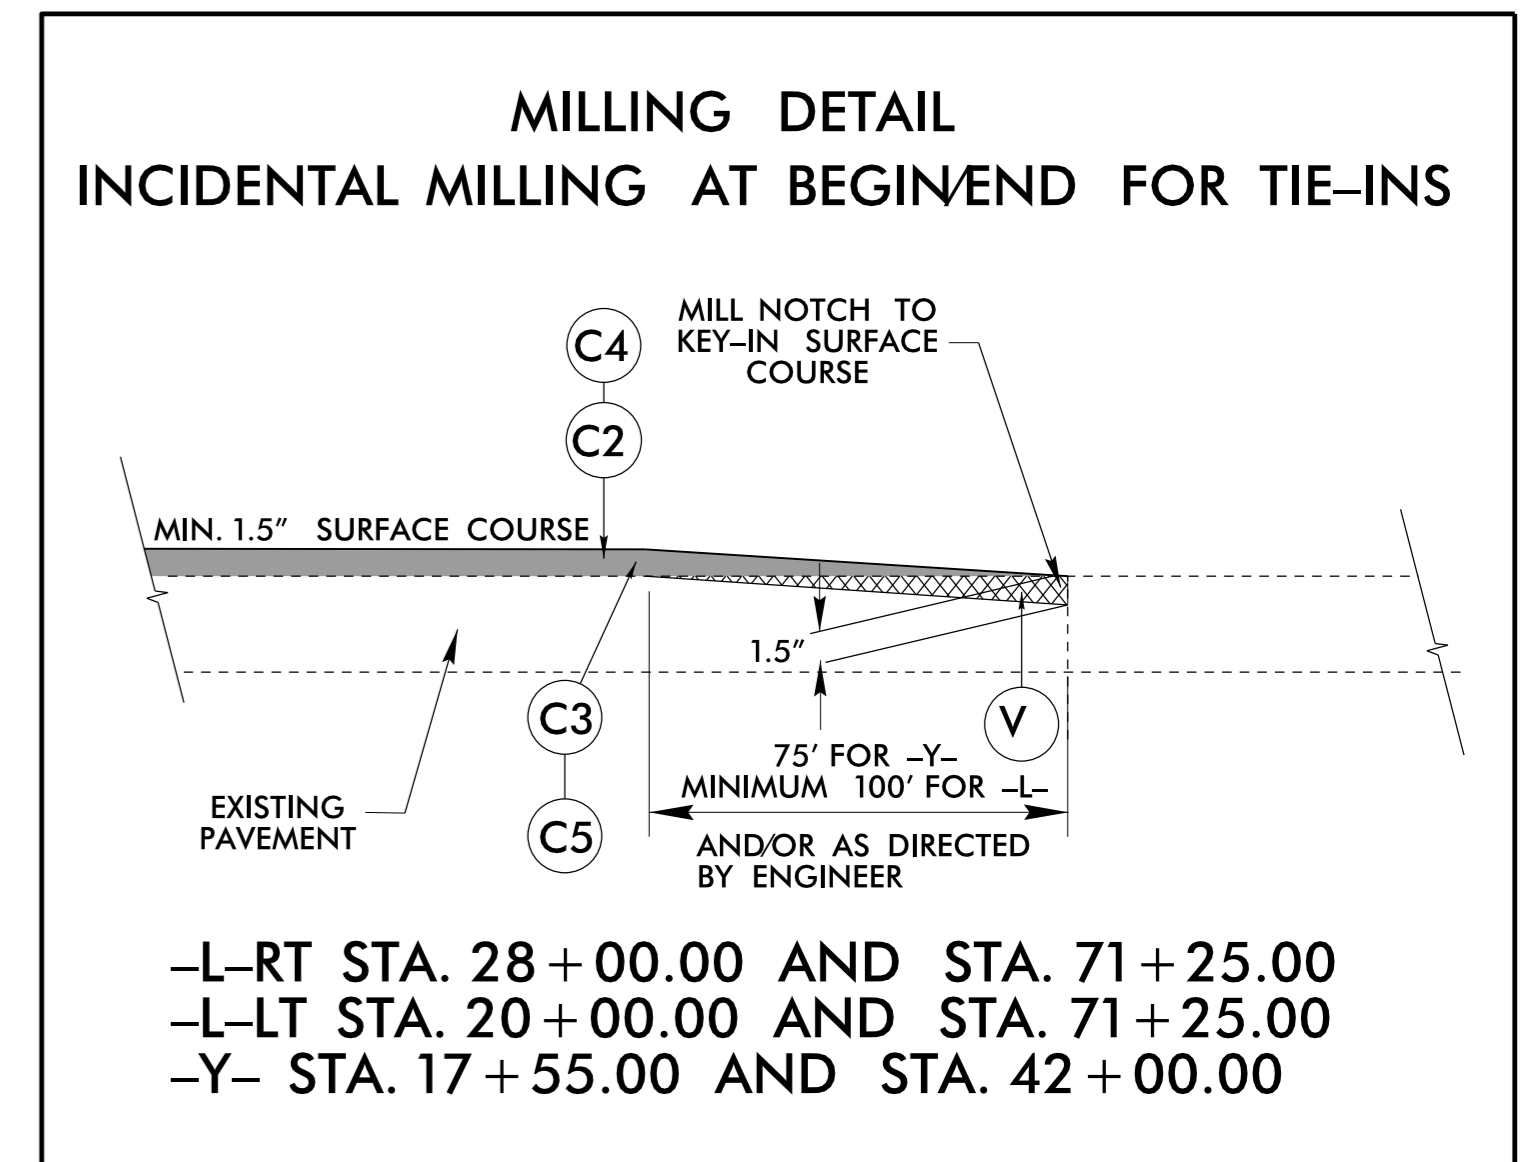

Wedging Detail For Superelevated Section -L-

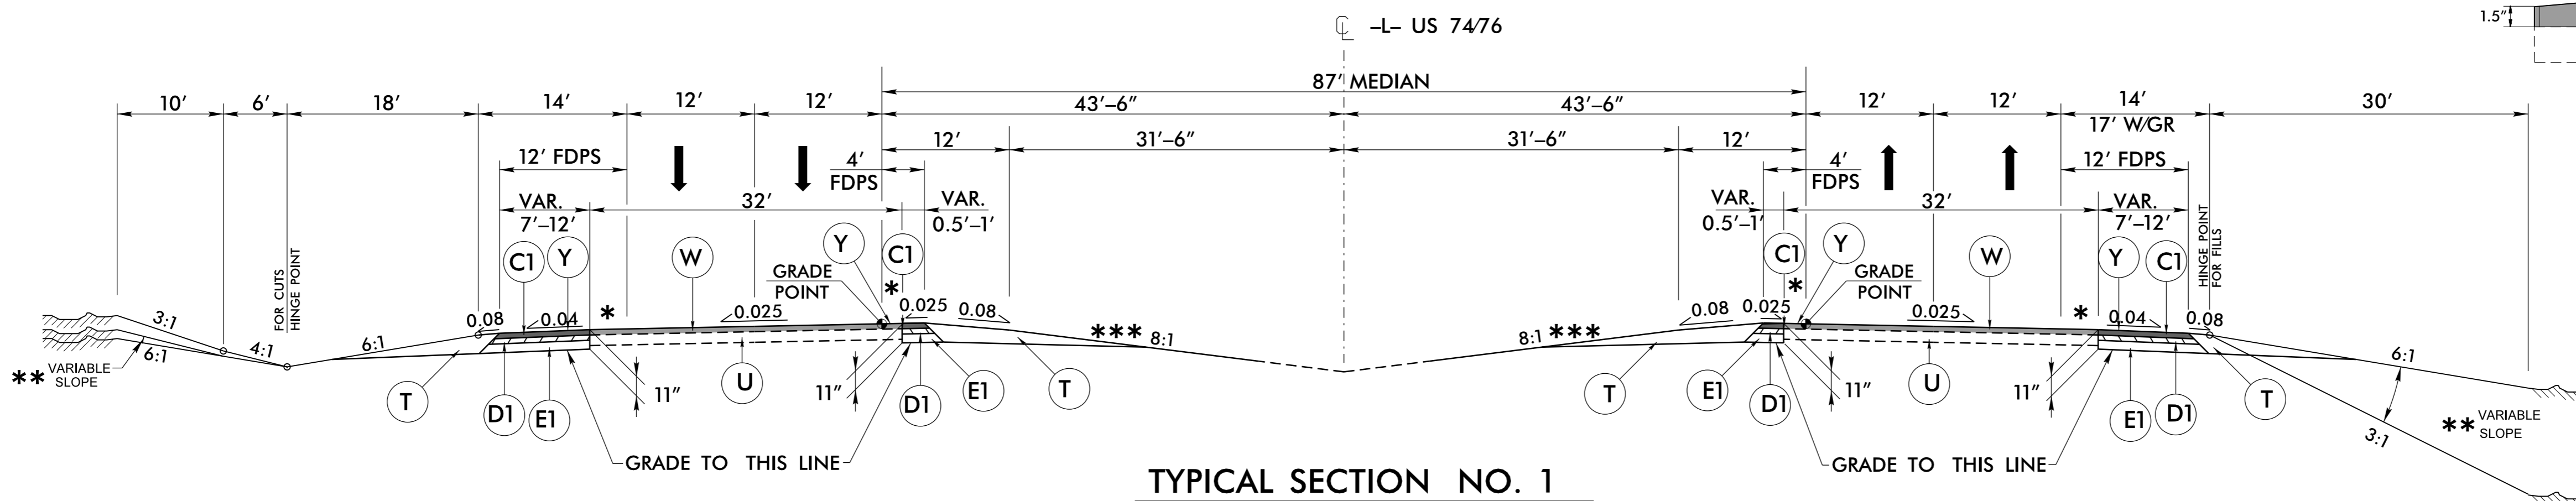

TYPICAL SECTION NO. 1

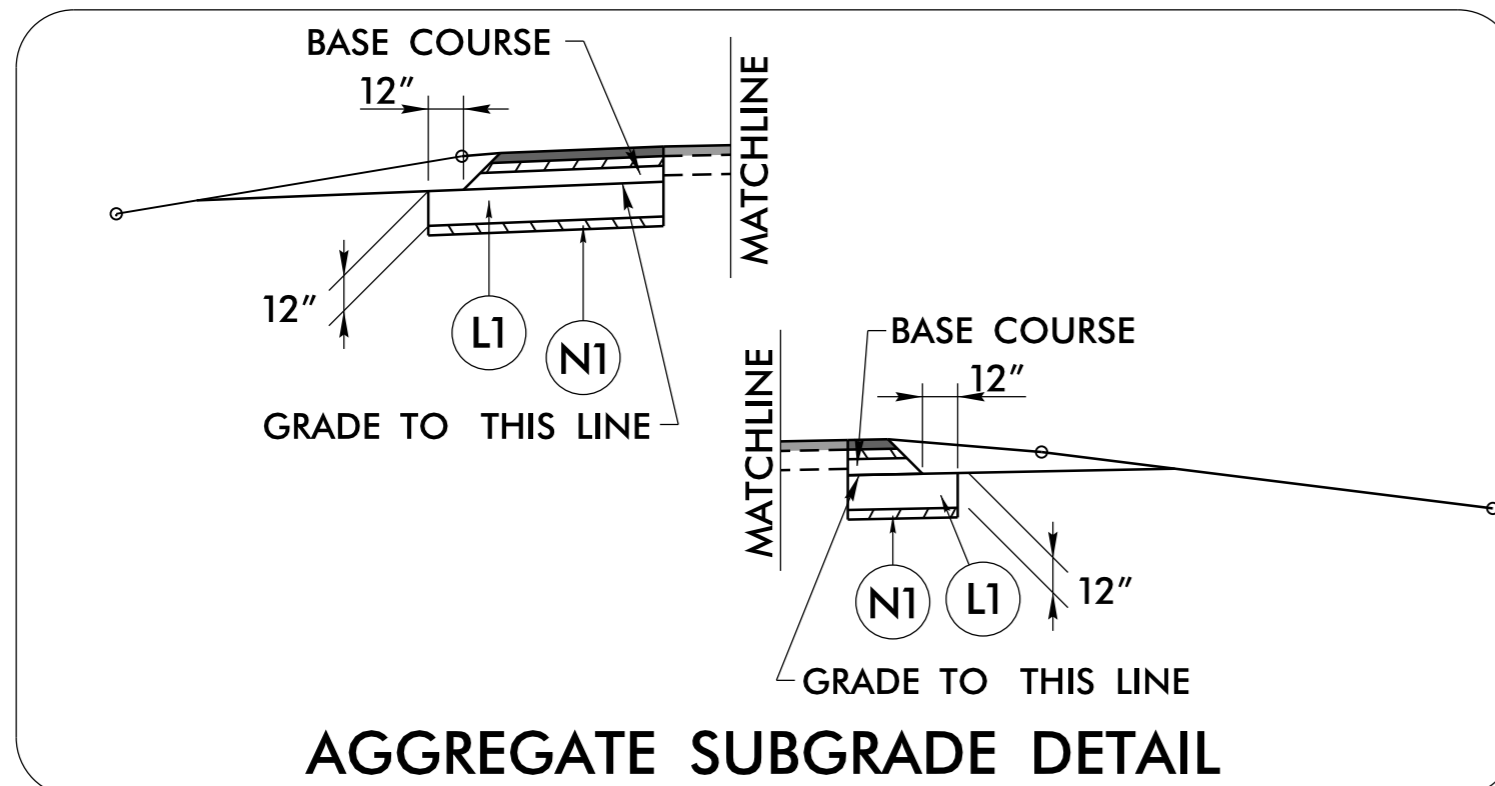

AGGREGATE SUBGRADE DETAIL

USE AGGREGATE SUBGRADE DETAIL IN CONJUNCTION WITH TYPICAL SECTION NO. 1, 1A, 1B, 2, & 2A

- L- STA. 26+25.00 (LT) TO STA. 27+75.00 (LT)
- L- STA. 30+25.00 TO STA. 31+75.00
- L- STA. 34+25.00 TO STA. 36+75.00
- L- STA. 66+75.00 TO STA. 69+75.00
- L- STA. 72+25.00 (RT) TO STA. 83+14.00 (RT)







USE TYPICAL SECTION NO. 1

- L- RT STA. 28+00.00 TO STA. 71+25.00
- L- LT STA. 20+00.00 TO STA. 71+25.00

* MAINTAIN ROADWAY CROSS SLOPE OVER EXISTING PAVED SHOULDERS

** SEE CROSS SECTIONS FOR VARIABLE SLOPES. FILL SLOPES WITHIN THE INTERCHANGE WILL BE 4:1 OR FLATTER

*** 8:1 TYPICAL. VARY AS NECESSARY TO MAINTAIN EXISTING MEDIAN CENTERLINE AND ELEVATION

PROJECT REFERENCE NO. R-5749	SHEET NO. 2A-1
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
ROADWAY DESIGN ENGINEER 	PAVEMENT DESIGN ENGINEER 
	
	

Invalid ExpressJob: R-5749_Rdy_tup.dgn
USER: R-5749