


# CLEARING & GRUBBING PLAN


PROJECT REFERENCE NO. R-5749	SHEET NO. EC-08/CONST.06
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

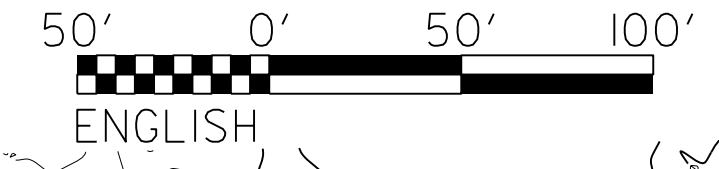

NAD 83/NSRS 2007

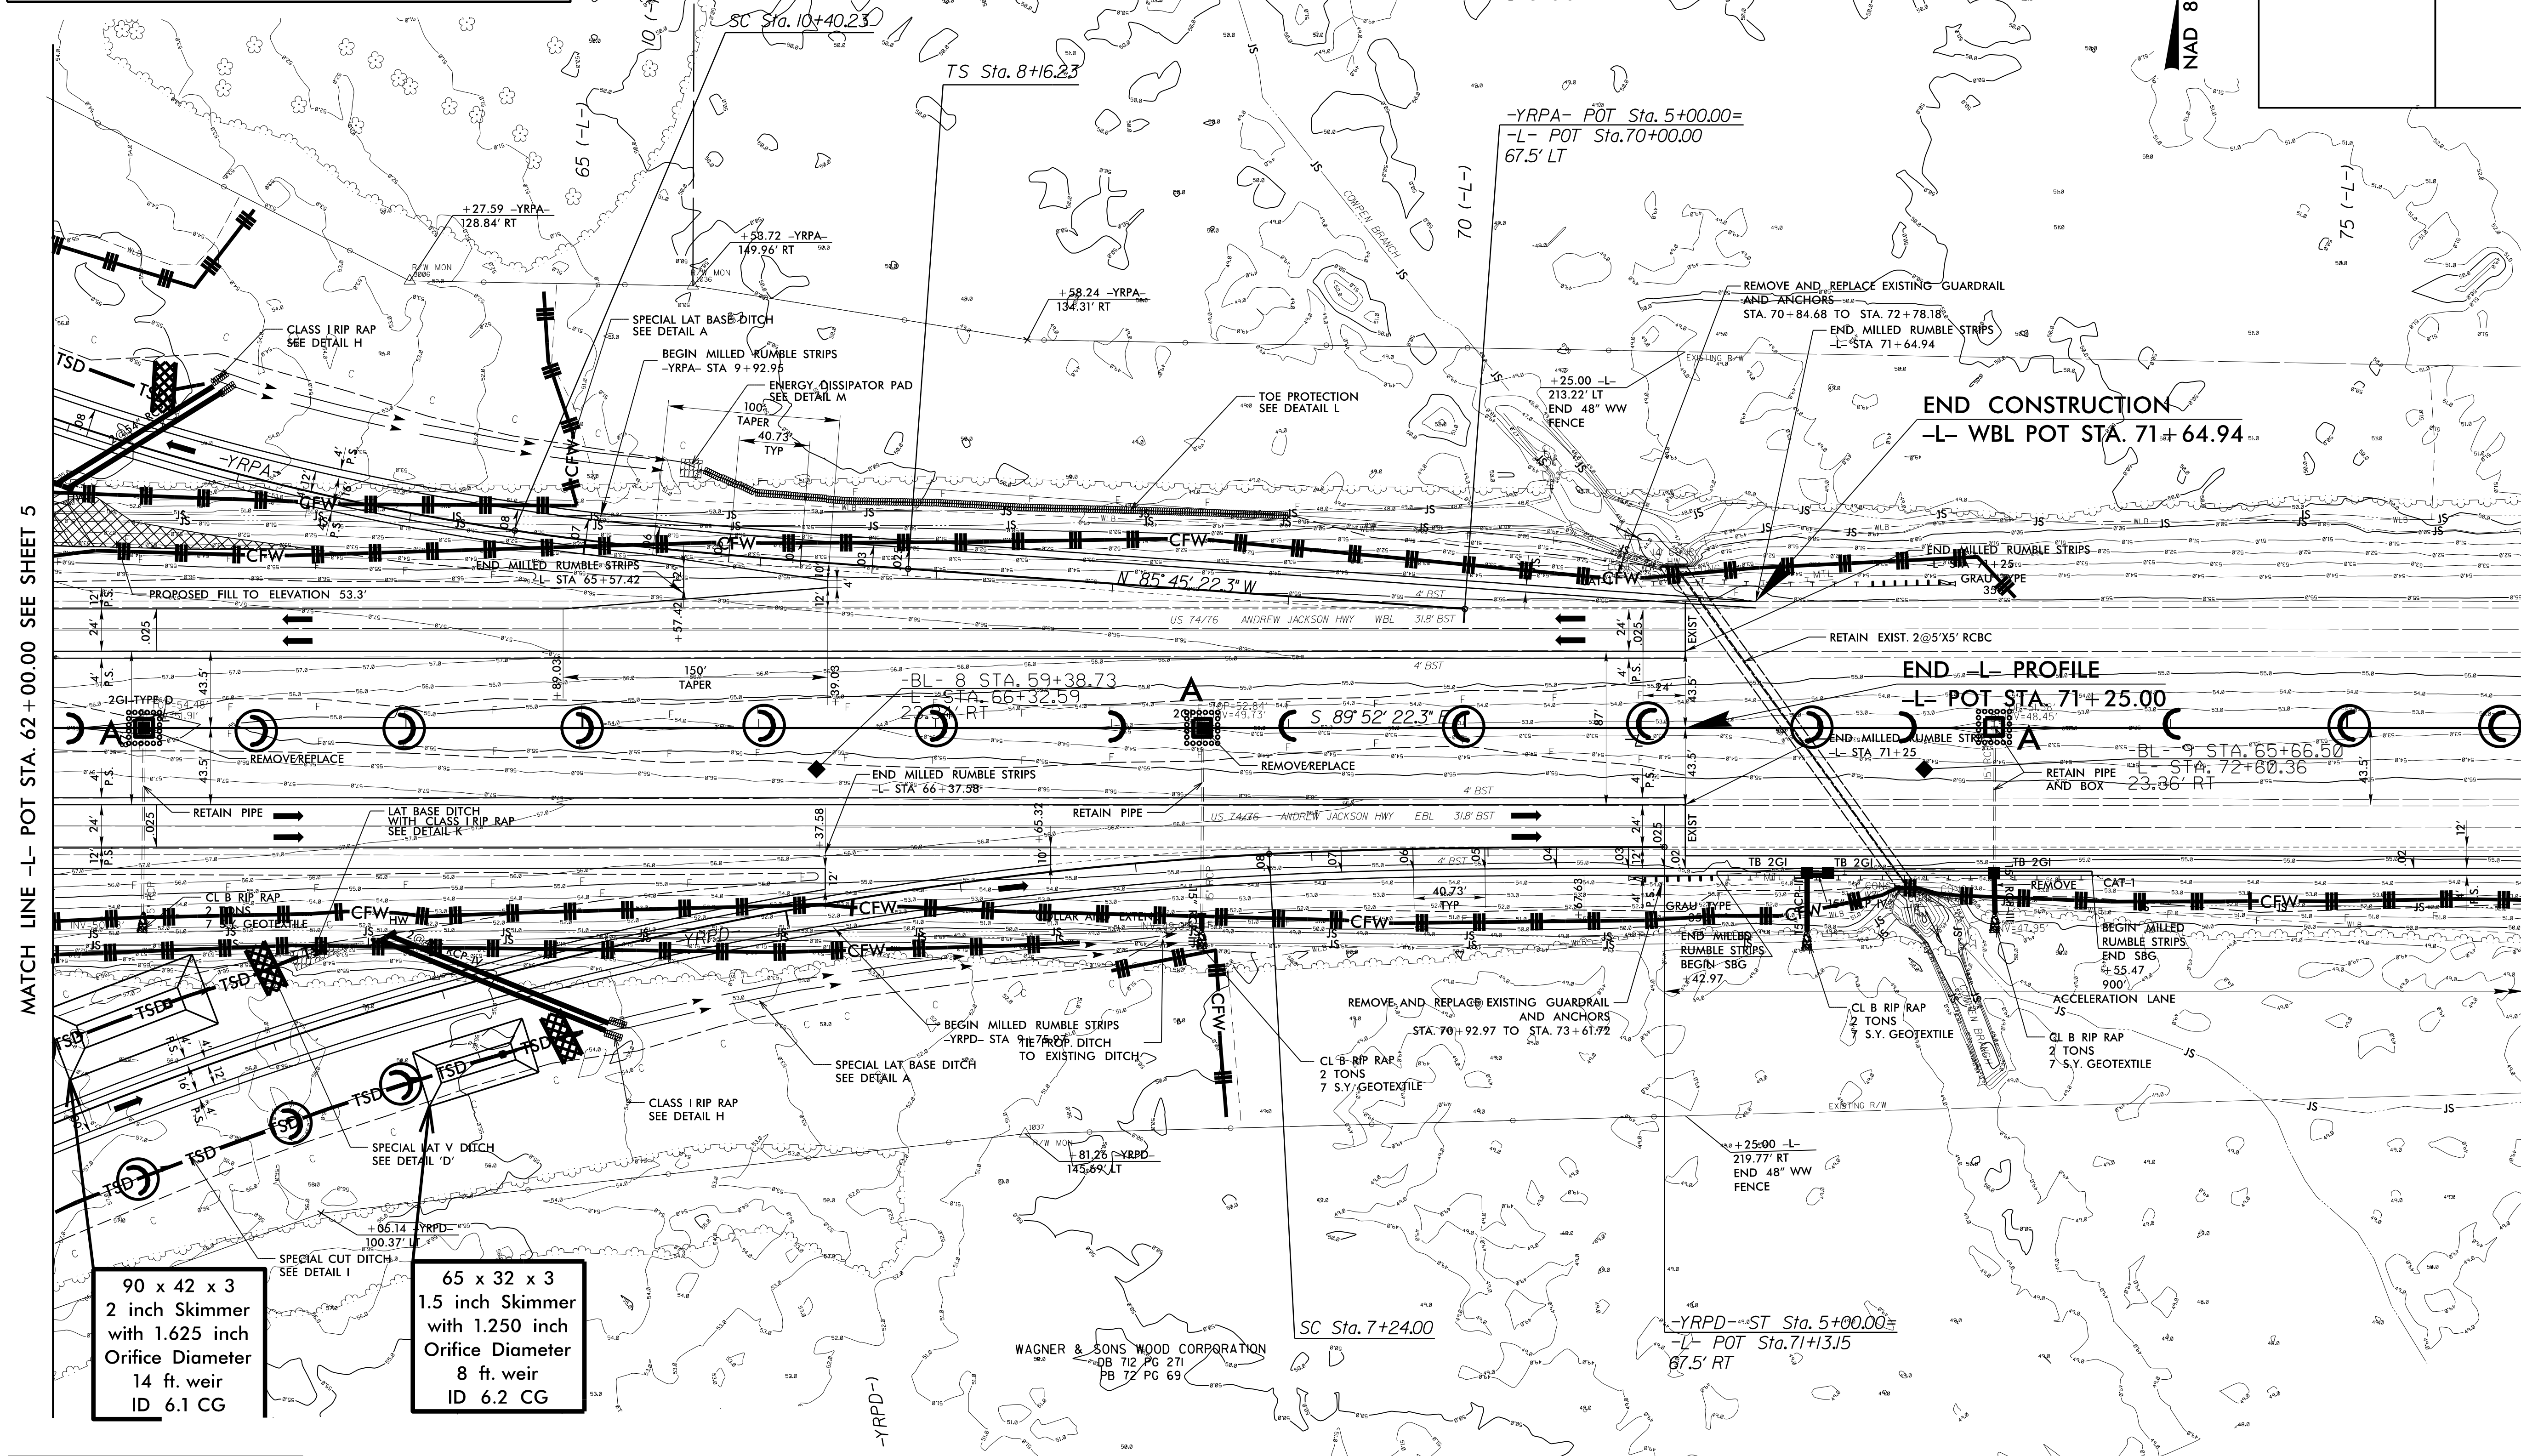

MATCH LINE -L- POT STA. 62+00.00 SEE SHEET 5

MATCH LINE -L- POT STA. 76+00.00 SEE SHEET 7

90 x 42 x 3  
2 inch Skimmer  
with 1.625 inch  
Orifice Diameter  
14 ft. weir  
ID 6.1 CG

65 x 32 x 3  
1.5 inch Skimmer  
with 1.250 inch  
Orifice Diameter  
8 ft. weir  
ID 6.2 CG

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 06

NOTE: UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

5/14/09