


5/14/99

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

CLEARING & GRUBBING PLAN

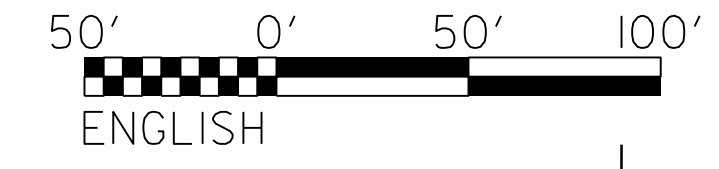


NAD 83/NSRS 2007

PROJECT REFERENCE NO. R-5749	SHEET NO. EC-09/CONST.07
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

FRANK GALLOWAY
DB 862 PG 916
PB 75 PG 84

J.J. BARNHARDT (HEIRS)
PB 75 PG 84

FRANK GALLOWAY
DB 892 PG 916
PB 75 PG 84

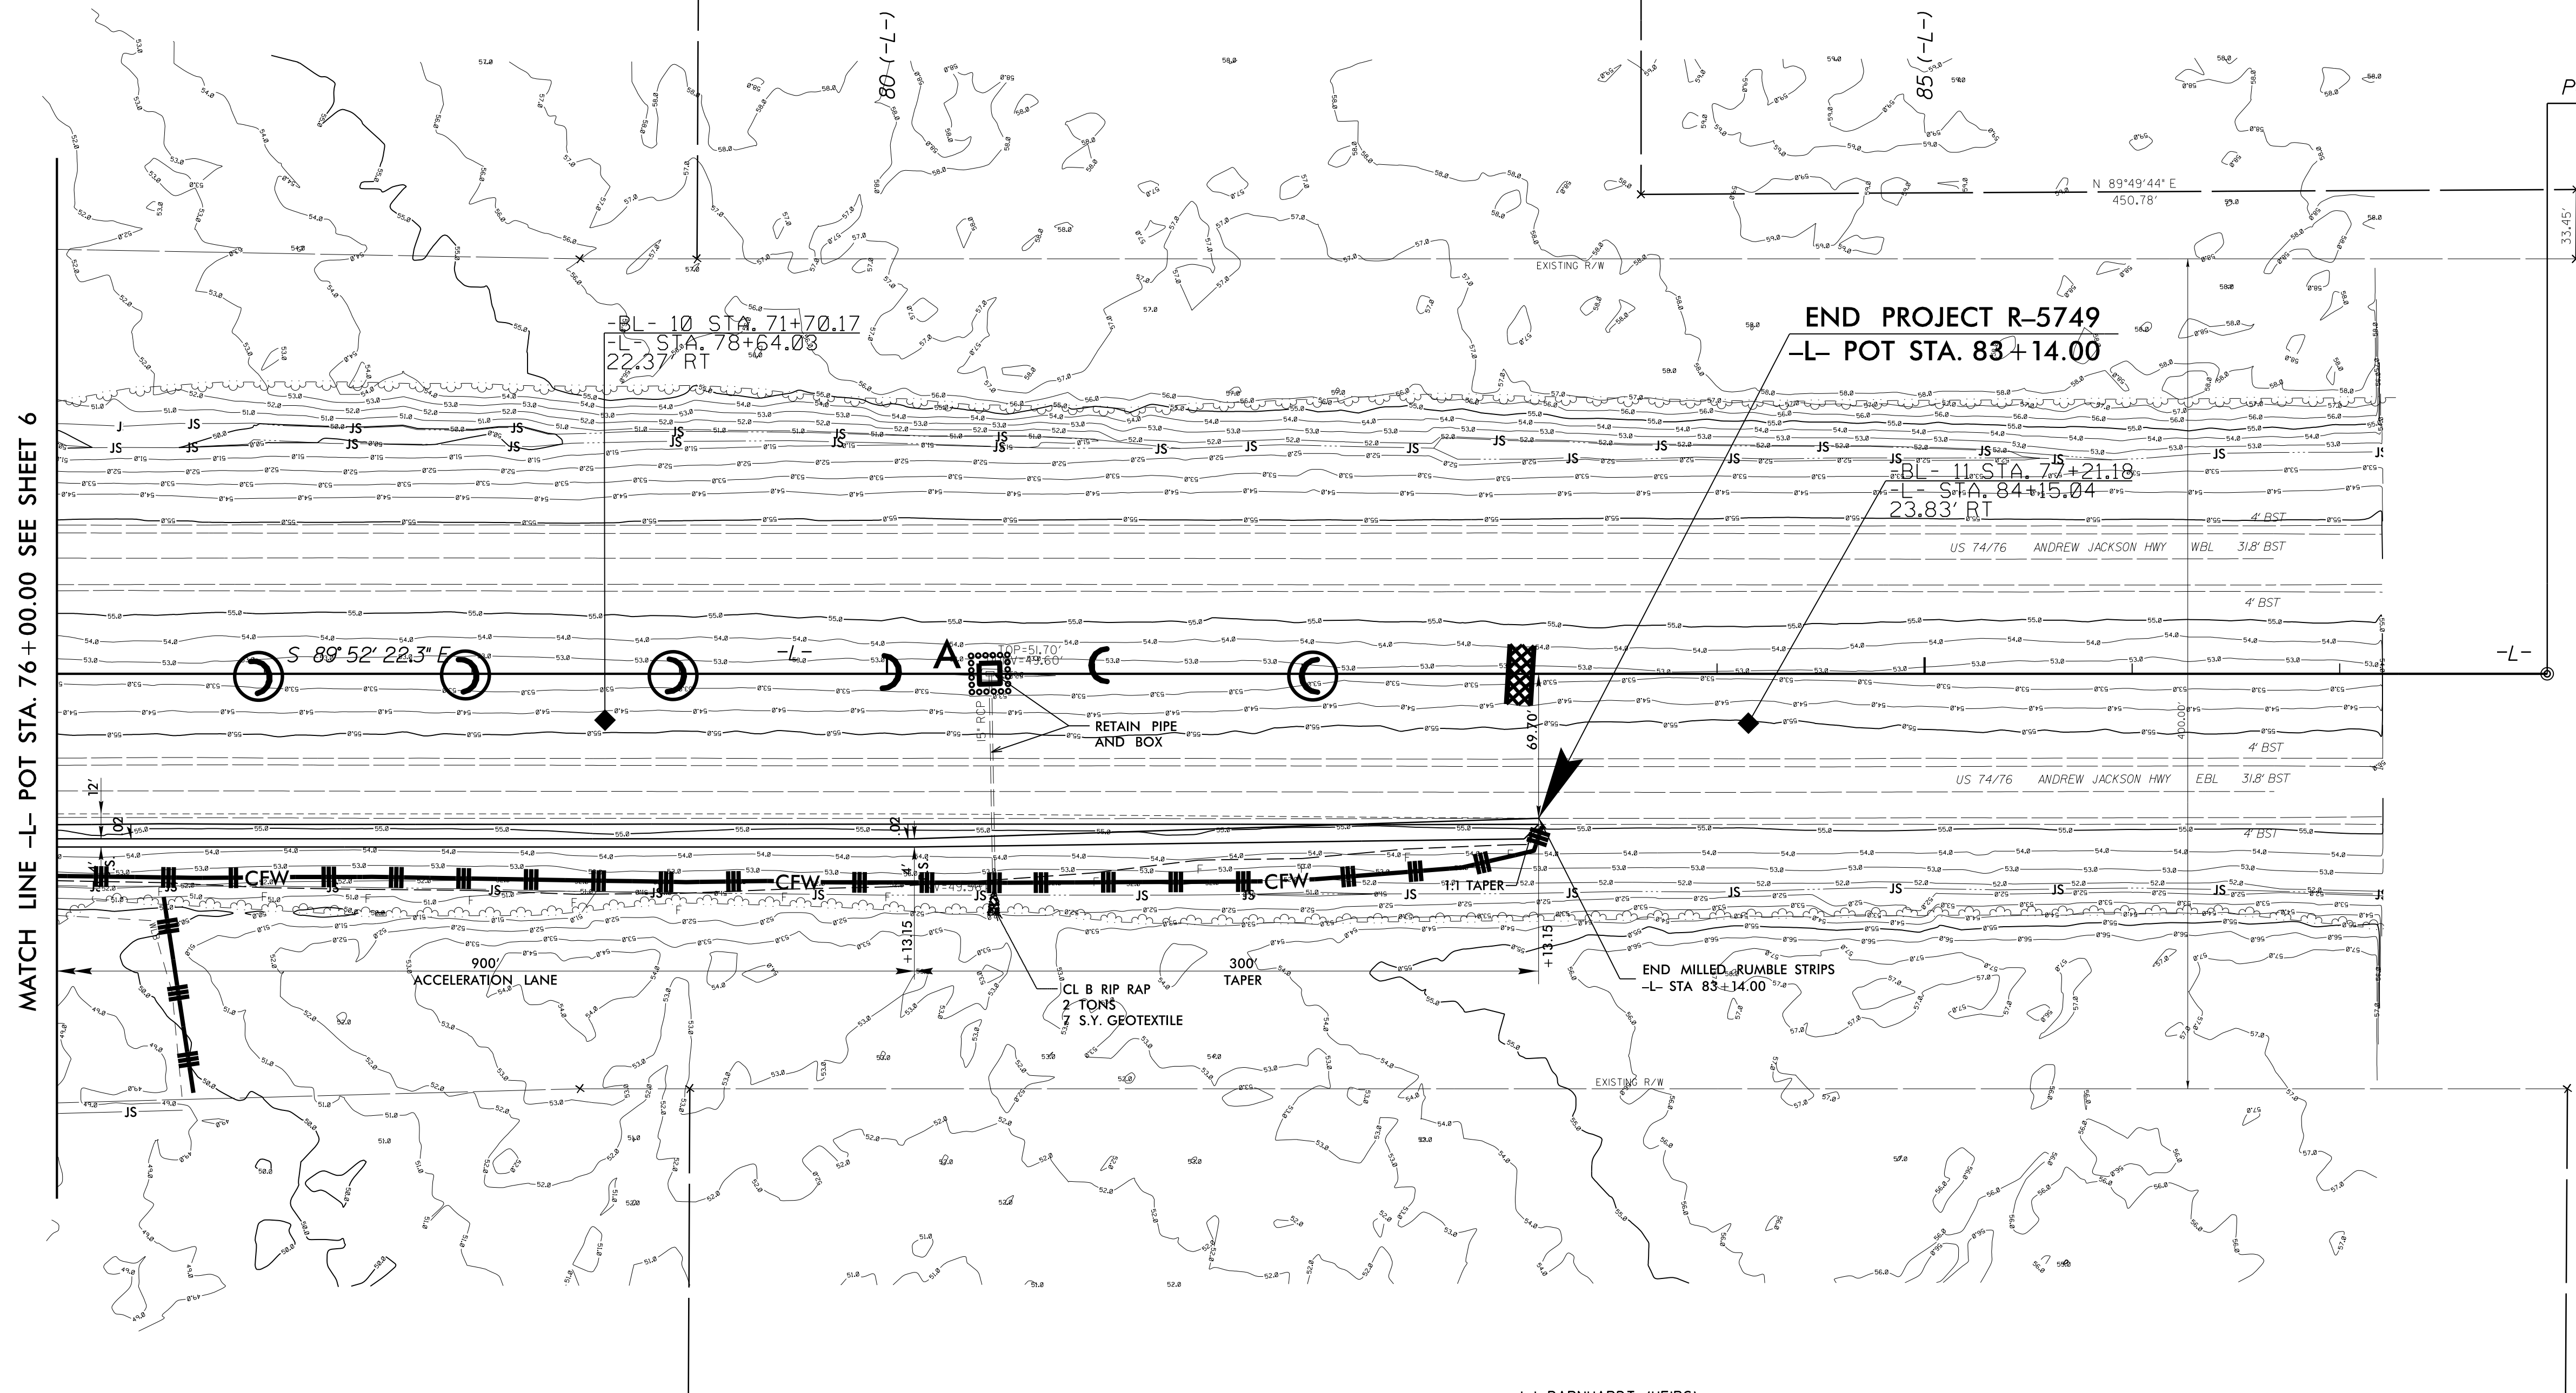

MATCH LINE -L- POT STA. 76+00.00 SEE SHEET 6

POT Sta. 88+00.00

NOTE: UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 07

WAGNER & SONS WOOD CORPORATION
DB 712 PG 271
PB 72 PG 69

J.J. BARNHARDT (HEIRS)
PB 72 PG 69

N 00°29'55" E
588.65'

S 00°30'04" W
33.45'

46
45
44
43
42
41
40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1