



| PROJ. REFERENCE NO. | SHEET NO. | TOTAL SHEETS |
|-------------------------|----------------|--------------|
| CLEVELAND CO. 2018-2019 | 7 | |
| STATE PROJ. NO. | F.A. PROJ. NO. | DESCRIPTION |
| 2018CPT.12.07.10231 | | |
| 2018CPT.12.07.20231 | | |

| PAVEMENT SCHEDULE | |
|-------------------|---|
| Y | SHOULDER RECONSTRUCTION |
| C1 | PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| C2 | PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. |
| E1 | PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD. |
| F1 | ASPHALT SURFACE TREATMENT, MATCOAT #6M STONE |
| V1 | MILL ASPHALT PAVEMENT APPROX. 1½" AS DIRECTED BY THE ENGINEER. |
| Z | INCIDENTAL MILLING |


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.
MILL BRIDGE APPROACHES 100' TO PROVIDE A SMOOTH TRANSITION AS DIRECTED.
MILL INTO GUTTER LINE WHERE SHOWN AND AS DIRECTED.
MAINTAIN PROPER CROWN FOR DRAINAGE OF THE ROAD SURFACE.

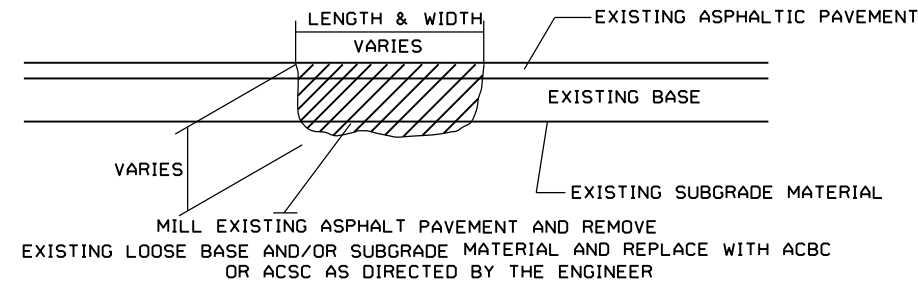

PATCHING EXISTING PAVEMENT

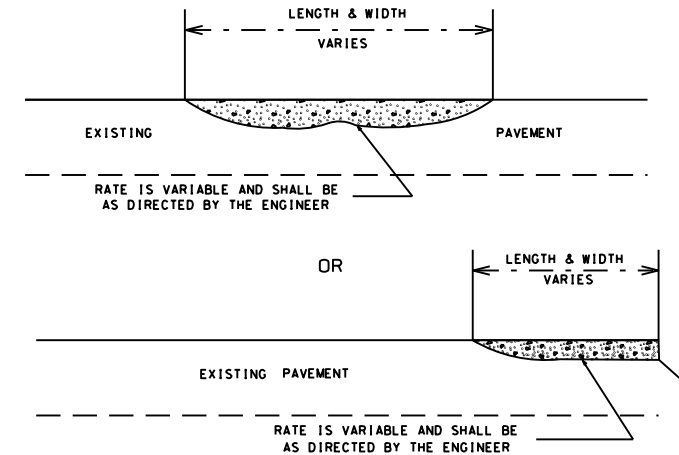

ASPHALT CONCRETE SURFACE COURSE
TYPE S9.5B/S9.5C (LEVELING COURSE)

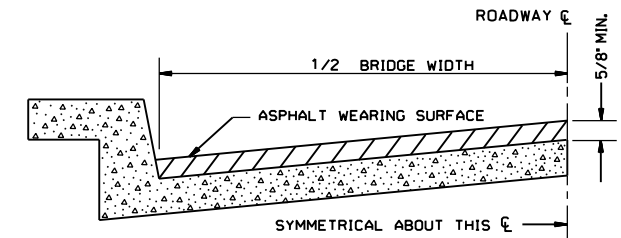


BRIDGE HALF TYPICAL SECTION

FOR BRIDGES WITH FLOOR DRAINS, CARE SHALL BE EXERCISED IN PLACING THE WEARING SURFACE AROUND FLOOR DRAINS SO AS NOT TO HINDER EFFECTIVE DRAINAGE. ALL DRAINS SHALL BE LEFT OPEN.

THE PROPOSED WEARING SURFACE SHALL VARY IN THICKNESS AS NECESSARY TO PROVIDE A SMOOTH RIDING SURFACE. A THICKNESS OF NOT LESS THAN 5/8" SHALL BE PROVIDED, THE MAXIMUM THICKNESS SHALL PREFERABLY BE 1-1/2" UNLESS IT IS IMPRACTICAL TO PROVIDE A SMOOTH RIDING SURFACE OTHERWISE.


NOTES

ALL UNPAVED S.R. ROADS TO BE SURFACED 50' FROM EDGE OF PAVEMENT OF MAIN PROJECT.
ALL PAVED S.R. ROADS TO BE RESURFACED TO THE ENDS OF THE RADII, OR AS DIRECTED BY THE ENGINEER.
EDGES, PAVEMENT WIDENING, INTERSECTIONS AND BRIDGE FLARES ARE INCLUDED IN THE TABLE OF QUANTITIES.
SHOULDERS AND DITCHES ARE TO BE CONSTRUCTED BY OTHERS UNLESS OTHERWISE NOTED.
BRIDGES TO BE RESURFACED AT LOCATIONS AND TO DEPTH AS DIRECTED BY THE ENGINEER.

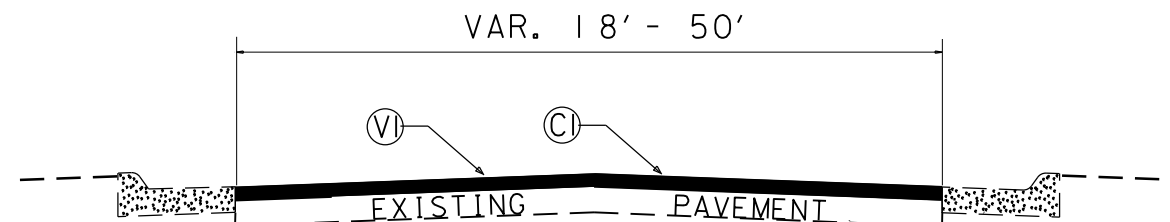


TYPICAL SECTION NO. 1

(MAP 5, 7, 8, 13, 14, 21, 22, 25, 34)

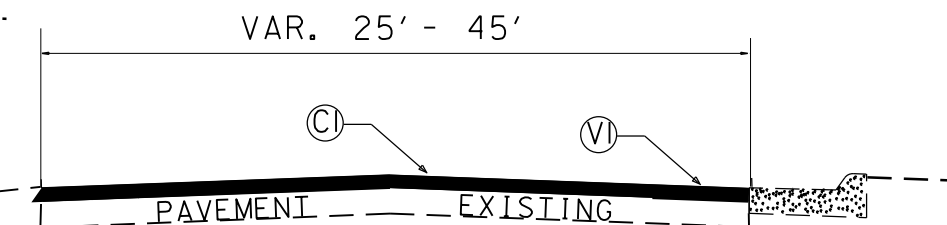


TYPICAL SECTION NO. 3

(MAP 3, 26, 34)

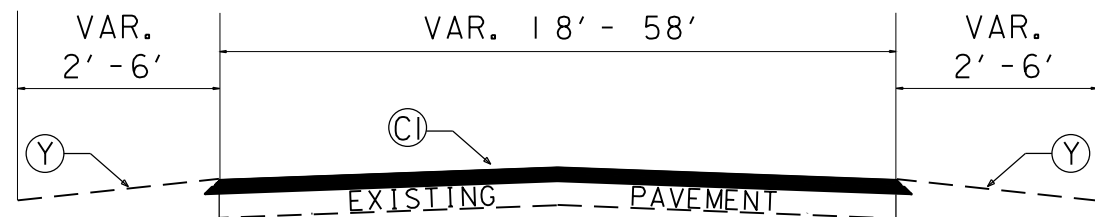

TYPICAL SECTION NO. 2


(MAP 2, 5, 9, 10, 13, 15, 22-26, 33-35, 50)

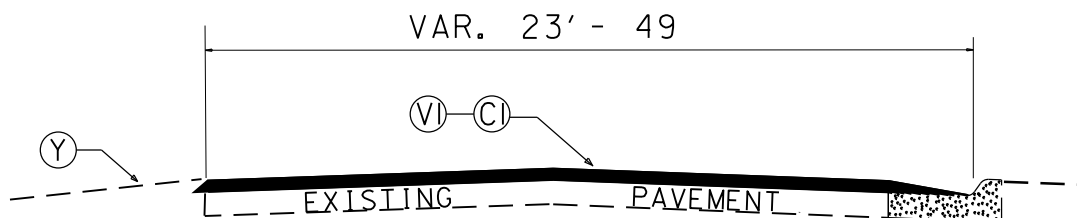


TYPICAL SECTION NO. 4

(MAP 5, 34)


INCIDENTAL MILLING DETAILS




BRIDGE PROFILE



RAILROAD PROFILE



END OF MILLING PROFILE

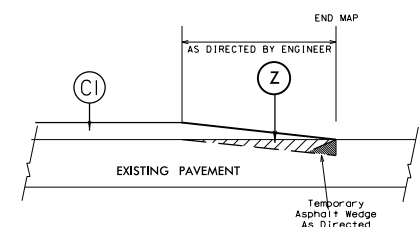

TIE-IN MILLING DETAIL