


SLOPE PROTECTION SHALL CONSIST OF 4" POURED-IN-PLACE CONCRETE PAVING AS SHOWN IN THE DETAILS ON THIS SHEET. CONCRETE SHALL BE CLASS "B". THE CONCRETE SURFACE SHALL BE FLOATED WITH A WOODEN FLOAT AND FINISHED. WELDED WIRE FABRIC REINFORCING SHALL BE 6 X 6 - W1.4 X W1.4. THE COST OF THE WELDED WIRE FABRIC SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE BID PER SQUARE YARD FOR SLOPE PROTECTION.

THE SLOPE PROTECTION IS DETAILED TO FIT WITH THE MSE WALL COPING DETAIL A. IF MSE WALL COPING DETAIL B IS USED, SLOPE PROTECTION SHALL BE ADJUSTED TO FIT. COORDINATE WITH THE MSE WALL FABRICATOR FOR ACTUAL WALL THICKNESS AND COPING TO BE USED. ADJUST SLOPE PROTECTION QUANTITIES AS NECESSARY TO FIT COPING USED.

BRID 28+98.8		4 INCH SLOPE PROTECTION	WELDED WIRE FABRIC
		SQUARE YARDS	APPROX. L.F.
END B	ENT 1	12	99
END B	ENT 2	12	99

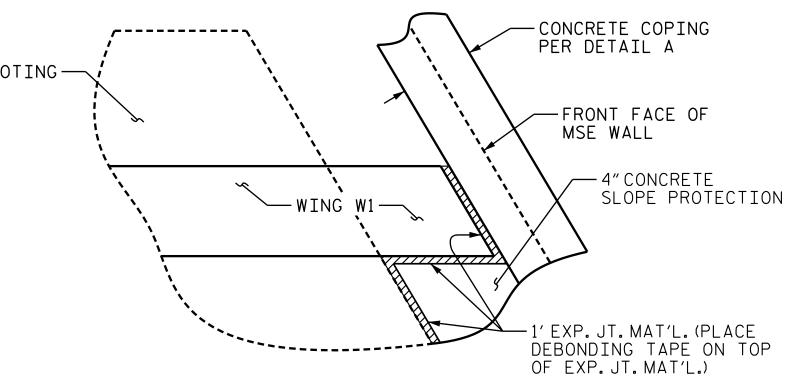

DETAIL C

PROJECT NO. U-2525C GUILFORD _ COUNTY STATION: 28+98.81 -Y4-

> STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH

CONCRETE SLOPE PROTECTION

SEAL 11915

SHEET NO. REVISIONS NO. BY: S6-32 DATE: DATE: NO. BY: TOTAL SHEETS 34