

# CLEARING AND GRUBBING PLAN

PROJECT REFERENCE NO. U-5795	SHEET NO. EC-06/CONST.06
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER



CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 06

### DRAINAGE NOTES:


MDCB = MINIMUM DEPTH CATCH BASIN

RIST TYPE-C INLET PROTECTION EROSION CONTROL MEASURES MAY BE SUBSTITUTED WITH FABRIC INSERT INLET PROTECTION DEVICES ON CATCH BASINS AT THE DISCRETION OF THE ENGINEER.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

**-Y7- CURVE DATA**  
 PI Sta 18+69.12  
 $\Delta = 13^{\circ} 22' 23.6" (LT)$   
 $D = 4' 59' 59.9"$   
 $L = 267.47'$   
 $T = 134.34'$   
 $R = 1,145.92'$

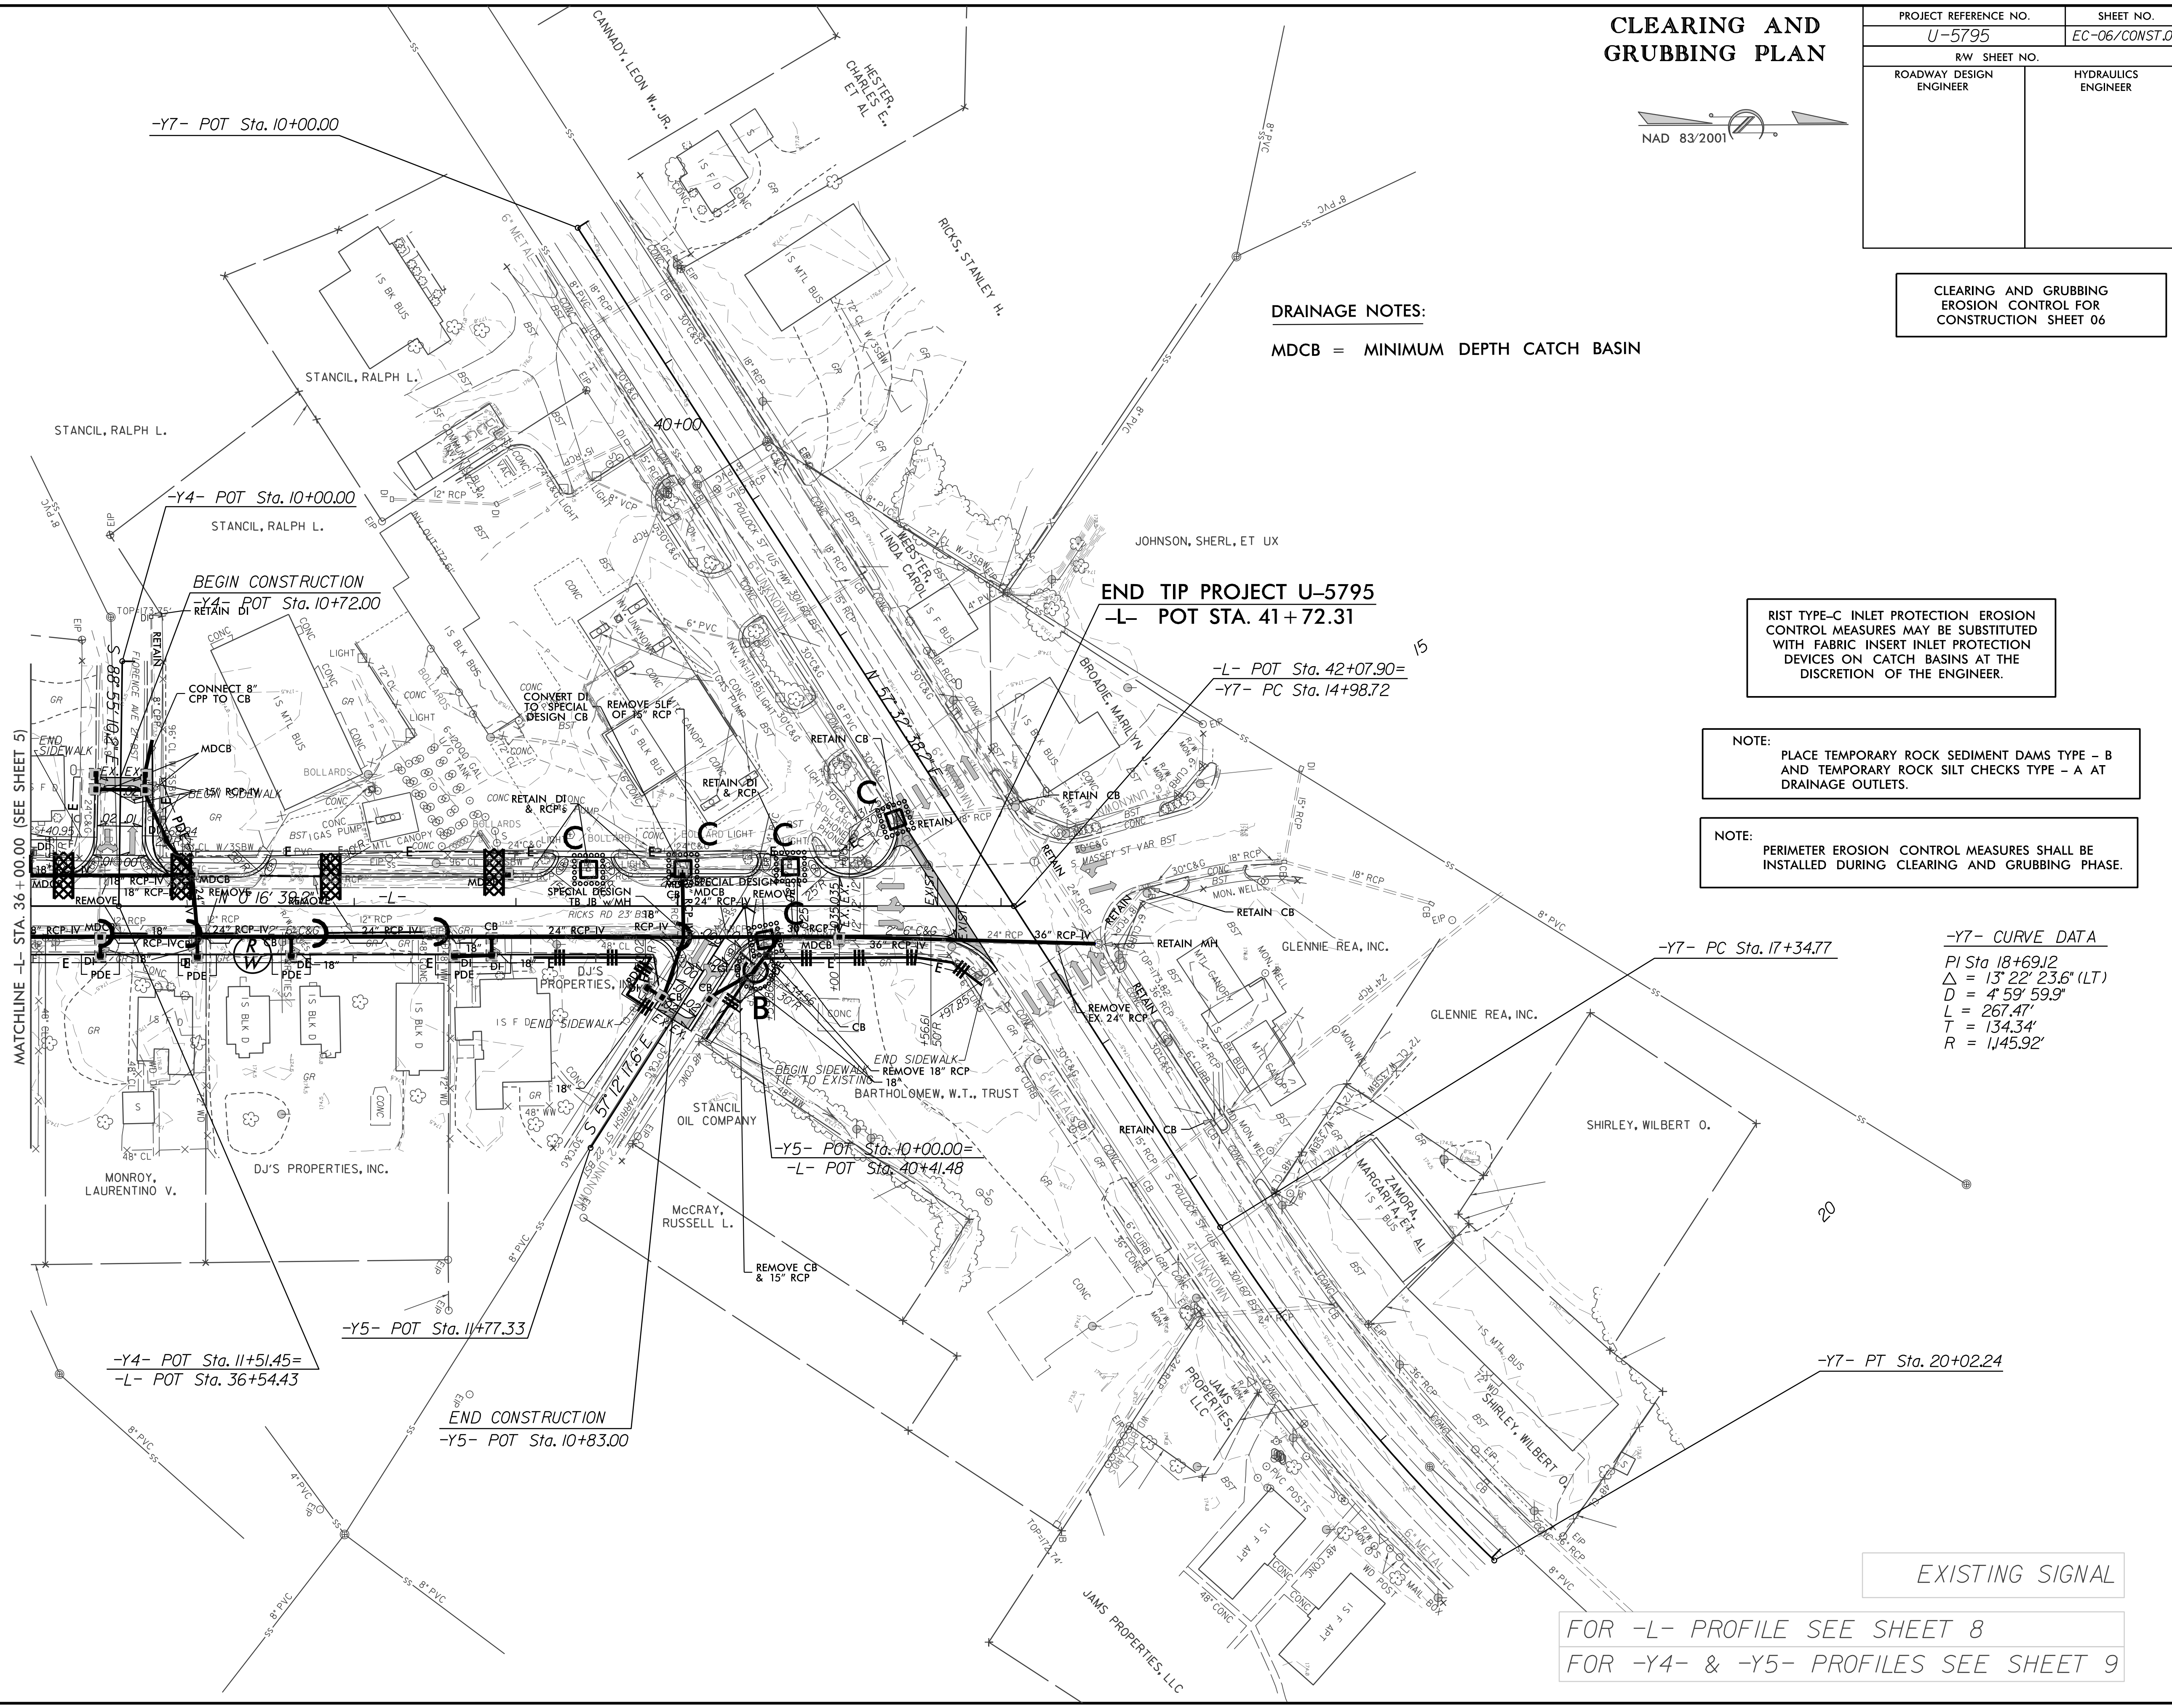

EXISTING SIGNAL

FOR -L- PROFILE SEE SHEET 8  
 FOR -Y4- & -Y5- PROFILES SEE SHEET 9