


| | | | |
|------------------|-----------------------------|-----------|--------------|
| STATE | PROJECT NO. | SHEET NO. | TOTAL SHEETS |
| N.C. | 2019CPT.10.01.10901.1, etc. | 34 | |
| F.A. PROJECT NO. | | | |

PAVEMENT SCHEDULE

| | |
|------|--|
| (C1) | PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD. |
| (C2) | PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| (C3) | PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 220 LBS. PER SQ. YD. |
| (C4) | PROP. APPROX. 1.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. |
| (C5) | PROP. ASPHALT SURFACE TREATMENT, DOUBLE SEAL, (SEE S. P. FOR AGGREGATE TYPE.) |
| (D1) | PROPOSED 2.5" ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. |
| (D2) | AST MAT COAT # 67 |
| (D3) | AST MAT COAT # 78M |
| (E1) | PROP. APPROX. 5" ASPHALT BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS PER SQYD. |
| (T1) | SHOULDER RECONSTRUCTION |
| (V1) | PROFILE MILLING EXISTING ASPHALT, 0 - 2.0" |
| (V2) | PROFILE MILLING EXISTING ASPHALT, 0 - 1.5" |
| (V3) | MILLING 1' OF EXISTING PAVEMENT, 5" IN DEPTH. (SEE S.P. FOR 'TRENCHING FOR BASE COURSE BY MILLING.') |
| (W) | EXISTING CONCRETE PAVEMENT |
| (U) | EXISTING PAVEMENT |
| (Z) | FULL DEPTH RECLAMATION |

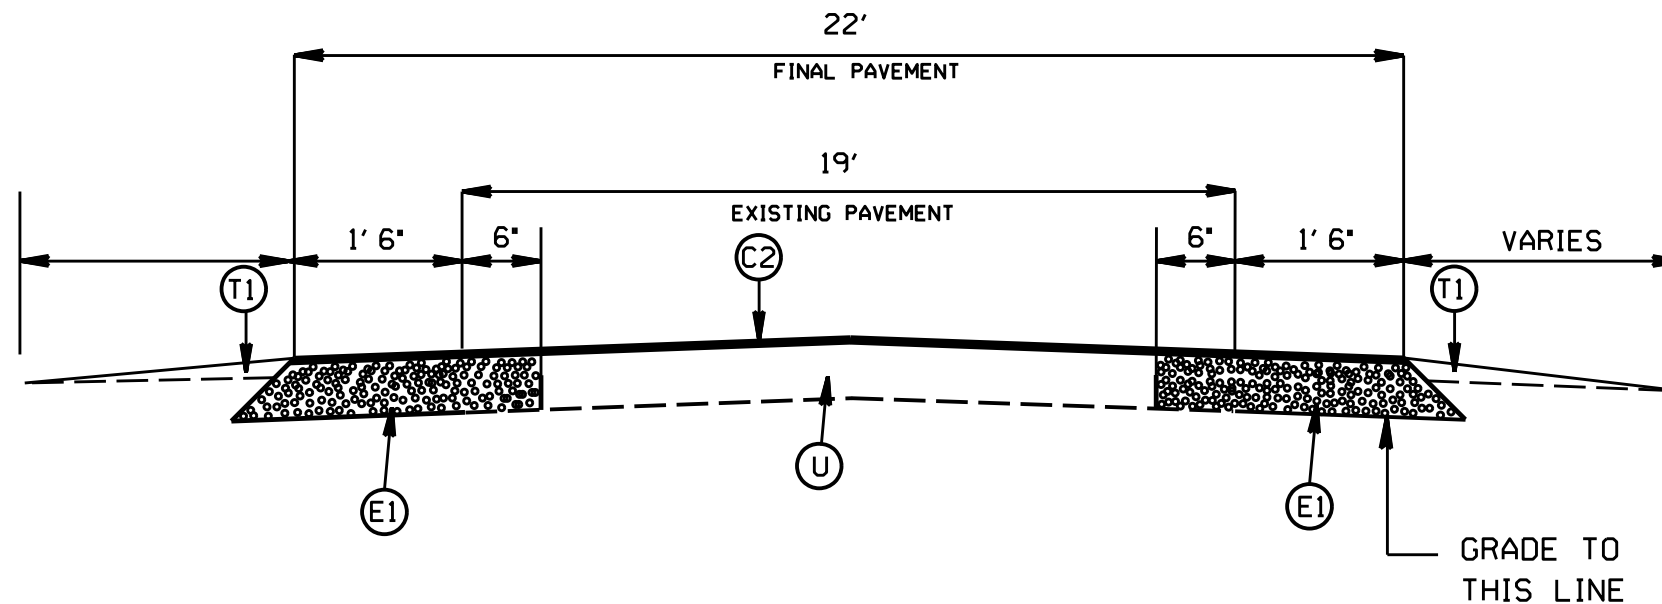

TYPICAL SECTION NO. 19
SR 1104 WAXHAW CREEK ROAD (MAP 28)

2018-2019
UNION COUNTY RESURFACING

| | | | |
|-----------|-------|--|-----------|
| SCALE | -NA- | | REVISIONS |
| DATE | 01/18 | | |
| DWG. BY | AMO | | |
| DESIGN BY | AMO | | |
| APPROVED | CLA | | |