



| STATE            | PROJECT NO. | SHEET NO. | TOTAL SHEETS |
|------------------|-------------|-----------|--------------|
| N.C.             | I-5825      | 12        |              |
| WBS NO. 50468.3J |             |           |              |


| PAVEMENT SCHEDULE |  |
|-------------------|--|
| A1                | APPROX. 10" PCC SLAB REPAIR  |
| B1                | PROP. APPROX. 5/8" ULTRATHIN HOT MIX ASPHALT COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD.                   |
| C1                | PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.       |
| C2                | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.       |
| C3                | PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. |
| C4                | PROP. APPROX. 3.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.         |
| C5                | PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.         |
| M                 | MILLED RUMBLE STRIPS   |
| T                 | SHOULDER RECONSTRUCTION  |
| V1                | MILLING 1.5" DEPTH   |
| V2                | MILLING, 2.0" DEPTH  |
| V3                | MILLING, 4.0" DEPTH  |
| V4                | MILLING, 2.5" DEPTH, BELOW ALL OVERHEAD BRIDGES  |
| Z                 | REMOVE AND REPLACE 2'-6" CONCRETE CURB & GUTTER  |

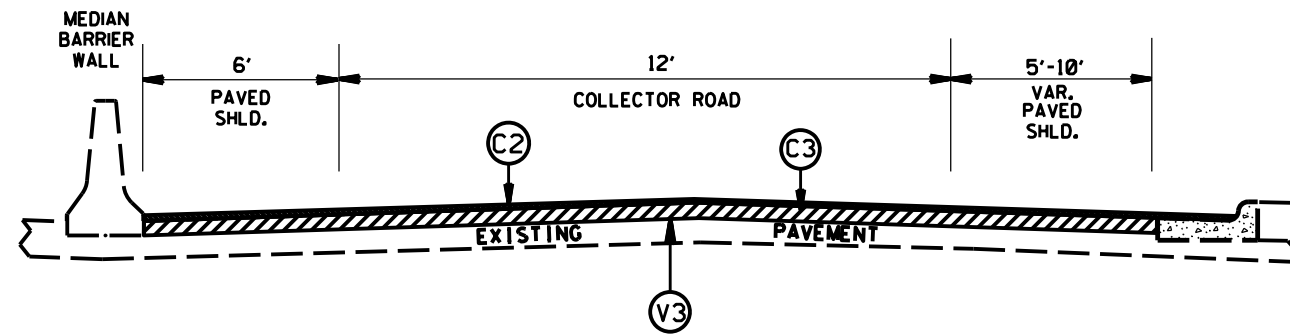

TYPICAL SECTION NO.10

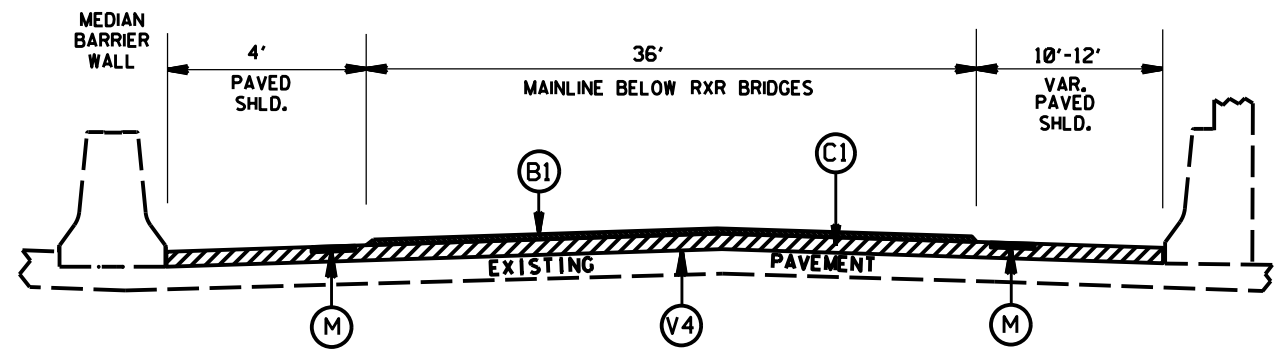


TYPICAL SECTION NO.11

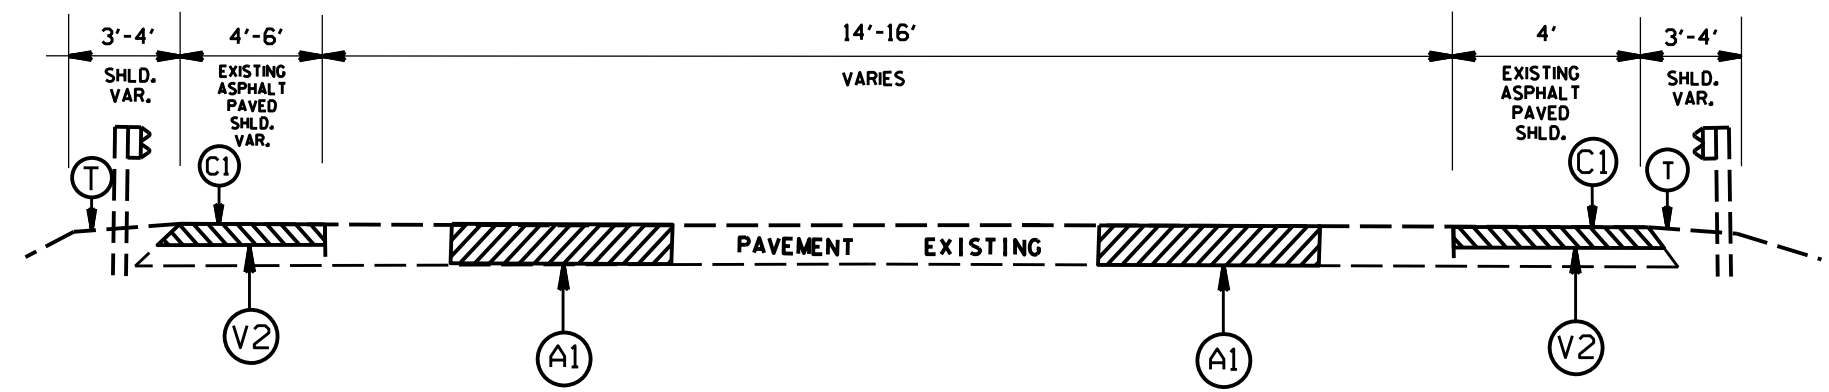

TYPICAL SECTION NO.12  
RAMP

I-5825  
I-77 PAVEMENT PRESERVATION

|           |      |   |           |  |
|-----------|------|---|-----------|--|
| SCALE     | -NA- |  | REVISIONS |  |
| DATE      | 9/17 |   | 2/13/18   |  |
| DWG. BY   | JHE  |   | 3/14/18   |  |
| DESIGN BY | JHE  |   |           |  |
| APPROVED  |      |   |           |  |