

FINAL PAVEMENT DESIGN					
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	D5	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.	N	GEOTEXTILE FOR PAVEMENT STABILIZATION
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	R1	2'-6" CONCRETE CURB AND GUTTER.
СЗ	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	E2	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.	R2	2'-9" CONCRETE CURB AND GUTTER.
C4	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	E3	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.	R3	5" MONOLITHIC CONCRETE ISLAND (KEYED IN).
C5	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	E4	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT GREATER THAN $5\frac{1}{2}$ " IN DEPTH OR LESS THAN 3" IN DEPTH.	Т	EARTH MATERIAL.
C6	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	E5	PROP. APPROX. 3" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	U	EXISTING PAVEMENT.
C7	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	E6	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.	V	3" MILLING
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	E7	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.OC, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT GREATER THAN 5½" IN DEPTH OR LESS THAN 3" IN DEPTH.	W1	WEDGING DETAIL #1
D2	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	J 1	PROP. 8" AGGREGATE BASE COURSE.	W2	WEDGING DETAIL #2
D3	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN $2\frac{1}{2}$ " IN DEPTH OR GREATER THAN 4" IN DEPTH.		BASE TO BE TREATED WITH LIME TO A DEPTH OF 8", AT A RATE OF 20 LBS PER SQ. YD. AS DIRECTED BY THE ENGINEER	W3	WEDGING DETAIL #3
D4	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	K	OR BASE TO BE TREATED WITH CEMENT TO A DEPTH OF 7", AT A RATE OF 55 LBS PER SQ. YD. AS DIRECTED BY THE ENGINEER	W4	WEDGING DETAIL #4


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

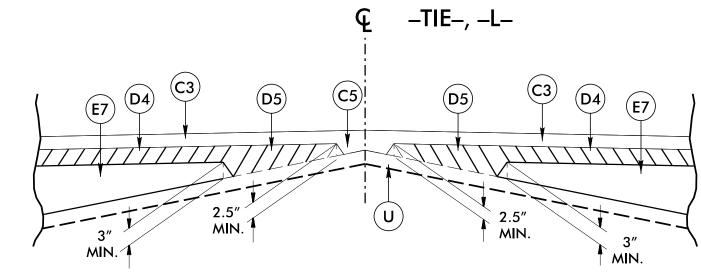

Detail Showing Method of Wedging #1

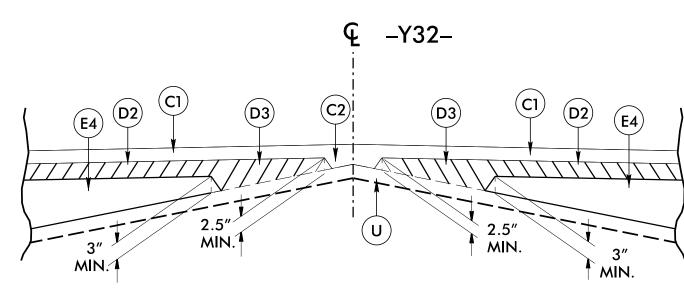


Detail Showing Method of Wedging #4

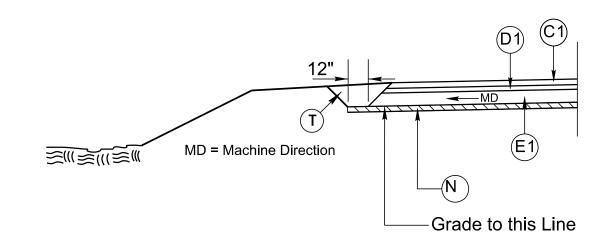


INSET A

USE GEOTEXTILE FOR PAVEMENT STABILIZATION
DETAIL WITH TRENCH SHOULDER SECTION AS FOLLOWS:
(THESE LOCATIONS TO BE INVESTIGATED DURING CONSTRUCTION)
-Y27- STA. 17 + 50.00 TO -Y27- STA. 18 + 50.00 (SEE TYP. SECT. NO. 6)

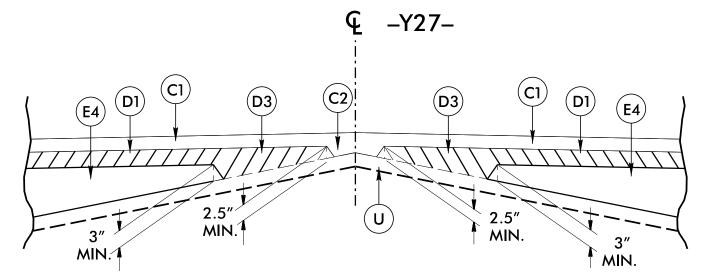


Detail Showing Method of Wedging #2

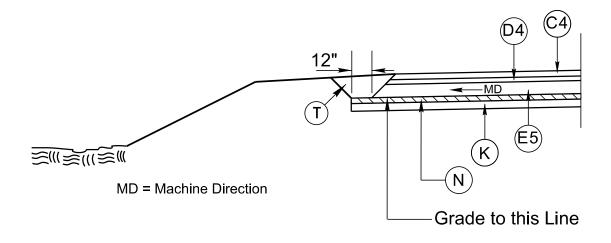

INSET D

(ALT. PAVEMENT STRUCTURE #2)
* NOTE: SEE INSET C FOR STATIONS

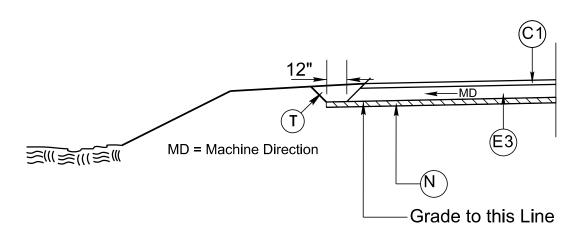


INSET B


USE GEOTEXTILE FOR PAVEMENT STABILIZATION

DETAIL WITH TRENCH SHOULDER SECTION AS FOLLOWS:

(THESE LOCATIONS TO BE INVESTIGATED DURING CONSTRUCTION) -Y28- STA. 17+00.00 TO -Y28- STA. 17+50.00 (SEE TYP. SECT. NO. 11)

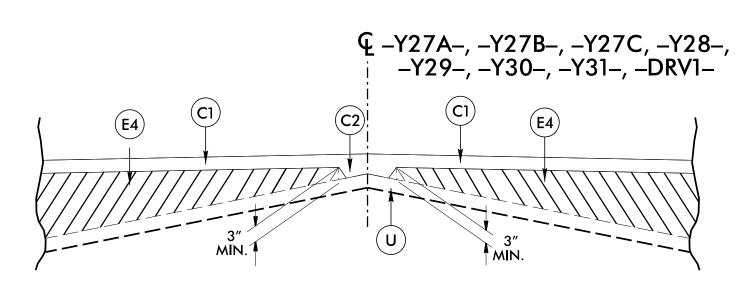


Detail Showing Method of Wedging #3

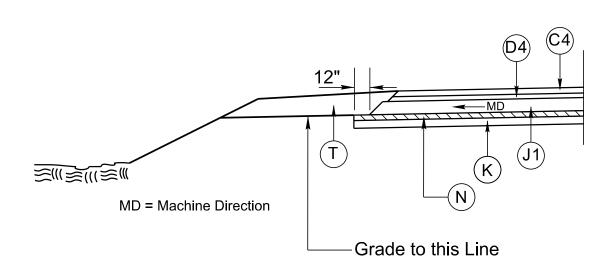


INSET C

(ALT. PAVEMENT STRUCTURE #1)


USE GEOTEXTILE FOR PAVEMENT STABILIZATION
DETAIL WITH GRADED SHOULDER SECTION (INSET C) AS FOLLOWS:
(THESE LOCATIONS TO BE INVESTIGATED DURING CONSTRUCTION)
-L- STA. 477 + 50.00 TO -L- STA. 483 + 50.00 (SEE TYP. SECT. NO. 3)
–L− STA. 503 + 00.00 TO –L− STA. 512 + 00.00 (SEE TYP. SECT. NO. 3)
-L- STA. 534 + 50.00 TO -L- STA. 545 + 00.00 (SEE TYP. SECT. NO. 3)
-L- STA. 563 + 00.00 TO -L- STA. 566 + 50.00 (SEE TYP. SECT. NO. 3)
–L− STA. 584 + 50.00 TO –L− STA. 593 + 00.00 (SEE TYP. SECT. NO. 3)
-L- STA. $606+50.00$ TO $-L-$ STA. $625+00.00$ (SEE TYP. SECT. NO. 3)
-L- STA. 628 + 50.00 TO -L- STA. 629 + 00.00 (SEE TYP. SECT. NO. 3)
-L- STA. 650 + 00.00 TO -L- STA. 652 + 50.00 (SEE TYP. SECT. NO. 3)
-L- STA. 660 + 50.00 TO -L- STA. 664 + 50.00 (SEE TYP. SECT. NO. 4)
·

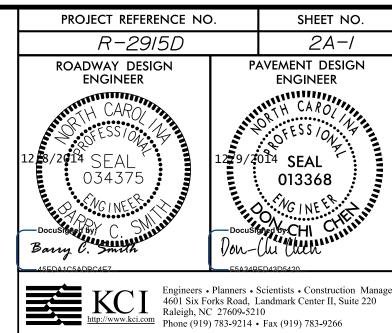




TEMPORARY PAVEMENT TYPICAL SECTION NO. 1

-L- STA. 457+46.00 TO -L- STA. 460+50.00 -L- STA. 546+00.00 TO -L- STA. 547+90.00



TEMPORARY PAVEMENT TYPICAL SECTION NO. 2

-TIE- STA. 23+52.00 -TIE- STA. 24+93.00



TEMPORARY PAVEMENT TYPICAL SECTION NO. 3

-L- STA. 517 + 25.00 TO -L- STA. 522 + 00.00 -L- STA. 549 + 23.00 TO -L- STA. 553 + 50.00 -L- STA. 571 + 78.00 TO -L- STA. 579 + 66.00 -Y31- STA. 10+00.00 TO -Y31- STA. 10+83.00