
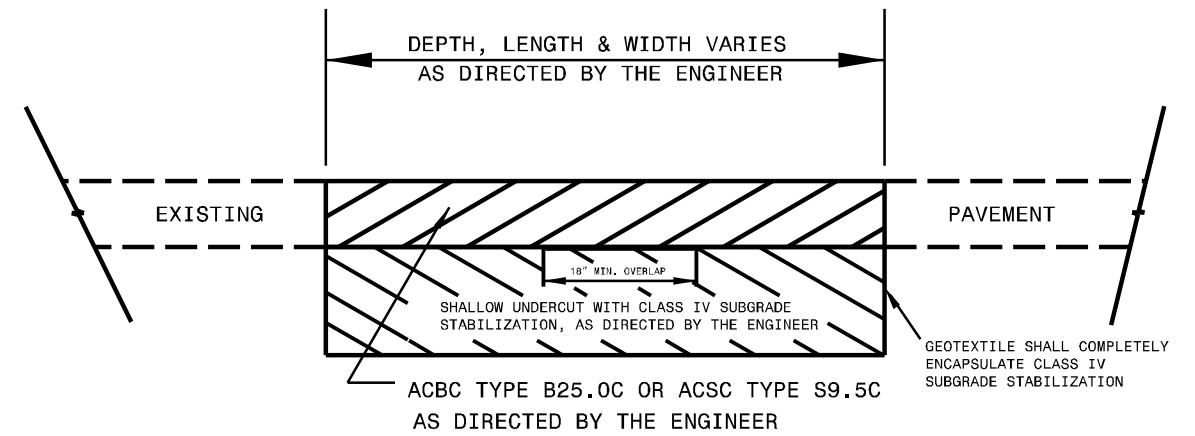


PAVEMENT SCHEDULE		U	EXISTING PAVEMENT
C1	1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	V1	1½" MILLING
C2	2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	V2	0-1½" MILLING (AS DIRECTED BY THE ENGINEER)
S	SHOULDER GRADING ASB REQUIRED	V3	0-½" MILLING (AS DIRECTED BY THE ENGINEER)

PROJECT REFERENCE NO.	SHEET NO.
2020CPT.05.01.10351.1	3


NOTES

ALL UNPAVED S.R. ROADS TO BE RESURFACED 50' FROM EDGE OF PAVEMENT OF MAIN PROJECT  
 ALL PAVED S.R. ROADS TO BE RESURFACED TO THE ENDS OF THE RADII, OR AS DIRECTED BY THE ENGINEER.  
 EDGES, PAVEMENT WIDENING, INTERSECTIONS AND BRIDGE FLARES ARE INCLUDED IN THE TABLE OF QUANTITIES.  
 BRIDGES TO BE RESURFACED AT LOCATIONS AND TO DEPTH AS DIRECTED BY THE ENGINEER.

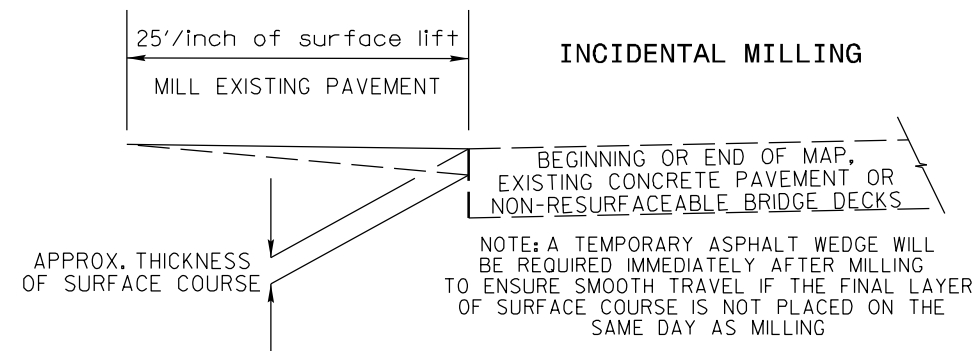


**PATCHING EXISTING PAVEMENT**

\*MILLING TO BE PERFORMED PRIOR TO PATCHING  
 \*UNDERCUT REQUIRED ONLY IN AREAS AS DIRECTED BY THE ENGINEER

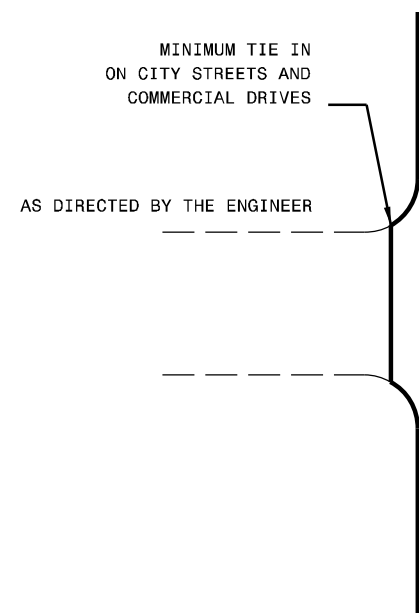

DETAIL OF PROJECT LIMITS AT SIGNALIZED Y LINES

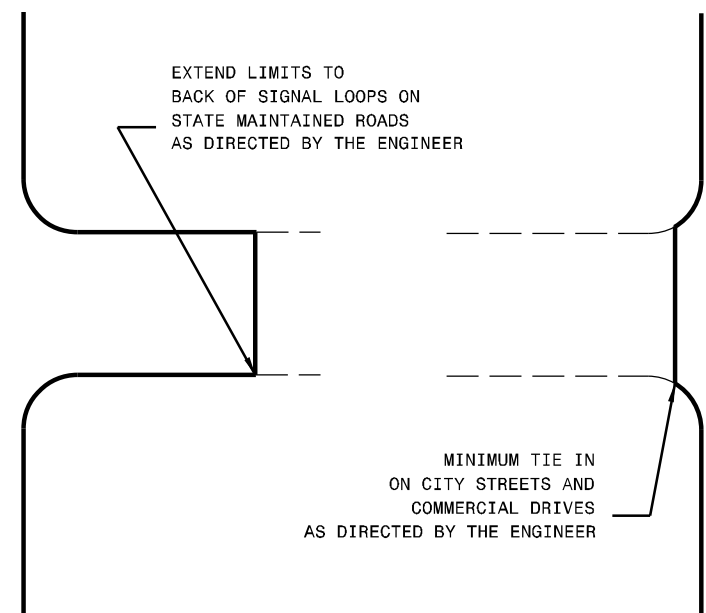

DETAIL OF PROJECT LIMITS AT UNSIGNALIZED Y LINES

