

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**


**This file or an individual page
shall not be considered a certified document.**

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

CUMBERLAND COUNTY



LOCATION: FAYETTEVILLE - US 401 (RAEFORD ROAD) FROM
OLD RAEFORD ROAD TO ROBESON STREET (US 401 BUSINESS)

TYPE OF WORK: TRAFFIC SIGNALS

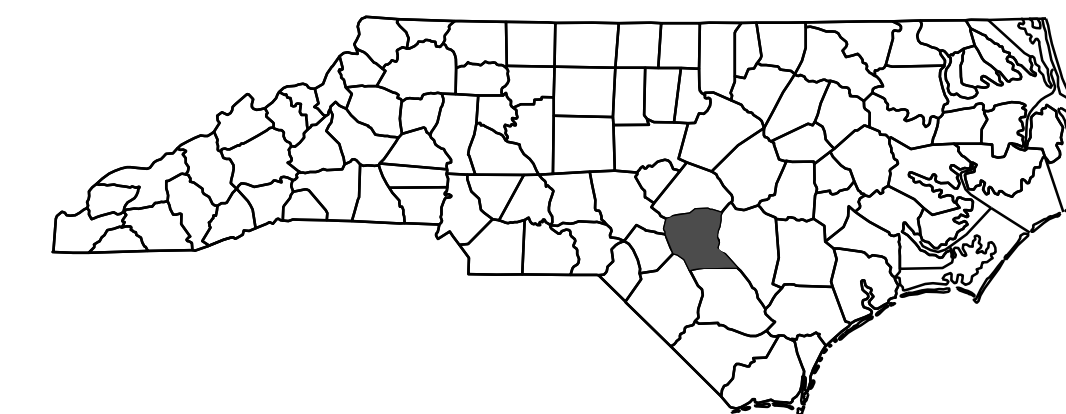

TIP PROJECT: U-4405

CONTRACT: C204107

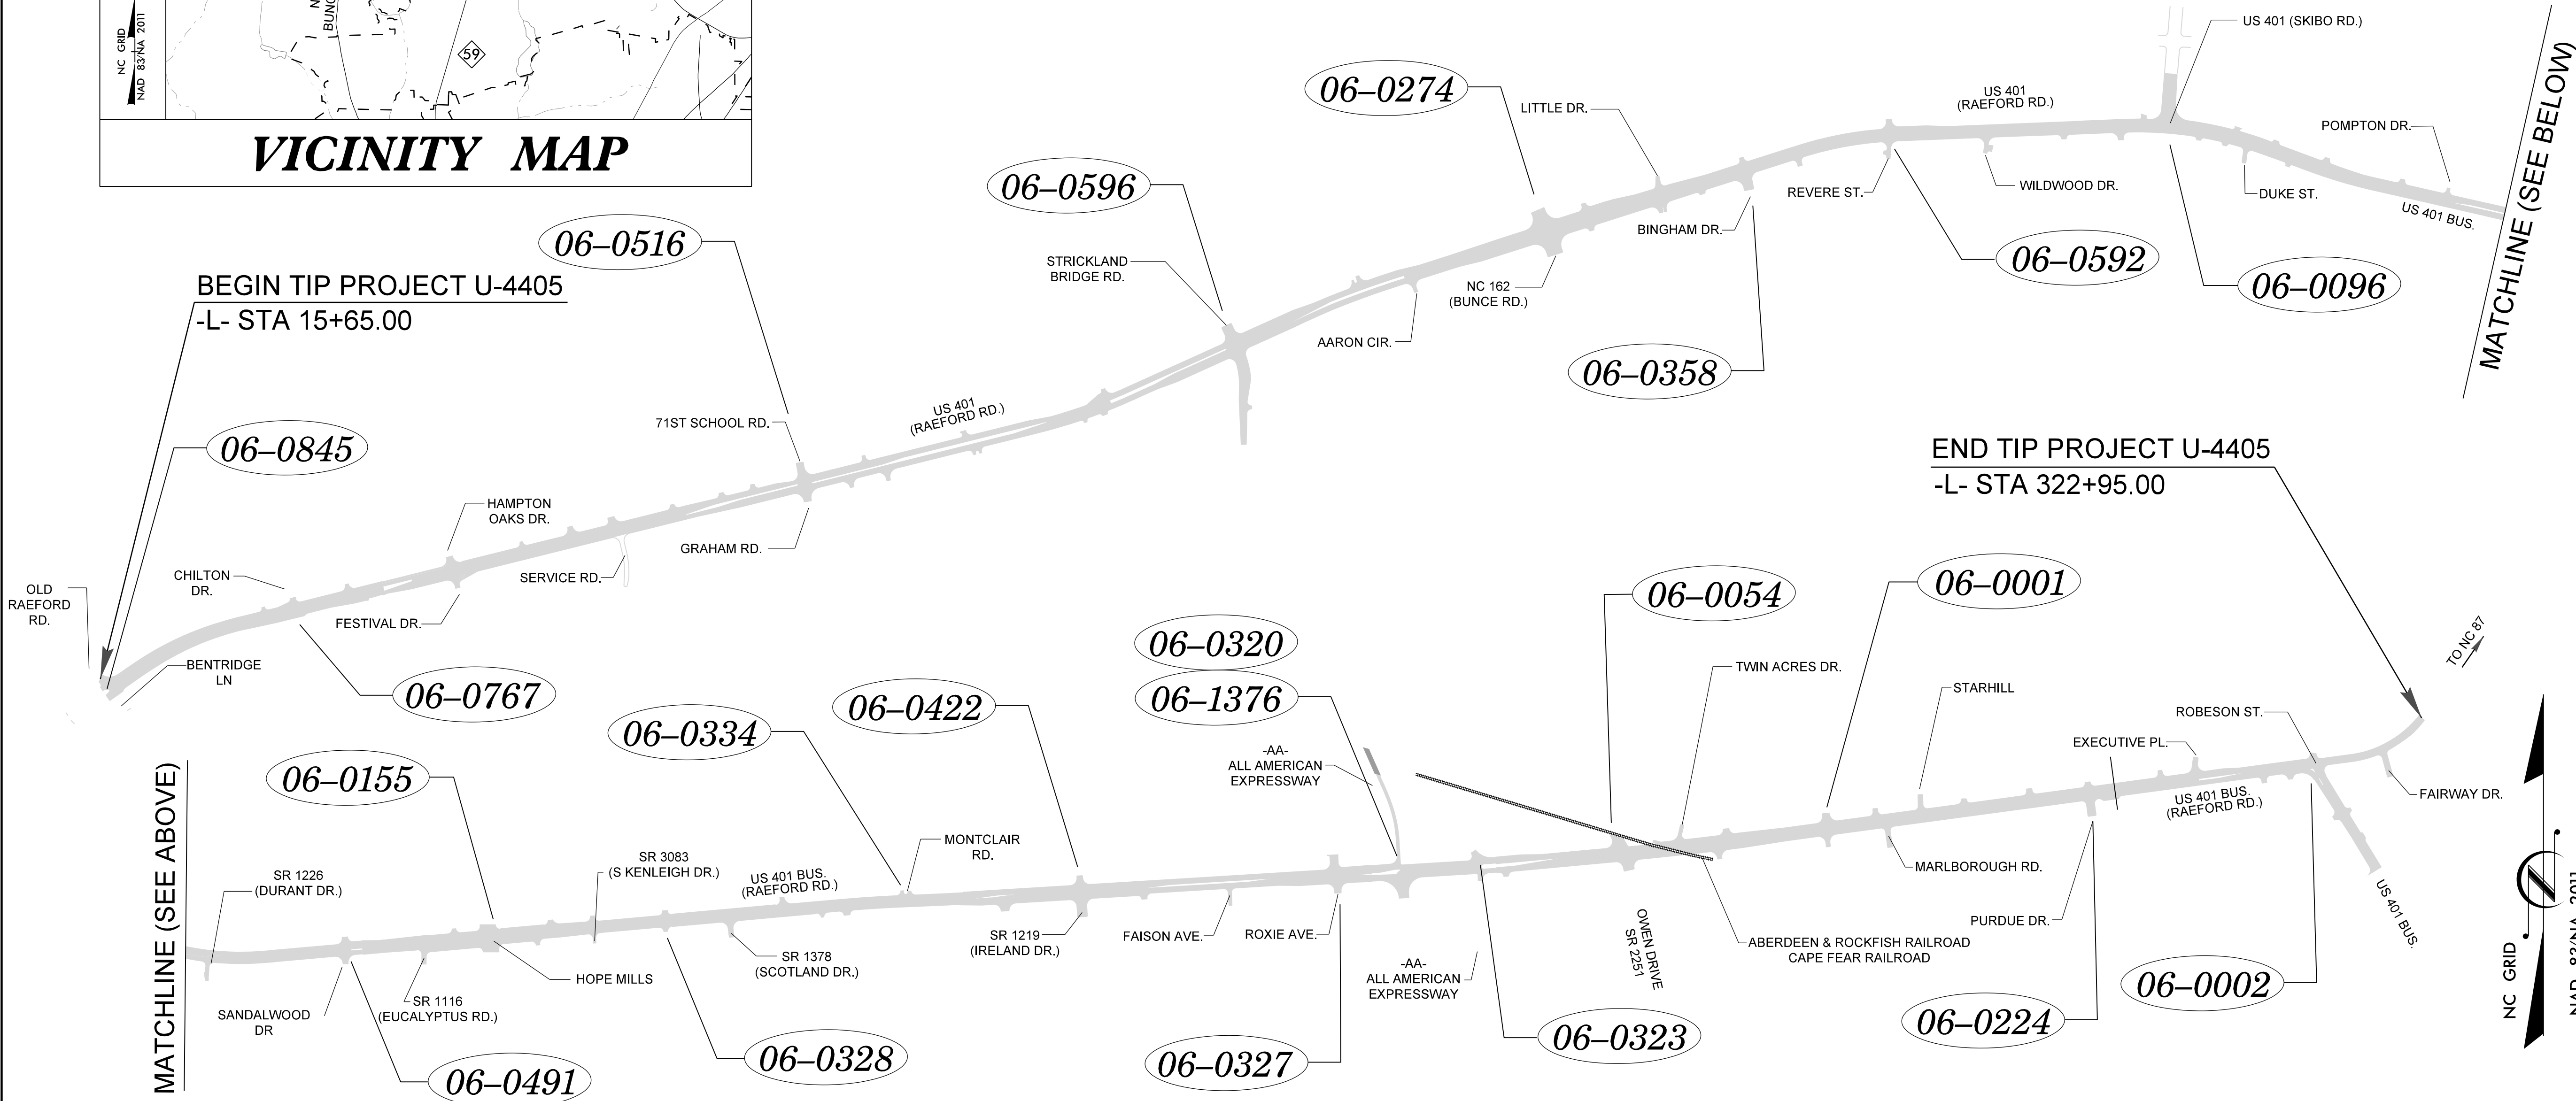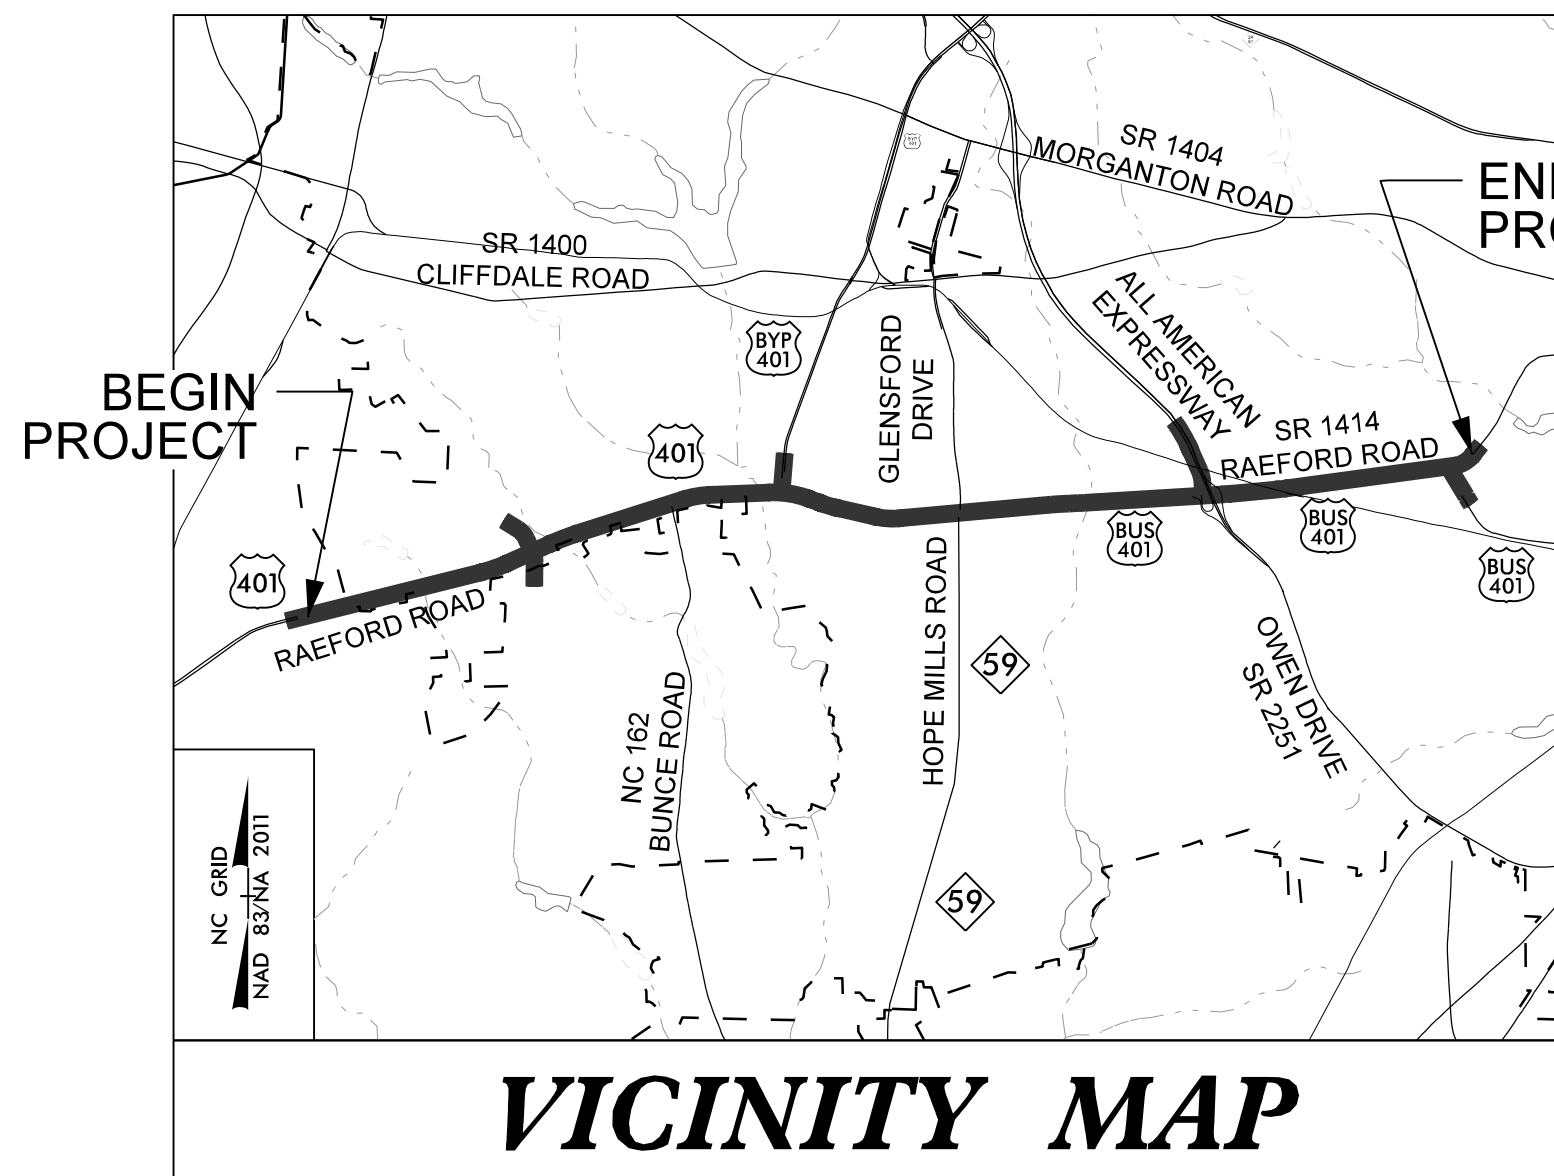

INDEX OF PLANS	
SHEET NUMBER	DESCRIPTION
SIG 1.0	TITLE SHEET
SIG 1.1	SHEET INDEX
SIG 2.0 - SIG 81.3	SIGNAL AND ELECTRICAL DESIGNS
SIG 82.0 - SIG 83.0	REVISED STANDARD PLATE SHEETS
MI - M8	METAL POLE STANDARD DRAWINGS

LEGEND	
XX-XXXX	SIGNAL INVENTORY NUMBER

INTELLIGENT TRANSPORTATION AND SIGNALS UNIT
Contacts:
Zachary Little, PE Signals Engineer, Eastern Region
Todd Joyce, PE Signal Equipment Design Review Engineer

Plans Prepared for:
DIVISION OF HIGHWAYS
TRANSPORTATION MOBILITY AND SAFETY DIVISION
750 N. Greenfield Parkway, Garner, NC 27529


Stantec
Stantec Consulting Services Inc.
801 Jones Franklin Rd-Suite 300
Raleigh, NC 27606
Tel. 919.851.6866
Fax. 919.851.7024
www.stantec.com
License No. F-0672

Betsy L. Watson, PE Senior Principal
Dean Harris Senior Transportation Designer

APPROVED: *Betsy L. Watson*
DATE: 3/29/2018

9:56:08 AM U:\Traffic\Signals\TIP\sheet\U-4405_SIG-TSH.dgn User:rmuncey

PHASING DIAGRAM

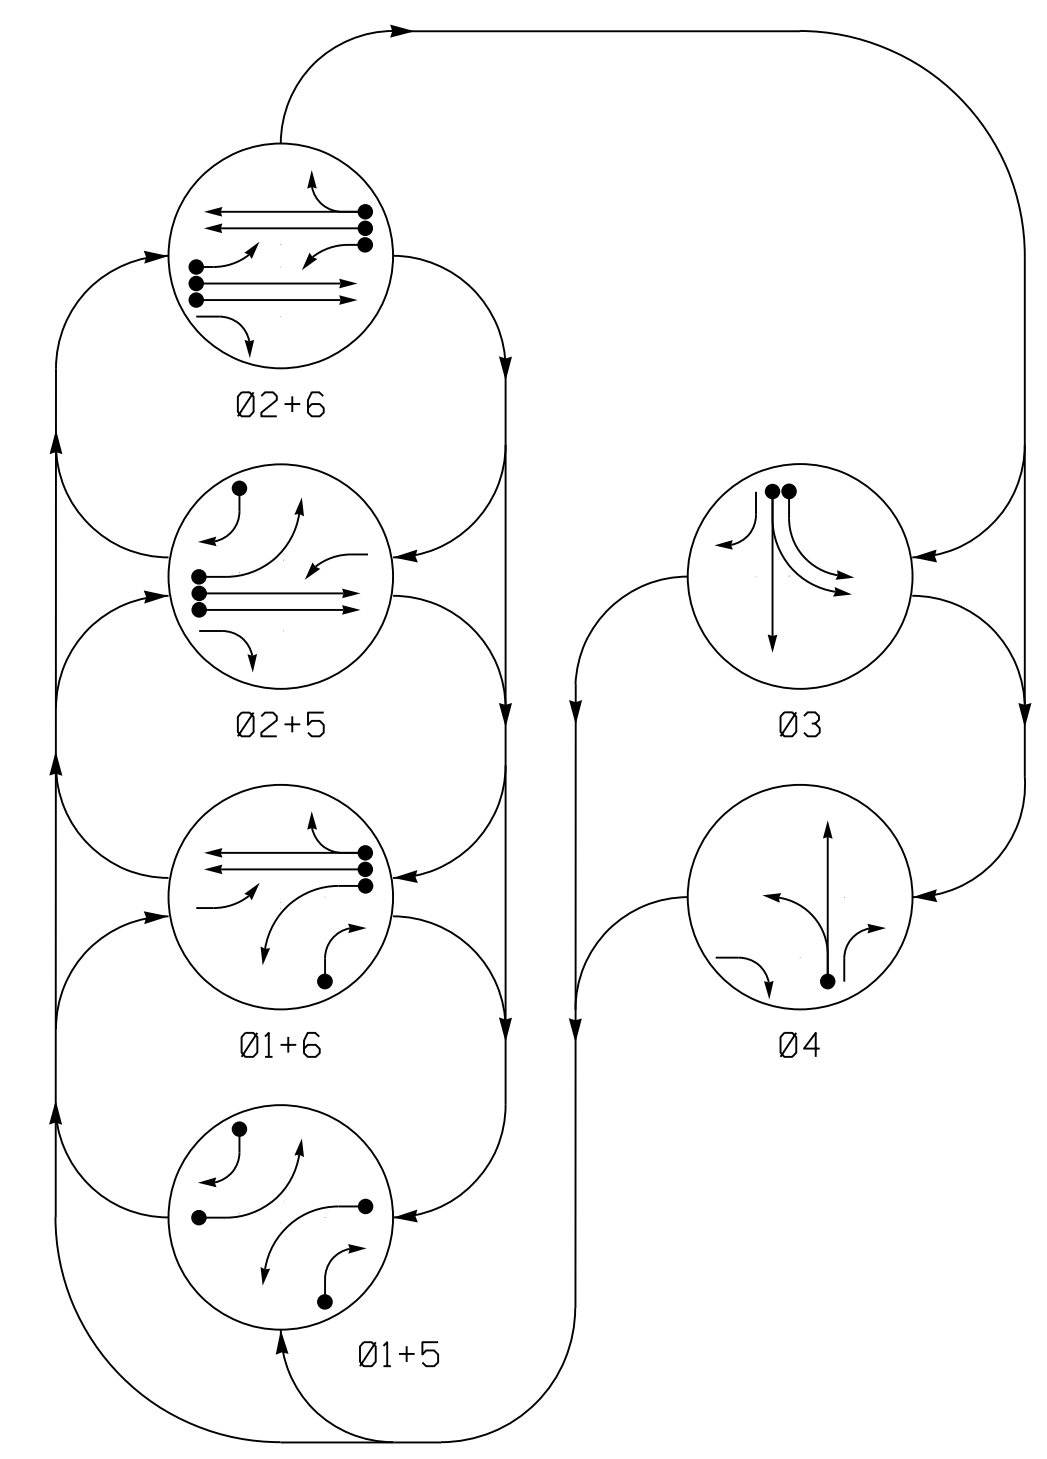


PHASING DIAGRAM DETECTION LEGEND

- ← ● DETECTED MOVEMENT
- ← ○ UNDETECTED MOVEMENT (OVERLAP)
- ← - - UNSIGNALIZED MOVEMENT
- ← - - PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE						FL HEADS
	01+5	01+6	02+5	02+6	03	04	
11	←	←	←	←	←	←	Y
21	R	R	G	G	R	R	Y
22	R	R	G	G	R	R	Y
31	←	←	←	←	←	←	Y
32	R	R	R	R	G	R	R
33	R	R	R	R	G	R	R
41	R	R	R	R	R	G	R
42	R	R	R	R	R	G	R
51	←	←	←	←	←	←	Y
61,62	R	G	R	G	R	R	Y

SIGNAL FACE I.D.

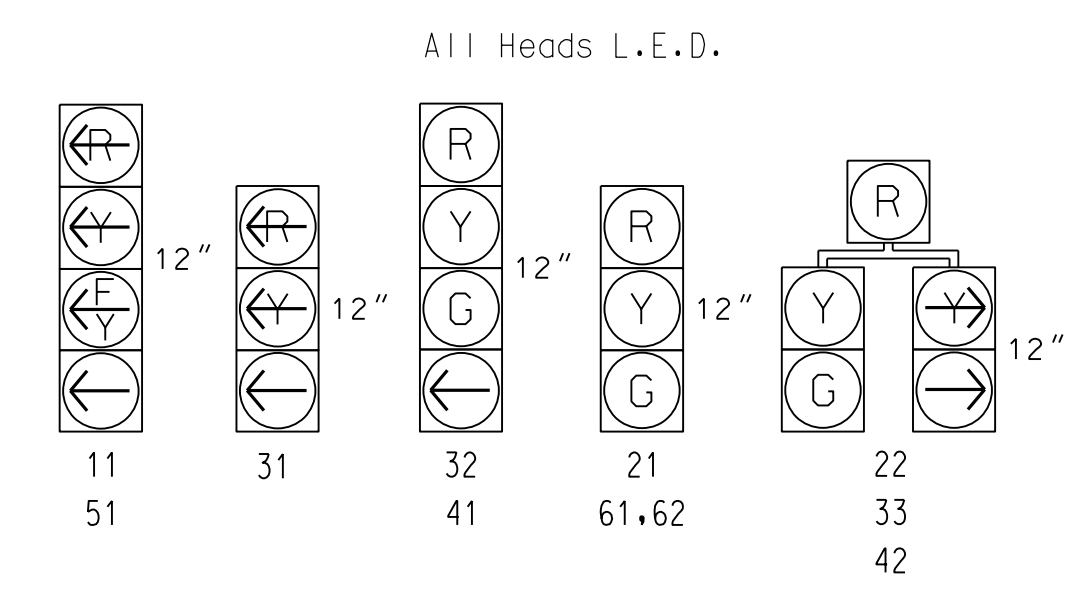

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	LOOP	NEW CARD
1A	6X40	0	*	-	1	Yes	-	15	-	S	-	X
1B	6X40	0	EXIST	-	6	Yes	-	3	-	G	-	X
2A	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2B	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2C	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
3A	6X40	0	*	-	3	Yes	-	3	-	S	-	X
3B	6X40	0	*	-	3	Yes	-	-	-	S	-	X
4A	6X40	0	EXIST	-	4	Yes	-	3	-	S	-	-
5A	6X40	0	*	-	5	Yes	-	15	-	S	-	X
5B	6X40	0	*	-	5	Yes	-	15	-	S	-	X
6A	6X6	300	*	-	6	Yes	-	-	-	N	-	X
6B	6X6	300	*	-	6	Yes	-	-	-	N	-	X
6C	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
6D	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X

* Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

6 Phase Fully Actuated Fayetteville Signal System

NOTES


- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- The order of phase 3 and phase 4 may be reversed.
- Locate new cabinet foundation so as not to obstruct sight distance of vehicles turning right on red. Relocate existing cabinet and controller onto new foundation.
- Reposition existing signal head numbered 32.
- Set all detector units to presence mode.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

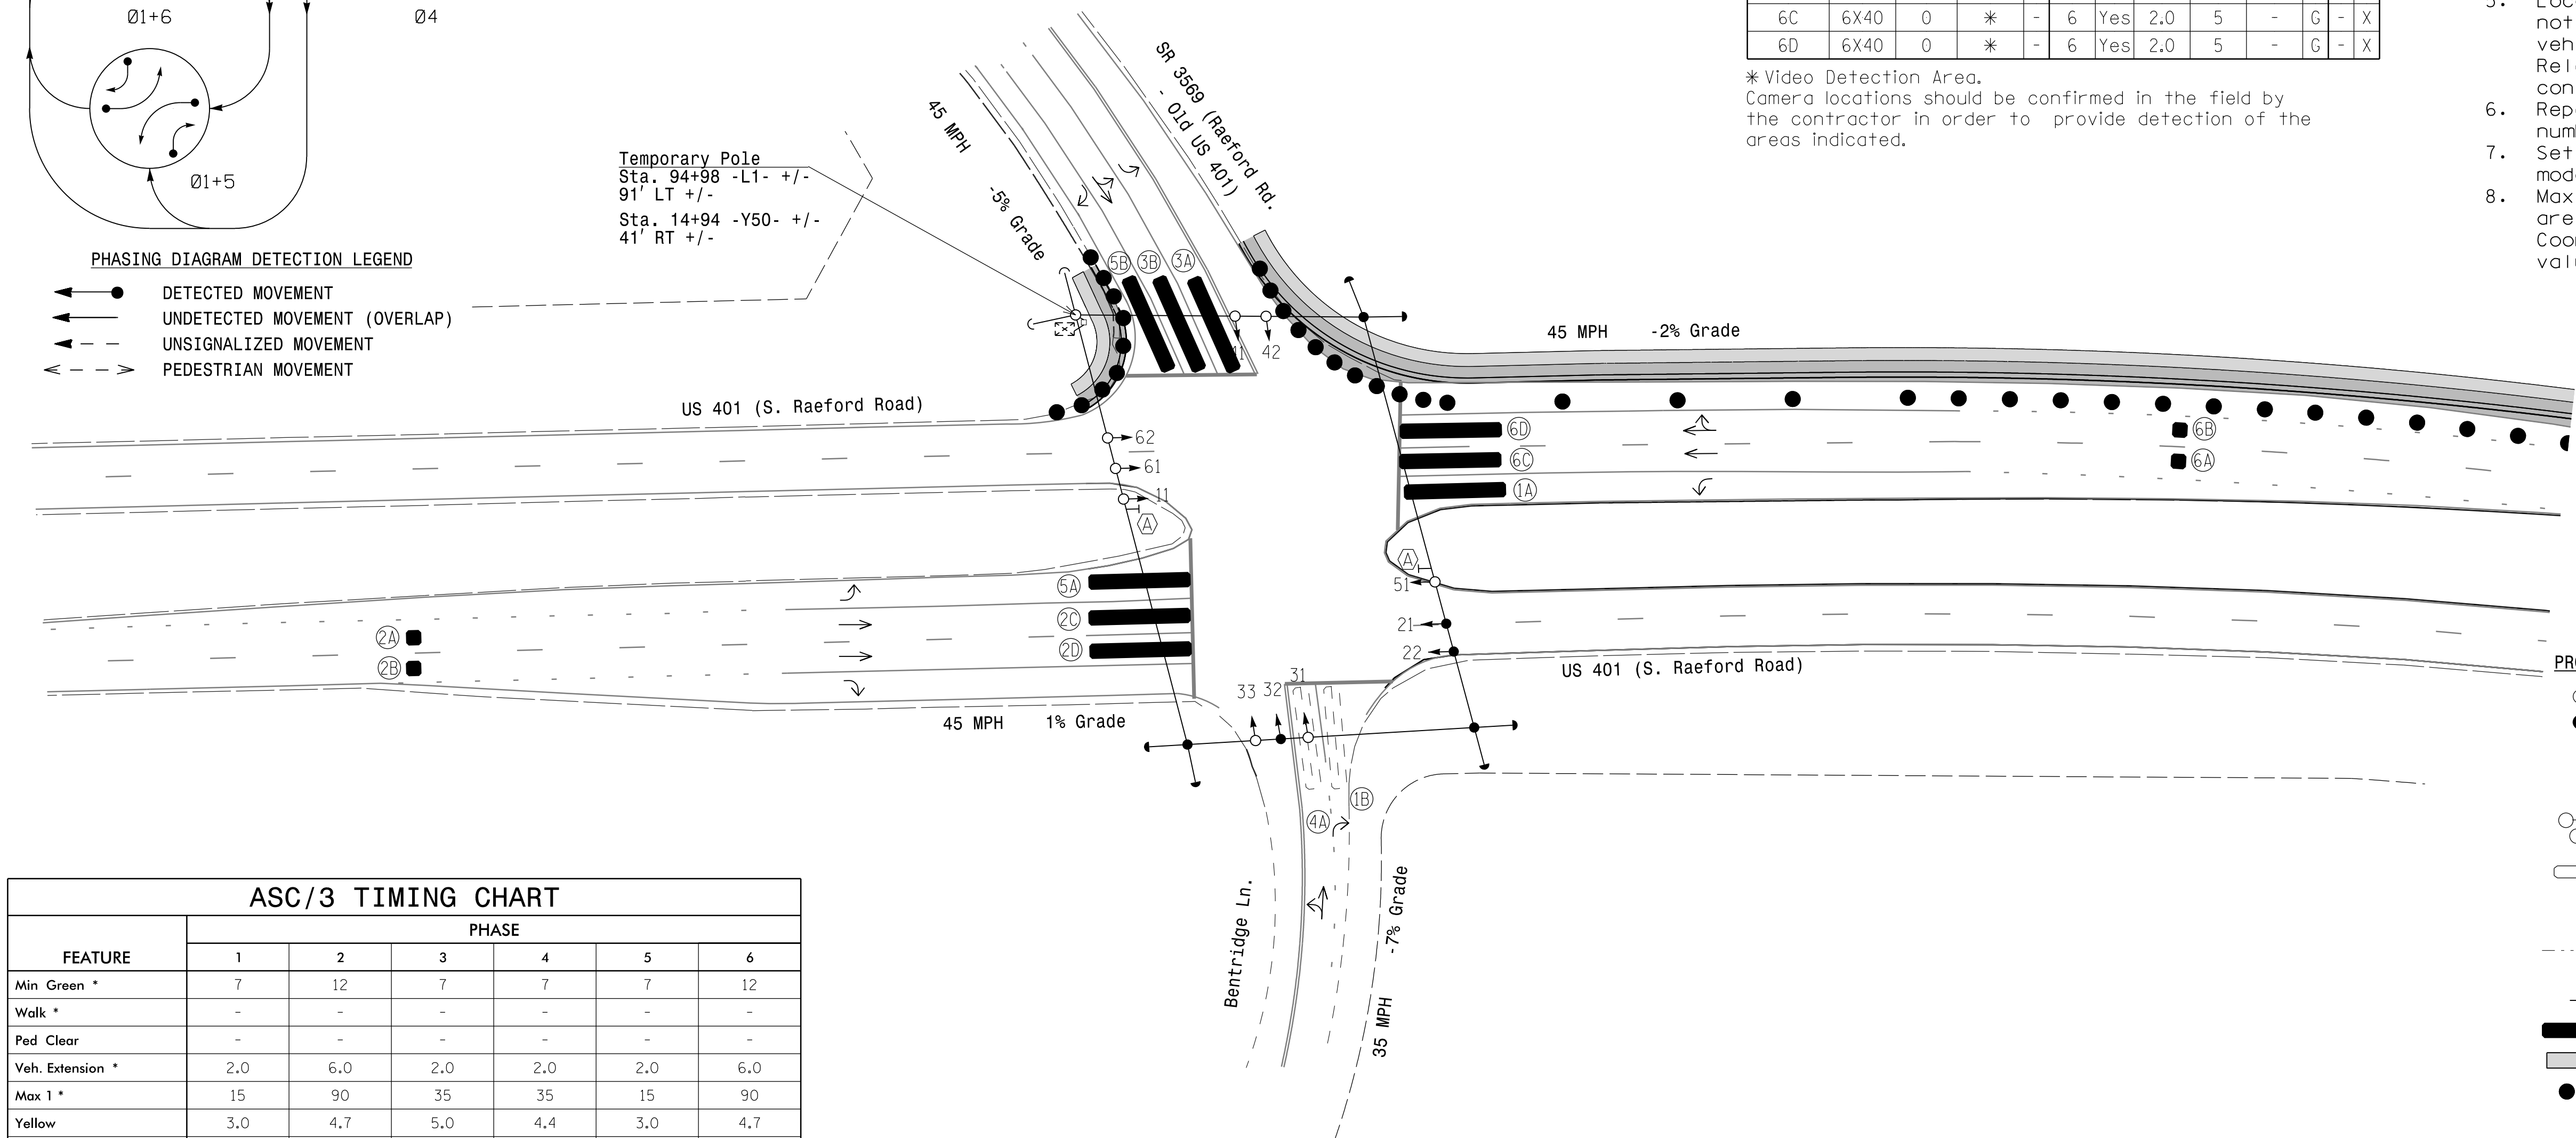

ASC/3 TIMING CHART

FEATURE	PHASE					
	1	2	3	4	5	6
Min Green *	7	12	7	7	7	12
Walk *	-	-	-	-	-	-
Ped Clear	-	-	-	-	-	-
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0
Max 1 *	15	90	35	35	15	90
Yellow	3.0	4.7	5.0	4.4	3.0	4.7
Red Clear	3.3	1.6	2.0	2.1	2.8	1.6
Red Revert	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-
Seconds / Actuation *	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-
Time Before Reduction *	-	15	-	-	-	15
Time To Reduce *	-	30	-	-	-	30
Minimum Gap	-	3.0	-	-	-	3.0
Locking Detector	-	X	-	-	-	X
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL
Dual Entry	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

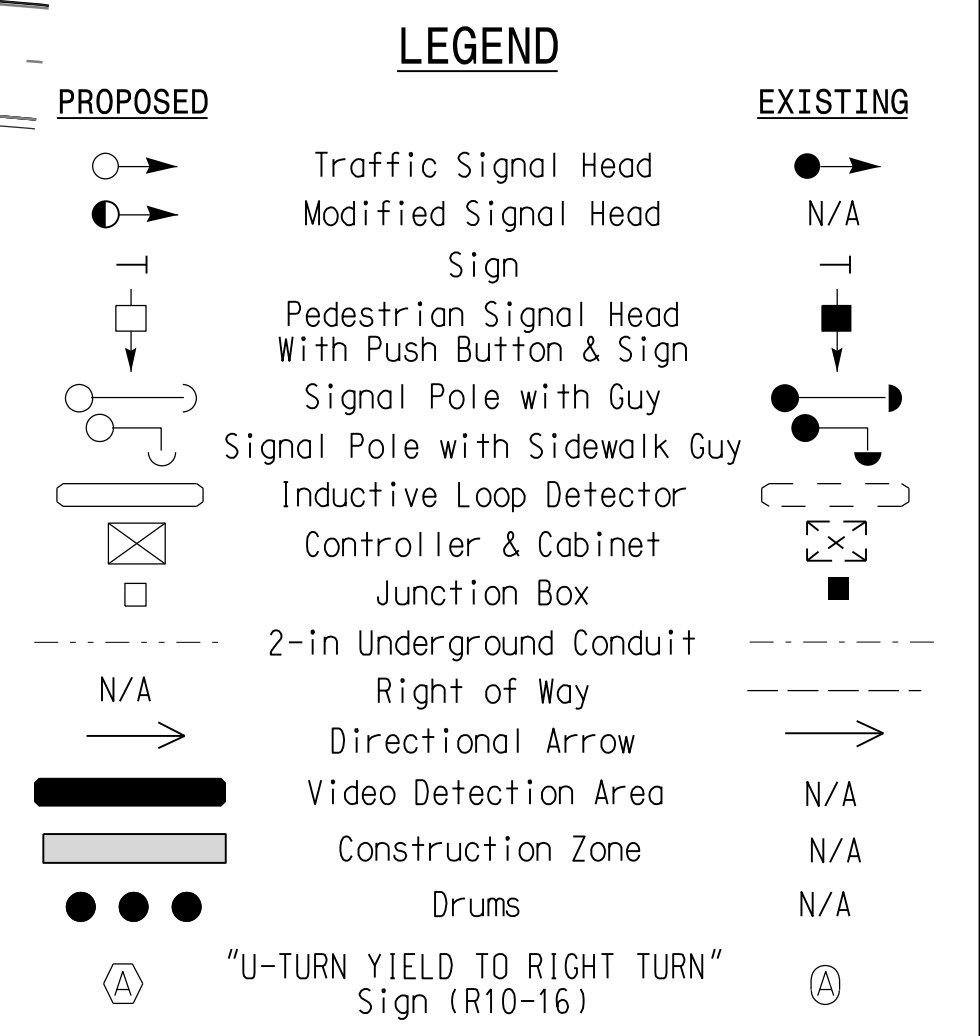

Signal Upgrade Temporary Design 1 - TMP Phase II

Stantec
 Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared for the Offices of:

 TRANSPORTATION MOBILITY AND SAFETY DIVISION
 STATE OF NORTH CAROLINA
 SIGNAL DESIGN SECTION
 750 N. Greenfield Pkwy, Garner, NC 27526
 SCALE: 0 40
 1"=40'

US 401 (South Raeford Rd.) at SR 3569 (Raeford Rd-Old US 401) Bentrbridge Ln.
 Division 6 Cumberland County Fayetteville
 PLAN DATE: March 2018 REVIEWED BY: E D Harris
 PREPARED BY: R M Muncey REVIEWED BY: B L Watson

REVISIONS	INIT.	DATE


PROFESSIONAL SEAL 29449
 NORTH CAROLINA PROFESSIONAL ENGINEER
 Betsy L. Watson
 3/29/2018
 SIG. INVENTORY NO. 06-084511

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

3/29/2018
 User: rfmuncy
 Path: \\pfs01\cadd\signal\Design\Phase 2\U-4405.sig.dgn, 06-084511.dgn

EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

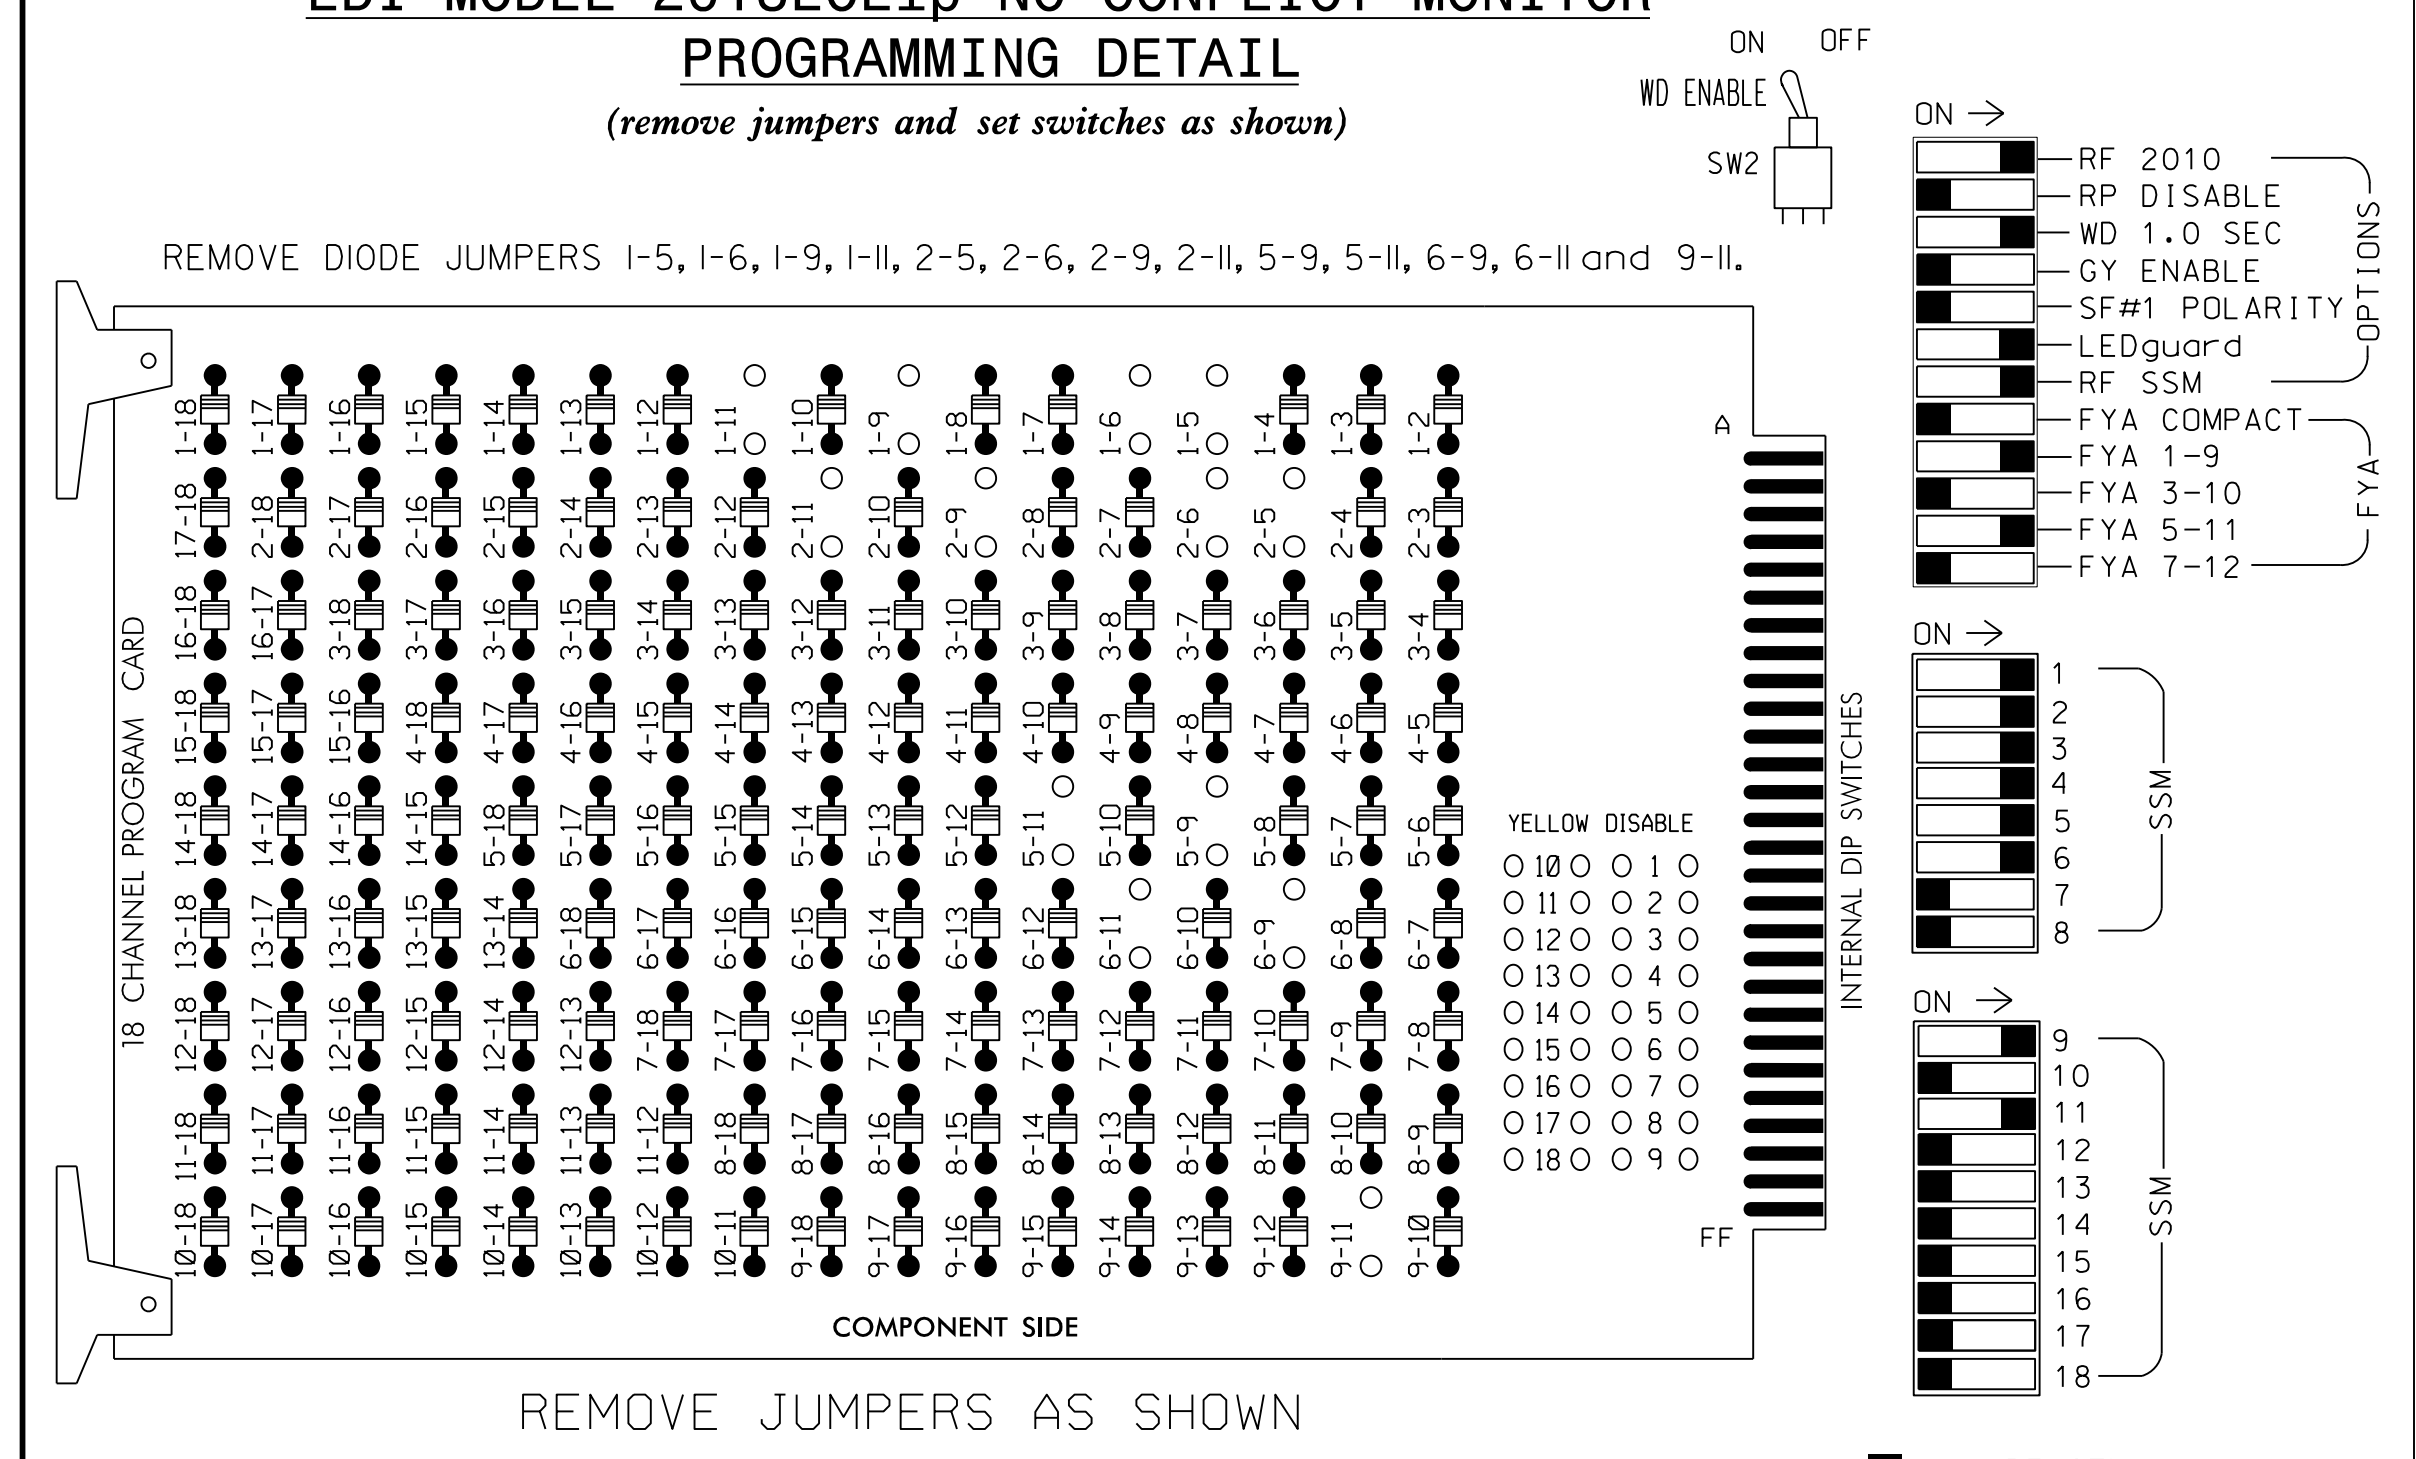

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 Green and 6 Green.
- The cabinet and controller are part of the Fayetteville Signal System.

SIGNAL HEAD HOOK-UP CHART

	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11★	42	21,22	NU	31	32	33	41	42	22	NU	51★	33	61,62	NU	NU	51★	NU
RED	*	128		116	116	101	101				*	134						
YELLOW		129		117	117	102	102					135						
GREEN		130		118	118	103	103					136						
RED ARROW				116											A121		A114	
YELLOW ARROW	126			117					102			132			A122		A115	
FLASHING YELLOW ARROW															A123		A116	
GREEN ARROW	127	127		118	118	103	103	133	133									


NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ See pictorial of head wiring in detail this sheet.

EQUIPMENT INFORMATION


CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX.
 LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8
 AUX S1,AUX S4
 PHASES USED.....1,2,3,4,5,6
 OVERLAP "A".....*
 OVERLAP "B".....NOT USED
 OVERLAP "C".....*
 OVERLAP "D".....NOT USED
 * See overlap programming detail on sheet 2

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

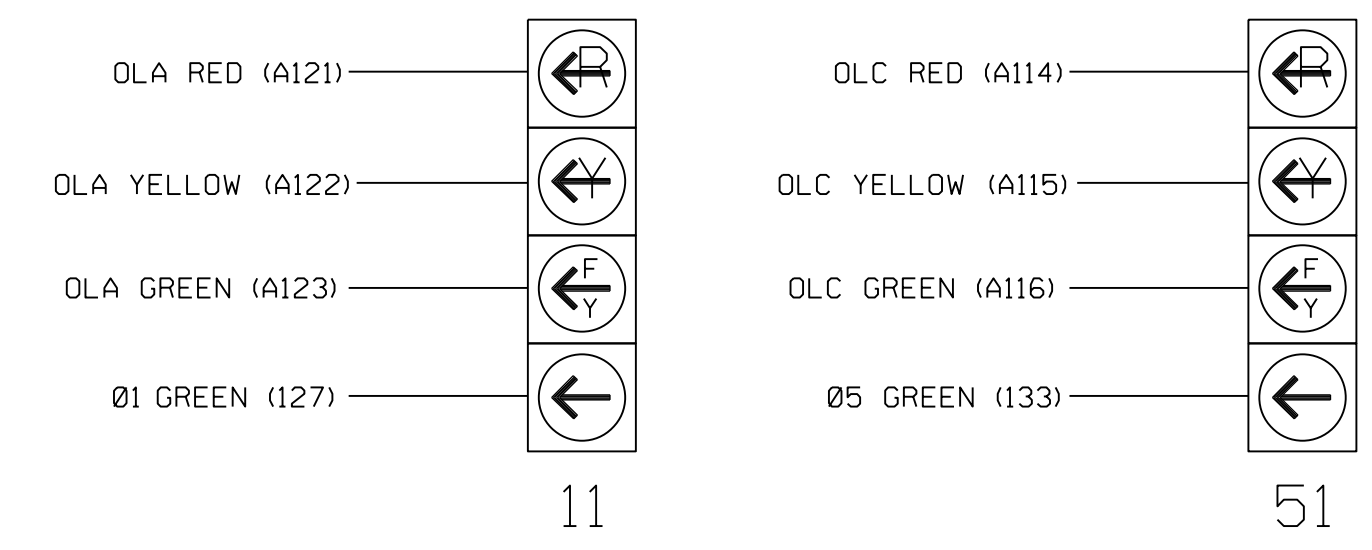


INPUT FILE POSITION LAYOUT

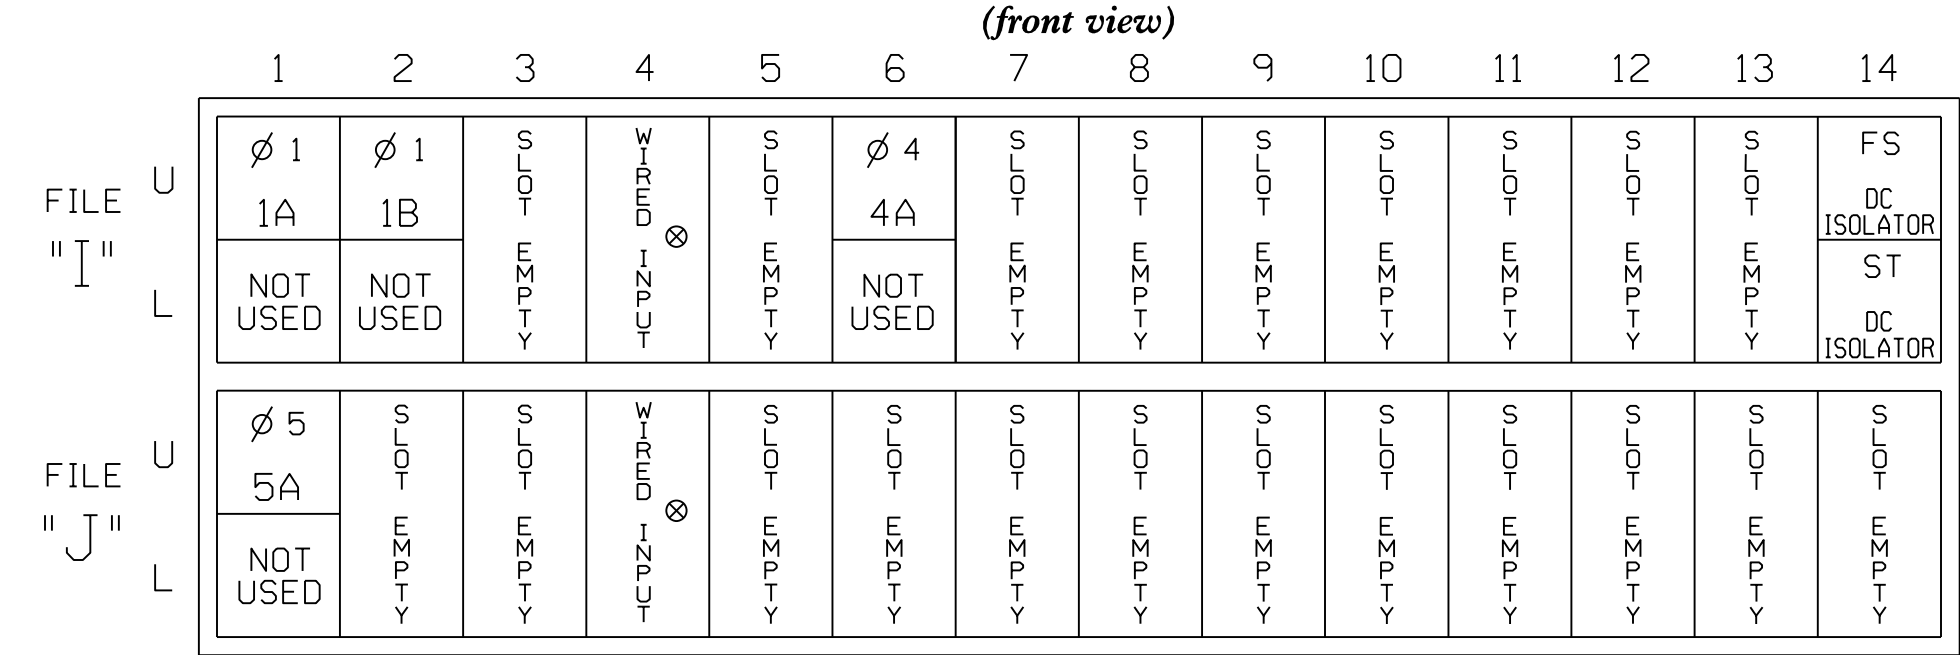

LOAD RESISTOR INSTALLATION DETAIL


(install resistors as shown)

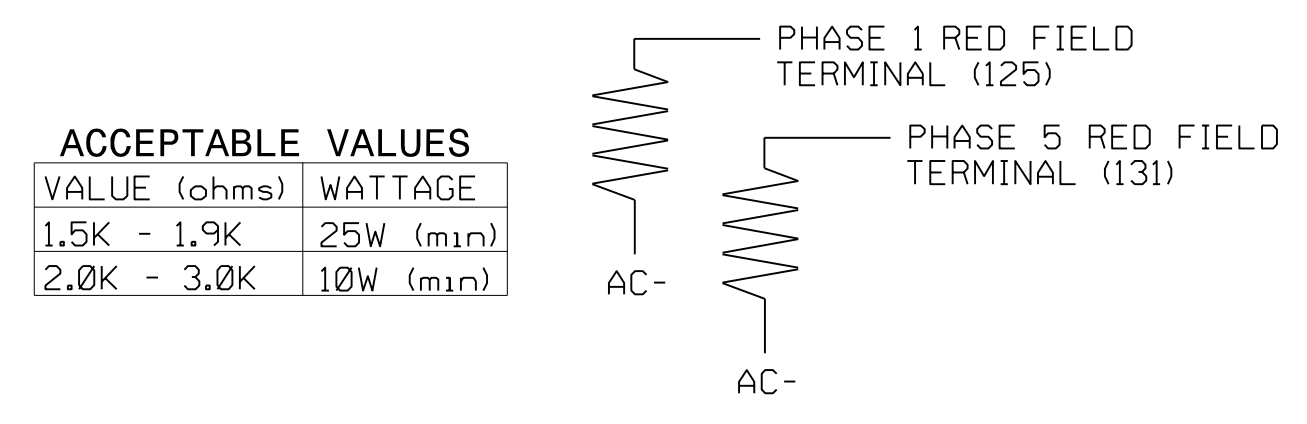

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
1A ¹	-	I1U	56	1	1	YES		15		S
1B	TB2-5,6	J4U	48	26	6	YES		3		G
4A	TB4-9,10	I2U	39	2	2	YES				S
5A ²	-	J1U	55	5	5	YES		15		S
	-	I4U	47	22	2	YES		3		G

¹Add jumper from I1-W to J4-W, on rear of input file.
²Add jumper from J1-W to I4-W, on rear of input file.

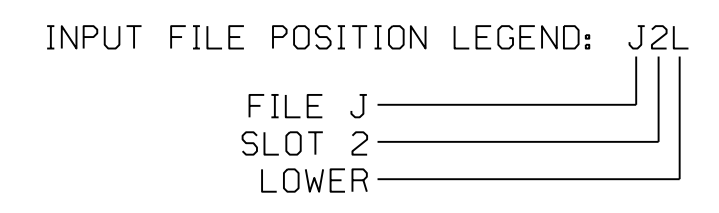

DETECTOR NOTES

- For all loops, install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.
- For loops 1A and 5A detector card placements and slots reserved for wired inputs are typical for a NCDOT installation.

Temporary Design 1 - TMP Phase II Electrical Detail - Sheet 1 of 2

Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared in the Offices of:

750 N. Greenfield Pkwy, Garner, NC 27529

US 401 (South Raeford Road)
 at
 SR 3569 (Raeford Rd-
 Old US 401)/Bentridge Ln.
 Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn
 PREPARED BY: R M Muncey REVIEWED BY:

REVISIONS	INIT.	DATE

3/29/2018
 DATE
 SIG. INVENTORY NO. 06-0845T1

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

DATE: U:\Projects\Signal\Temp\Detail\Signal\Phase I\U-4405.sig.ele_06-0845T1.dgn User: rnmuncy

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

OVERLAP A

Select TMG VEH OVLP [A] and 'PPLT FYA'

```

TMG VEH OVLP...[A] TYPE: ....[PPLT FYA]
PROTECTED LEFT TURN.... PHASE 1
OPPOSING THROUGH..... PHASE 2

FLASHING ARROW OUTPUT....CH9 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0
        
```

Toggle Twice

OVERLAP C

Select TMG VEH OVLP [C] and 'PPLT FYA'

```

TMG VEH OVLP...[C] TYPE: ....[PPLT FYA]
PROTECTED LEFT TURN.... PHASE 5
OPPOSING THROUGH..... PHASE 6

FLASHING ARROW OUTPUT....CH11 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0
        
```

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 06-0845T1
DESIGNED: March 2018
SEALED: 03-29-2018
REVISED: N/A

Tempoary Design 1 - TMP Phase II
Electrical Detail - Sheet 2 of 2

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Stantec <small>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</small>	<small>ELECTRICAL AND PROGRAMMING DETAILS FOR:</small> <small>Prepared in the Offices of: North Carolina Department of Transportation Signal Management Section 750 N. Greenfield Pkwy, Garner, NC 27529</small>	US 401 (South Raeford Road) at SR 3569 (Raeford Rd- Old US 401)/Bentridge Ln. <small>Division 6 Cumberland County Fayetteville</small>	<small>SEAL</small> <small>PROFESSIONAL ENGINEER LAWRENCE E. OVERN 045933</small>											
	<small>PLAN DATE: March 2018 REVIEWED BY: L Overn</small> <small>PREPARED BY: R M Muncey REVIEWED BY:</small>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="font-size: x-small;">REVISIONS</th> <th style="font-size: x-small;">INIT.</th> <th style="font-size: x-small;">DATE</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table>	REVISIONS	INIT.	DATE									
REVISIONS	INIT.	DATE												


DATE: 03/29/2018 10:45:11 AM
User: rfmuncey

6 Phase Fully Actuated Fayetteville Signal System

NOTES

1. Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
3. Phase 1 may be lagged.
4. The order of phase 3 and phase 4 may be reversed.
5. Set all detector units to presence mode.
6. Locate new cabinet foundation so as not to obstruct sight distance of vehicles turning right on red. Relocate existing cabinet and controller onto new foundation. Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
7. Program pedestrian heads to countdown the flashing "Don't Walk" time only.
8. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values. The Division (City) Traffic Engineer will determine the hours of use for each phasing plan.
9. Pedestrian pedestals are conceptual and shown for reference only. See 2018 NCDOT Roadway Standard Drawings 1705.04 Sheets 1-3 for push button location details.

SIGNAL FACE I.D. All Heads L.E.D.

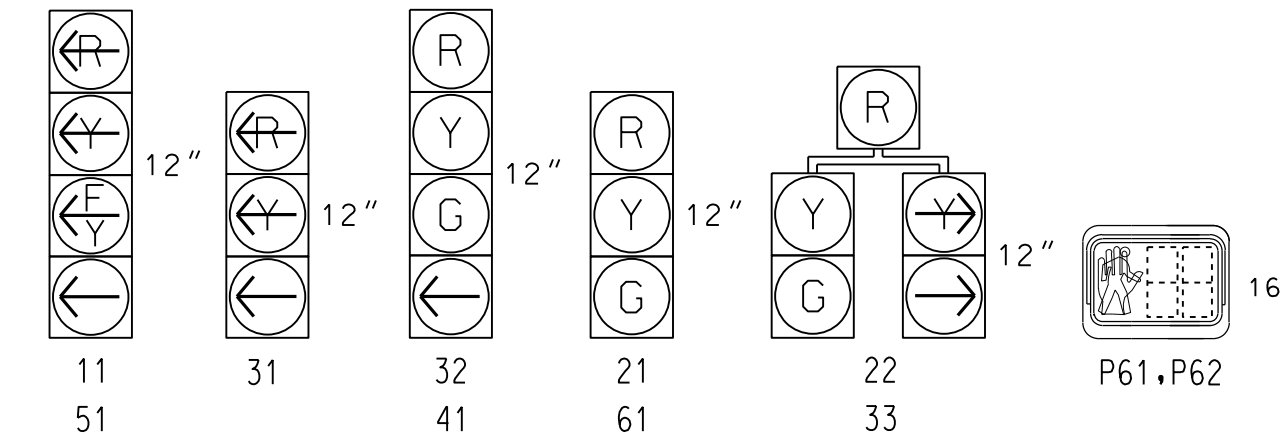


ASC/3 DETECTOR INSTALLATION CHART													
DETECTOR				PROGRAMMING									
LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	LOOP SYSTEM	NEW CARD	
1A	6X40	0	2-4-2	X	1	Yes	-	15	*	-	S	-	X
1B	6X40	0	2-4-2	X	6	Yes	-	3	-	-	G	-	X
2A	6X6	300	6	X	2	Yes	-	-	-	-	N	-	X
2B	6X6	300	6	X	2	Yes	-	-	-	-	N	-	X
3A	6X40	0	2-4-2	X	3	Yes	-	3	-	-	S	-	X
3B	6X40	0	2-4-2	X	3	Yes	-	-	-	-	S	-	X
4A	6X40	0	2-4-2	X	4	Yes	-	3	-	-	S	-	X
5A	6X40	0	2-4-2	X	5	Yes	-	15	*	-	S	-	X
5B	6X40	0	2-4-2	X	2	Yes	-	3	-	-	G	-	X
6A	6X6	300	6	X	6	Yes	-	-	-	-	N	-	X
6B	6X6	300	6	X	6	Yes	-	-	-	-	N	-	X


Disable Phase(s) call during Alternate Phasing Operation.
 * Disable delay during Alternate Phasing Operation.

SIGNAL FACE	PHASE						FLASH
	Ø 1+5	Ø 1+6	Ø 2+5	Ø 2+6	Ø 3	Ø 4	
11	←	←	←	←	←	←	Y
21	R	R	G	G	R	R	Y
22	R	R	G	G	R	R	Y
31	←	←	←	←	←	←	Y
32	R	R	R	R	G	R	R
33	R	R	R	R	G	R	R
41	R	R	R	R	G	R	R
42	R	R	R	R	G	R	R
51	←	←	←	←	←	←	Y
61	R	G	R	G	R	R	Y
62	R	G	R	G	R	R	Y
P61,P62	DW	W	DW	W	DW	W	DRK


SIGNAL FACE	PHASE						FLASH
	Ø 1+5	Ø 1+6	Ø 2+5	Ø 2+6	Ø 3	Ø 4	
11	←	←	←	←	←	←	Y
21	R	R	G	G	R	R	Y
22	R	R	G	G	R	R	Y
31	←	←	←	←	←	←	Y
32	R	R	R	R	G	R	R
33	R	R	R	R	G	R	R
41	R	R	R	R	G	R	R
42	R	R	R	R	G	R	R
51	←	←	←	←	←	←	Y
61	R	G	R	G	R	R	Y
62	R	G	R	G	R	R	Y
P61,P62	DW	W	DW	W	DW	W	DRK

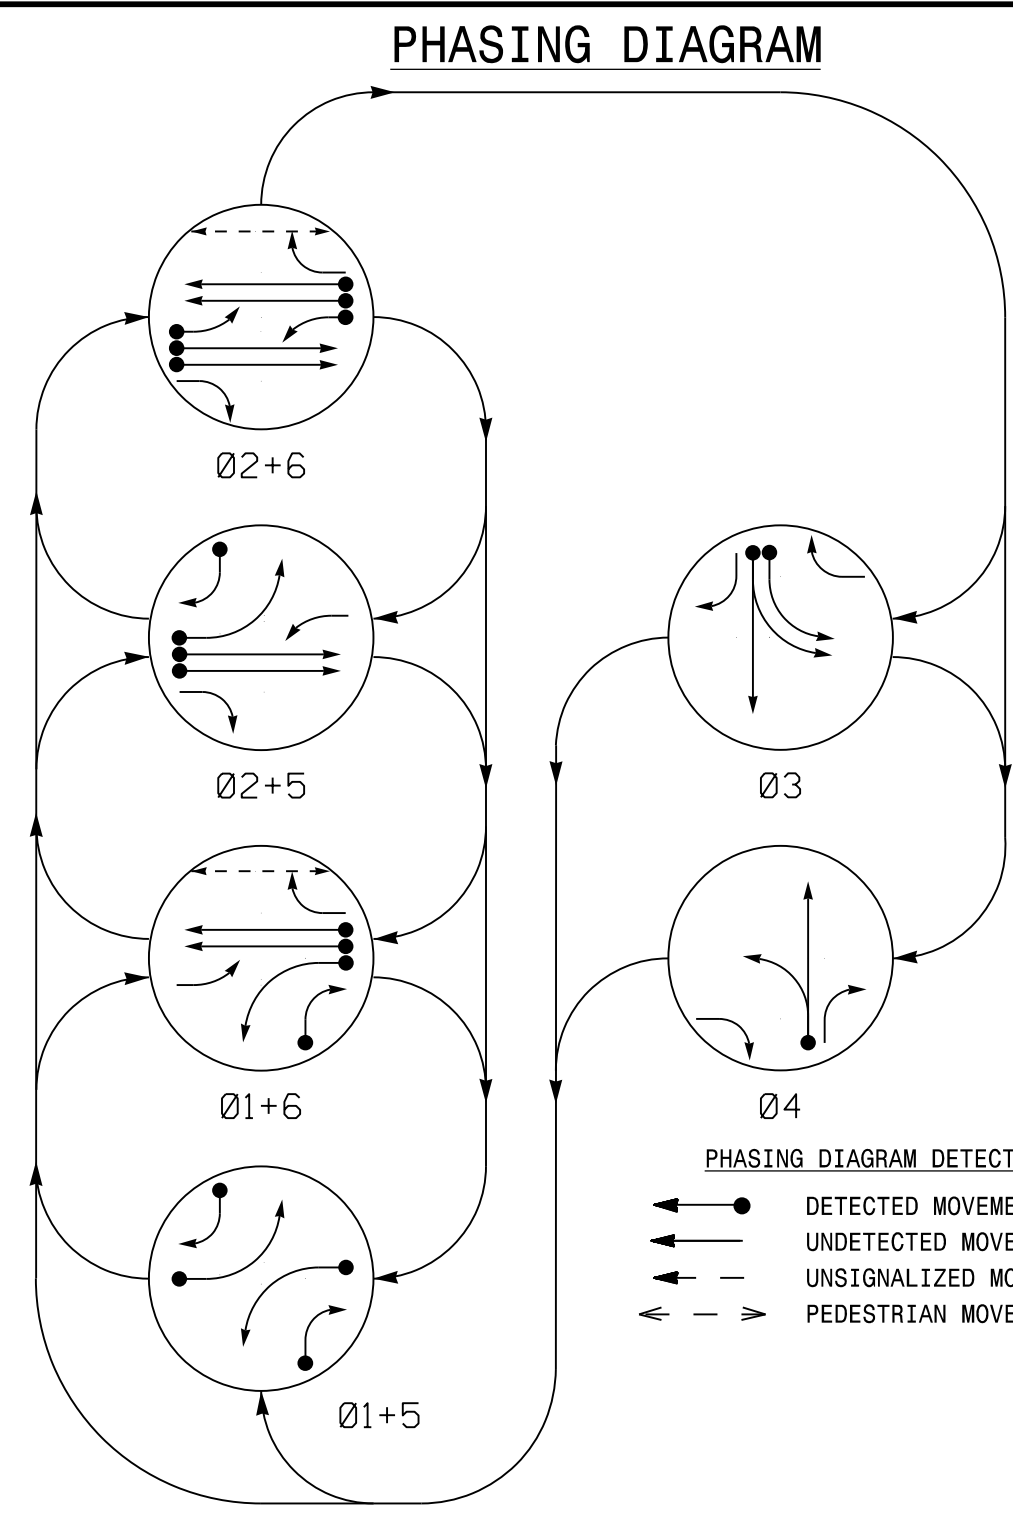

PHASING DIAGRAM DETECTION LEGEND
 ● DETECTED MOVEMENT
 ○ UNDETECTED MOVEMENT (OVERLAP)
 - UNSIGNALIZED MOVEMENT
 - PEDESTRIAN MOVEMENT

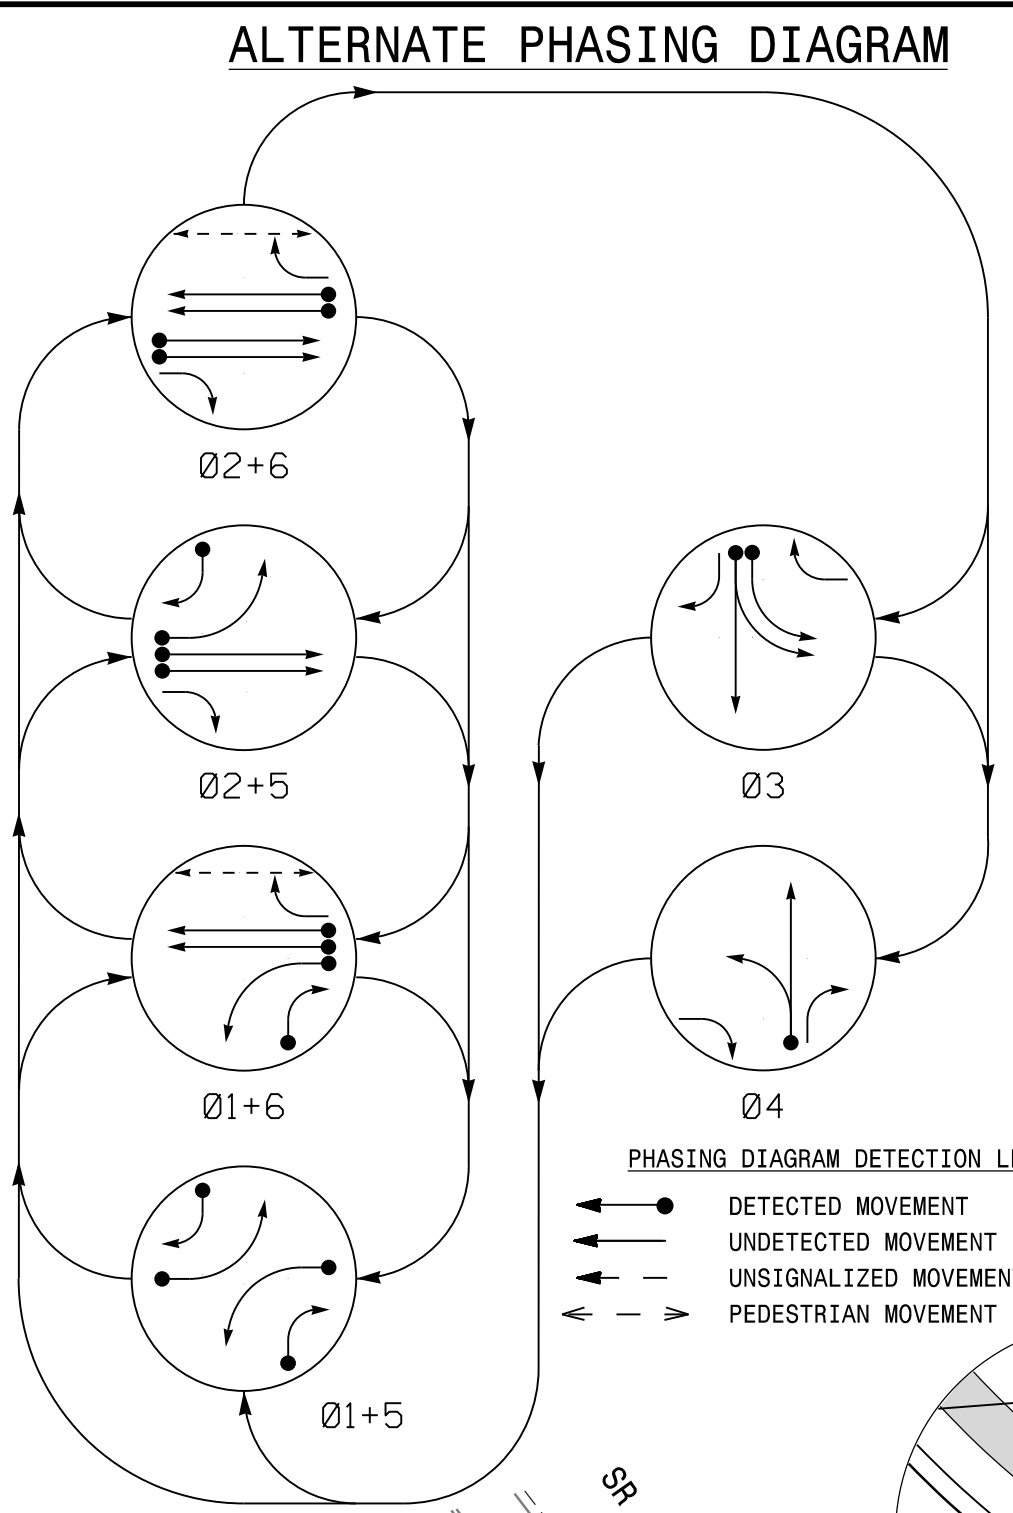


PHASING DIAGRAM DETECTION LEGEND
 ● DETECTED MOVEMENT
 ○ UNDETECTED MOVEMENT (OVERLAP)
 - UNSIGNALIZED MOVEMENT
 - PEDESTRIAN MOVEMENT

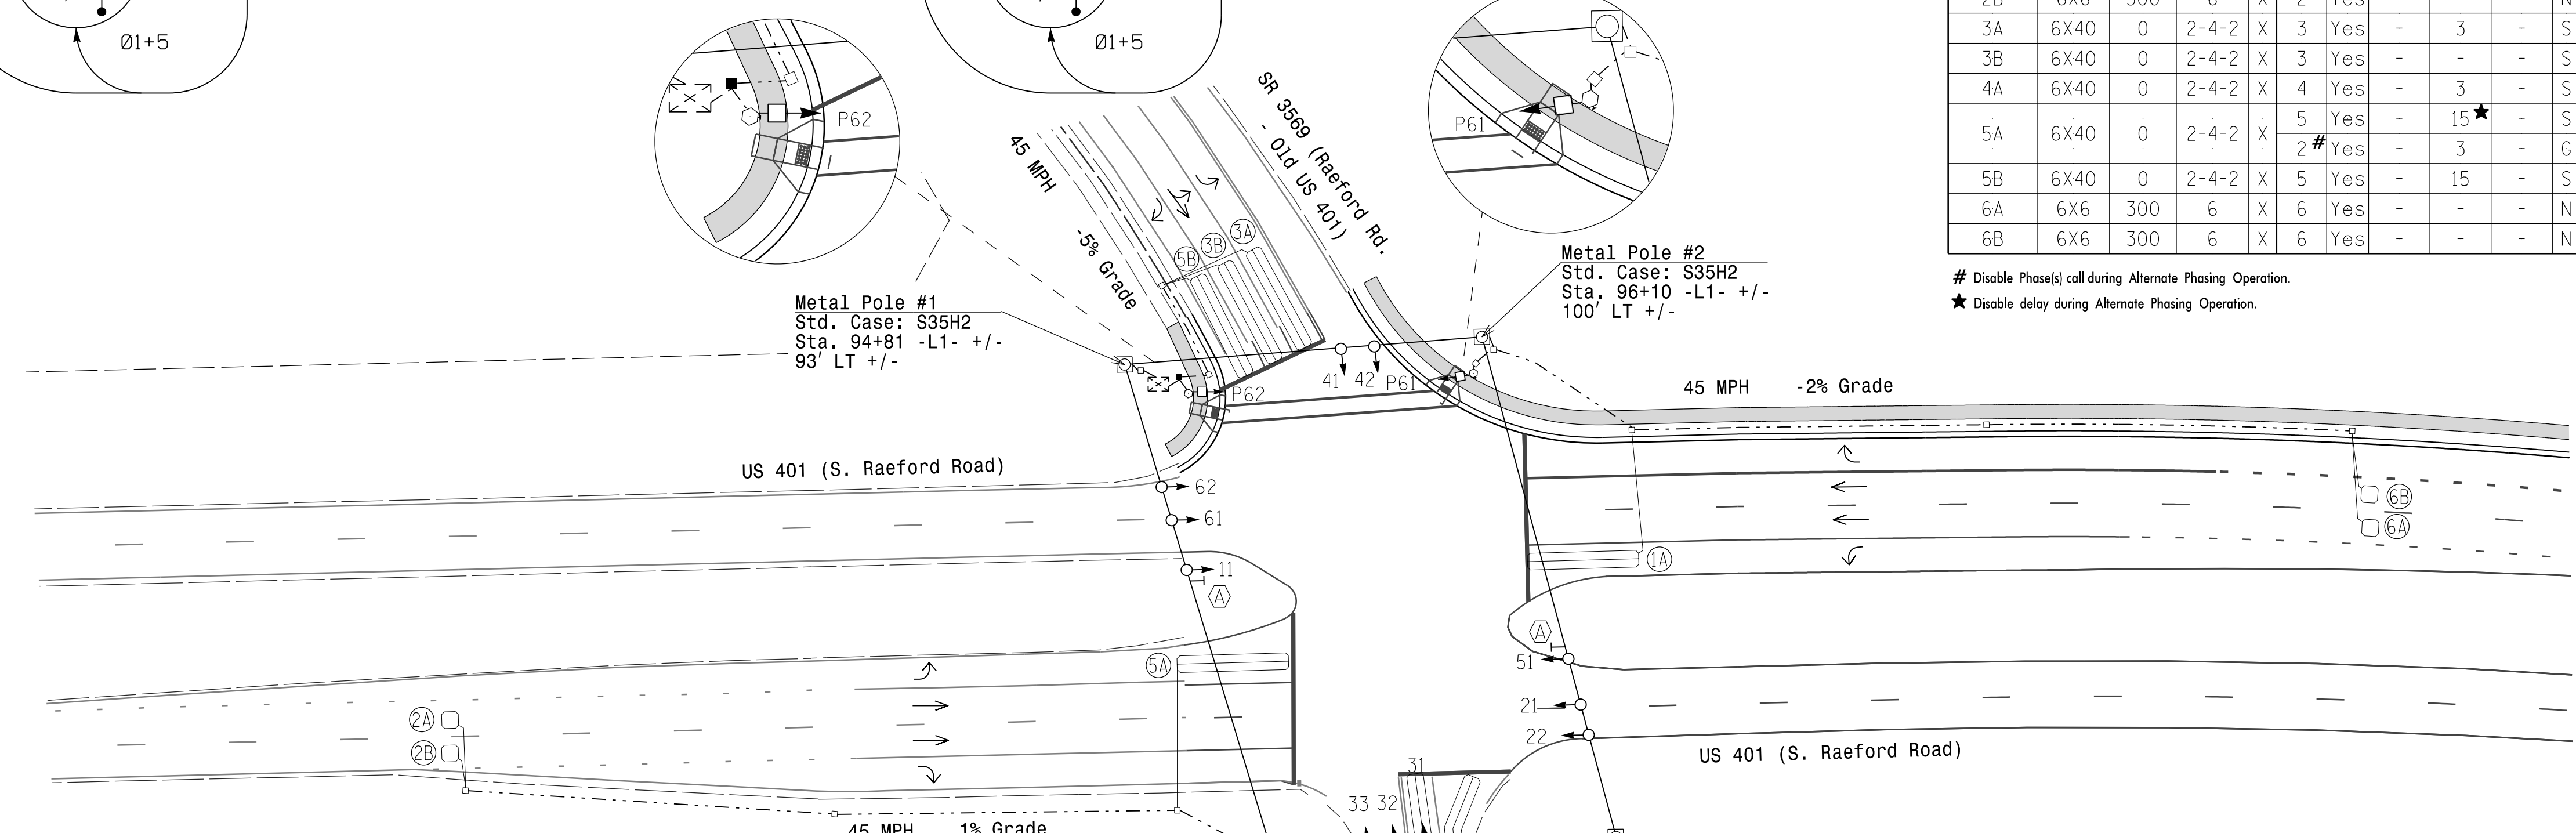

FEATURE	PHASE					
	1	2	3	4	5	6
Min Green *	7	12	7	7	7	12
Walk *	-	-	-	-	-	7
Ped Clear	-	-	-	-	-	20
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0
Max I *	15	90	35	35	15	90
Yellow	3.0	4.7	5.0	4.4	3.0	4.7
Red Clear	3.2	1.9	2.4	2.7	3.3	1.9
Red Revert	-	-	-	-	-	-
Actuations B4 Add *	-	0	-	-	-	0
Seconds /Actuation *	-	1.5	-	-	-	1.5
Max Initial *	-	34	-	-	-	34
Time Before Reduction *	-	15	-	-	-	15
Time To Reduce *	-	30	-	-	-	30
Minimum Gap	-	3.0	-	-	-	3.0
Locking Detector	-	X	-	-	-	X
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL
Dual Entry	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

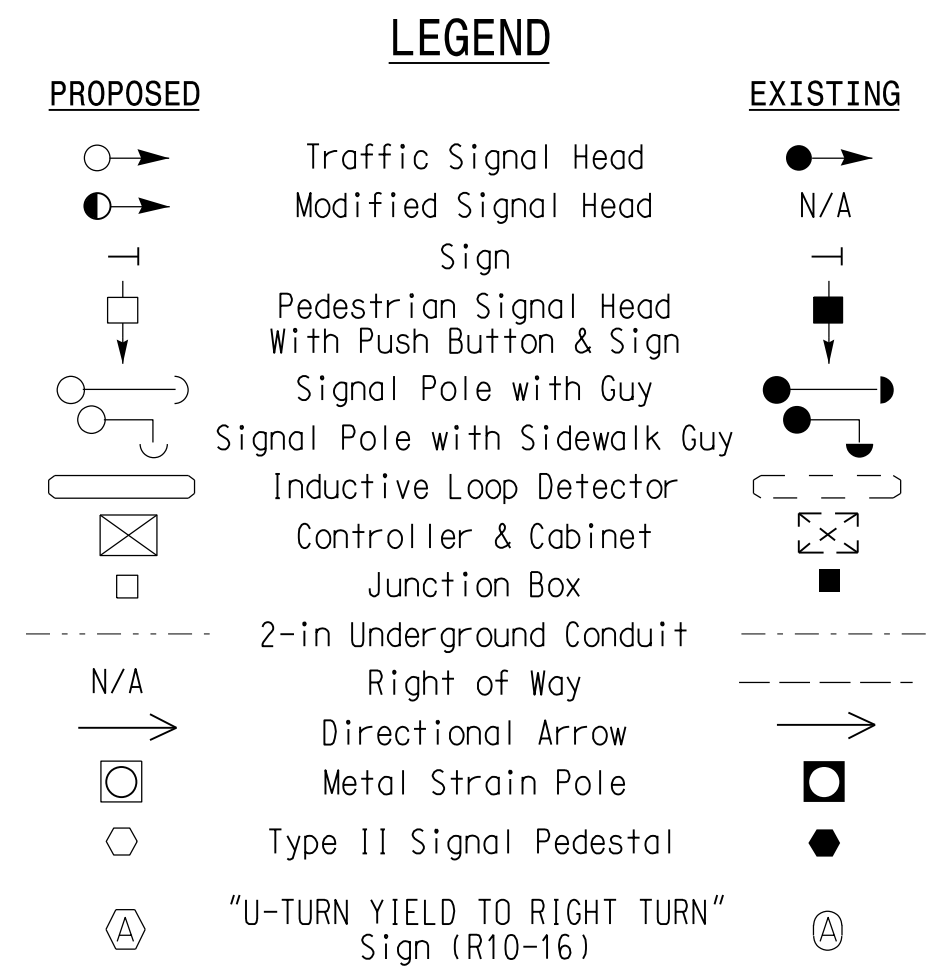

Signal Upgrade - Final Design

Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared For the Offices of:

750 N. Greenfield Pkwy, Garner, NC 27526

SCALE: 0 40
1"=40'

US 401 (South Raeford Rd.)
 at
 SR 3569 (Raeford Rd-Old US 401)
 Bentrige Ln.

Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: E D Harris

PREPARED BY: R M Muncey REVIEWED BY: B L Watson

REVISIONS	INIT.	DATE


DATE: 3/29/2018
 SIG. INVENTORY NO. 06-0845

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)





REMOVE DIODE JUMPERS 1-5, 1-6, 1-9, 1-11, 1-15, 2-5, 2-6, 2-9, 2-11, 2-15, 5-9, 5-11, 6-9, 6-11, 6-15, 9-11, 9-15, and 11-15.

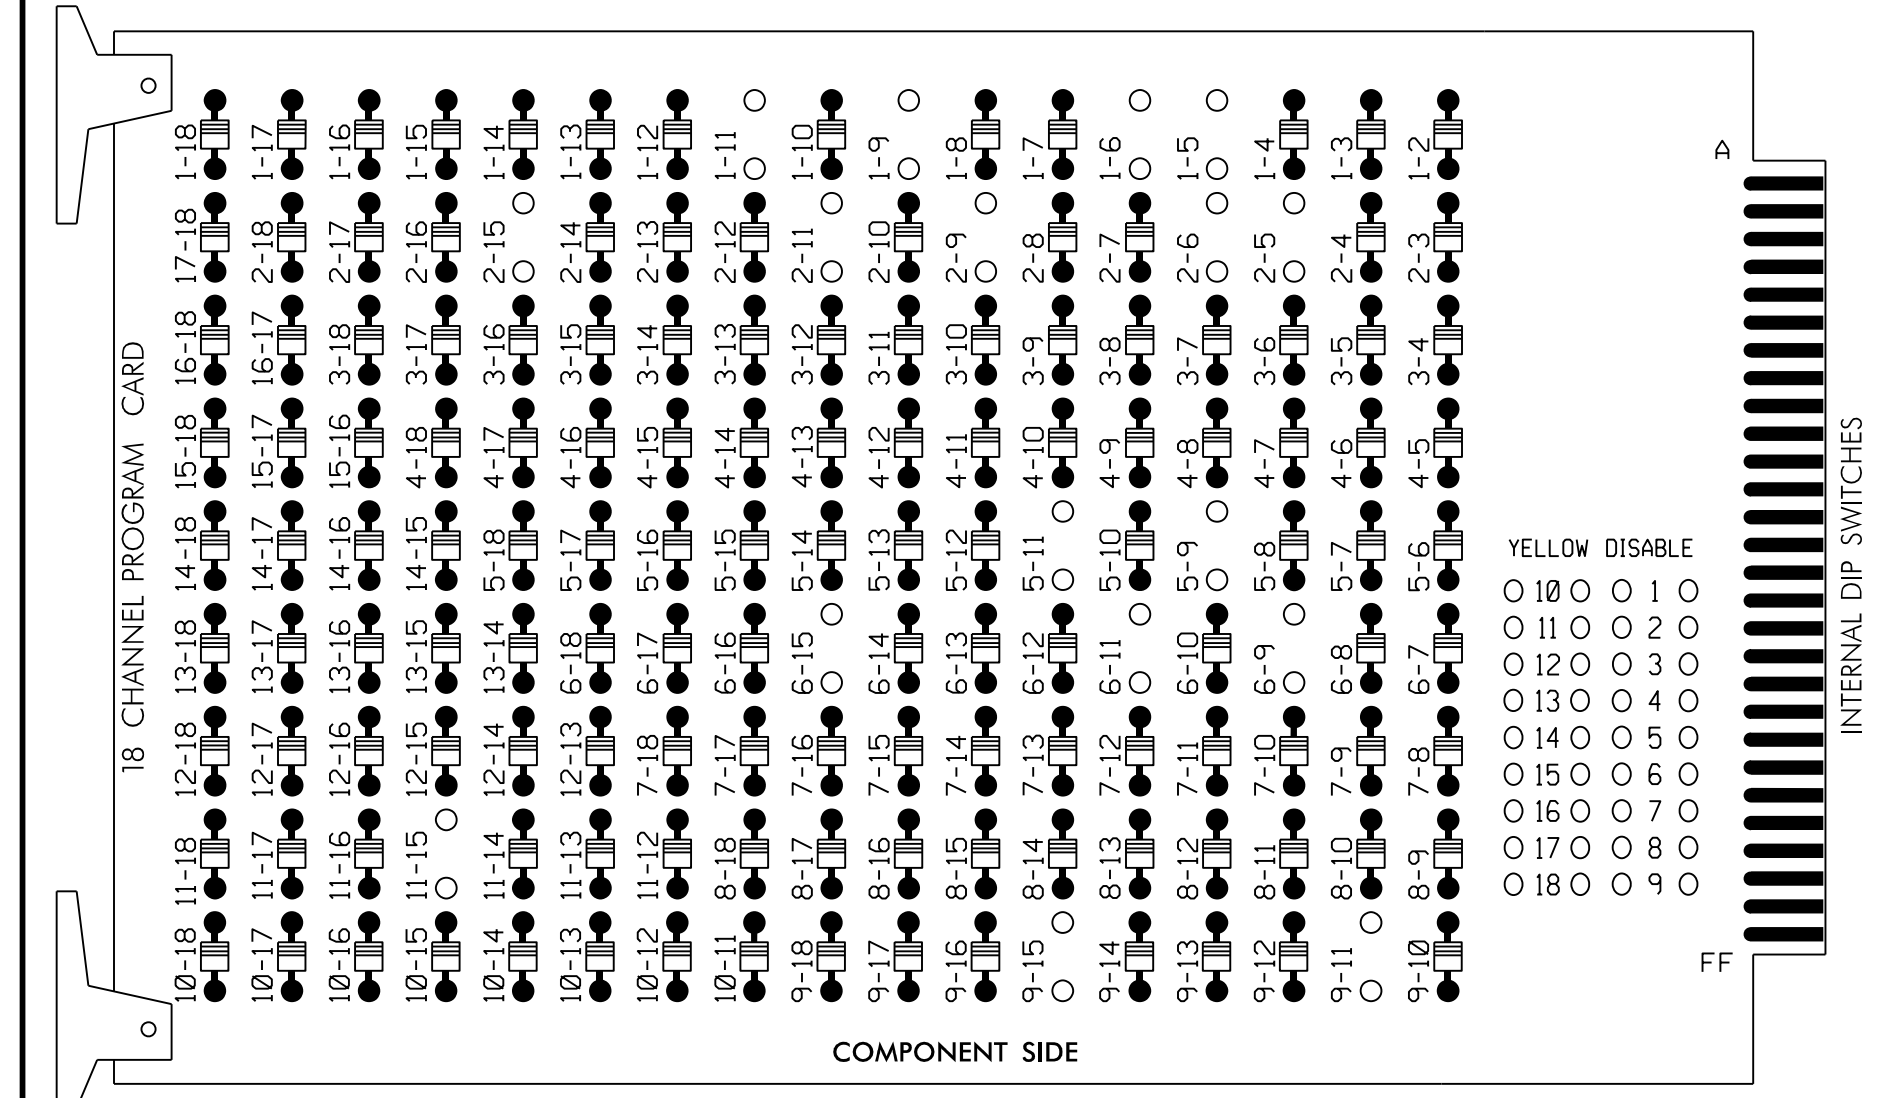

REMOVE JUMPERS AS SHOWN

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Integrate monitor with Ethernet network in cabinet.

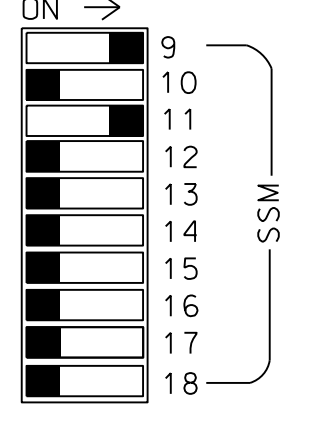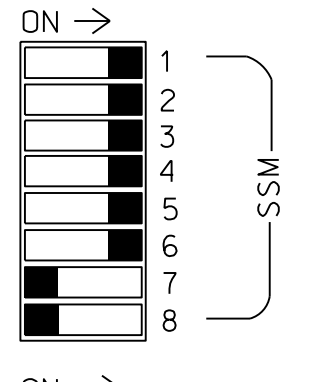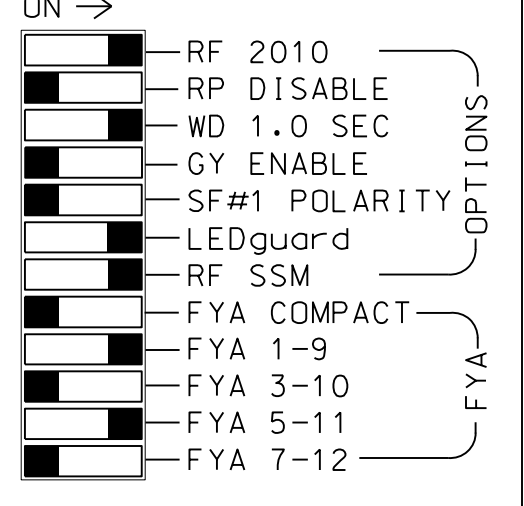

■ = DENOTES POSITION OF SWITCH

NOTES


- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 Green and 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

SIGNAL HEAD HOOK-UP CHART

	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6							
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18							
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE							
SIGNAL HEAD NO.	11★	42	21,22	NU	31	32	33	62	41	42	22	NU	51★	33	61,62	P61, P62	NU	NU	NU	11★	51★	NU	NU		
RED	*	128			116	116		101	101				*	134											
YELLOW		129			117	117		102	102					135											
GREEN		130			118	118		103	103					136											
RED ARROW					116																	A121		A114	
YELLOW ARROW		126			117			117		102			132										A122		A115
FLASHING YELLOW ARROW																							A123		A116
GREEN ARROW	127	127			118	118		118	103	103		133	133												
Hand icon																									119
Person icon																									121

NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ See pictorial of head wiring in detail this sheet.

INPUT FILE POSITION LAYOUT (front view)

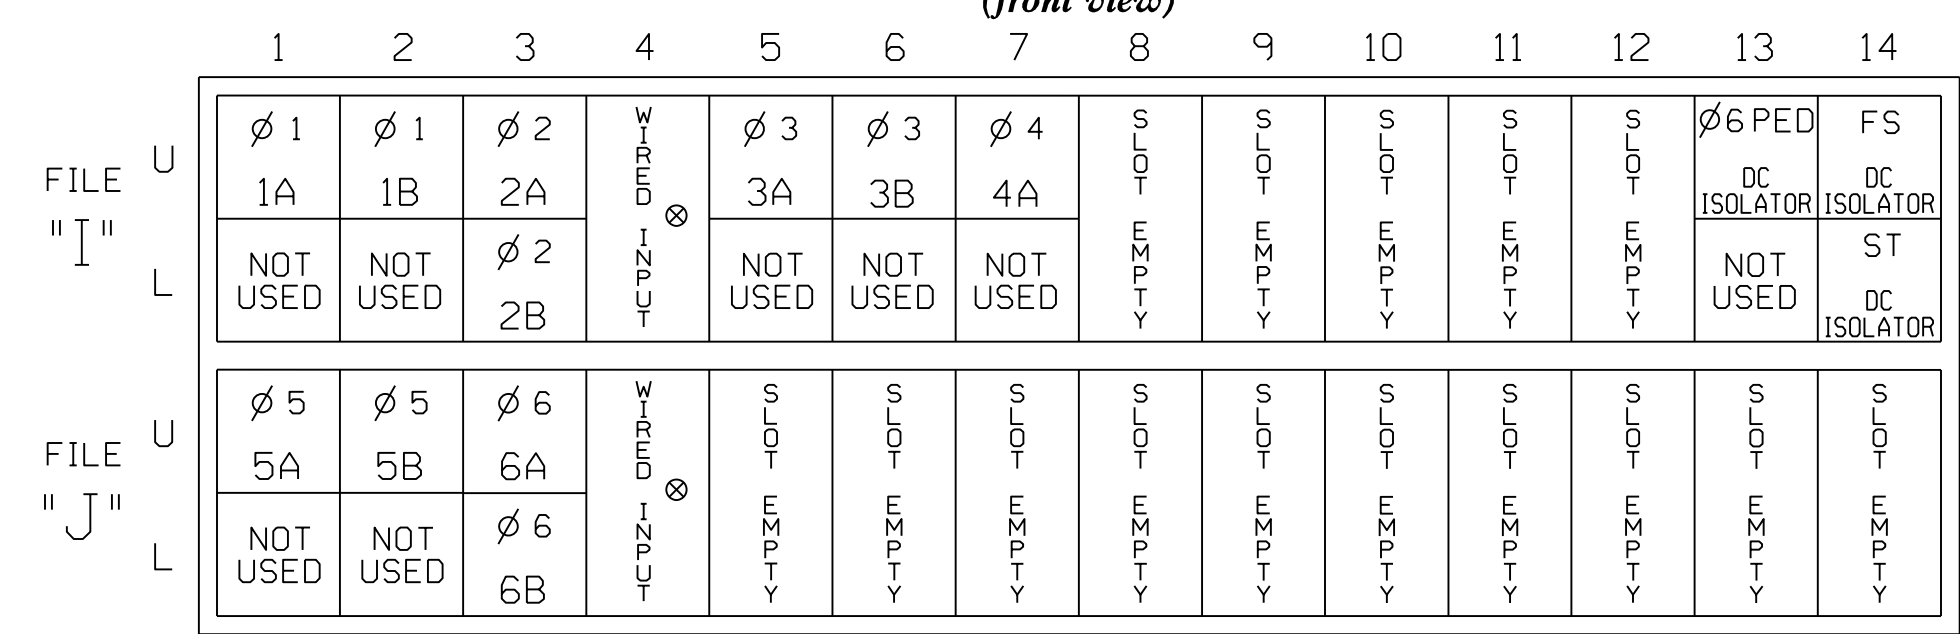


EX.: 1A, 2A, ETC. = LOOP NO.'S FS = FLASH SENSE
 ⊗ Wired Input - Do not populate slot with detector card ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
1A ¹	TB2-1,2	I1U	56	1★	1	YES		15		S
	-	J4U	48	26★	6	YES		3		G
1B	TB2-5,6	I2U	39	2	1	YES		15		S
2A	TB2-9,10	I3U	63	32	2	YES			X	N
2B	TB2-11,12	I3L	76	42	2	YES			X	N
3A	TB4-5,6	I5U	58	3	3	YES		3		S
3B	TB4-9,10	I6U	41	4	3	YES				S
4A	TB6-1,2	I7U	65	34	4	YES		3		S
5A ²	TB3-1,2	J1U	55	5★	5	YES		15		S
	-	I4U	47	22★	2	YES		3		G
5B	TB3-5,6	J2U	40	6	5	YES		15		S
6A	TB3-7,8	J3U	64	6	6	YES			X	N
6B	TB3-9,10	J3L	77	16	6	YES			X	N
PED PUSH BUTTONS										
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED					

¹Add jumper from I1-W to J4-W, on rear of input file.
²Add jumper from J1-W to I4-W, on rear of input file.
 ★ See Vehicle Detector Setup Programming Detail for alternate phasing on Sheet 3.

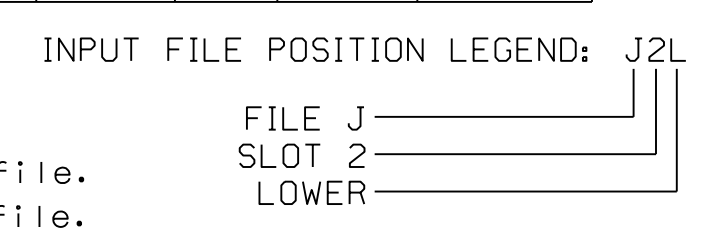


EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX.
 OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,S9
 AUX S1,AUX S4
 PHASES USED.....1,2,3,4,5,6,6PED
 OVERLAP "A".....*
 OVERLAP "B".....NOT USED
 OVERLAP "C".....*
 OVERLAP "D".....NOT USED
 * See overlap programming detail on sheet 2

FYA SIGNAL WIRING DETAIL


(wire signal heads as shown)

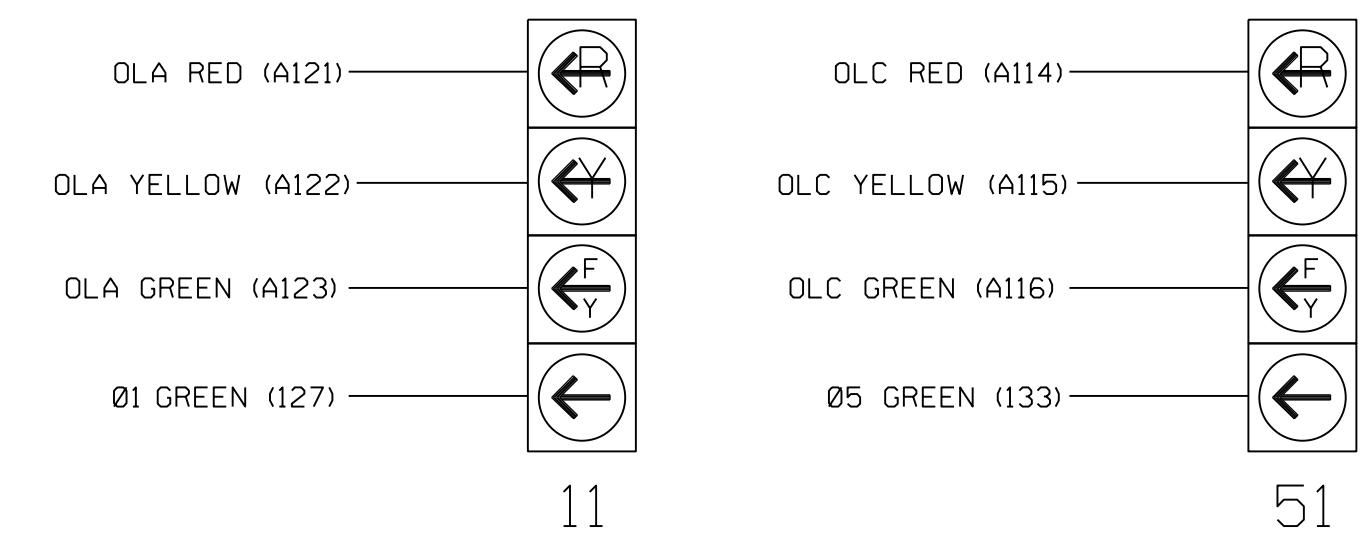

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown)

VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

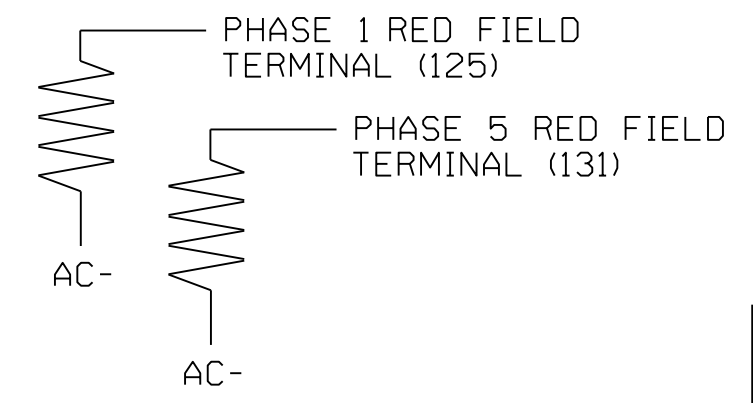

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0845
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Final Design
 Electrical Detail - Sheet 1 of 3

US 401 (South Raeford Road)
 at
 SR 3569 (Raeford Rd-
 Old US 401)/Bentridge Ln.
 Division 6 Cumberland County Fayetteville
 PLAN DATE: March 2018 REVIEWED BY: L Overn
 PREPARED BY: R M Muncey REVIEWED BY:

SEAL
 NORTH CAROLINA
 PROFESSIONAL ENGINEER
 LAWRENCE E. OVERN
 3/29/2018
 DATE
 SIG. INVENTORY NO. 06-0845

ECONOLITE ASC/3-2070 ACTION PLAN PROGRAMMING DETAIL

- From Main Menu select **5. TIME BASE**
- From TIME BASE Submenu select **2. ACTION PLAN**

ACTION PLAN... [1]	
PATTERN.....AUTO	SYS OVERRIDE.... NO
TIMING PLAN..... 0	SEQUENCE..... 0
VEH DETECTOR PLAN.. 2	DET LOG.....NONE
FLASH..... --	RED REST..... NO
VEH DET DIAG PLN... 0	PED DET DIAG PLN..0
DIMMING ENABLE.. NO	PRIORITY RETURN. NO
PED PR RETURN.. NO	QUEUE DELAY..... NO
PMT COND DELAY NO	
PHASE 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6	
PED RCL	
WALK 2	
VEX 2	
VEH RCL	
MAX RCL	
MAX 2	
PHASE 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6	
MAX 3	
CS INH	
OMIT	
SPC FCT X . . . X . . . (1-8)	
AUX FCT . . . (1-3)	
1 2 3 4 5 6 7 8 9 0 1 2 3 4 5	
LP 1-15	
LP 16-30	
LP 31-45	
LP 46-60	
LP 61-75	
LP 76-90	
LP 91-100	

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select **2. CONTROLLER**
- From CONTROLLER Submenu select **2. VEHICLE OVERLAPS**

OVERLAP A
Select TMG VEH OVLP [A] and 'PPLT FYA'

TMG VEH OVLP... [A] TYPE:	PPLT FYA
PROTECTED LEFT TURN....	PHASE 1
OPPOSING THROUGH.....	PHASE 2
FLASHING ARROW OUTPUT.....CH9	ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0	
ACTION PLAN SF BIT DISABLE.....	1

← NOTICE ACTION PLAN SF BIT "1"

Toggle Twice

OVERLAP C

Select TMG VEH OVLP [C] and 'PPLT FYA'

TMG VEH OVLP... [C] TYPE:	PPLT FYA
PROTECTED LEFT TURN....	PHASE 5
OPPOSING THROUGH.....	PHASE 6
FLASHING ARROW OUTPUT.....CH11	ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0	
ACTION PLAN SF BIT DISABLE.....	5

← NOTICE ACTION PLAN SF BIT "5"

END PROGRAMMING

ALTERNATE PHASING ACTIVATION DETAIL

TO RUN ALT. PHASING DURING FREE RUN - PROGRAM CHANGES (SHOWN BELOW) IN A TIME BASED ACTION PLAN. SCHEDULE A DAY PLAN THAT INCLUDES THE ACTION PLAN PROGRAMMED TO SELECT VEH DET PLAN 2 AND ENABLE SF BITS 1 and 5.

TO RUN ALT. PHASING DURING COORDINATION - SELECT THE TIME BASED ACTION PLAN THAT IS PROGRAMMED TO SELECT VEH DET PLAN 2 AND ENABLE SF BITS 1 and 5.

PHASING	VEH DET PLAN	SF BITS ENABLED
ACTIONS REQUIRED TO RUN <u>DEFAULT PHASING</u>	1	NONE
ACTIONS REQUIRED TO RUN <u>ALTERNATE PHASING</u>	2	1, 5

IMPORTANT: IF ALT. PHASING IS USED DURING FREE RUN AND COORDINATION, DO NOT OPERATE TIME OF DAY EVENTS CONCURRENTLY WITH COORDINATION PLAN EVENTS IN THE EVENT SCHEDULER. (EX. FREE RUN EVENT SHOULD END BEFORE COORDINATION PLAN EVENT STARTS AND VICE-VERSA).

ALTERNATE PHASING CHANGE SUMMARY

THE FOLLOWING IS A SUMMARY OF WHAT TAKES PLACE WHEN SF BITS 1 AND 5 AND VEH DET PLAN 2 ACTIVATE TO CALL THE "ALTERNATE PHASING":

- SF BITS 1,5:** Modifies overlap parent phases for heads 11 and 51 to run protected turns only.
- VEH DET PLAN 2:** Disables phase 6 call on loop 1A and reduces delay time for phase 1 call on loop 1A to 0 seconds.
Disables phase 2 call on loop 5A and reduces delay time for phase 5 call on loop 5A to 0 seconds.

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0845
DESIGNED: March 2018
SEALED: 03-29-2018
REVISED: N/A

Final Design
Electrical Detail - Sheet 2 of 3


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED



Stantec Consulting Services Inc.
801 Jones Franklin Road-Suite 300
Raleigh, NC 27606
Tel. (919) 851-6866
Fax. (919) 851-7024
www.stantec.com
License No. F-0672

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared in the Offices of:




750 N. Greenfield Pkwy, Garner, NC 27529

US 401 (South Raeford Road)
at
SR 3569 (Raeford Rd-
Old US 401)/Bentridge Ln.
Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn
PREPARED BY: R M Muncey REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL

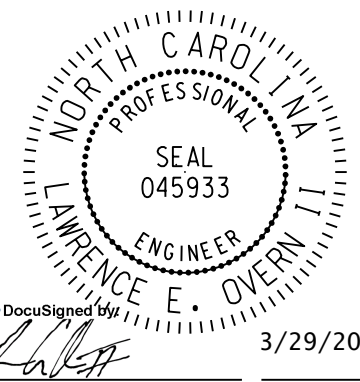

3/29/2018
DATE
SIG. INVENTORY NO. 06-0845

ECONOLITE ASC/3-2070 VEHICLE DETECTOR SETUP PROGRAMMING DETAIL FOR ALTERNATE PHASING LOOPS 1A, 5A *(program controller as shown)*

IMPORTANT!

Program detectors per the input file connection and programming chart shown on sheet 1 before proceeding.

- From Main Menu select **8. UTILITIES**
- From UTILITIES Submenu select **1. COPY/CLEAR**
- Copy from DETECTOR PLAN "1" to DETECTOR PLAN "2".

```

COPY / CLEAR UTILITY
FROM          TO
PHASE TIMING... > PHASE TIMING...
TIMING PLAN... > TIMING PLAN...
PH DET OPT PLAN... > PH DET OPT PLAN...
DETECTOR PLAN... 1 > DETECTOR PLAN... 2
TOGGLE TO SELECT A "FROM" AND A "TO"
THEN PRESS ENTER
  
```

- From Main Menu select **6. DETECTORS**
- From DETECTOR Submenu select **2. VEHICLE DETECTOR SETUP**
- Place cursor in VEH DET PLAN [] position and enter "2".

- Place cursor in VEH DETECTOR [] position and enter "1".
 - Set delay time to "3.0".

```

VEH DETECTOR [ 1]  VEH DET PLAN [ 2]
TYPE: S-STANDARD
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
1 1
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . DR OCC .
PMT QUEUE DELAY. NO
  
```

- Place cursor in VEH DETECTOR [] position and enter "26".
 - Set assigned phase to "0".

```

VEH DETECTOR [26]  VEH DET PLAN [ 2]
TYPE: G-GREEN EXTENSION/DELAY
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
26 0
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . DR OCC .
PMT QUEUE DELAY. NO
  
```

- Place cursor in VEH DETECTOR [] position and enter "5".
 - Set delay time to "3.0".

```

VEH DETECTOR [ 5]  VEH DET PLAN [ 2]
TYPE: S-STANDARD
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
5 5
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . DR OCC .
PMT QUEUE DELAY. NO
  
```

- Place cursor in VEH DETECTOR [] position and enter "22".
 - Set assigned phase to "0".

```

VEH DETECTOR [22]  VEH DET PLAN [ 2]
TYPE: G-GREEN EXTENSION/DELAY
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
22 0
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . DR OCC .
PMT QUEUE DELAY. NO
  
```

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0845
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Final Design
 Electrical Detail - Sheet 3 of 3


DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED



Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

ELECTRICAL AND PROGRAMMING
 DETAILS FOR:

Prepared in the Offices of:

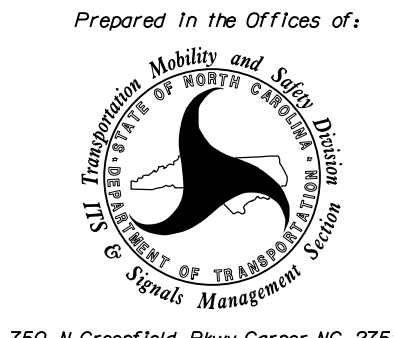


750 N. Greenfield Pkwy, Garner, NC 27529

US 401 (South Raeford Road)
 at
 SR 3569 (Raeford Rd-
 Old US 401)/Bentridge Ln.
 Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn
 PREPARED BY: R M Muncey REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL

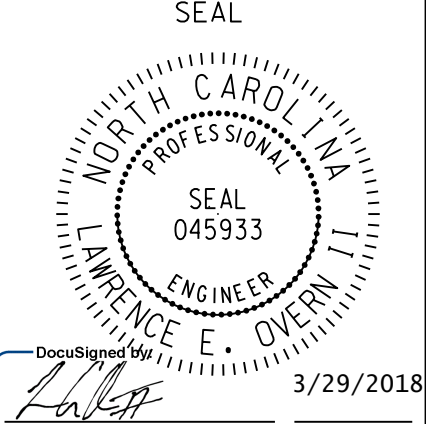

3/29/2018

SIG. INVENTORY NO. 06-0845

DATE: 03/29/2018 10:45:11 AM
 User: rfmuncey

PHASING DIAGRAM


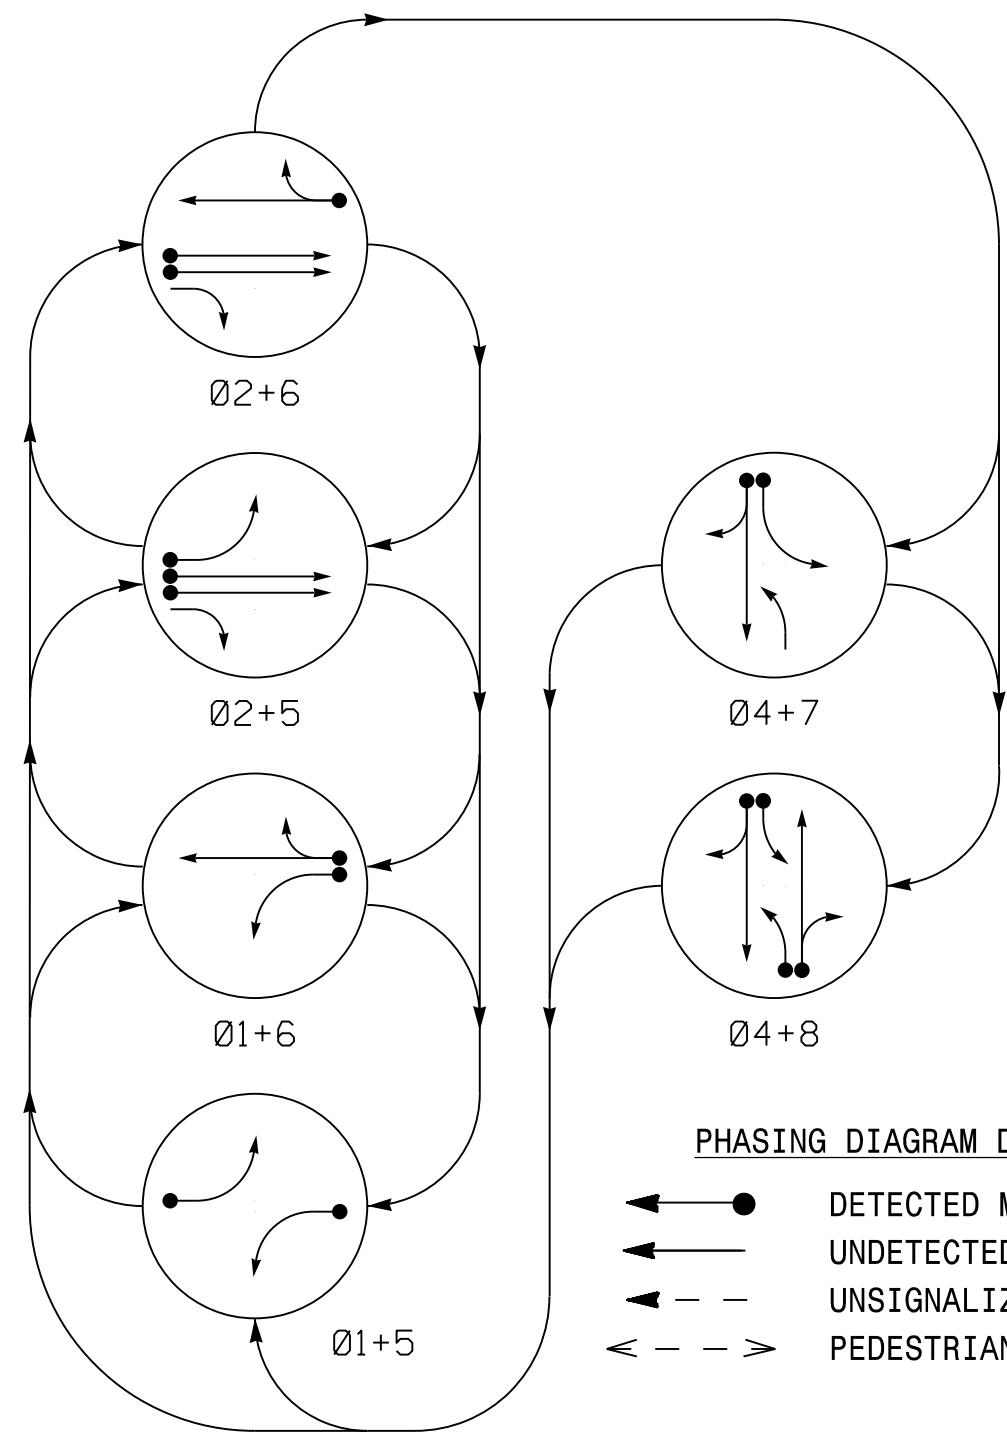


TABLE OF OPERATION

SIGNAL FACE	PHASE							
	01+5	01+6	02+5	02+6	04+7	04+8	F	H
11	←	←	←	←	←	←	←	←
21, 22	R	R	G	G	R	R	Y	
41, 42	R	R	R	R	G	G	R	
51	←	←	←	←	←	←	←	←
61, 62	R	G	R	G	R	R	Y	
71	←	←	←	←	←	←	←	←
81	←	←	←	←	←	←	←	←
82,83	R	R	R	R	R	G	R	

SIGNAL FACE I.D.

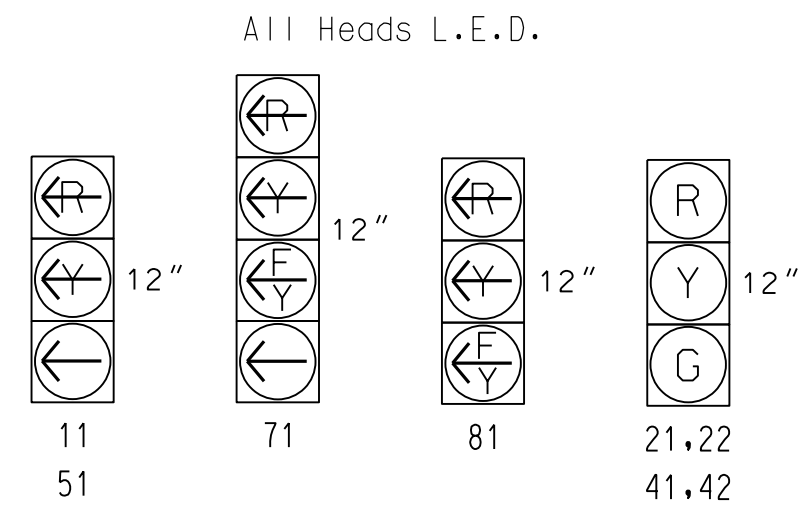

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
1A	6X40	0	*	-	1	Yes	-	-	-	S	-	X
2A	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2B	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2C	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
4A	6X40	0	*	-	4	Yes	-	10	-	S	-	X
5A	6X40	0	*	-	5	Yes	-	-	-	S	-	X
6A	6X6	300	*	-	6	Yes	-	-	-	N	-	X
6B	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
7A	6X40	0	*	-	7	Yes	-	15	-	S	-	X
8A	6X40	0	*	-	8	Yes	-	3	-	S	-	X
8B	6X40	0	*	-	8	Yes	-	10	-	S	-	X

*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

6 Phase Fully Actuated Fayetteville Signal System

NOTES

1. Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
3. Phase 1 and/or phase 5 may be lagged.
4. Phase 7 may be lagged.
5. Set all detector units to presence mode.
6. Locate new cabinet foundation so as not to obstruct sight distance of vehicles turning right on red. Relocate existing cabinet and controller onto new foundation.
7. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
8. Field adjust temporary poles as needed.

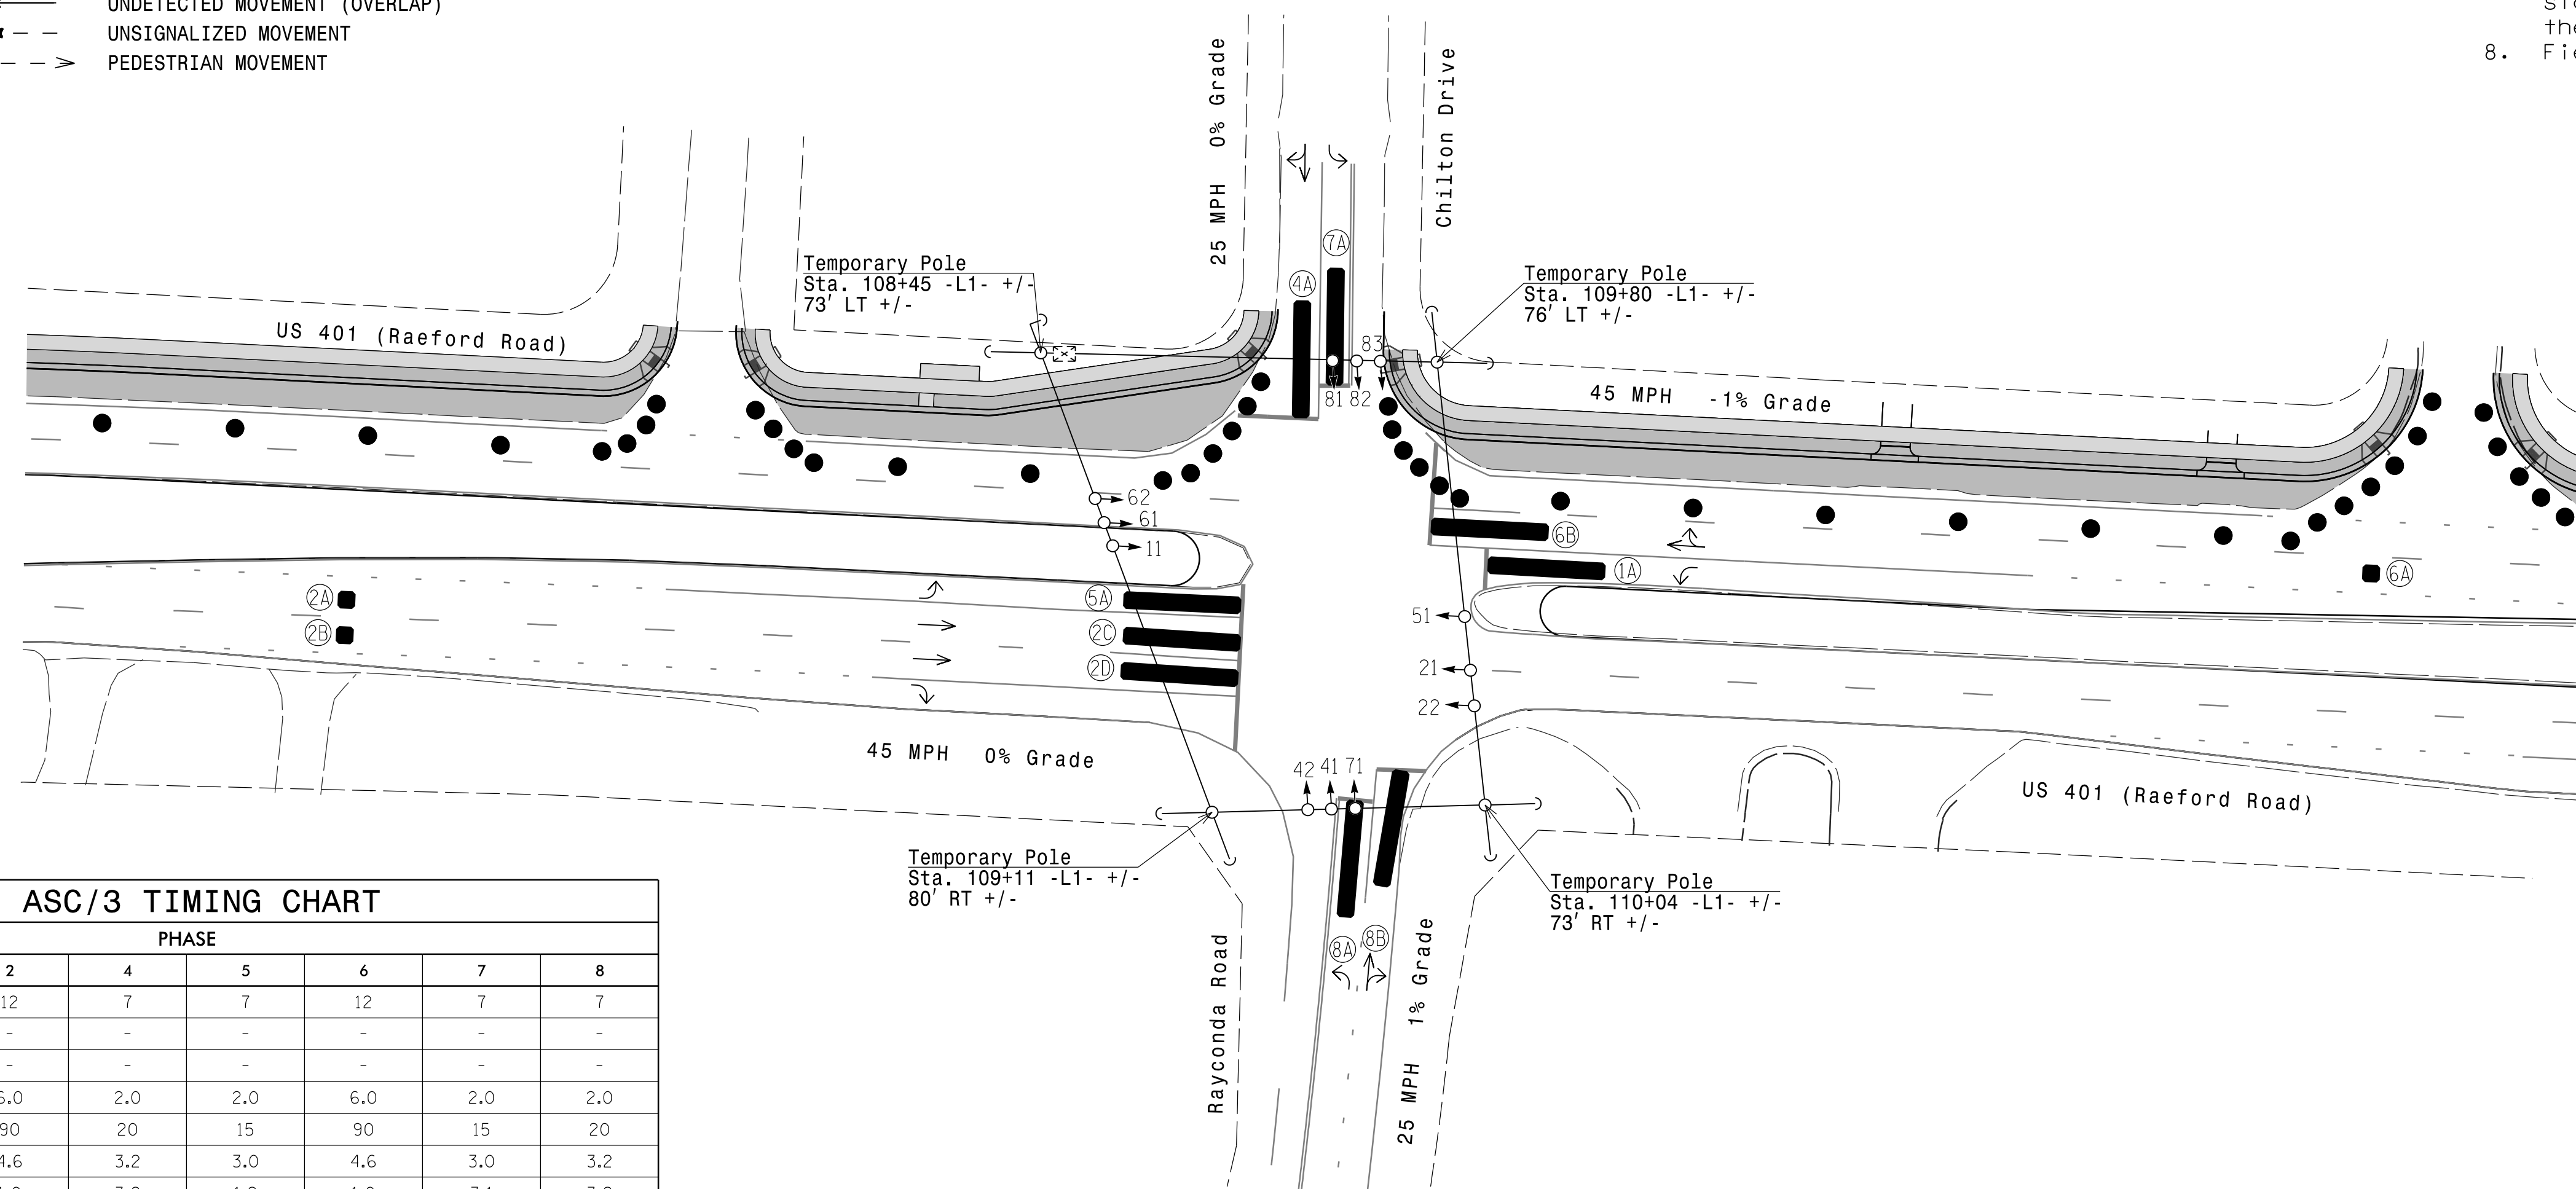

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	4	5	6	7	8	
Min Green *	7	12	7	7	12	7	7	
Walk *	-	-	-	-	-	-	-	
Ped Clear	-	-	-	-	-	-	-	
Veh. Extension *	2.0	6.0	2.0	2.0	6.0	2.0	2.0	
Max I *	15	90	20	15	90	15	20	
Yellow	3.0	4.6	3.2	3.0	4.6	3.0	3.2	
Red Clear	2.8	1.0	3.2	1.9	1.0	3.1	3.2	
Red Revert	-	-	-	-	-	-	-	
Actuations B4 Add *	-	-	-	-	-	-	-	
Seconds / Actuation *	-	-	-	-	-	-	-	
Max Initial *	-	-	-	-	-	-	-	
Time Before Reduction *	-	15	-	-	15	-	-	
Time To Reduce *	-	30	-	-	30	-	-	
Minimum Gap	-	3.0	-	-	3.0	-	-	
Locking Detector	-	-	-	-	-	-	-	
Recall Position	-	VEH. RECALL	-	-	VEH. RECALL	-	-	
Dual Entry	-	-	X	-	-	-	X	
Simultaneous Gap	X	X	X	X	X	X	X	

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

PROPOSED	EXISTING


Signal Upgrade Temporary Design 1 - TMP Phase II

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>		<p>US 401 (Raeford Rd.) at Chilton Dr / Rayconda Rd</p>	
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: E D Harris</p> <p>PREPARED BY: R M Muncey REVIEWED BY: B L Watson</p>	<p>3/29/2018</p> <p>DATE</p>

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

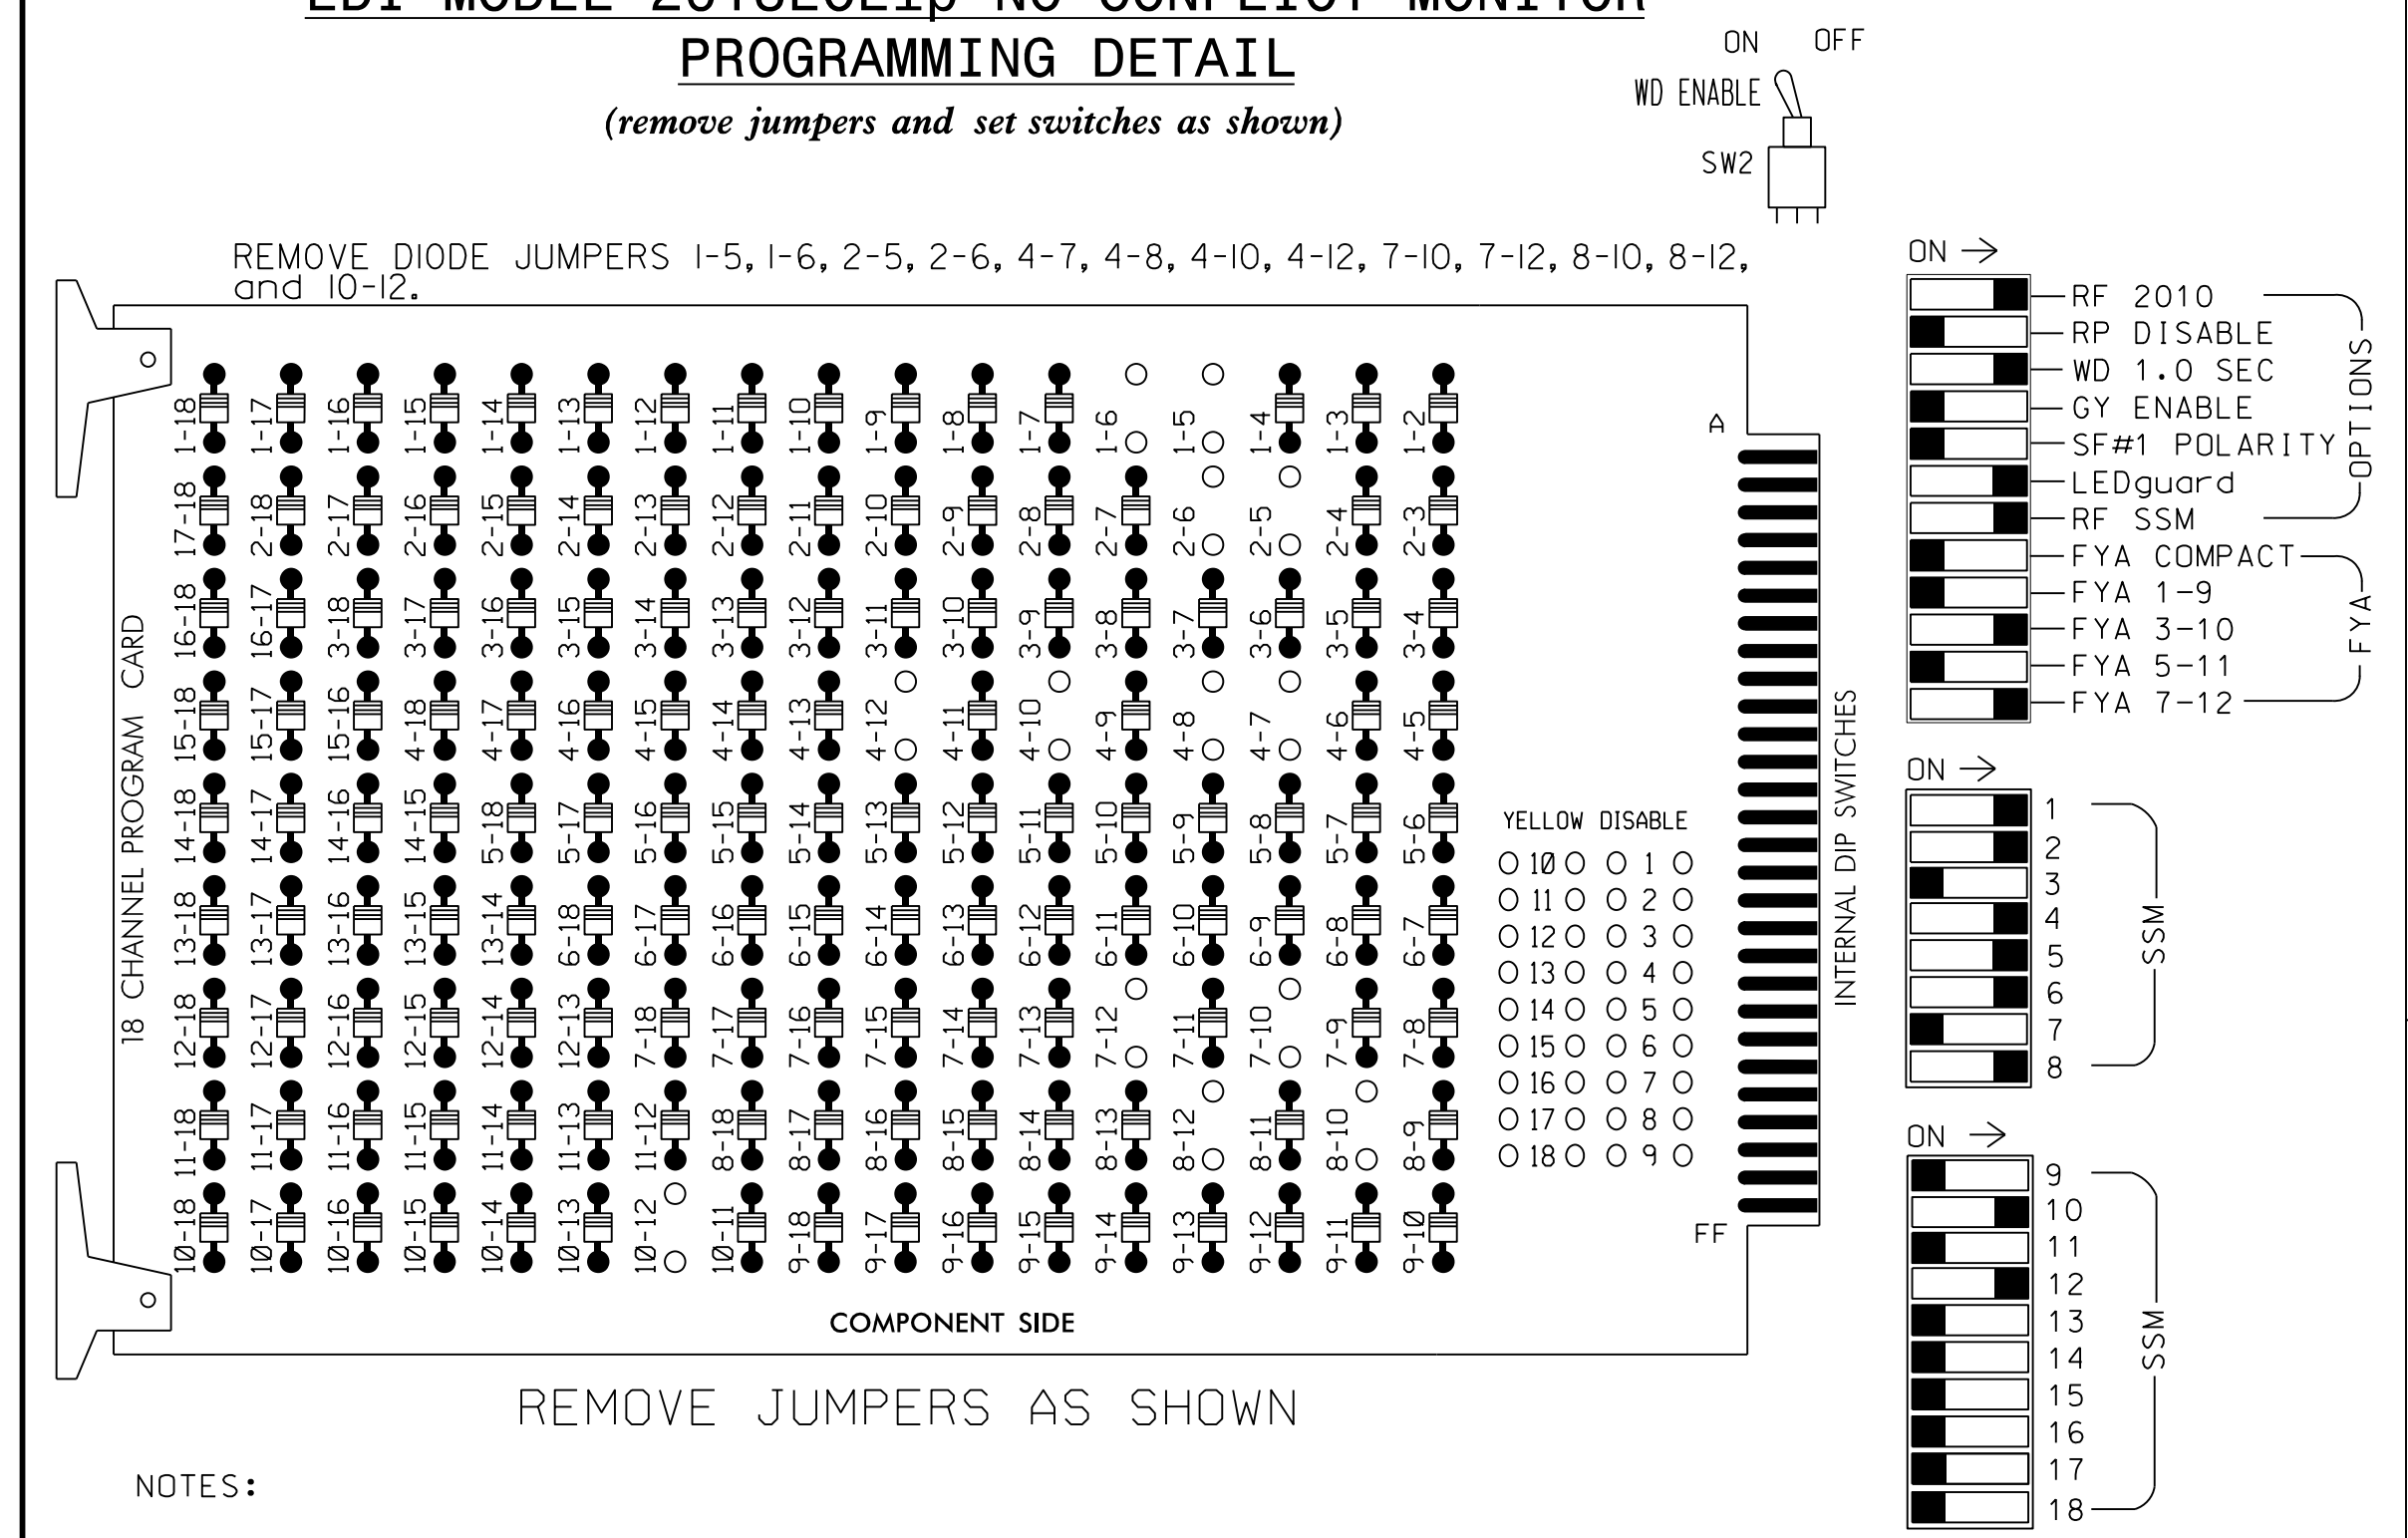

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Program controller to start up in phase 2 Green and 6 Green.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S5,S7,S8,S10,
 S11,AUX S2,AUX S5

PHASES USED.....1,2,4,5,6,7,8
 OVERLAP "A".....NOT USED
 OVERLAP "B".....*
 OVERLAP "C".....NOT USED
 OVERLAP "D".....*

* See overlap programming detail on sheet 2

SIGNAL HEAD HOOK-UP CHART


LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	21,22	NU	NU	41,42	NU	51	61,62	NU	71	82,83	NU	NU	81	NU	NU	71	NU
RED		128			101			134			107							
YELLOW		129			102			135		*	108							
GREEN		130			103			136			109							
RED ARROW	125							131							A124			A101
YELLOW ARROW	126							132							A125			A102
FLASHING YELLOW ARROW															A126			A103
GREEN ARROW	127							133			124							

NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ See pictorial of head wiring in detail this sheet.

LOAD RESISTOR INSTALLATION DETAIL


(install resistor as shown)

VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

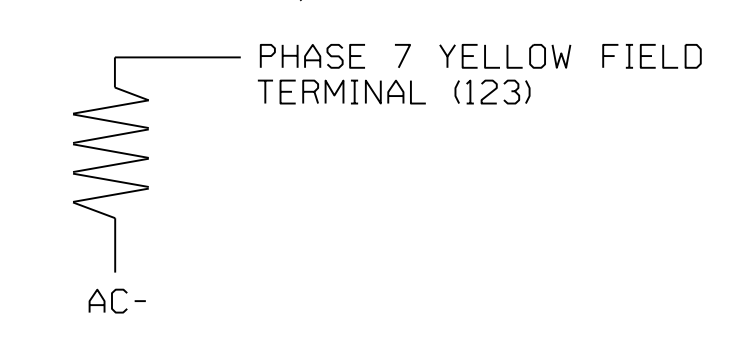

INPUT FILE POSITION LAYOUT

(front view)

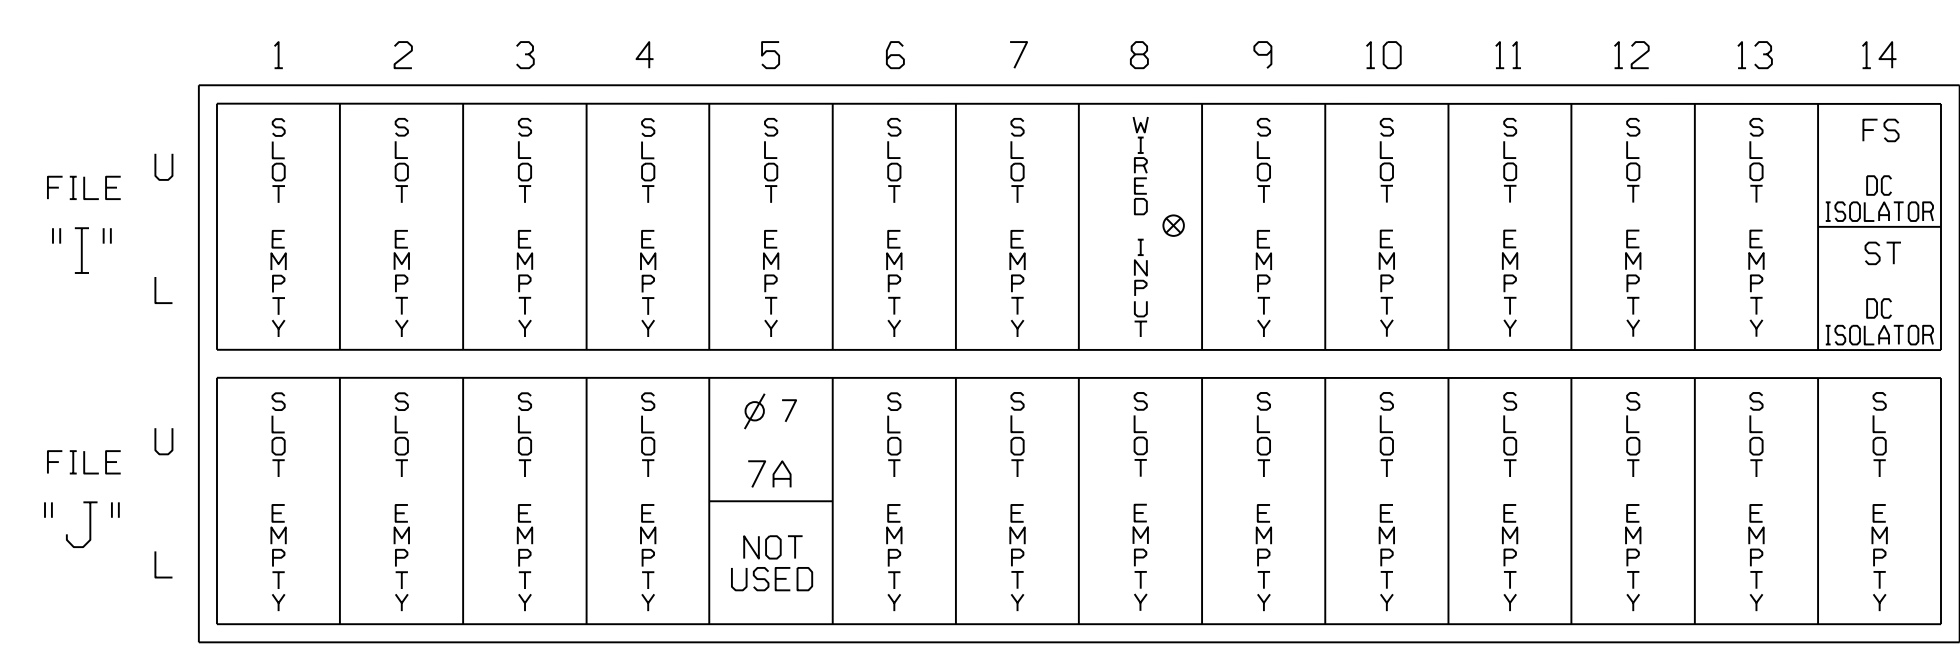


DETECTOR NOTES

- For all loops install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.
- For loop 7A detector card placements and slots reserved for wired inputs are typical for a NCDOT installation.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

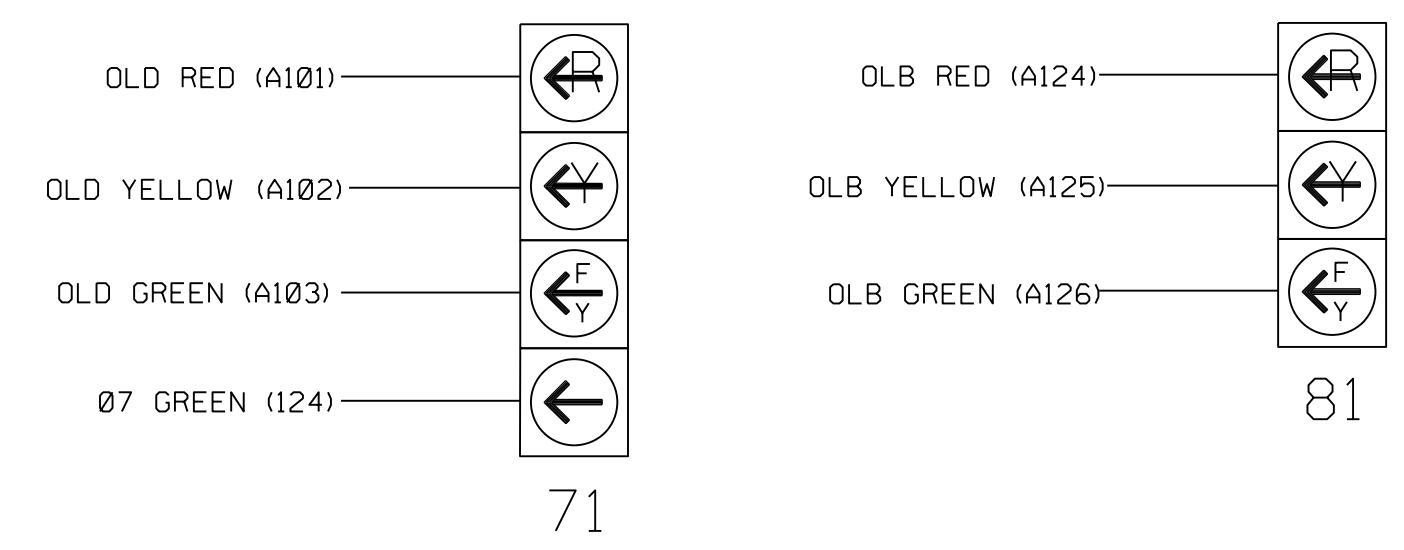


INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
7A ¹	-	J5U	57	7	7	YES		15		S
	-	I8U	49	24	4	YES		3		S

¹Add jumper from J5-W to I8-W, on rear of input file.

INPUT FILE POSITION LEGEND: J2L

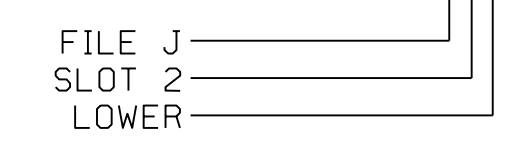

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0767T1
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 1 - TMP Phase II
 Electrical Detail - Sheet 1 of 2

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p> <p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>US 401 (Raeford Rd.) at Chilton Dr / Rayconda Rd</p>		<p>SEAL</p> <p>3/29/2018</p>				
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: R M Muncey REVIEWED BY:</p>			<p>REVISIONS</p> <table border="1"> <tr> <th>NO.</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </table>	NO.	INIT.	DATE
NO.	INIT.	DATE						

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select **2. CONTROLLER**
- From CONTROLLER Submenu select **2. VEHICLE OVERLAPS**
- Toggle Once

OVERLAP B

Select TMG VEH OVLP [B] and 'OTHER/ECONOLITE'

```

TMG VEH OVLP...[B] TYPE:OTHER/ECONOLITE
  PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
INCLUDED . . . X . . . . .
PROTECT . . . . .
PED PRTC . . . . .
NOT OVLP . . . . .
FLSH GRN . . . 1 . . . . .
LAG X PH . . . . .
LAG 2 PH . . . . .

LAG GRN 0.0 YEL 0.0 RED 0.0 ADV GRN 0.0

```

Toggle Twice

OVERLAP D

Select TMG VEH OVLP [D] and 'PPLT FYA'

```

TMG VEH OVLP...[D] TYPE: . . . . .PPLT FYA
PROTECTED LEFT TURN.... PHASE 7
OPPOSING THROUGH..... PHASE 8

FLASHING ARROW OUTPUT.....CH12 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0




```

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0767T1
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 1 - TMP Phase II
Electrical Detail - Sheet 2 of 2



DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672	ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared in the Offices of:  750 N. Greenfield Pkwy, Garner, NC 27529	US 401 (Raeford Rd.) at Chilton Dr / Rayconda Rd		SEAL  LAWRENCE E. OVERN ENGINEER 045933
		Division 6 Cumberland County Fayetteville		
PREPARED BY: R M Muncey REVIEWED BY:		REVISIONS _____ INIT. DATE	DATE 3/29/2018	
SIG. INVENTORY NO. 06-0767T1				

DATE: 03/29/2018 10:45:11 AM
User: rfmuncey

EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

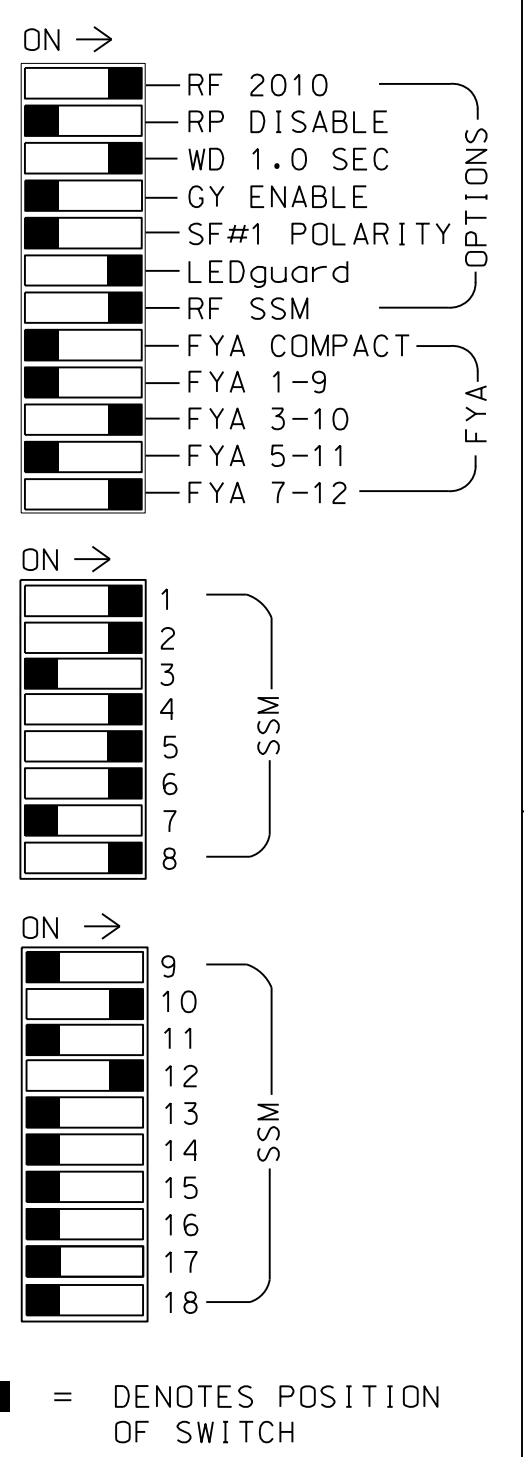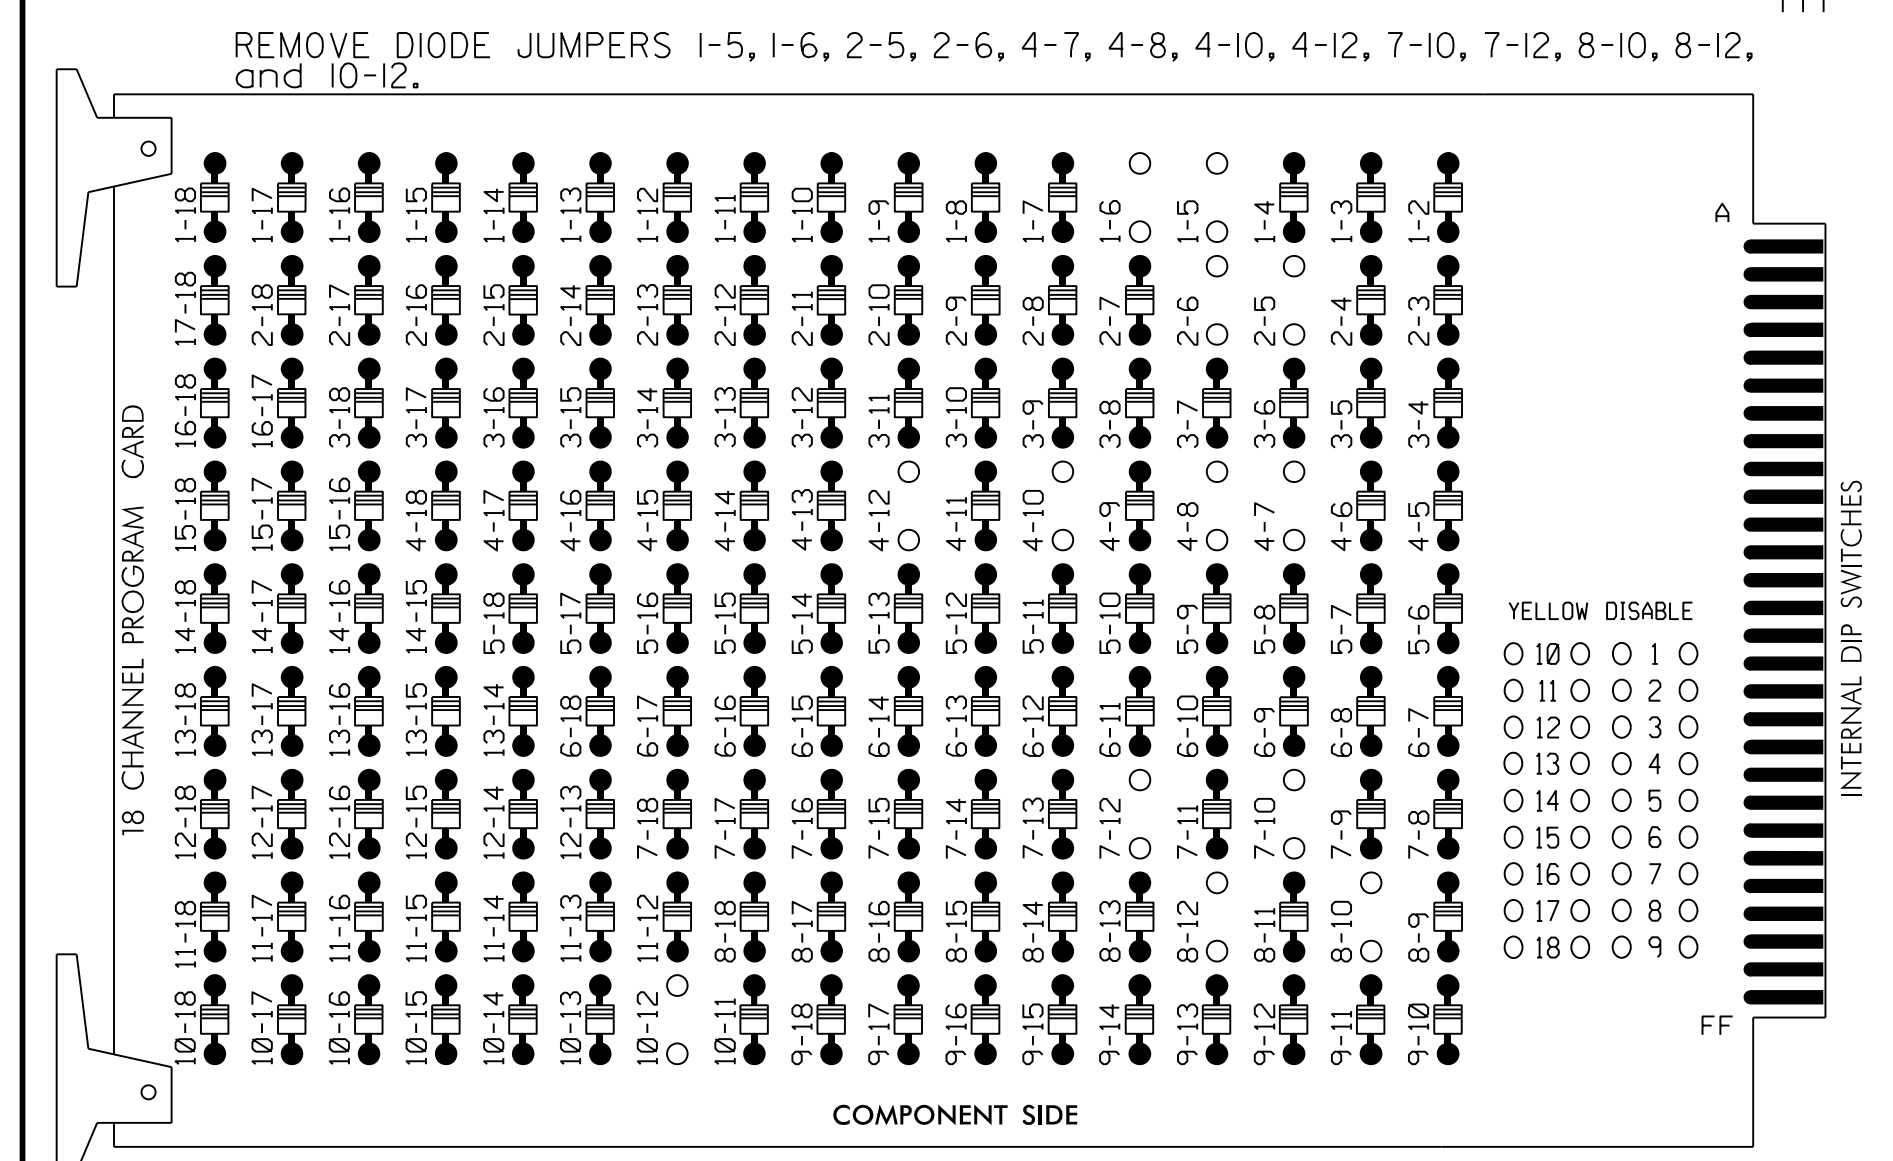

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Program phases 4 and 8 for Dual Entry.
3. Program controller to start up in phase 2 Green and 6 Green.
4. The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S5,S7,S8,S10,
 S11,AUX S2,AUX S5
 PHASES USED.....1,2,4,5,6,7,8
 OVERLAP "A".....NOT USED
 OVERLAP "B".....*
 OVERLAP "C".....NOT USED
 OVERLAP "D".....*
 * See overlap programming detail on sheet 2

SIGNAL HEAD HOOK-UP CHART


LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	21,22	NU	NU	41,42	NU	51	61,62	NU	71	82,83	NU	NU	81	NU	NU	71	NU
RED		128			101			134			107							
YELLOW		129			102			135		*	108							
GREEN		130			103			136			109							
RED ARROW	125							131							A124			A101
YELLOW ARROW	126							132							A125			A102
FLASHING YELLOW ARROW															A126			A103
GREEN ARROW	127							133			124							

NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ See pictorial of head wiring in detail this sheet.

LOAD RESISTOR INSTALLATION DETAIL


(install resistor as shown)

ACCEPTABLE VALUES	
VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

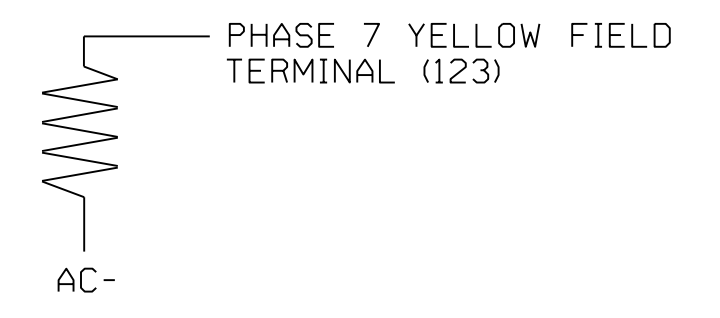

INPUT FILE POSITION LAYOUT

(front view)

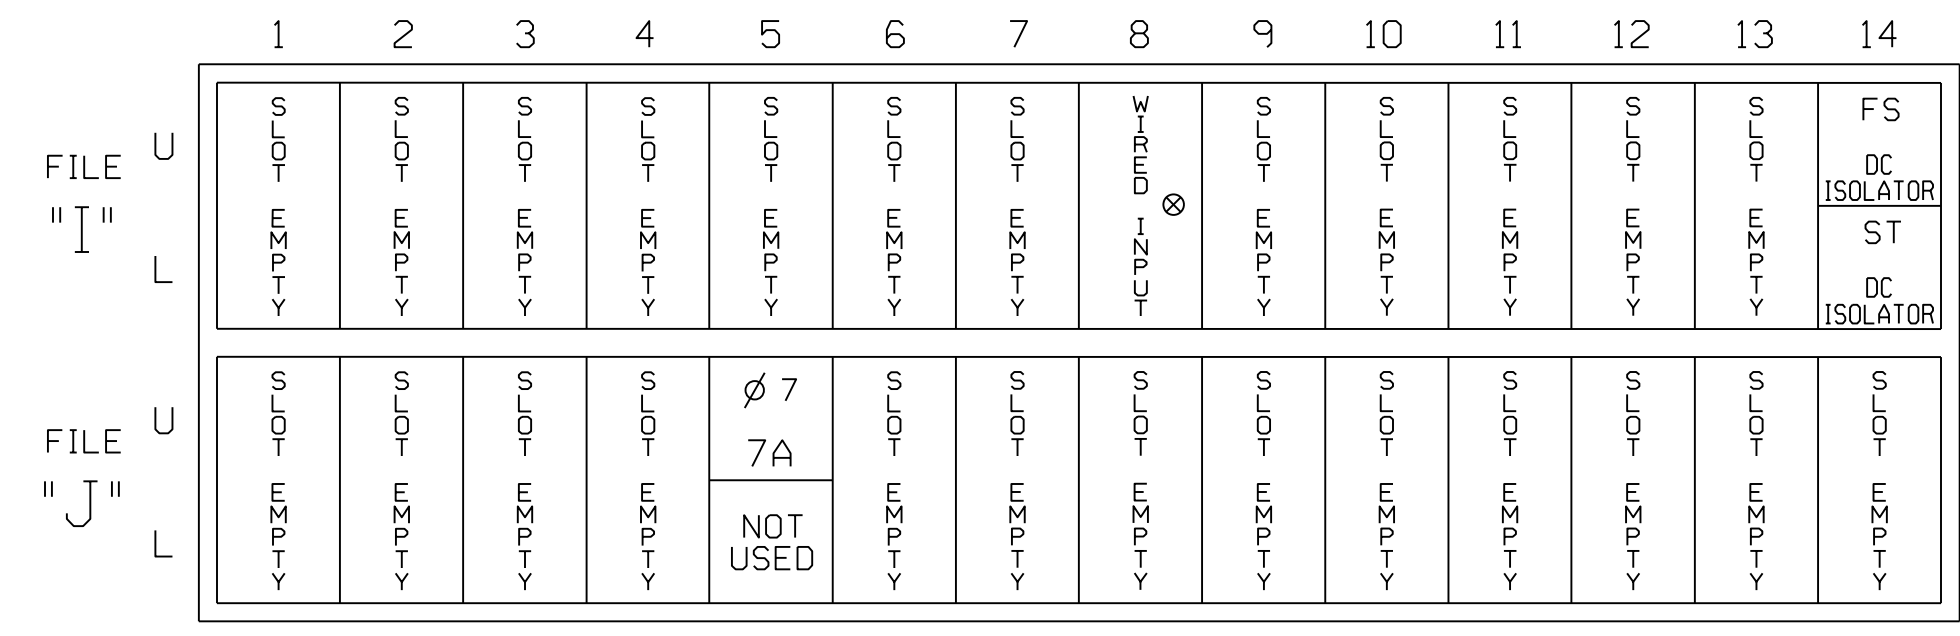

EX.: 1A, 2A, ETC. = LOOP NO.'S
 FS = FLASH SENSE
 ST = STOP TIME


⊗ Wired Input - Do not populate slot with detector card

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
7A ¹	-	J5U	57	7	7	YES		15		S
	-	I8U	49	24	4	YES		3		S

¹Add jumper from J5-W to I8-W, on rear of input file.

INPUT FILE POSITION LEGEND: J2L

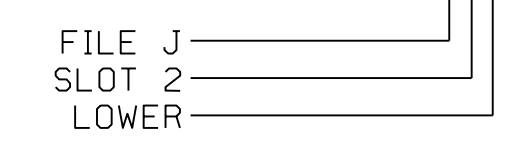


DETECTOR NOTES

1. For all loops install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.
2. For loop 7A detector card placements and slots reserved for wired inputs are typical for a NCDOT installation.

SIGNAL WIRING DETAIL

(wire signal heads as shown)

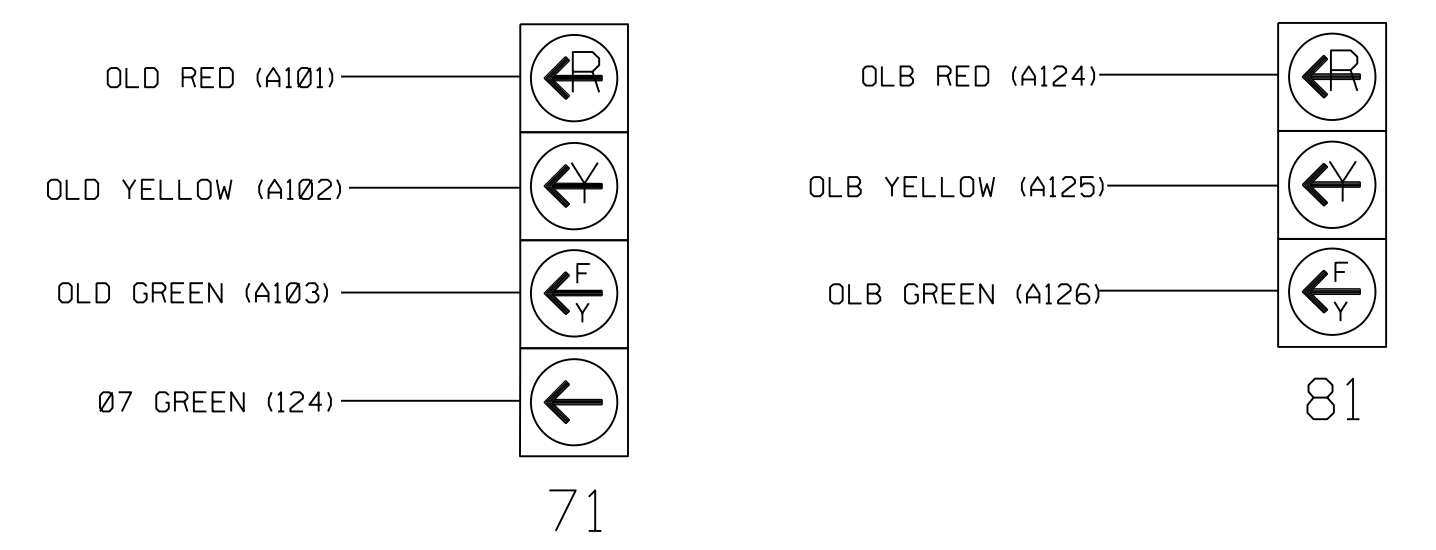

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-076712
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 2- TMP Phase III
 Electrical Detail - Sheet 1 of 2

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared in the Offices of: 	US 401 (Raeford Rd.) at Chilton Dr / Rayconda Rd Division 6 Cumberland County Fayetteville PLAN DATE: March 2018 REVIEWED BY: L Overn PREPARED BY: R M Muncey REVIEWED BY:	SEAL <p>3/29/2018</p>
	750 N. Greenfield Pkwy, Garner, NC 27529	REVISIONS INIT. DATE	DATE

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select **2. CONTROLLER**
- From CONTROLLER Submenu select **2. VEHICLE OVERLAPS**
- Toggle Once

OVERLAP B

Select TMG VEH OVLP [B] and 'OTHER/ECONOLITE'

```

TMG VEH OVLP...[B] TYPE:OTHER/ECONOLITE
  PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
INCLUDED . . . X . . . . .
PROTECT . . . . .
PED PRTC . . . . .
NOT OVLP . . . . .
FLSH GRN . . . 1 . . . . .
LAG X PH . . . . .
LAG 2 PH . . . . .

LAG GRN 0.0 YEL 0.0 RED 0.0 ADV GRN 0.0

```

Toggle Twice

OVERLAP D

Select TMG VEH OVLP [D] and 'PPLT FYA'

```

TMG VEH OVLP...[D] TYPE: . . . . .PPLT FYA
PROTECTED LEFT TURN.... PHASE 7
OPPOSING THROUGH..... PHASE 8

FLASHING ARROW OUTPUT.....CH12 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0




```

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0767T2
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 2- TMP Phase III
Electrical Detail - Sheet 2 of 2

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672	ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared in the Offices of:  750 N. Greenfield Pkwy, Garner, NC 27529	US 401 (Raeford Rd.) at Chilton Dr / Rayconda Rd Division 6 Cumberland County Fayetteville PLAN DATE: March 2018 REVIEWED BY: L Overn PREPARED BY: R M Muncey REVIEWED BY:	SEAL  LAWRENCE E. OVERN ENGINEER 045933 3/29/2018							
	REVISIONS <table border="1"> <thead> <tr> <th>NO.</th> <th>DESCRIPTION</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		NO.	DESCRIPTION	INIT.	DATE				
NO.	DESCRIPTION	INIT.	DATE							

DATE: 03/29/2018 10:45:11 AM
User: rfmuncy

PHASING DIAGRAM


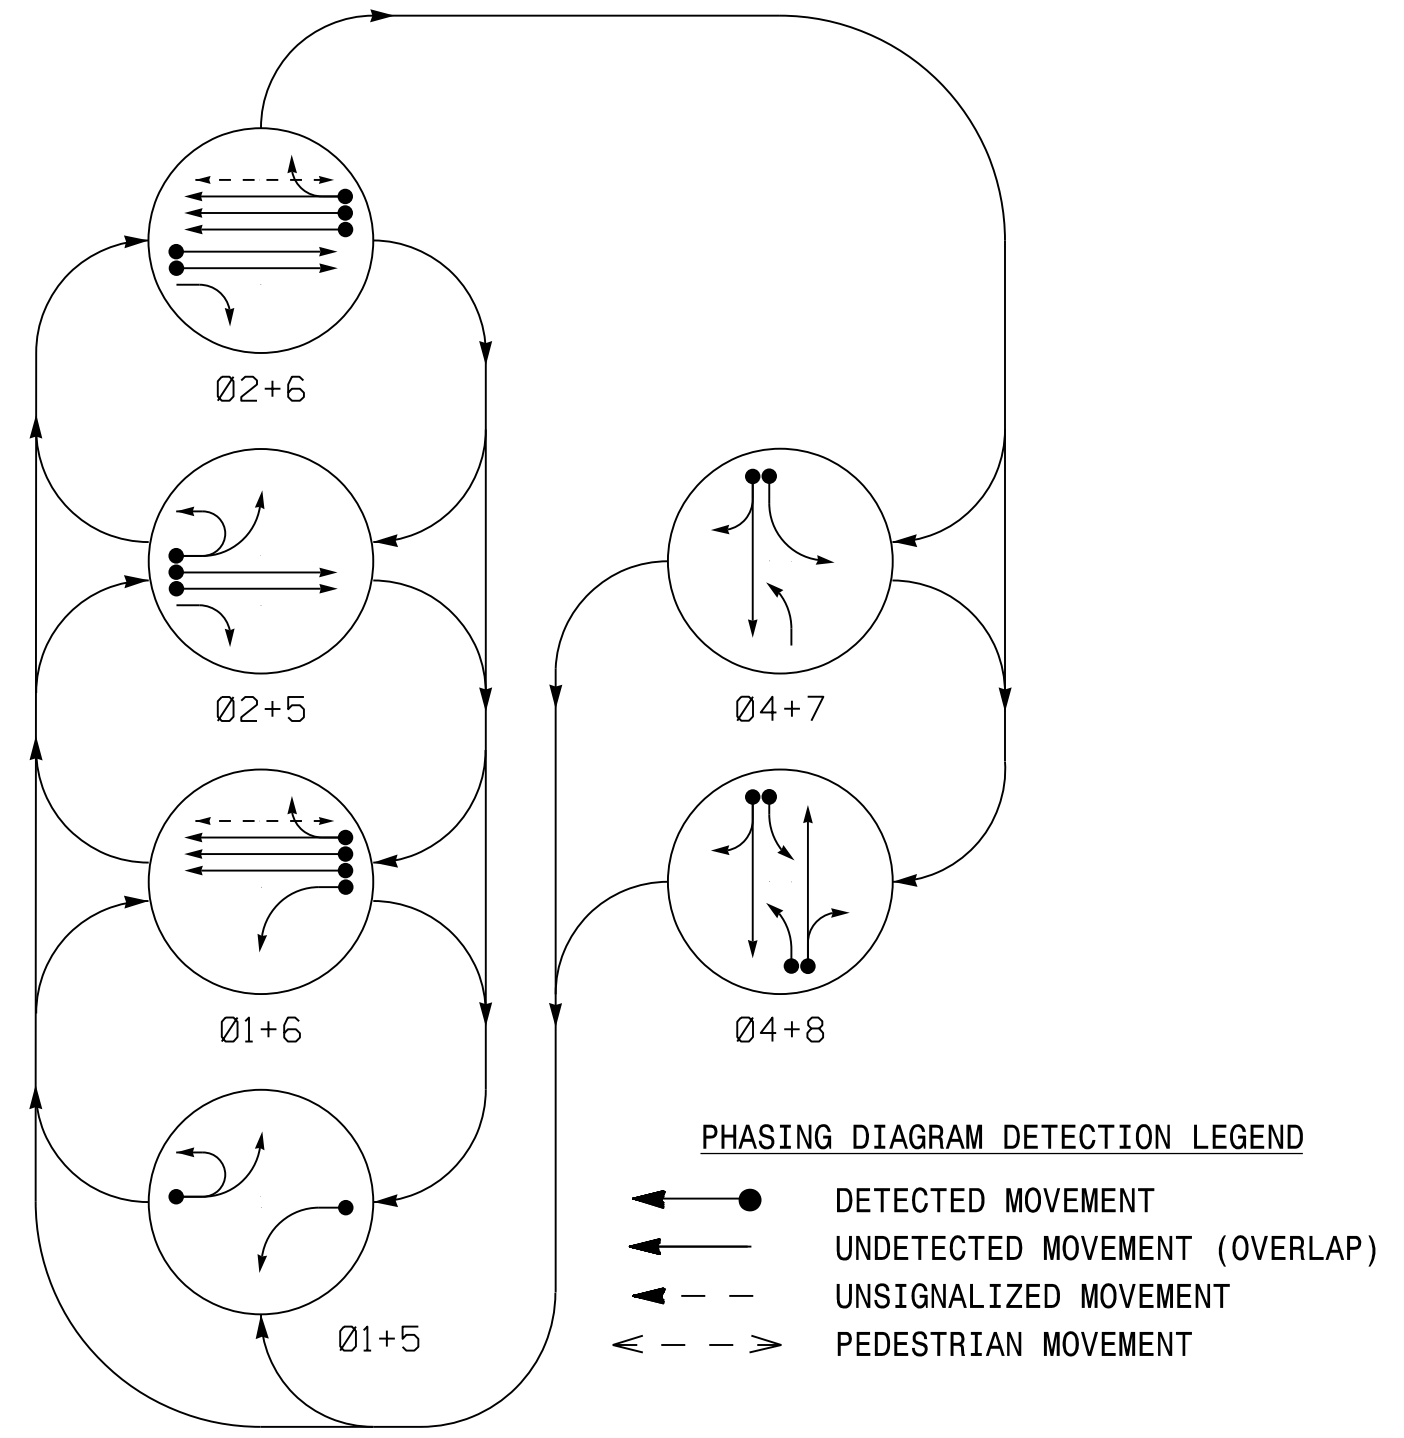


TABLE OF OPERATION

SIGNAL FACE	PHASE							
	Ø1+5	Ø1+6	Ø2+5	Ø2+6	Ø4+7	Ø4+8	F	H
11	←	←	→	→	→	→	→	→
21, 22	R	R	G	G	R	R	Y	
41, 42	R	R	R	R	G	G	R	
51	←	←	→	→	→	→	→	→
61, 62, 63	R	G	R	G	R	R	Y	
71	→	→	→	→	←	←	←	←
81	→	→	→	→	←	←	←	←
82, 83	R	R	R	R	G	G	R	
P61, P62	DW	W	DW	W	DW	DW	DRK	

SIGNAL FACE I.D.

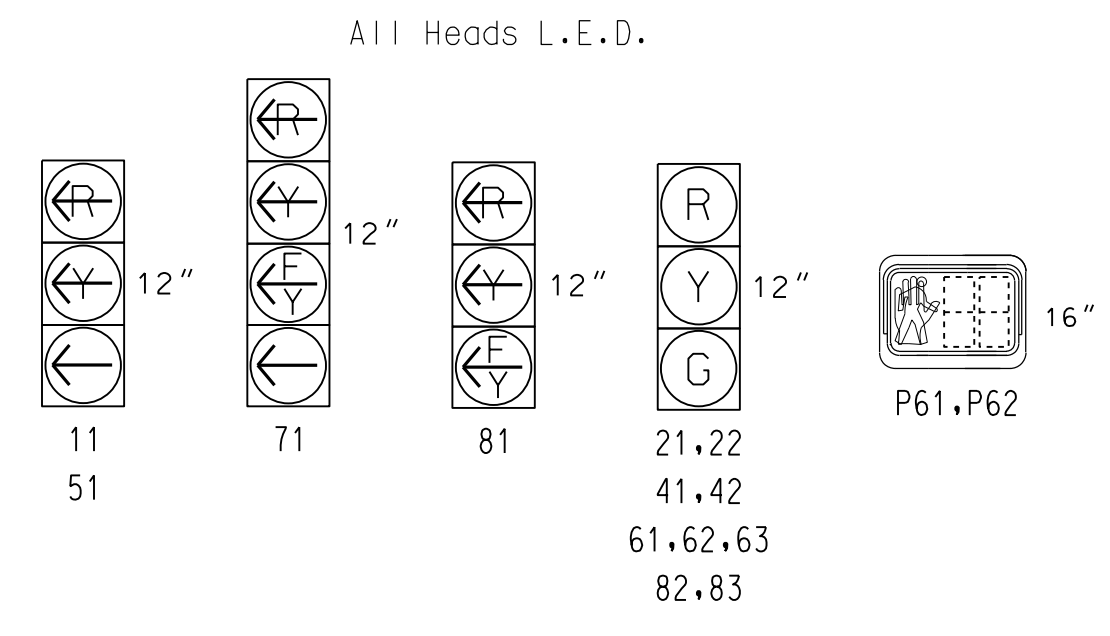


ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
1A	6X40	0	2-4-2	X	1	Yes	-	-	-	S	-	X
2A	6X6	300	5	X	2	Yes	-	-	X	N	-	X
2B	6X6	300	5	X	2	Yes	-	-	X	N	-	X
4A	6X40	0	2-4-2	X	4	Yes	-	10	-	S	-	X
5A	6X40	0	2-4-2	X	5	Yes	-	-	-	S	-	X
6A	6X6	300	6	X	6	Yes	-	-	X	N	-	X
6B	6X6	300	6	X	6	Yes	-	-	X	N	-	X
6C	6X6	300	6	X	6	Yes	-	-	X	N	-	X
7A	6X40	0	2-4-2	X	7	Yes	-	15	-	S	-	X
8A	6X6	0	2-4-2	X	8	Yes	-	3	-	S	-	X
8B	6X6	0	2-4-2	X	8	Yes	-	10	-	S	-	X

6 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 7 may be lagged.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Pedestrian pedestals are conceptual and shown for reference only. See 2018 NCDOT Roadway Standard Drawings 1705.04 Sheets 1-3 for push button location details.

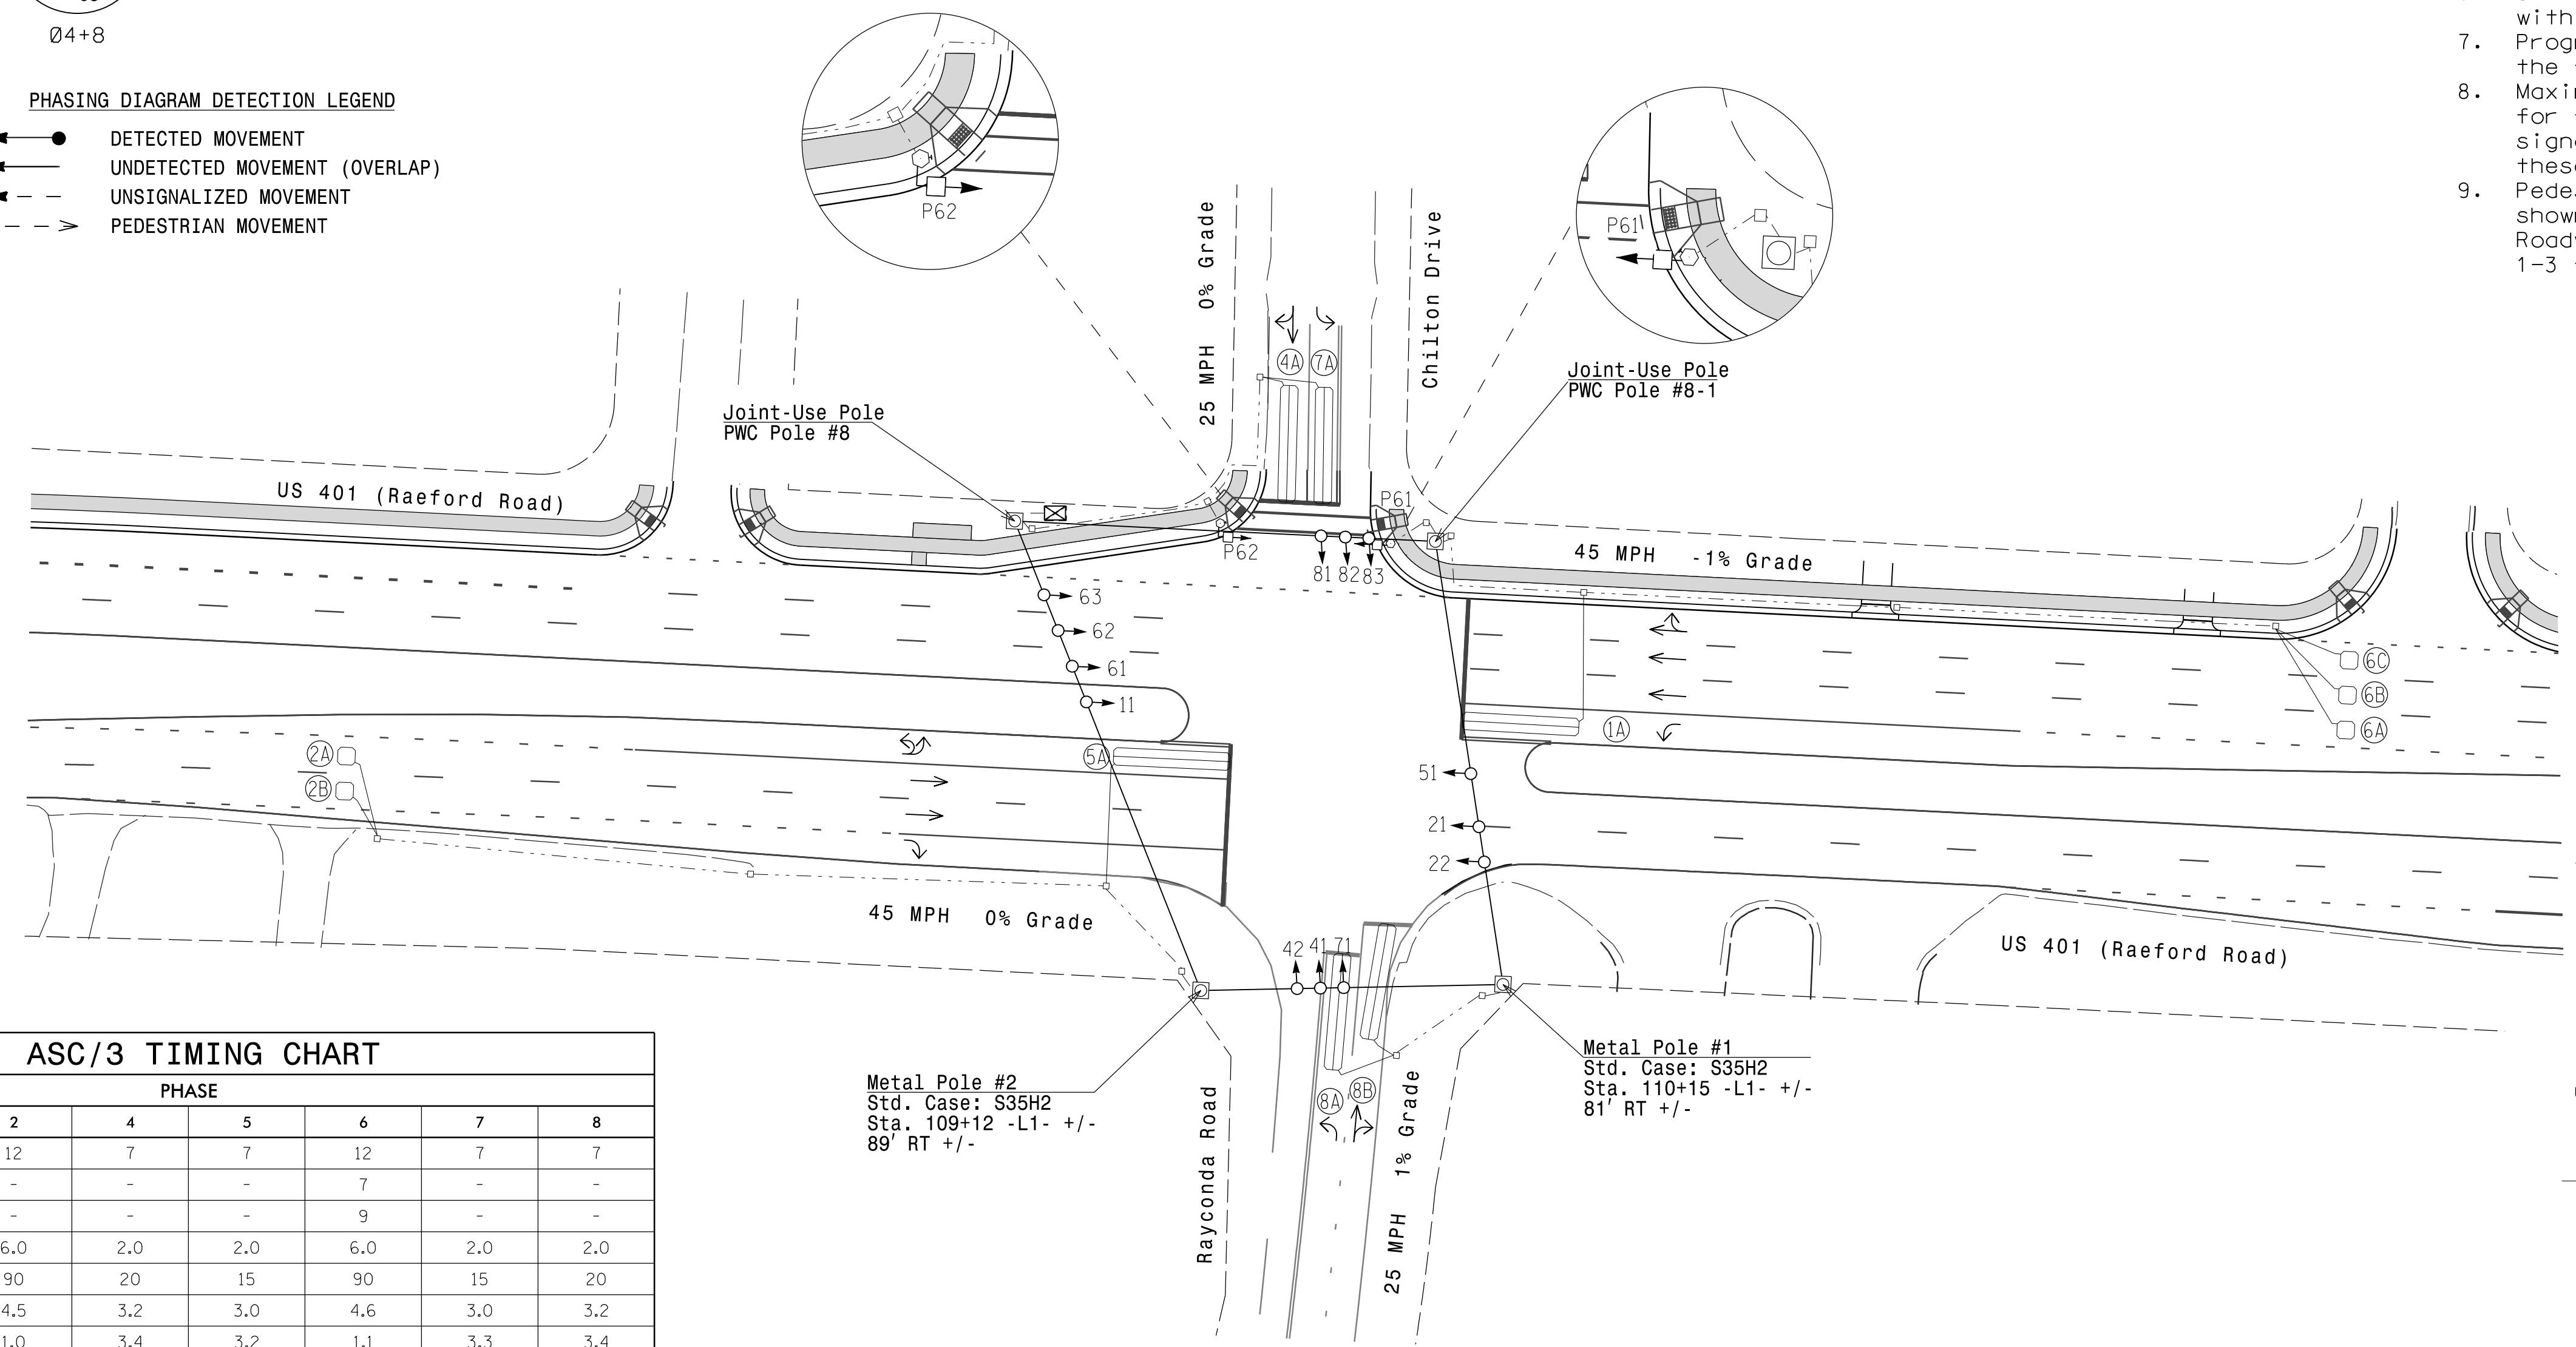


ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	4	5	6	7	8	
Min Green *	7	12	7	7	12	7	7	
Walk *	-	-	-	-	7	-	-	
Ped Clear	-	-	-	-	9	-	-	
Veh. Extension *	2.0	6.0	2.0	2.0	6.0	2.0	2.0	
Max I *	15	90	20	15	90	15	20	
Yellow	3.0	4.5	3.2	3.0	4.6	3.0	3.2	
Red Clear	2.8	1.0	3.4	3.2	1.1	3.3	3.4	
Red Revert	-	-	-	-	-	-	-	
Actuations B4 Add *	-	0	-	-	0	-	-	
Seconds / Actuation *	-	1.5	-	-	1.5	-	-	
Max Initial *	-	34	-	-	34	-	-	
Time Before Reduction *	-	15	-	-	15	-	-	
Time To Reduce *	-	30	-	-	30	-	-	
Minimum Gap	-	3.0	-	-	3.0	-	-	
Locking Detector	-	X	-	-	X	-	-	
Recall Position	-	VEH. RECALL	-	-	VEH. RECALL	-	-	
Dual Entry	-	-	X	-	-	-	X	
Simultaneous Gap	X	X	X	X	X	X	X	

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

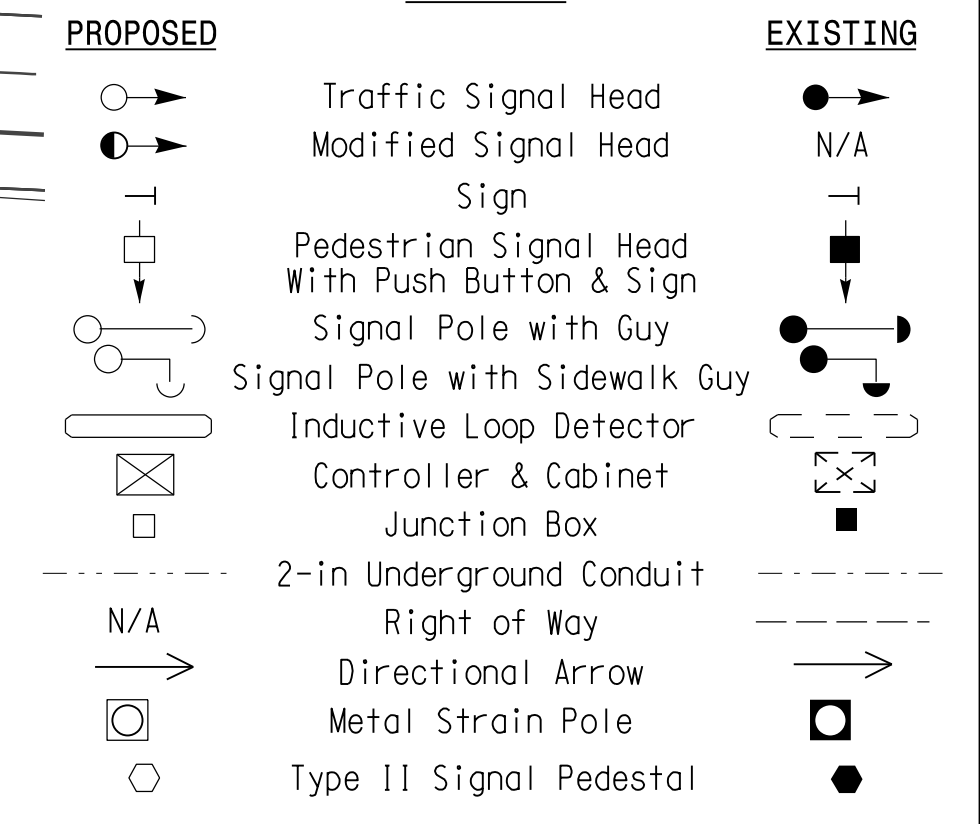

Signal Upgrade - Final Design

Stantec Consulting Services Inc.
801 Jones Franklin Road-Suite 300
Raleigh, NC 27606
Tel. (919) 851-6866
Fax. (919) 851-7024
www.stantec.com
License No. F-0672

US 401 (Raeford Rd.) at Chilton Dr / Rayconda Rd

Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: E D Harris

PREPARED BY: R M Muncey REVIEWED BY: B L Watson


REVISIONS	INIT.	DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

3/29/2018
 U:\Projects\4405\Signal\Drawings\Signal\4405_Sig.dwg
 User: rfmuncey

EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

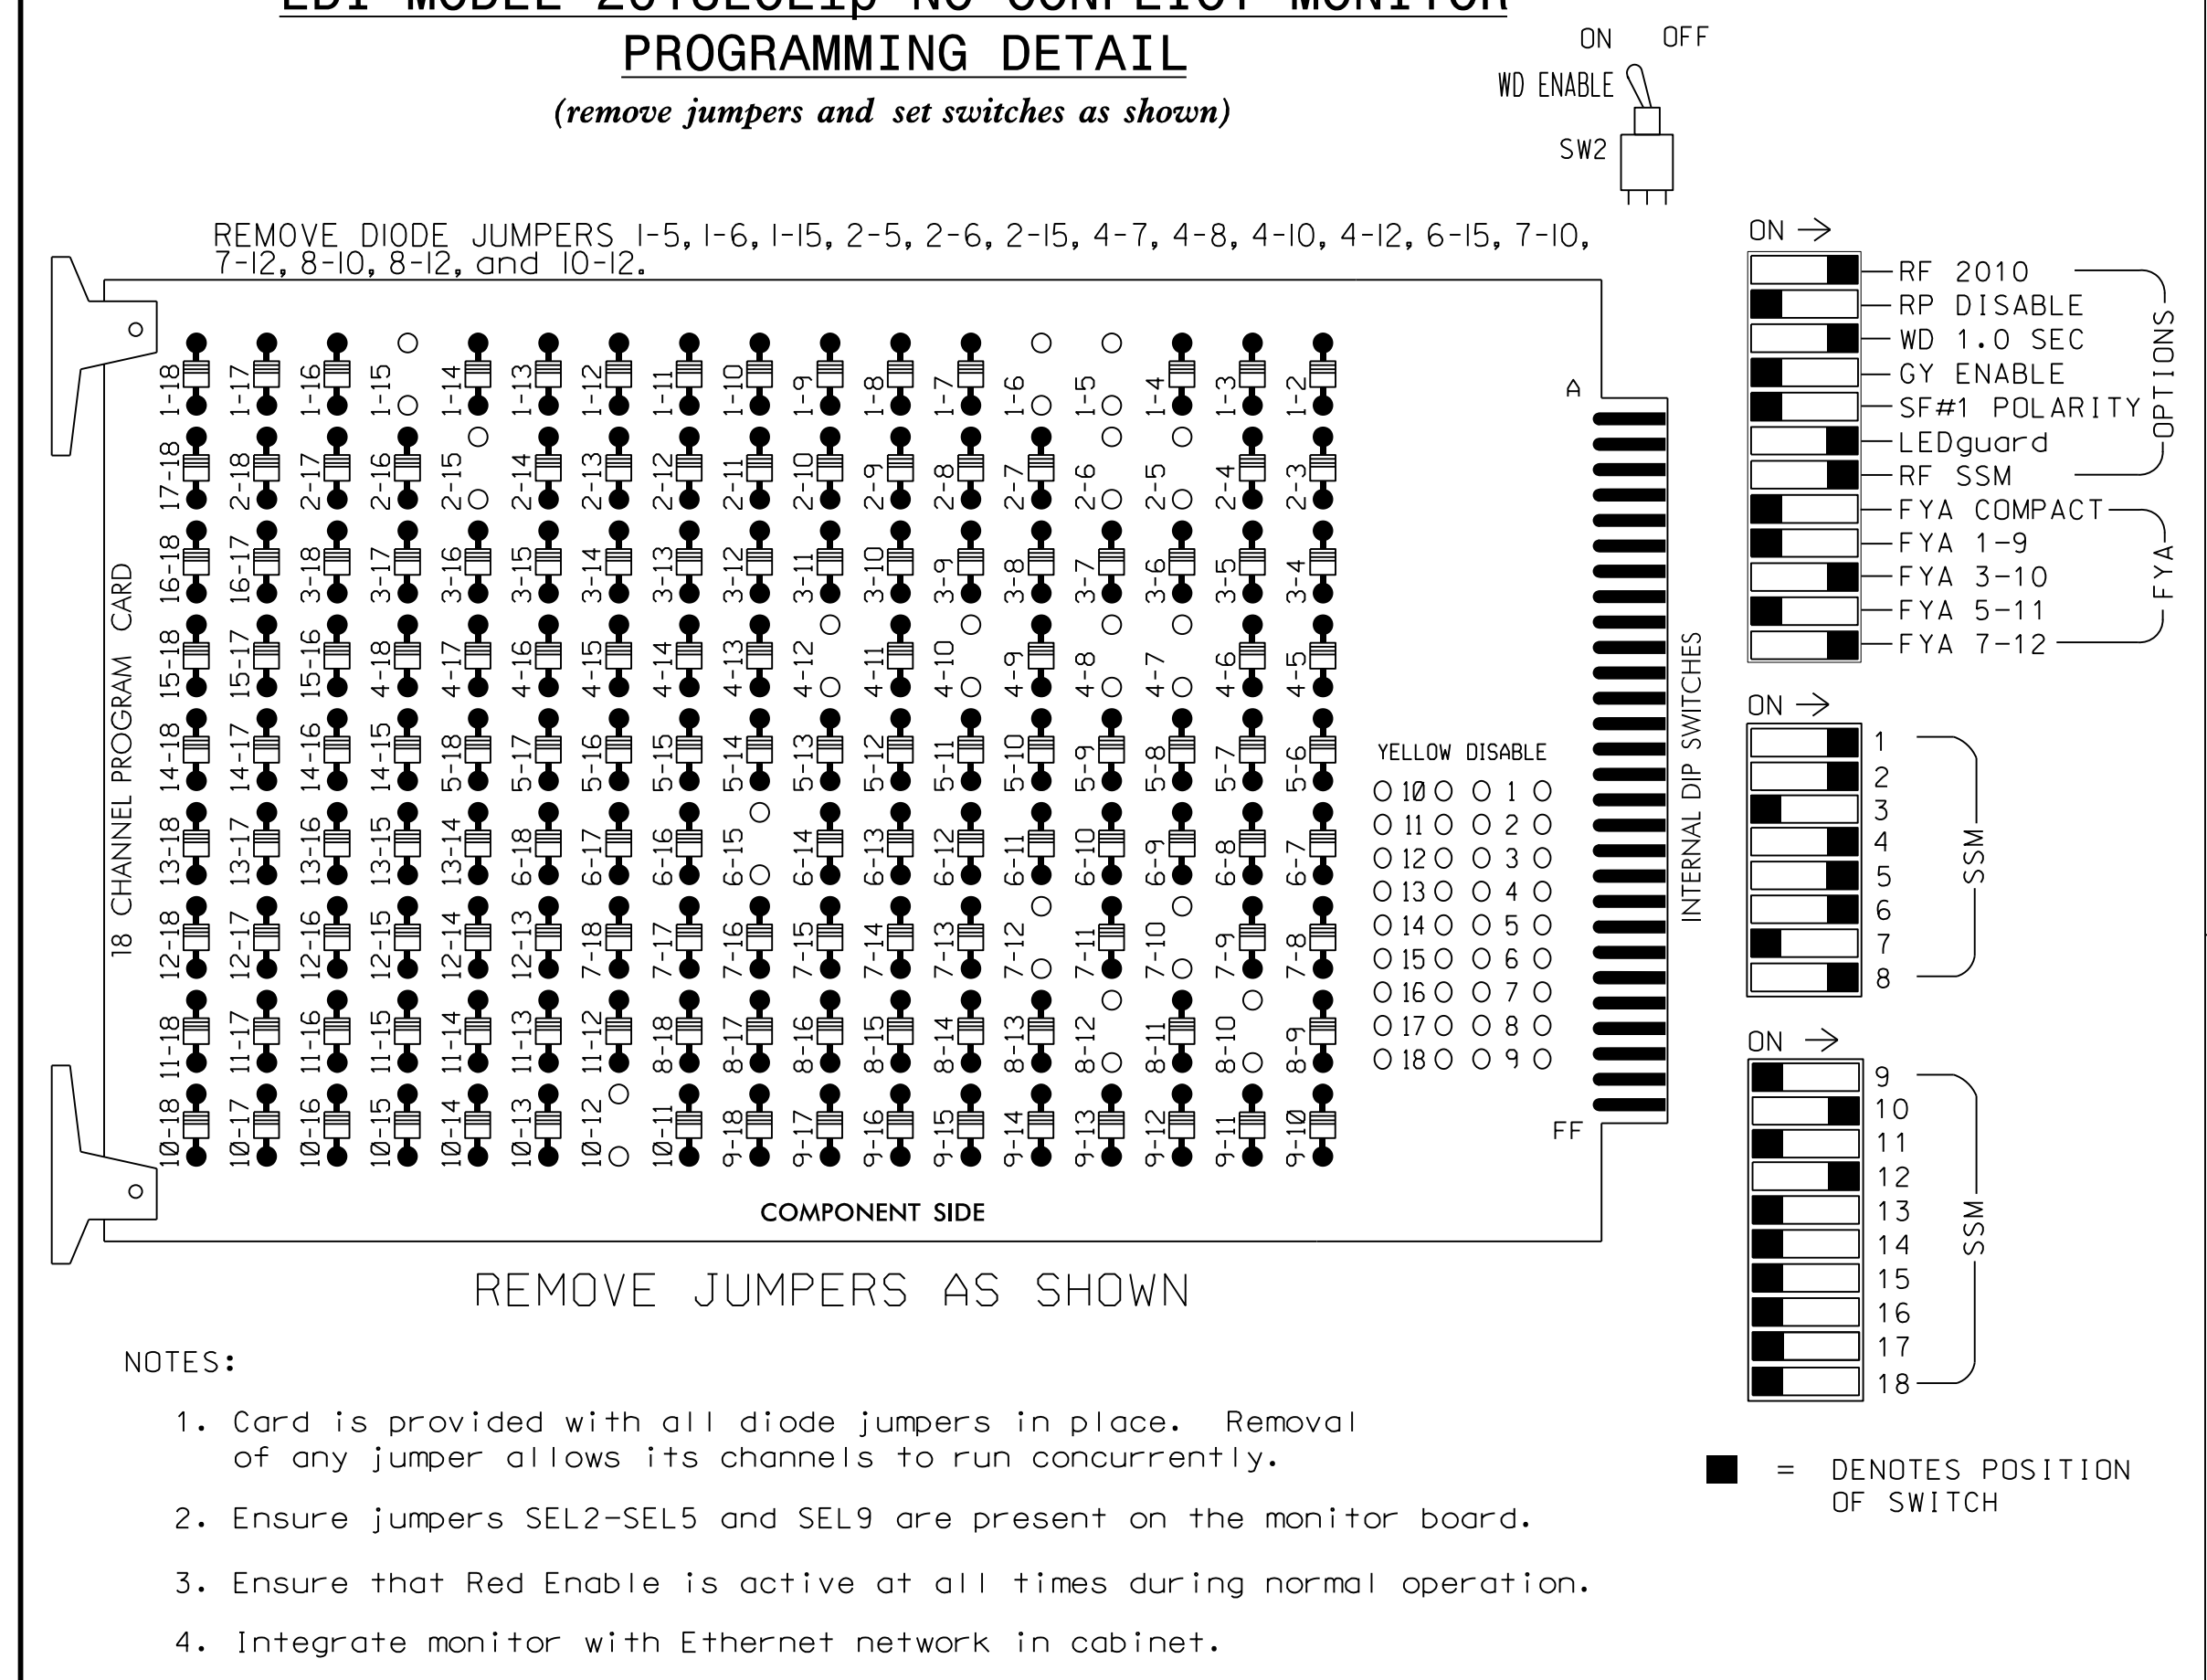

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Program controller to start up in phase 2 Green and 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S5,S7,S8,S9,S10,
 S11,AUX S2,AUX S5
 PHASES USED.....1,2,4,5,6,PED,7,8
 OVERLAP "A".....NOT USED
 OVERLAP "B".....*
 OVERLAP "C".....NOT USED
 OVERLAP "D".....*
 * See overlap programming detail on sheet 2


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	21,22	NU	NU	41,42	NU	51	61,62 63	61,62 63	71	82,83	NU	NU	81	NU	NU	71	NU
RED		128			101			134			107							
YELLOW		129			102			135		*	108							
GREEN		130			103			136			109							
RED ARROW	125						131								A124			A101
YELLOW ARROW	126						132								A125			A102
FLASHING YELLOW ARROW															A126			A103
GREEN ARROW	127						133			124								
Hand										119								
Walking										121								

NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ See pictorial of head wiring in detail this sheet.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

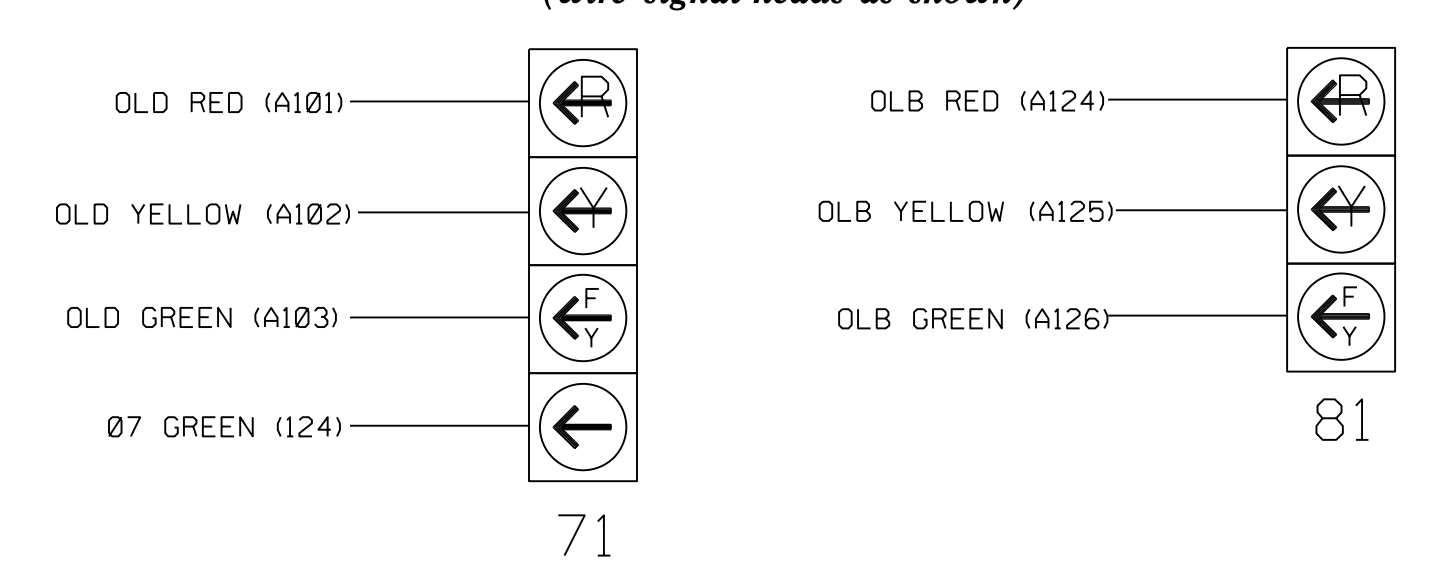

INPUT FILE POSITION LAYOUT

(front view)

FILE "I"	1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	∅ 1 1A	∅ 2 2A	∅ 3 3A	∅ 4 4A	∅ 5 5A	∅ 6 6A	∅ 7 7A	∅ 8 8A	∅ 9 9A	∅ 10 10A	∅ 11 11A	∅ 12 12A	∅ 13 13A	∅ 14 14A
L	NOT USED	∅ 2 2B	∅ 3 3B	NOT USED	∅ 5 5B	∅ 6 6B	∅ 7 7B	∅ 8 8B	∅ 9 9B	∅ 10 10B	∅ 11 11B	∅ 12 12B	∅ 13 13B	∅ 14 14B
U	∅ 5 5A	∅ 6 6A	∅ 6 6C	∅ 7 7A	∅ 8 8A	∅ 9 9A	∅ 10 10A	∅ 11 11A	∅ 12 12A	∅ 13 13A	∅ 14 14A	∅ 15 15A	∅ 16 16A	∅ 17 17A
L	NOT USED	∅ 6 6B	NOT USED	NOT USED	∅ 8 8B	∅ 9 9B	∅ 10 10B	∅ 11 11B	∅ 12 12B	∅ 13 13B	∅ 14 14B	∅ 15 15B	∅ 16 16B	∅ 17 17B

EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME


⊗ Wired Input - Do not populate slot with detector card

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
1A	TB2-1,2	I1U	56	1	1	YES				S
2A	TB2-5,6	I2U	39	2	2	YES			X	N
2B	TB2-7,8	I2L	43	12	2	YES			X	N
4A	TB4-9,10	I6U	41	4	4	YES		10		S
5A	TB3-1,2	J1U	55	5	5	YES				S
6A	TB3-5,6	J2U	40	6	6	YES			X	N
6B	TB3-7,8	J2L	44	16	6	YES			X	N
6C	TB3-9,10	J3U	64	36	6	YES			X	N
7A ¹	TB5-5,6	J5U	57	7	7	YES		15		S
	-	I8U	49	24	4	YES		3		G
8A	TB5-9,10	J6U	42	8	8	YES		3		S
8B	TB5-11,12	J6L	46	18	8	YES		10		S
PED PUSH BUTTONS										
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED					


NOTE:
 INSTALL DC ISOLATORS IN INPUT FILE SLOT 113.

¹Add jumper from J5-W to 18-W, on rear of input file.

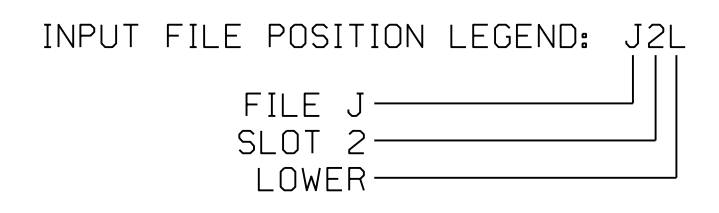

LOAD RESISTOR INSTALLATION DETAIL

(install resistor as shown)

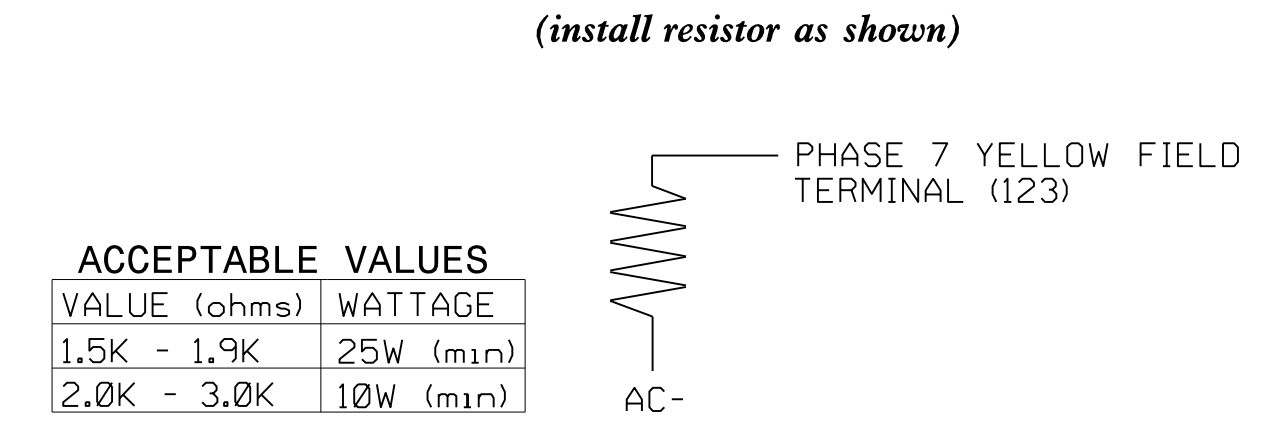

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0767
 DESIGNED:
 SEALED: 03-29-2018
 REVISED: N/A

Final Design
 Electrical Detail - Sheet 1 of 2

Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared in the Offices of:

750 N. Greenfield Pkwy, Garner, NC 27529

US 401 (Raeford Rd.)
 at
 Chilton Dr / Rayconda Rd

Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn

PREPARED BY: R M Muncy REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL

3/29/2018

DATE

SIG. INVENTORY NO. 06-0767

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select
- From CONTROLLER Submenu select
- Toggle Once

OVERLAP B

Select TMG VEH OVLP [B] and 'OTHER/ECONOLITE'

```

TMG VEH OVLP...[B] TYPE: OTHER/ECONOLITE
PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
INCLUDED . . . X . . . . .
PROTECT . . . . .
PED PRTC . . . . .
NOT OVLP . . . . .
FLSH GRN . . . 1 . . . . .
LAG X PH . . . . .
LAG 2 PH . . . . .

LAG GRN 0.0 YEL 0.0 RED 0.0 ADV GRN 0.0

```

Toggle Twice

OVERLAP D

Select TMG VEH OVLP [D] and 'PPLT FYA'

```

TMG VEH OVLP...[D] TYPE: . . . . PPLT FYA
PROTECTED LEFT TURN... PHASE 7
OPPOSING THROUGH..... PHASE 8

FLASHING ARROW OUTPUT.....CH12 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0

```

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0767
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Final Design
Electrical Detail - Sheet 2 of 2


DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED



Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

ELECTRICAL AND PROGRAMMING
 DETAILS FOR:

Prepared in the Offices of:



750 N. Greenfield Pkwy, Garner, NC 27529

US 401 (Raeford Rd.)
 at
 Chilton Dr / Rayconda Rd


Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn

PREPARED BY: R M Muncey REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL



Lawrence E. Overn
 PROFESSIONAL ENGINEER
 SEAL 045933


DocuSign
 3/29/2018

SIG. INVENTORY NO. 06-0767

DATE: 03/29/2018 11:00:00 AM
 User: rfmuncy

EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

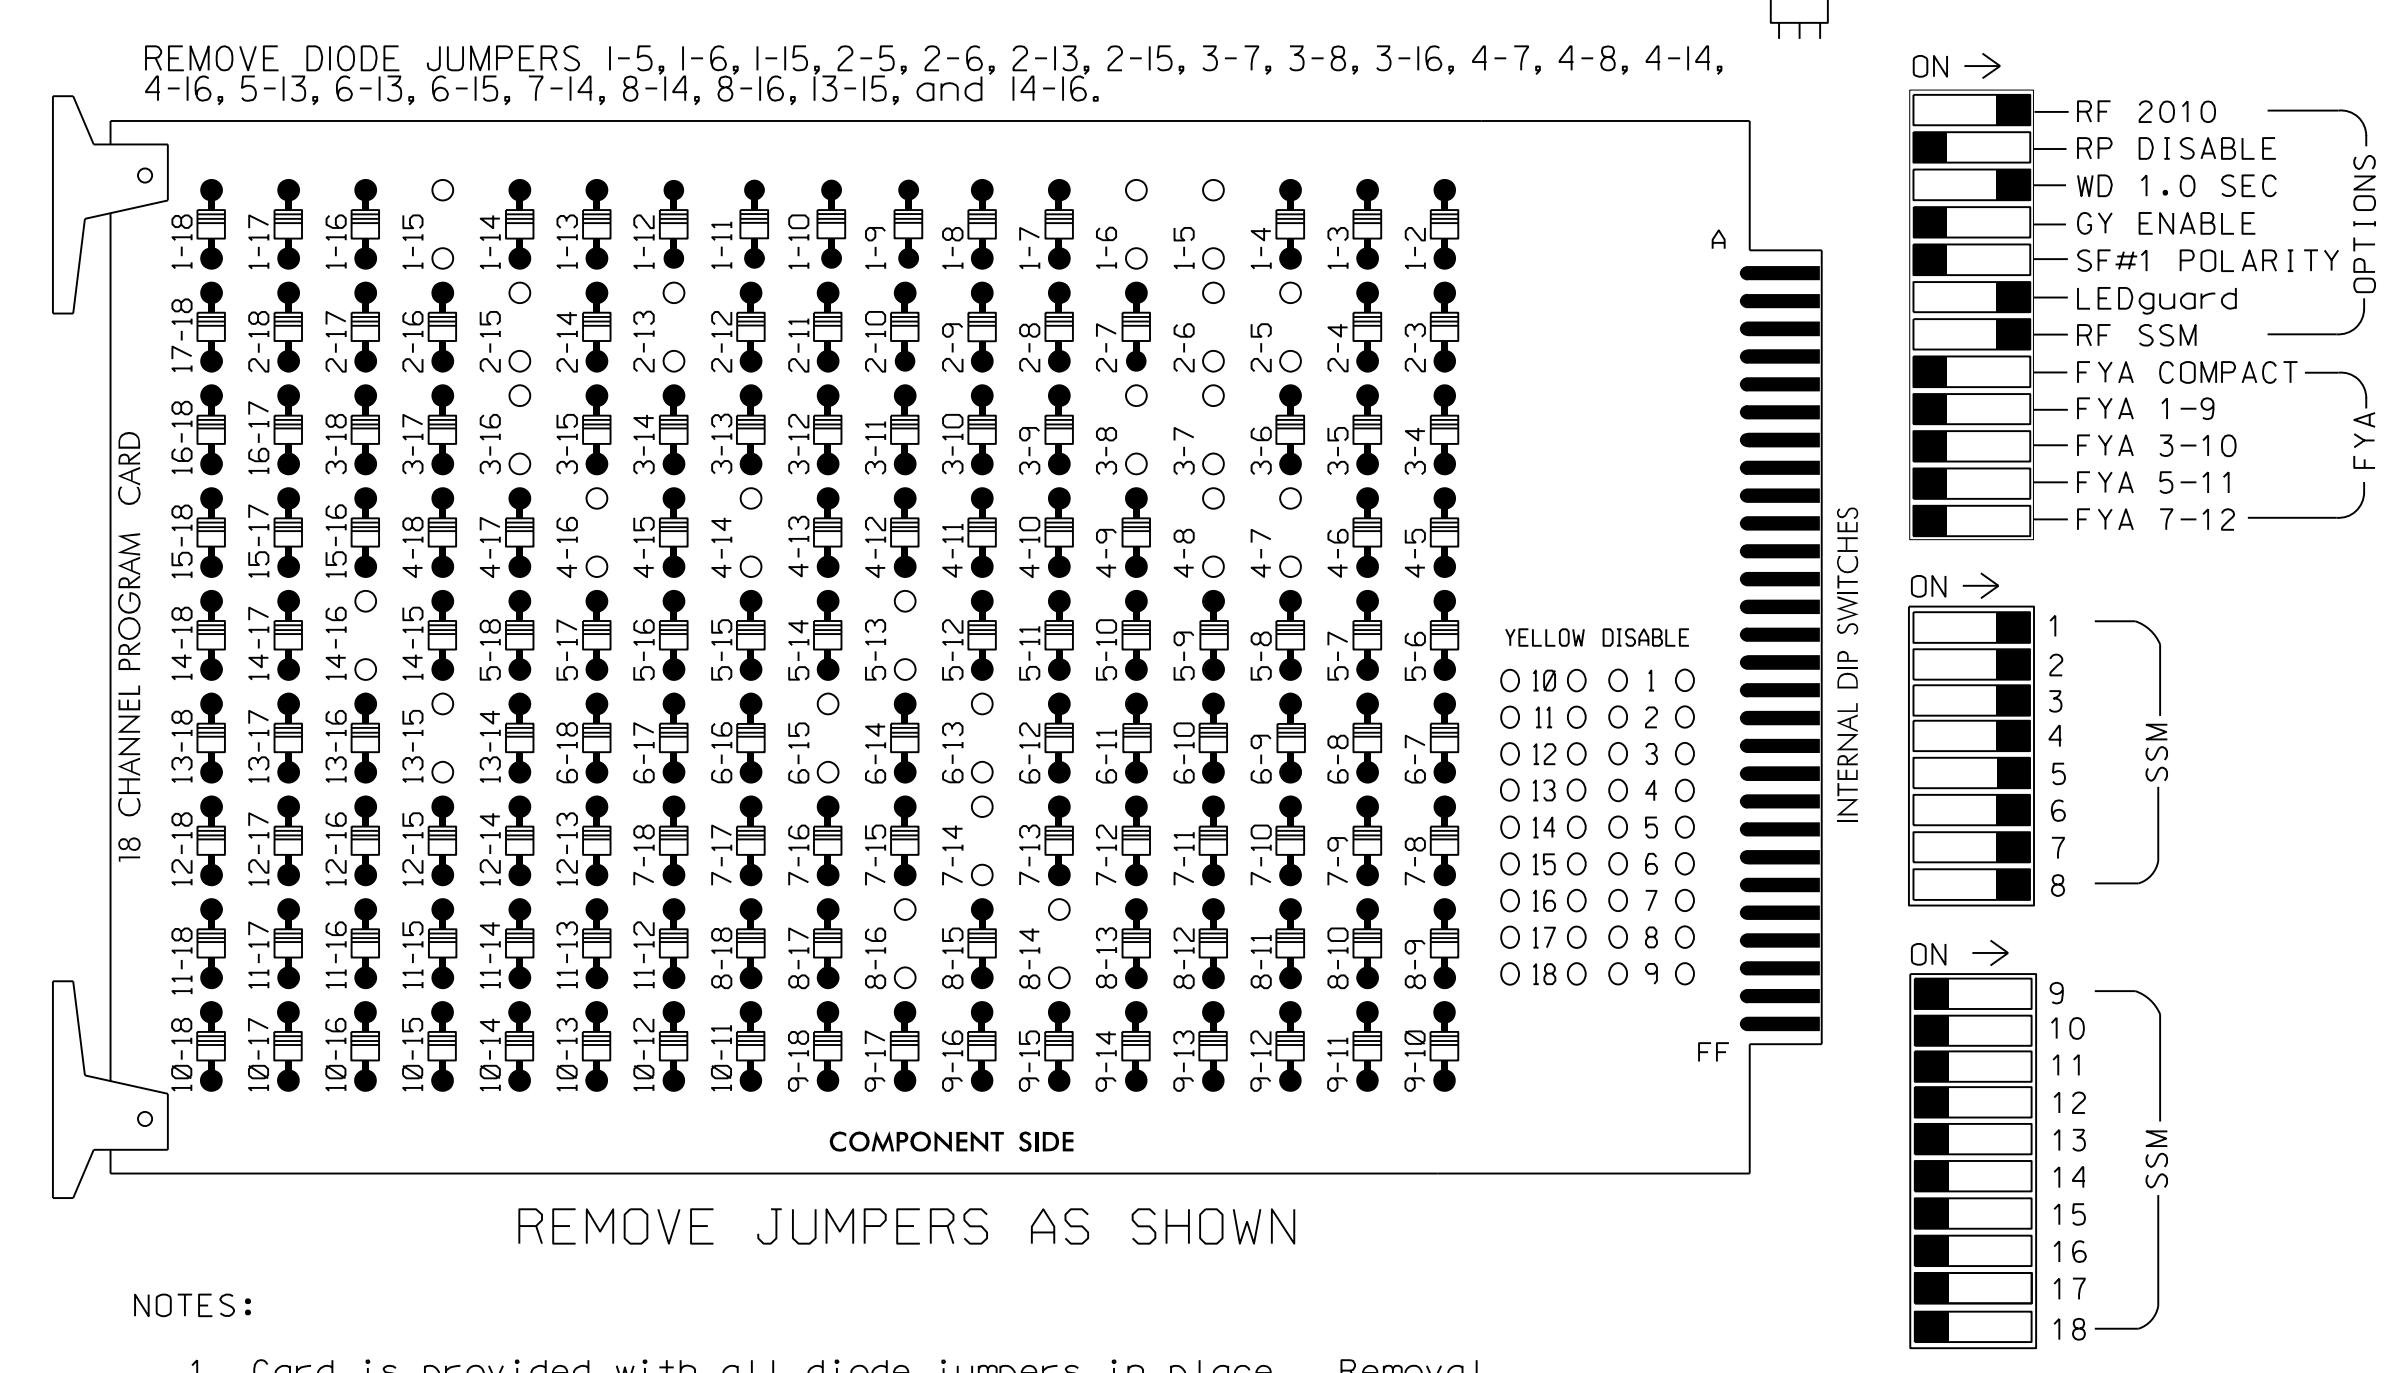

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to Start Up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,
 S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,
 6PED,7,8,8PED
 OVERLAPS.....NONE

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12		
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16		
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED		
SIGNAL HEAD NO.	11	21,22	P21, P22	31	22	41,42	P41, P42	51	61,62	P61, P62	71	62	81,82	P81, P82
RED		128			101			134				107		
YELLOW		129			102			135				108		
GREEN		130			103			136				109		
RED ARROW	125			116				131			122			
YELLOW ARROW	126			117	117			132			123	123		
GREEN ARROW	127			118	118			133			124	124		
Hand			113				104			119			110	
Walking			115				106			121			112	


NU = Not Used

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.


INPUT FILE POSITION LAYOUT

(front view)

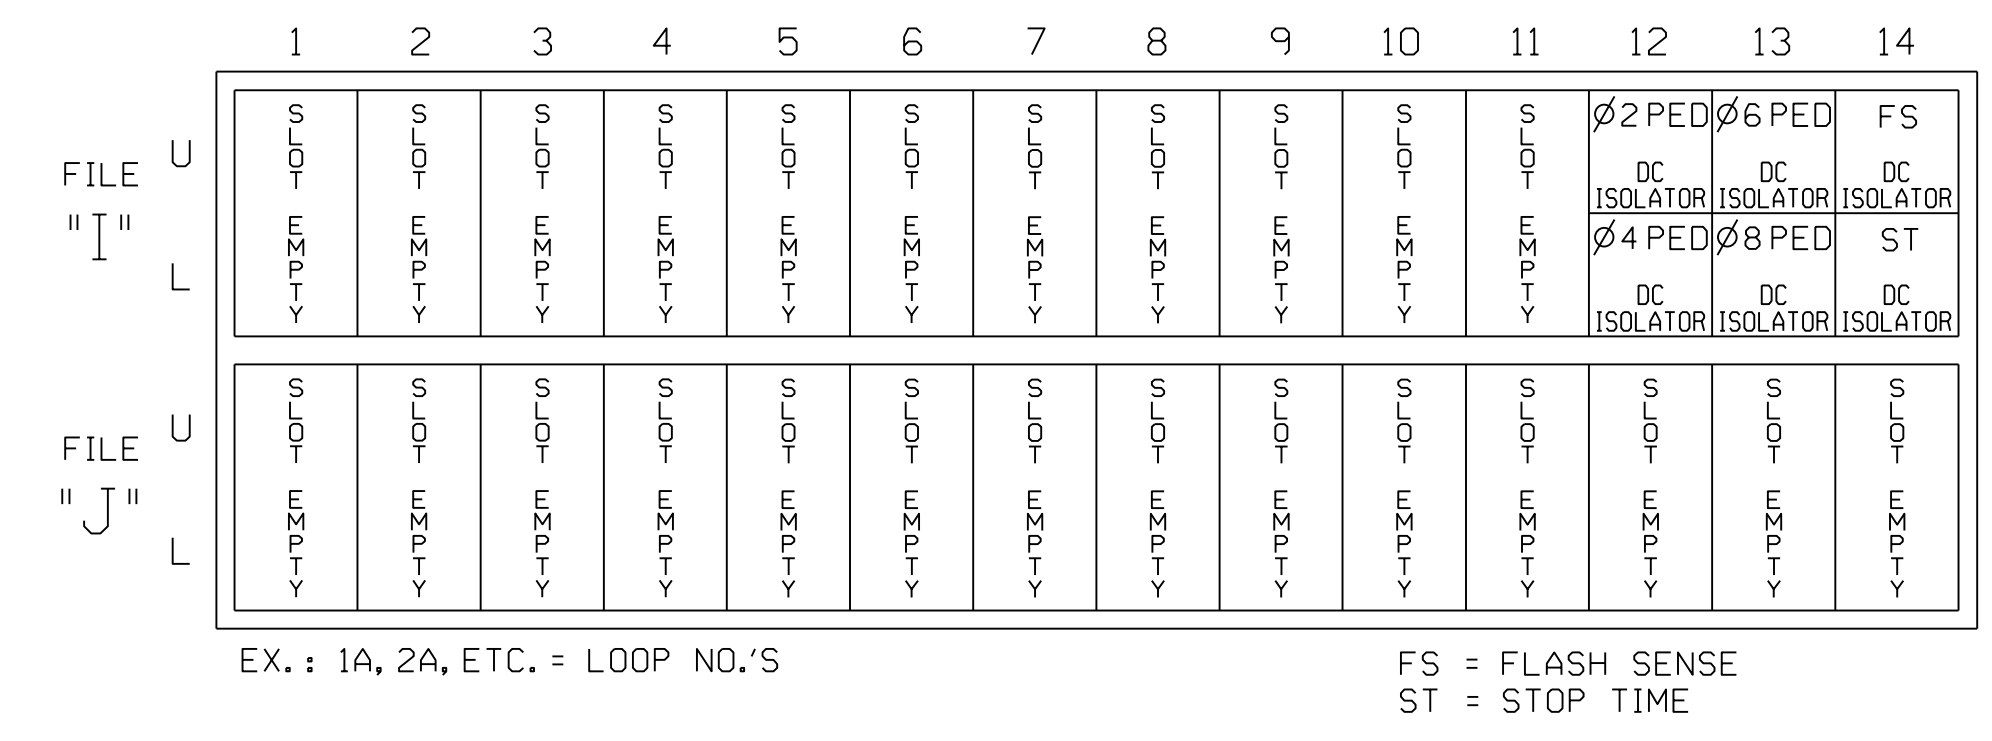

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE
PED PUSH BUTTONS					
P21,P22	TB8-4,6	I12U	67	PED 2	2 PED
P41,P42	TB8-5,6	I12L	69	PED 4	4 PED
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED
P81,P82	TB8-8,9	I13L	70	PED 8	8 PED

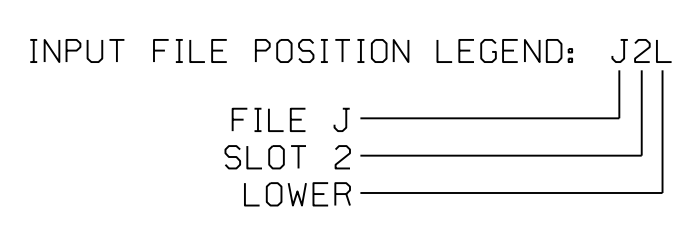

NOTE:
INSTALL DC ISOLATORS IN INPUT FILE SLOTS 112 AND 113.

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.


THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0516T1
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 1 - TMP Phase I
 Electrical Detail

DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>Lawrence E. Overn Professional Engineer License No. 045933 3/29/2018</p>	US 401 (Raeford Road) at SR 1409 (71st School Rd) / SR 1105 (Graham Rd)
		Division 6 Cumberland County Fayetteville PLAN DATE: March 2018 REVIEWED BY: L Overn PREPARED BY: M RG WILSON REVIEWED BY:
REVISIONS: _____ INIT. DATE _____		DATE: _____ SIG. INVENTORY NO. 06-0516T1

PHASING DIAGRAM

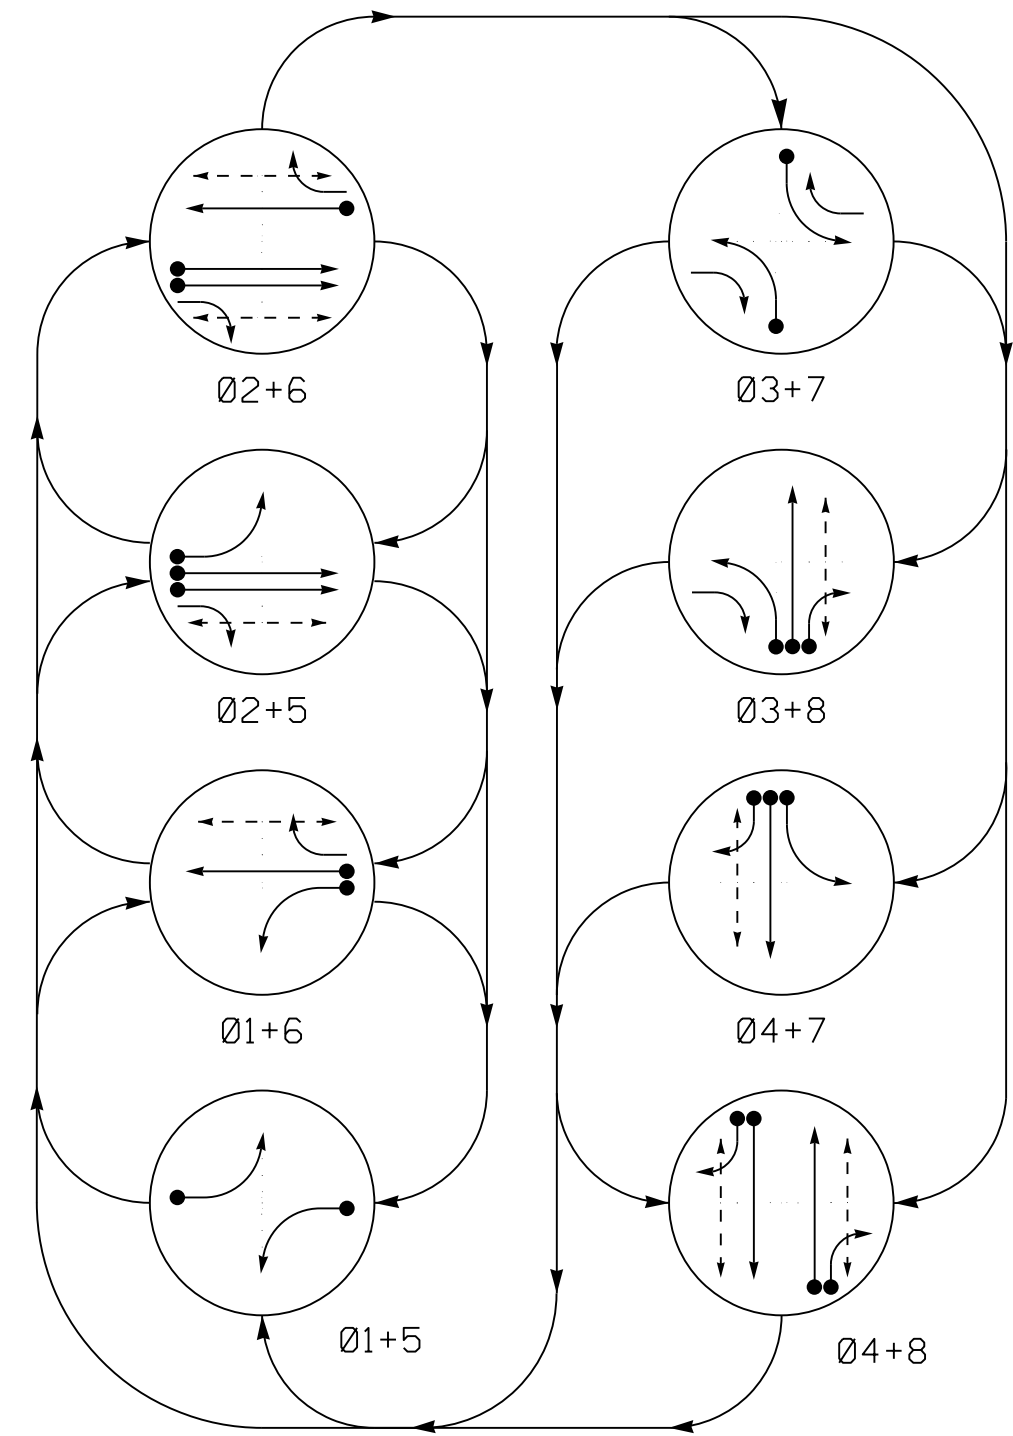


PHASING DIAGRAM DETECTION LEGEND

- DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE								FLASH
	01+5	01+6	02+5	02+6	03+7	03+8	04+7	04+8	
11	—	—	—	—	—	—	—	—	—
21	R	R	G	G	R	R	R	Y	
22	R	R	G	G	R	R	R	Y	
31	—	—	—	—	—	—	—	—	
41, 42	R	R	R	R	R	R	G	G	R
51	—	—	—	—	—	—	—	—	
61	R	G	R	G	R	R	R	Y	
62	R	G	R	G	R	R	R	Y	
71	—	—	—	—	—	—	—	—	
81, 82	R	R	R	R	R	G	R	G	R
P21, P22	DW	DW	W	W	DW	DW	DW	DRK	
P41, P42	DW	DW	DW	DW	DW	DW	W	DRK	
P61, P62	DW	W	DW	W	DW	DW	DW	DRK	
P81, P82	DW	DW	DW	DW	DW	W	DW	DRK	

SIGNAL FACE I.D.

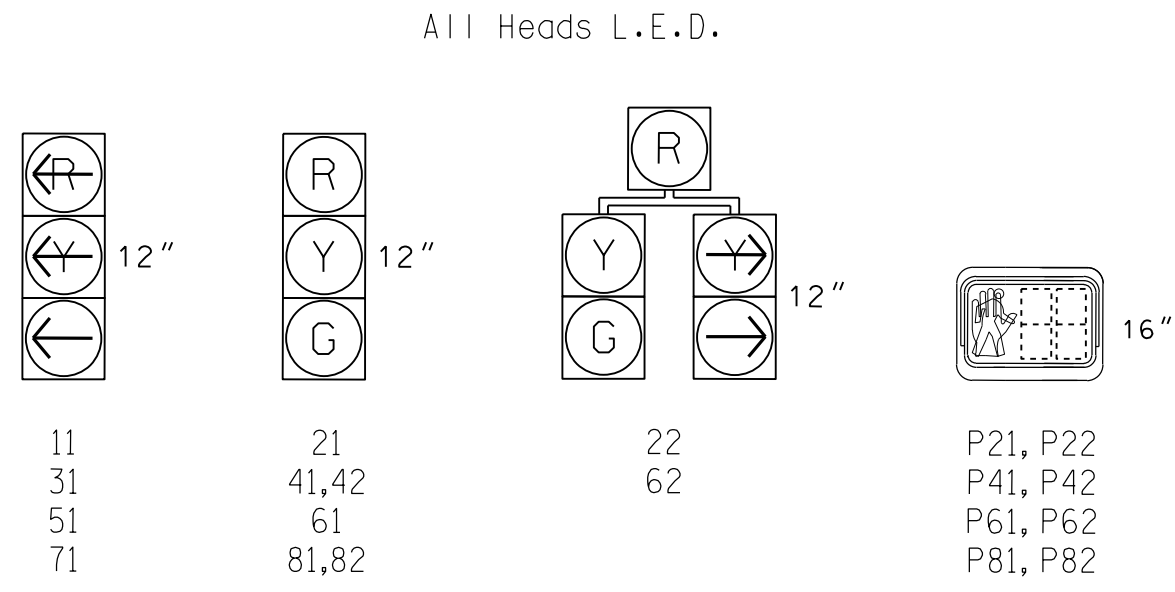

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING						
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP
1A	6X40	0	*	-	1	Yes	-	-	-	S	-
2A	6X6	300	*	-	2	Yes	-	-	-	N	-
2B	6X6	300	*	-	2	Yes	-	-	-	N	X
2C	6X40	0	*	-	2	Yes	2.0	5	-	G	-
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-
3A	6X40	0	*	-	3	Yes	-	3	-	S	-
4A	6X40	0	*	-	4	Yes	-	-	-	S	-
4B	6X40	0	*	-	4	Yes	-	15	-	S	-
5A	6X40	0	*	-	5	Yes	-	-	-	S	-
6A	6X6	300	*	-	6	Yes	-	-	-	N	-
6B	6X40	0	*	-	6	Yes	2.0	5	-	G	-
7A	6X40	0	*	-	7	Yes	-	3	-	S	-
8A	6X40	0	*	-	8	Yes	-	-	-	S	-
8B	6X40	0	*	-	8	Yes	-	15	-	S	-

* Video Detection Area Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal heads numbered 11, 21, 22, 51, 61, & 62.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Pavement markings are existing.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Pedestrian pedestals are conceptual and are shown for reference only. See 2018 NCDOT Roadway Standard Drawings 1705.04 sheets 1-3 for push button details.

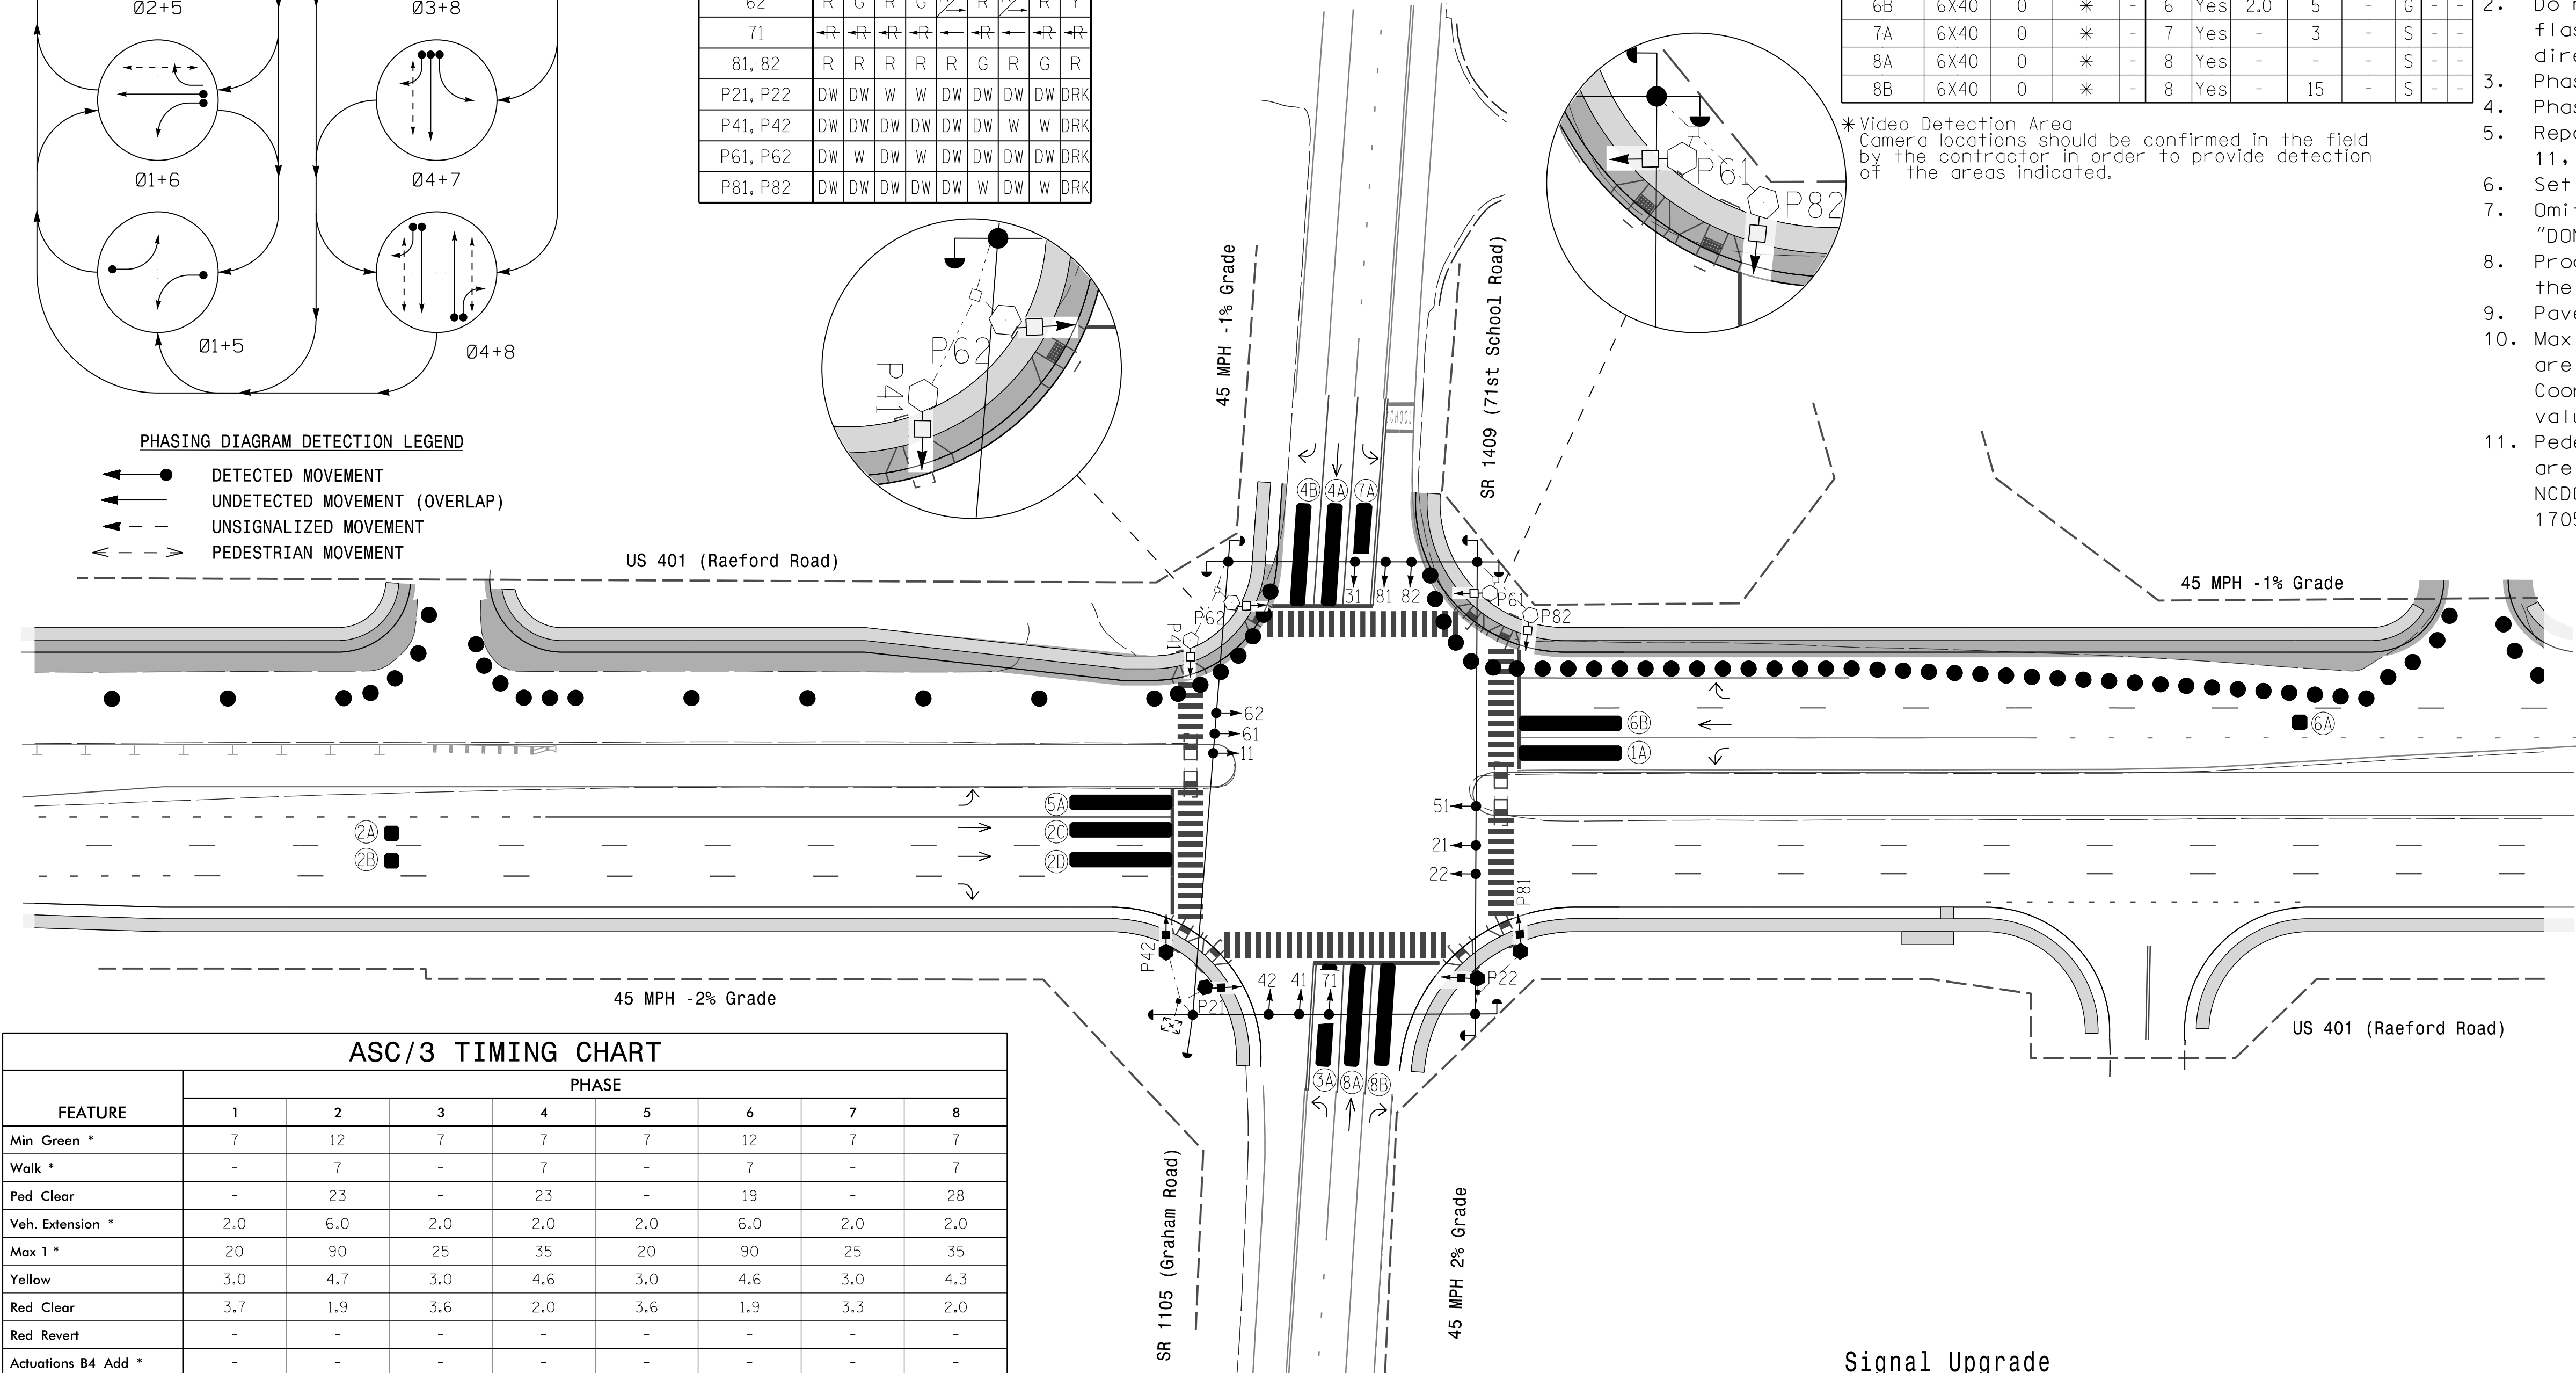

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	7	-	7	-	7	-	7
Ped Clear	-	23	-	23	-	19	-	28
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max I *	20	90	25	35	20	90	25	35
Yellow	3.0	4.7	3.0	4.6	3.0	4.6	3.0	4.3
Red Clear	3.7	1.9	3.6	2.0	3.6	1.9	3.3	2.0
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds / Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	30	-	-	-	30	-	-
Minimum Gap	-	3.0	-	-	-	3.0	-	-
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | PROPOSED | EXISTING |
|--|----------|
| ○ Traffic Signal Head | ● N/A |
| ○ Modified Signal Head | ○ N/A |
| ○ Sign | ○ N/A |
| ○ Pedestrian Signal Head With Push Button & Sign | ○ N/A |
| ○ Signal Pole with Guy | ○ N/A |
| ○ Signal Pole with Sidewalk Guy | ○ N/A |
| ○ Inductive Loop Detector | ○ N/A |
| ○ Controller & Cabinet | ○ N/A |
| ○ Junction Box | ○ N/A |
| ○ 2-in Underground Conduit | ○ N/A |
| ○ Right of Way | ○ N/A |
| ○ Directional Arrow | ○ N/A |
| ○ Video Detection Area | ○ N/A |
| ○ Construction Zone | ○ N/A |
| ○ Drums | ○ N/A |
| ○ Type II Signal Pedestal | ○ N/A |

Signal Upgrade Temporary Signal Design 2 - TMP Phase II

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>		<p>US 401 (Raeford Road) at SR 1409 (71st School Road) / SR 1105 (Graham Road)</p>	
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: E D Harris</p> <p>PREPARED BY: A D Smith REVIEWED BY: B L Watson</p>	<p>3/29/2018</p>


3/29/2018
 User: rfmccoy
 Path: \\server\projects\2018\4405\Signal Design\Phase 2\4405_Sig.dwg
 User: rfmccoy

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SIG. INVENTORY NO. 06-0516T2


EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

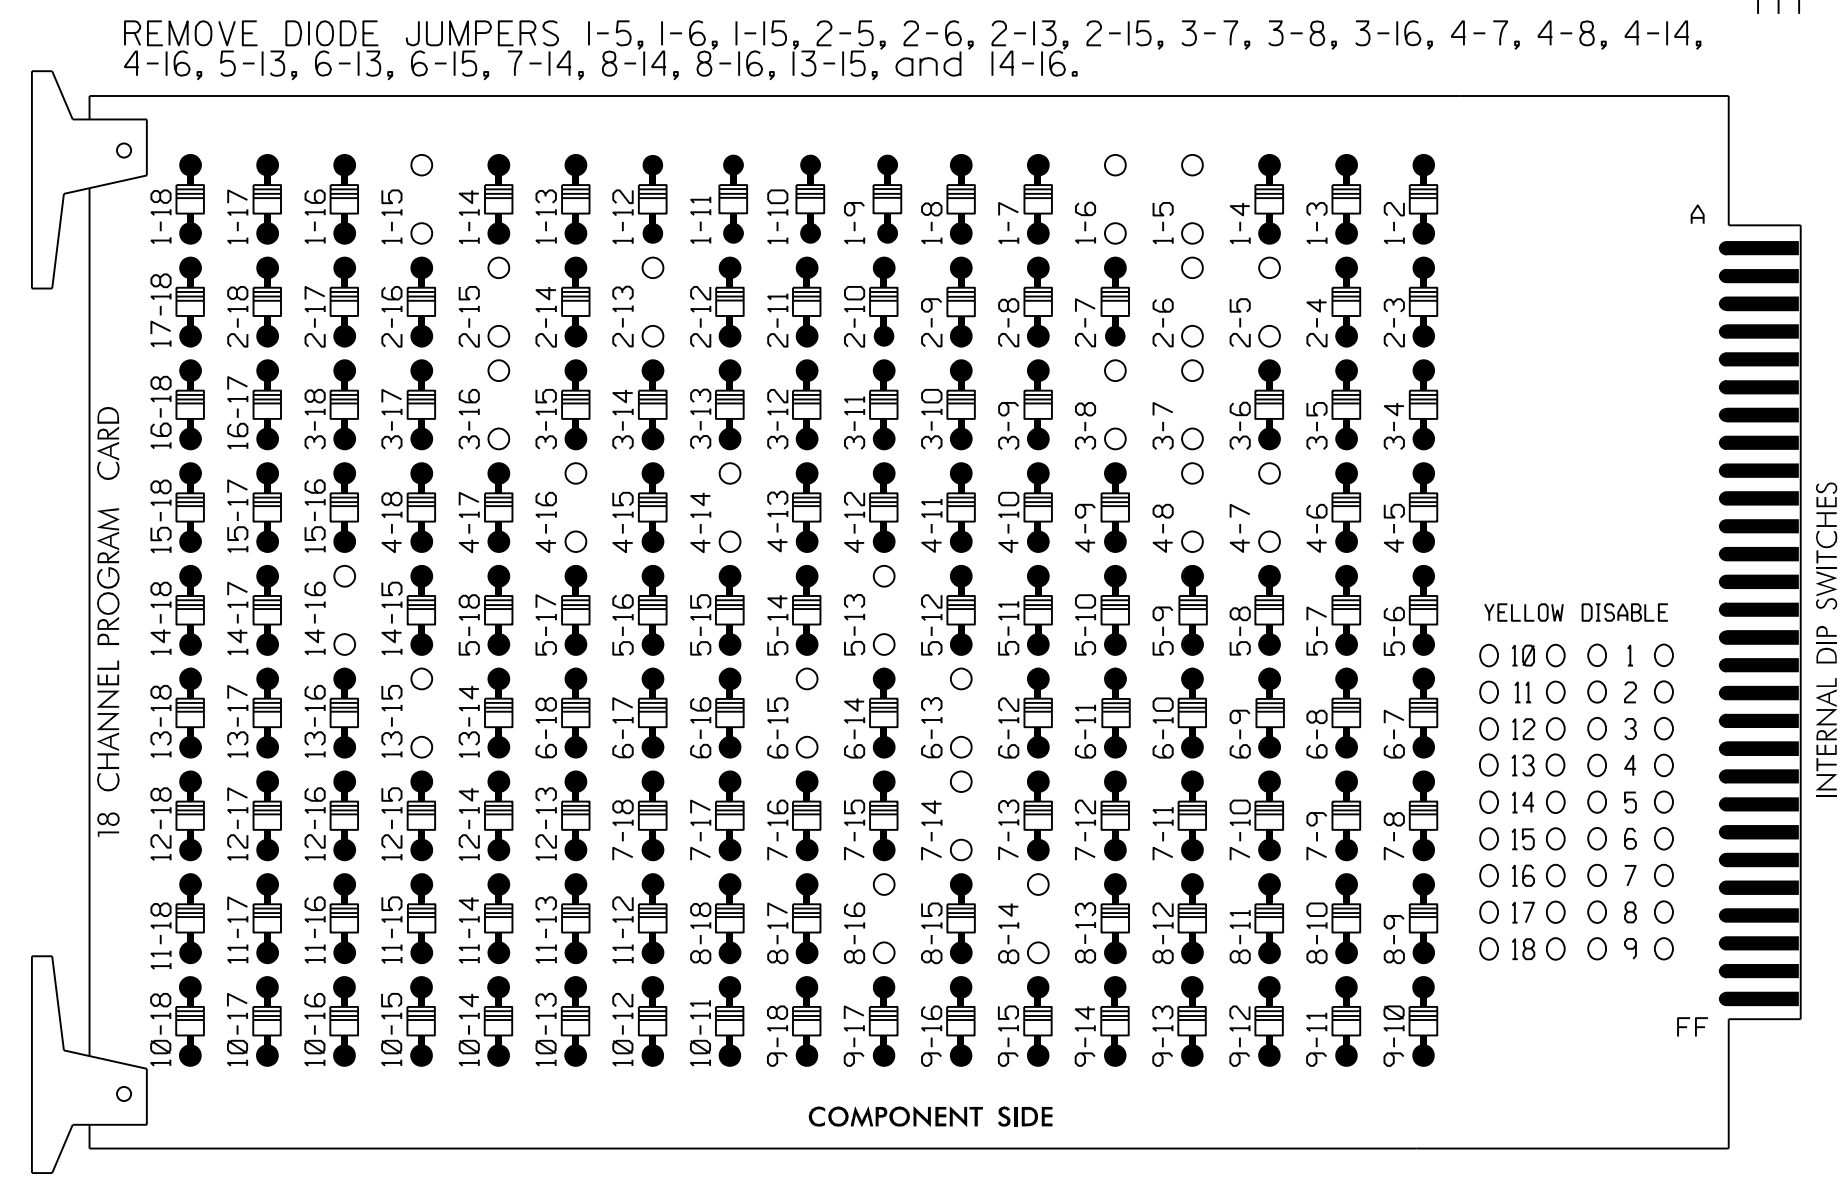

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

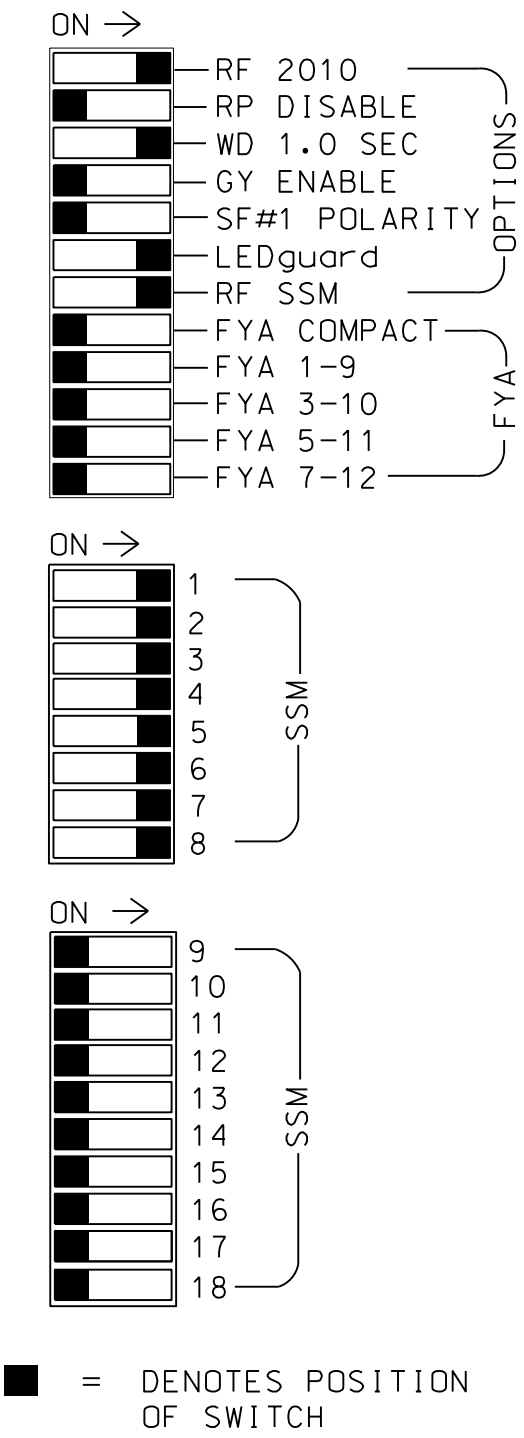

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Program controller to Start Up in phase 2 WALK and phase 6 WALK.
3. The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,
 S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,
 6PED,7,8,8PED
 OVERLAPS.....NONE

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12		
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16		
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED		
SIGNAL HEAD NO.	11	21,22	P21, P22	31	22	41,42	P41, P42	51	61,62	P61, P62	71	62	81,82	P81, P82
RED		128			101			134				107		
YELLOW		129			102			135				108		
GREEN		130			103			136				109		
RED ARROW	125			116				131			122			
YELLOW ARROW	126			117	117			132			123	123		
GREEN ARROW	127			118	118			133			124	124		
Hand icon			113				104			119			110	
Walking person icon			115				106			121			112	


NU = Not Used

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.


INPUT FILE POSITION LAYOUT

(front view)

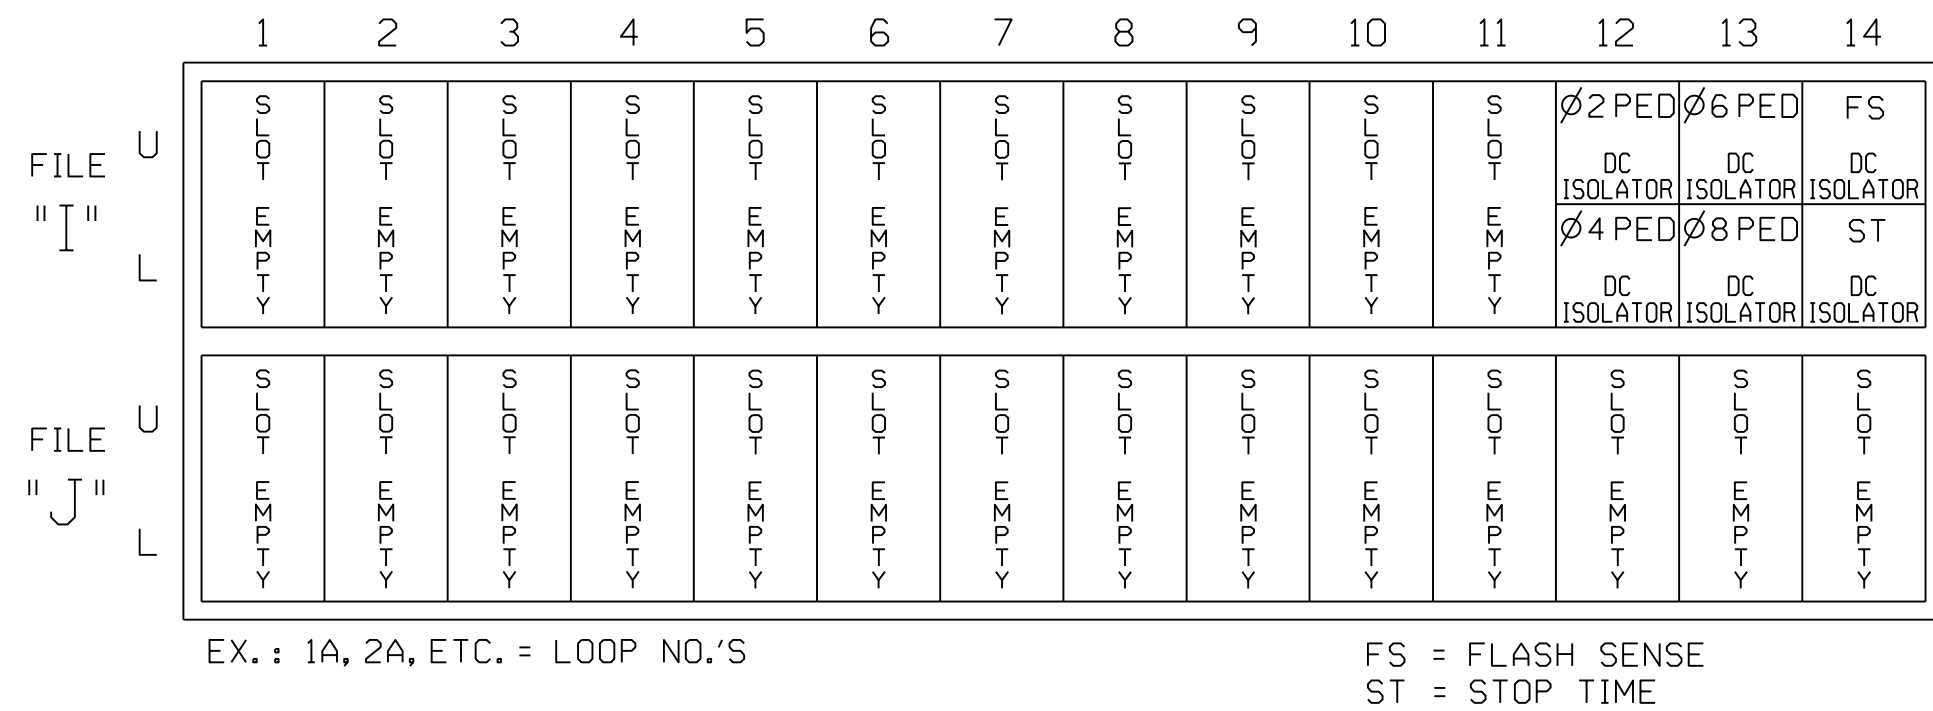

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE
PED PUSH BUTTONS					
P21,P22	TB8-4,6	I12U	67	PED 2	2 PED
P41,P42	TB8-5,6	I12L	69	PED 4	4 PED
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED
P81,P82	TB8-8,9	I13L	70	PED 8	8 PED

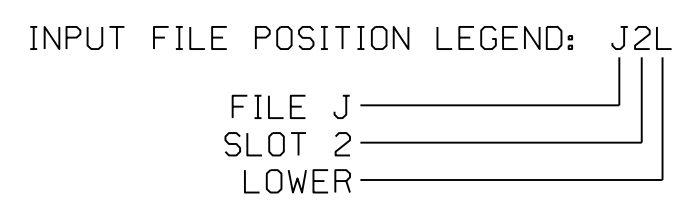

NOTE:
 INSTALL DC ISOLATORS IN INPUT FILE SLOTS 112 AND 113.

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0516T2
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A


Temporary Design 2 - TMP Phase II
 Electrical Detail

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p>	<p>US 401 (Raeford Road) at SR 1409 (71st School Rd) / SR 1105 (Graham Rd)</p>	
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: M RG WILSON REVIEWED BY:</p>	<p>SEAL</p> <p>045933</p> <p>3/29/2018</p>

8 Phase Fully Actuated Fayetteville Signal System

PHASING DIAGRAM

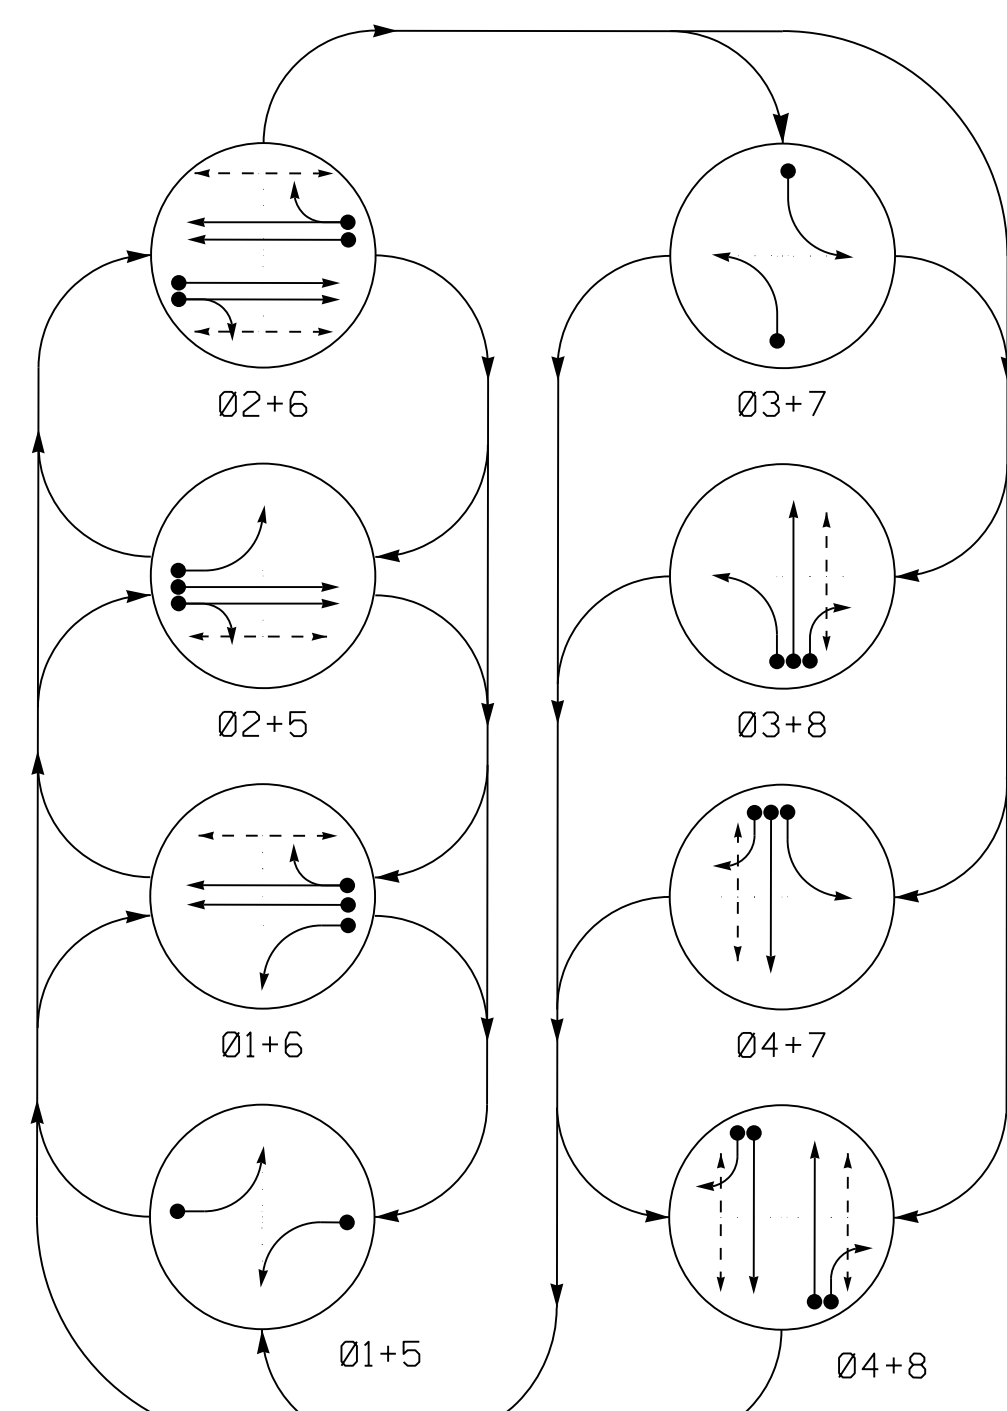

PHASING DIAGRAM DETECTION LEGEND


- DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- ⚡ UNSIGNALIZED MOVEMENT
- ⚡ PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE							
	01+5	02+6	03+7	04+8	01+6	02+5	03+8	04+7
11	←	←	←	←	←	←	←	←
21,22	R	R	G	G	R	R	R	Y
31	←	←	←	←	←	←	←	←
41, 42	R	R	R	R	G	G	R	Y
51	←	←	←	←	←	←	←	←
61,62	R	G	R	G	R	R	R	Y
71	←	←	←	←	←	←	←	←
81, 82	R	R	R	R	G	R	G	R
P21, P22	DW	DW	W	W	DW	DW	DW	DRK
P41, P42	DW	DW	DW	DW	DW	DW	W	DRK
P61, P62	DW	W	DW	W	DW	DW	DW	DRK
P81, P82	DW	DW	DW	DW	W	DW	W	DRK

SIGNAL FACE I.D.

All Heads L.E.D.

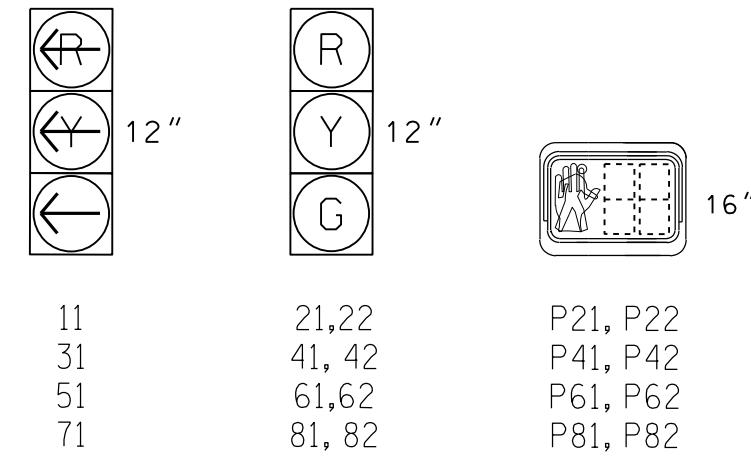


ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
1A	6X40	0	*	-	1	Yes	-	-	-	S	-	-
2A	6X6	300	*	-	2	Yes	-	-	-	N	-	-
2B	6X6	300	*	-	2	Yes	-	-	-	N	-	-
2C	6X40	0	*	-	2	Yes	2.0	5	-	G	-	-
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-	-
3A	6X40	0	*	-	3	Yes	-	3	-	S	-	-
4A	6X40	0	*	-	4	Yes	-	-	-	S	-	-
4B	6X40	0	*	-	4	Yes	-	15	-	S	-	-
5A	6X40	0	*	-	5	Yes	-	-	-	S	-	-
6A	6X6	300	*	-	6	Yes	-	-	-	N	-	-
6B	6X6	300	*	-	6	Yes	-	-	-	N	-	-
6C	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
6D	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
7A	6X40	0	*	-	7	Yes	-	3	-	S	-	-
8A	6X40	0	*	-	8	Yes	-	-	-	S	-	-
8B	6X40	0	*	-	8	Yes	-	15	-	S	-	-

*Video Detection Area Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal heads numbered 11, 21, 51 & 61.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Pavement markings are existing.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

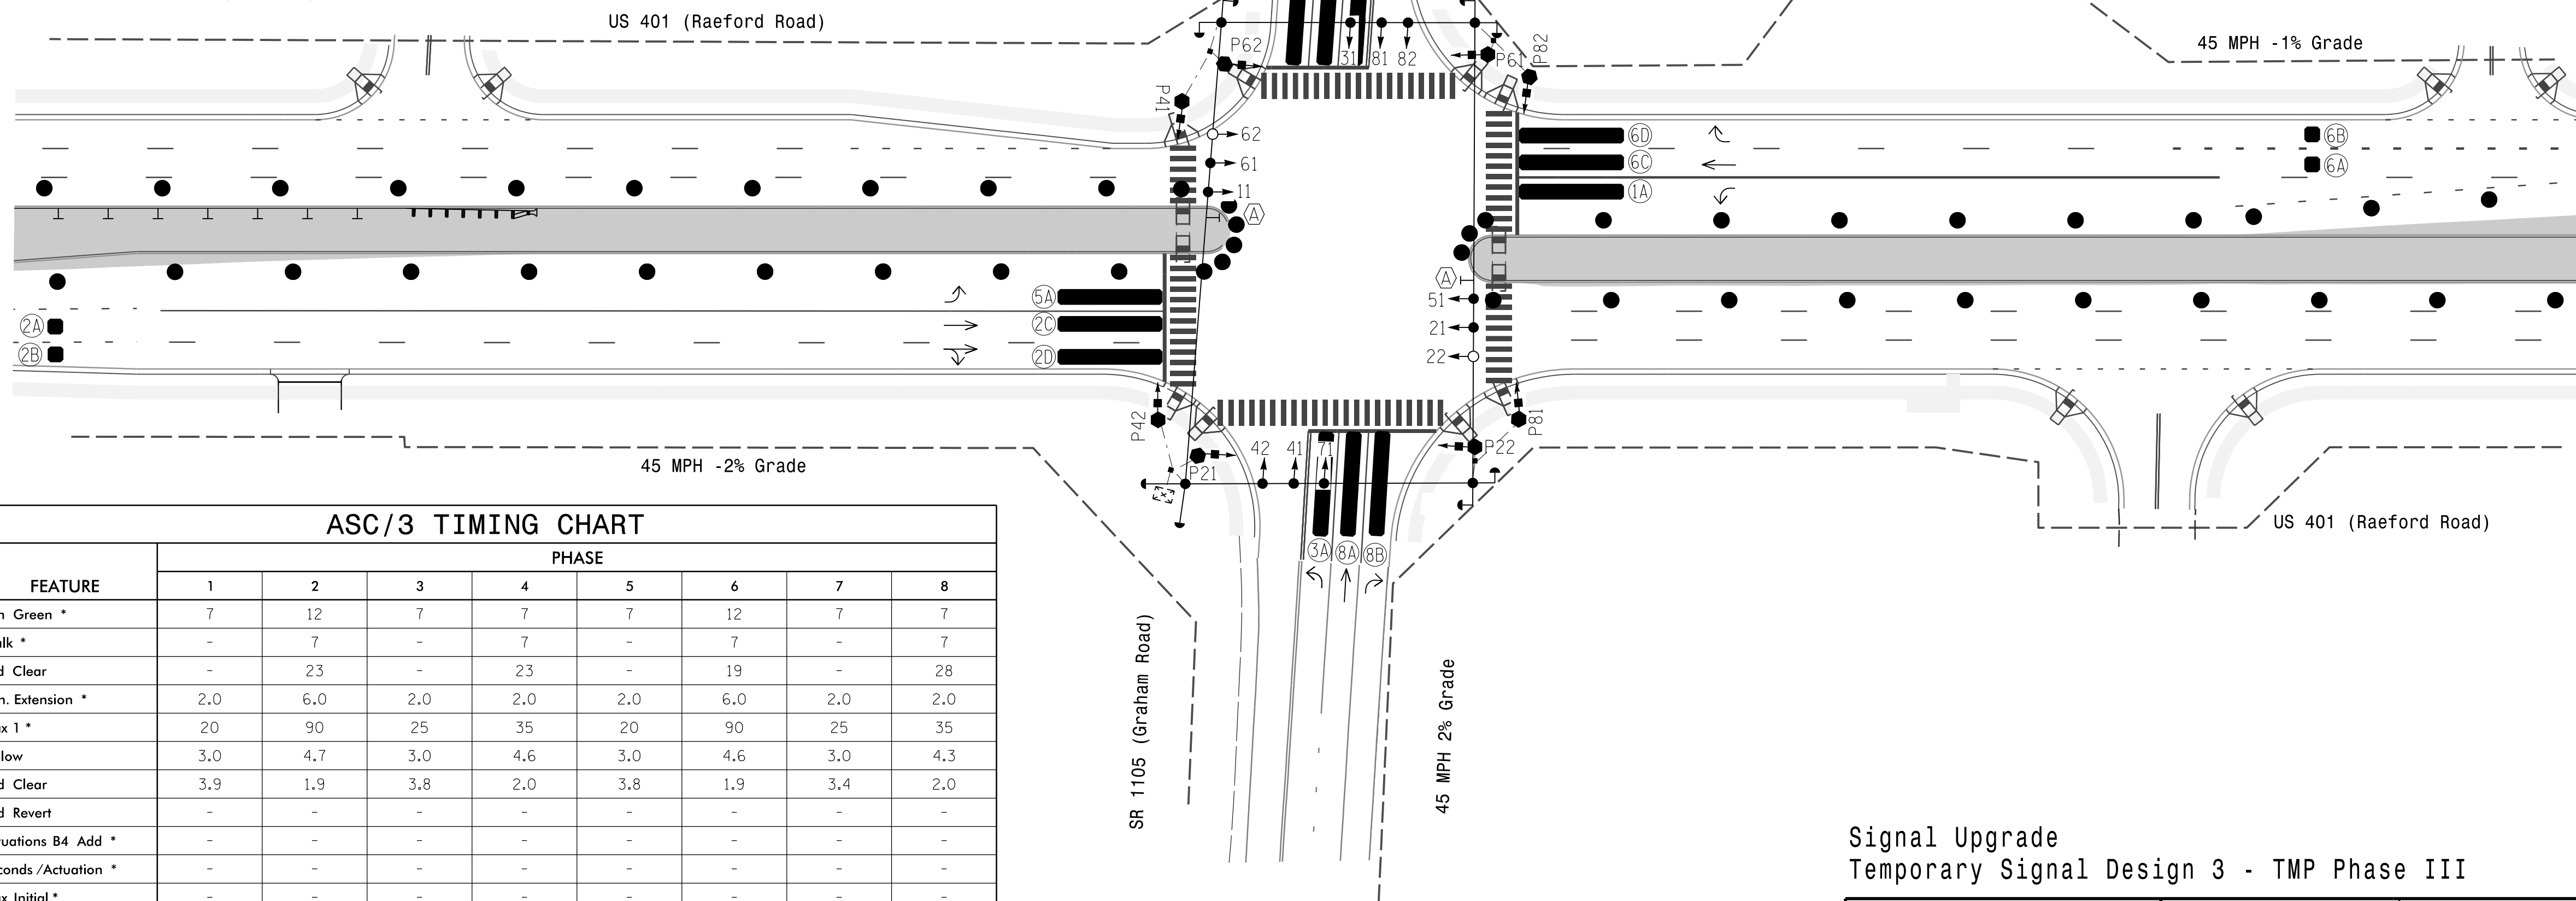

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	7	-	7	-	7	-	7
Ped Clear	-	23	-	23	-	19	-	28
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max I *	20	90	25	35	20	90	25	35
Yellow	3.0	4.7	3.0	4.6	3.0	4.6	3.0	4.3
Red Clear	3.9	1.9	3.8	2.0	3.8	1.9	3.4	2.0
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds /Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	30	-	-	-	30	-	-
Minimum Gap	-	3.0	-	-	-	3.0	-	-
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | | | | |
|-----|--|-----|--|
| ○ | PROPOSED | ○ | EXISTING |
| ● | Traffic Signal Head | ● | Traffic Signal Head |
| ○ | Modified Signal Head | ○ | Modified Signal Head |
| ⊙ | Signal | ⊙ | Signal |
| ⊙ | Pedestrian Signal Head With Push Button & Sign | ⊙ | Pedestrian Signal Head With Push Button & Sign |
| ⊙ | Signal Pole with Guy | ⊙ | Signal Pole with Guy |
| ⊙ | Signal Pole with Sidewalk Guy | ⊙ | Signal Pole with Sidewalk Guy |
| ⊙ | Inductive Loop Detector | ⊙ | Inductive Loop Detector |
| ⊙ | Controller & Cabinet | ⊙ | Controller & Cabinet |
| ⊙ | Junction Box | ⊙ | Junction Box |
| ⊙ | 2-in Underground Conduit | ⊙ | 2-in Underground Conduit |
| N/A | Right of Way | N/A | Right of Way |
| → | Directional Arrow | → | Directional Arrow |
| ■ | Video Detection Area | ■ | Video Detection Area |
| ■ | Construction Zone | ■ | Construction Zone |
| ● | Drums | ● | Drums |
| ○ | Type II Signal Pedestal | ○ | Type II Signal Pedestal |
| ⊙ | "U-TURN YIELD TO RIGHT TURN" Sign (R10-16) | ⊙ | "U-TURN YIELD TO RIGHT TURN" Sign (R10-16) |

Signal Upgrade Temporary Signal Design 3 - TMP Phase III

Stantec
 Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared for the Offices of:

 TRANSPORTATION MOBILITY AND SAFETY DIVISION
 STATE OF NORTH CAROLINA
 SIGNAL DESIGN SECTION
 750 N. Greenfield Pkwy, Garner, NC 27526

US 401 (Raeford Road) at
 SR 1409 (71st School Road) /
 SR 1105 (Graham Road)
 Division 6 Cumberland County Fayetteville
 PLAN DATE: March 2018 REVIEWED BY: E D Harris
 PREPARED BY: A D Smith REVIEWED BY: B L Watson


Seal of the State of North Carolina Professional Engineer
 SEAL 29449
 Betsy L. Watson
 3/29/2018
 SIG. INVENTORY NO. 06-0516T3

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

3/29/2018
 User: rfmccancy
 Path: \\c:\Users\gnm\Documents\Signal Design\Phase 3\U-4405\sig.dwg
 User: rfmccancy

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

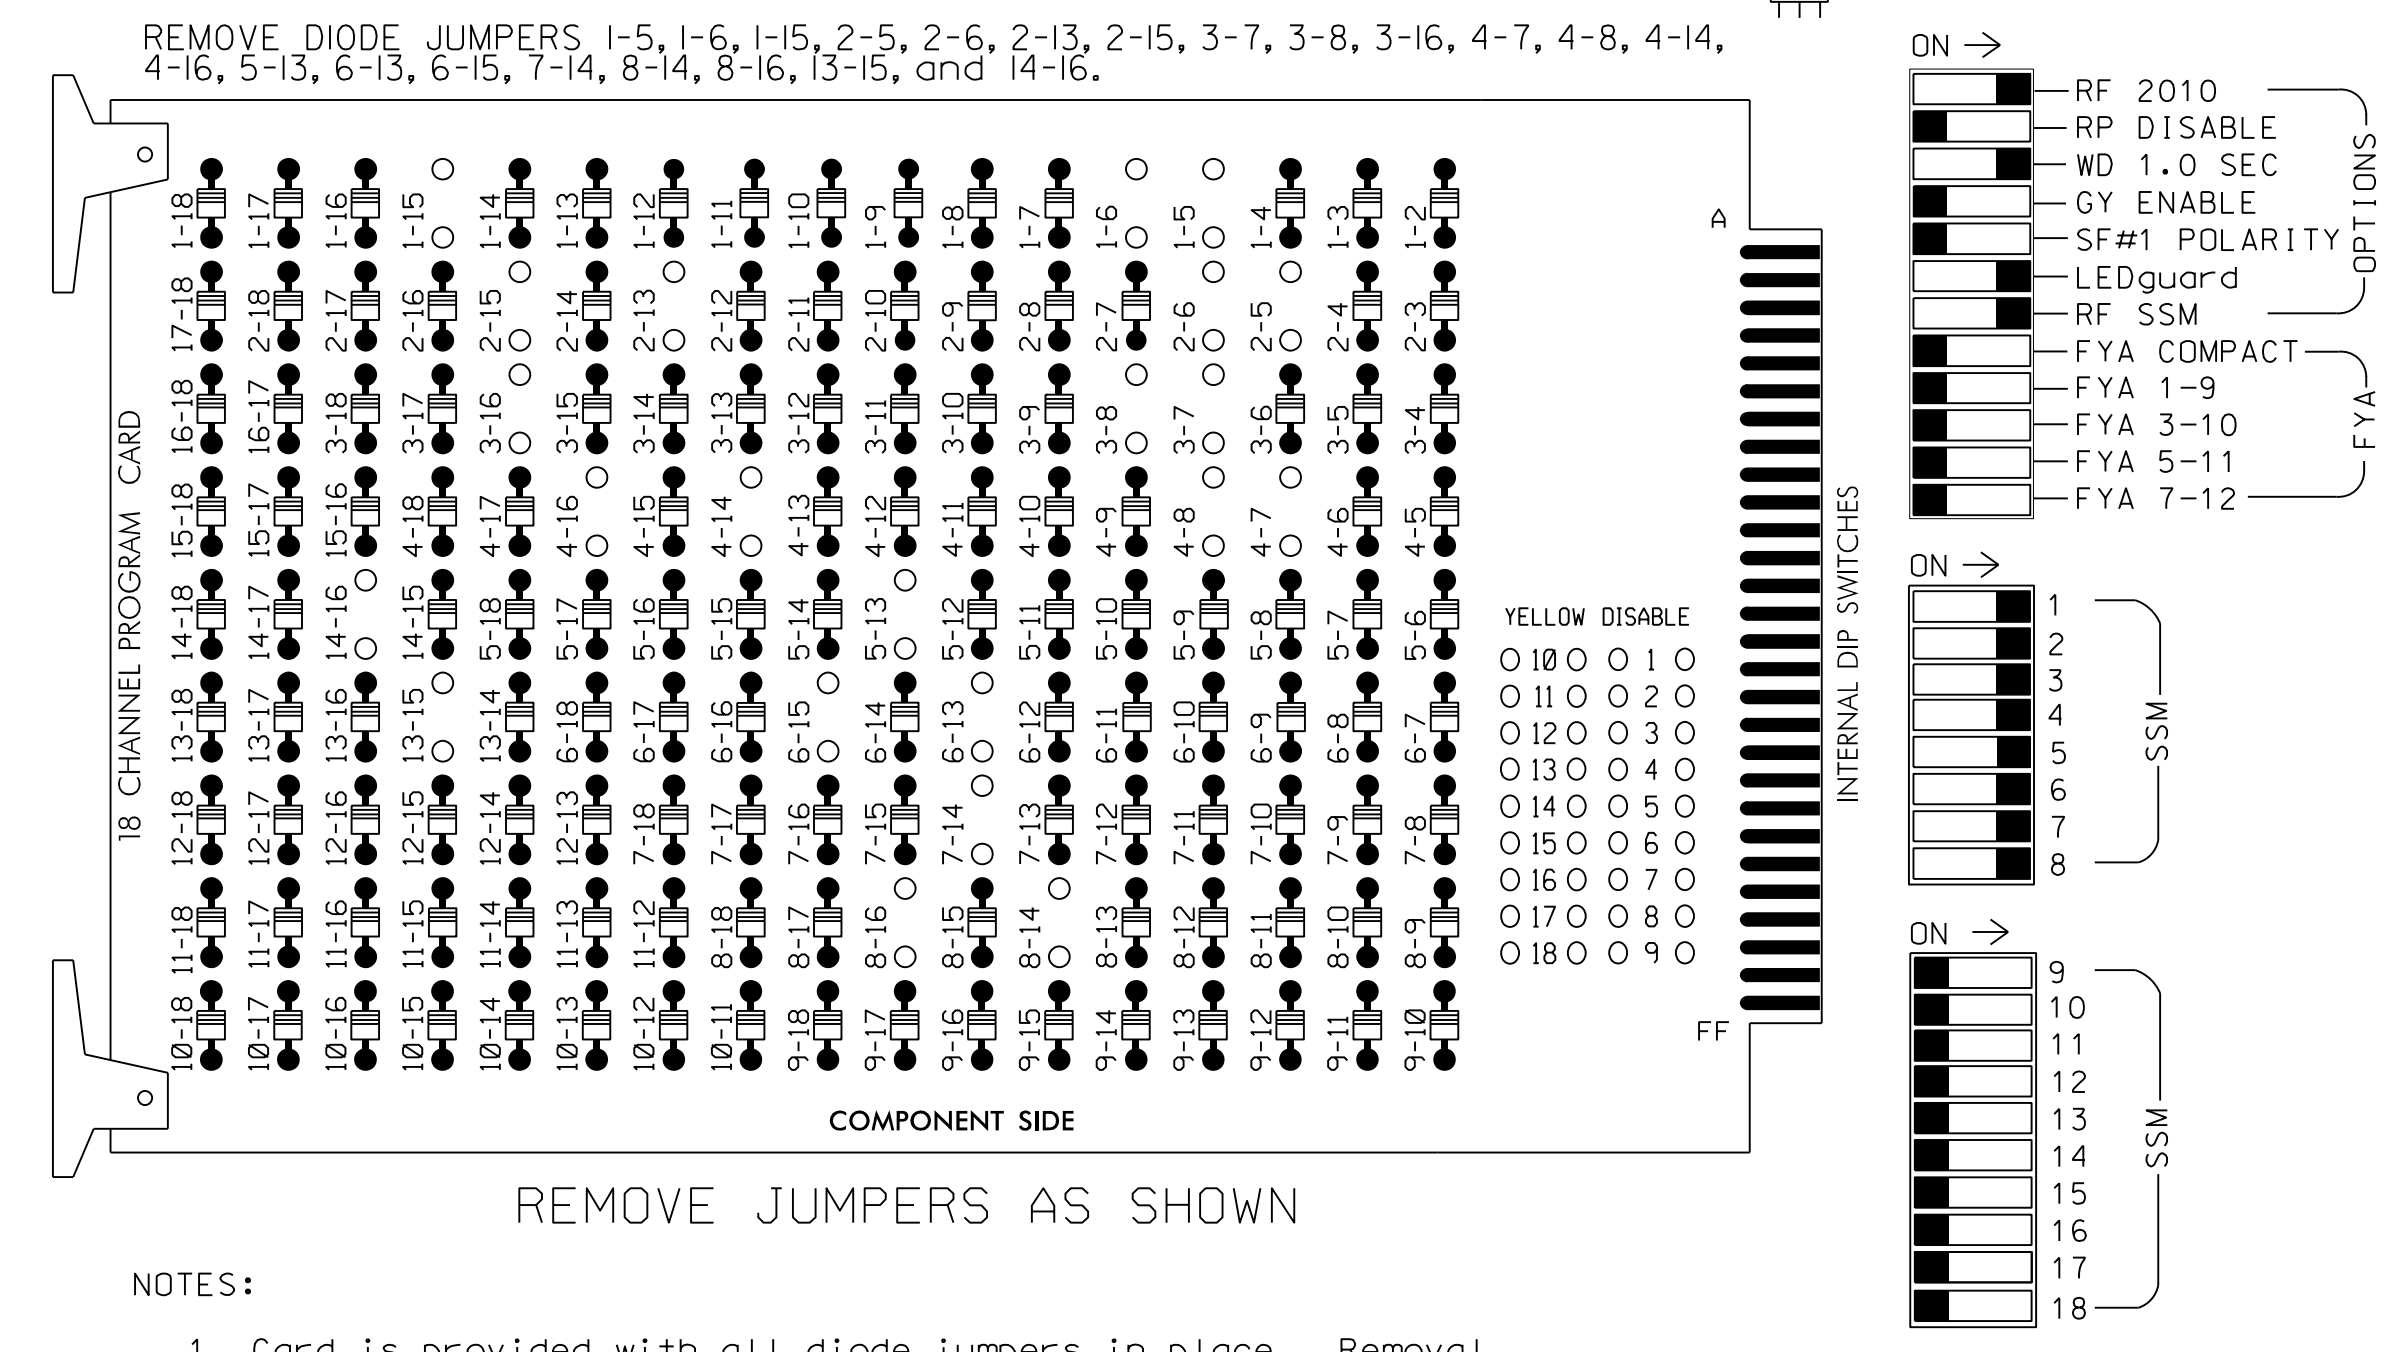

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to Start Up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	11	21,22	P21, P22	31	41,42	P41, P42	51	61,62	P61, P62	71	81,82	P81, P82
RED		128			101			134				107
YELLOW		129			102			135				108
GREEN		130			103			136				109
RED ARROW	125			116			131				122	
YELLOW ARROW	126			117			132				123	
GREEN ARROW	127			118			133				124	
Hand icon			113			104			119			110
Walking person icon			115			106			121			112

NU = Not Used

EQUIPMENT INFORMATION


CONTROLLER.....2070
 CABINET.....332
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,
 S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,
 6PED,7,8,8PED
 OVERLAPS.....NONE

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.


INPUT FILE POSITION LAYOUT

(front view)

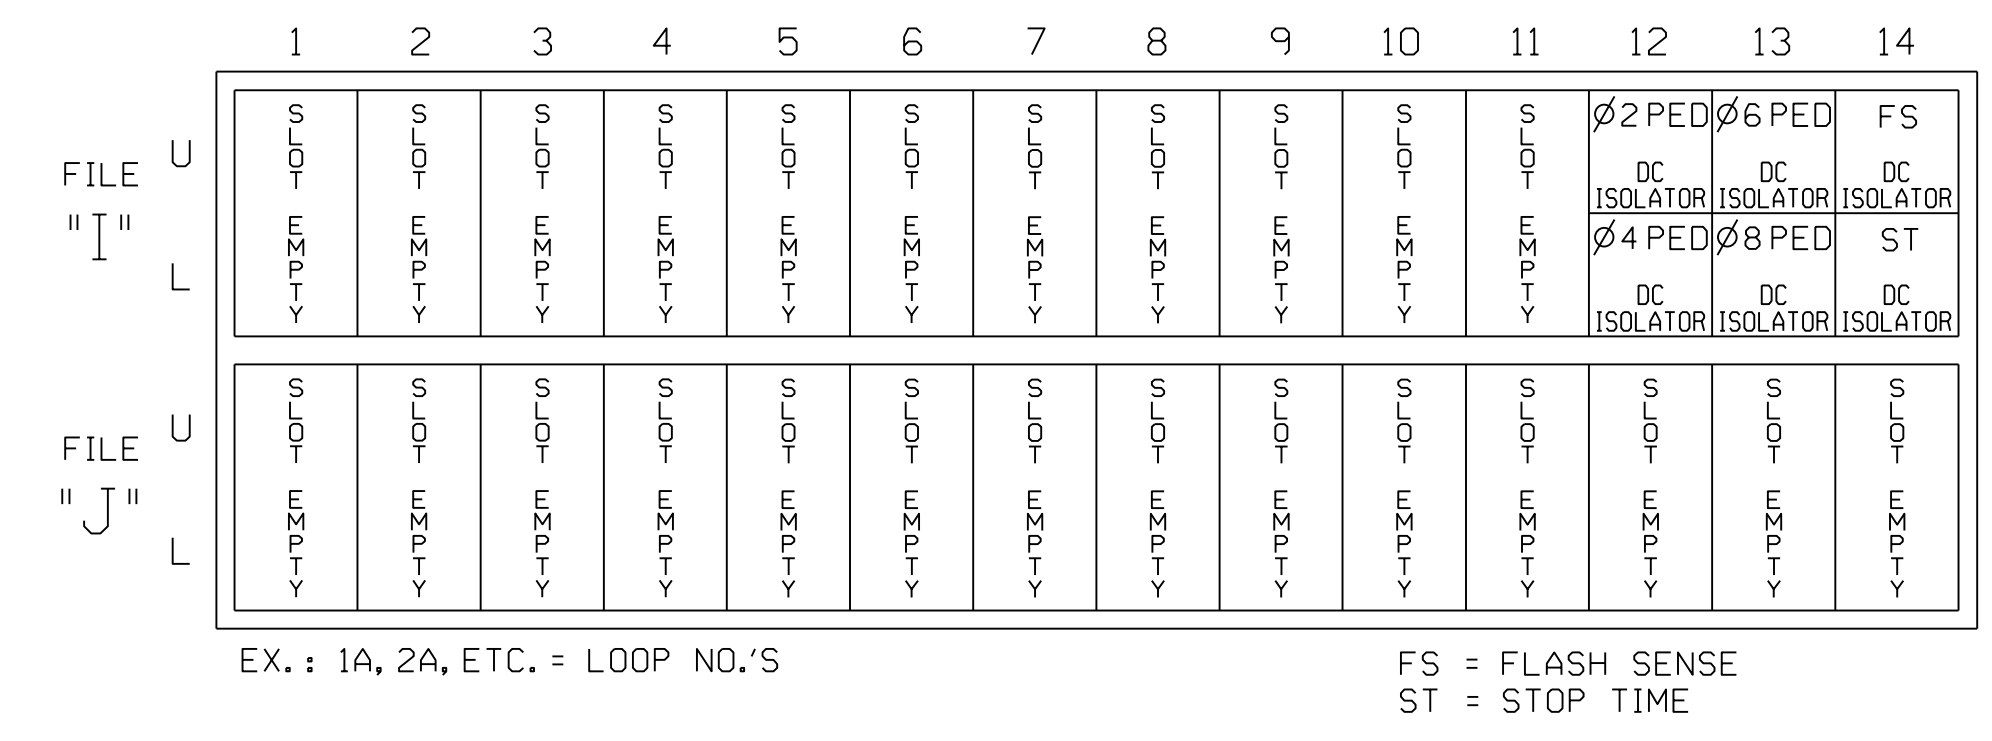

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE
P21,P22	TB8-4,6	I12U	67	PED 2	2 PED
P41,P42	TB8-5,6	I12L	69	PED 4	4 PED
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED
P81,P82	TB8-8,9	I13L	70	PED 8	8 PED

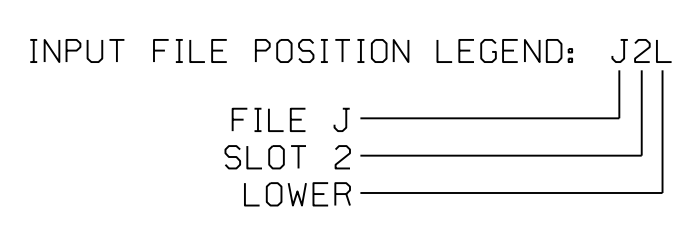

NOTE:
 INSTALL DC ISOLATORS IN INPUT FILE SLOTS 112 AND 113.

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0516T3
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A


Temporary Design 3-TMP Phase III
 Electrical Detail

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p> <p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>US 401 (Raeford Road) at SR 1409 (71st School Rd) / SR 1105 (Graham Rd)</p>		<p>SEAL NORTH CAROLINA PROFESSIONAL ENGINEER LAWRENCE E. OVERN 045933 3/29/2018</p>					
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: M RG WILSON REVIEWED BY:</p>	<p>REVISIONS</p> <table border="1"> <thead> <tr> <th>NO.</th> <th>DATE</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		NO.	DATE	INIT.	DATE	
NO.	DATE	INIT.	DATE						

EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

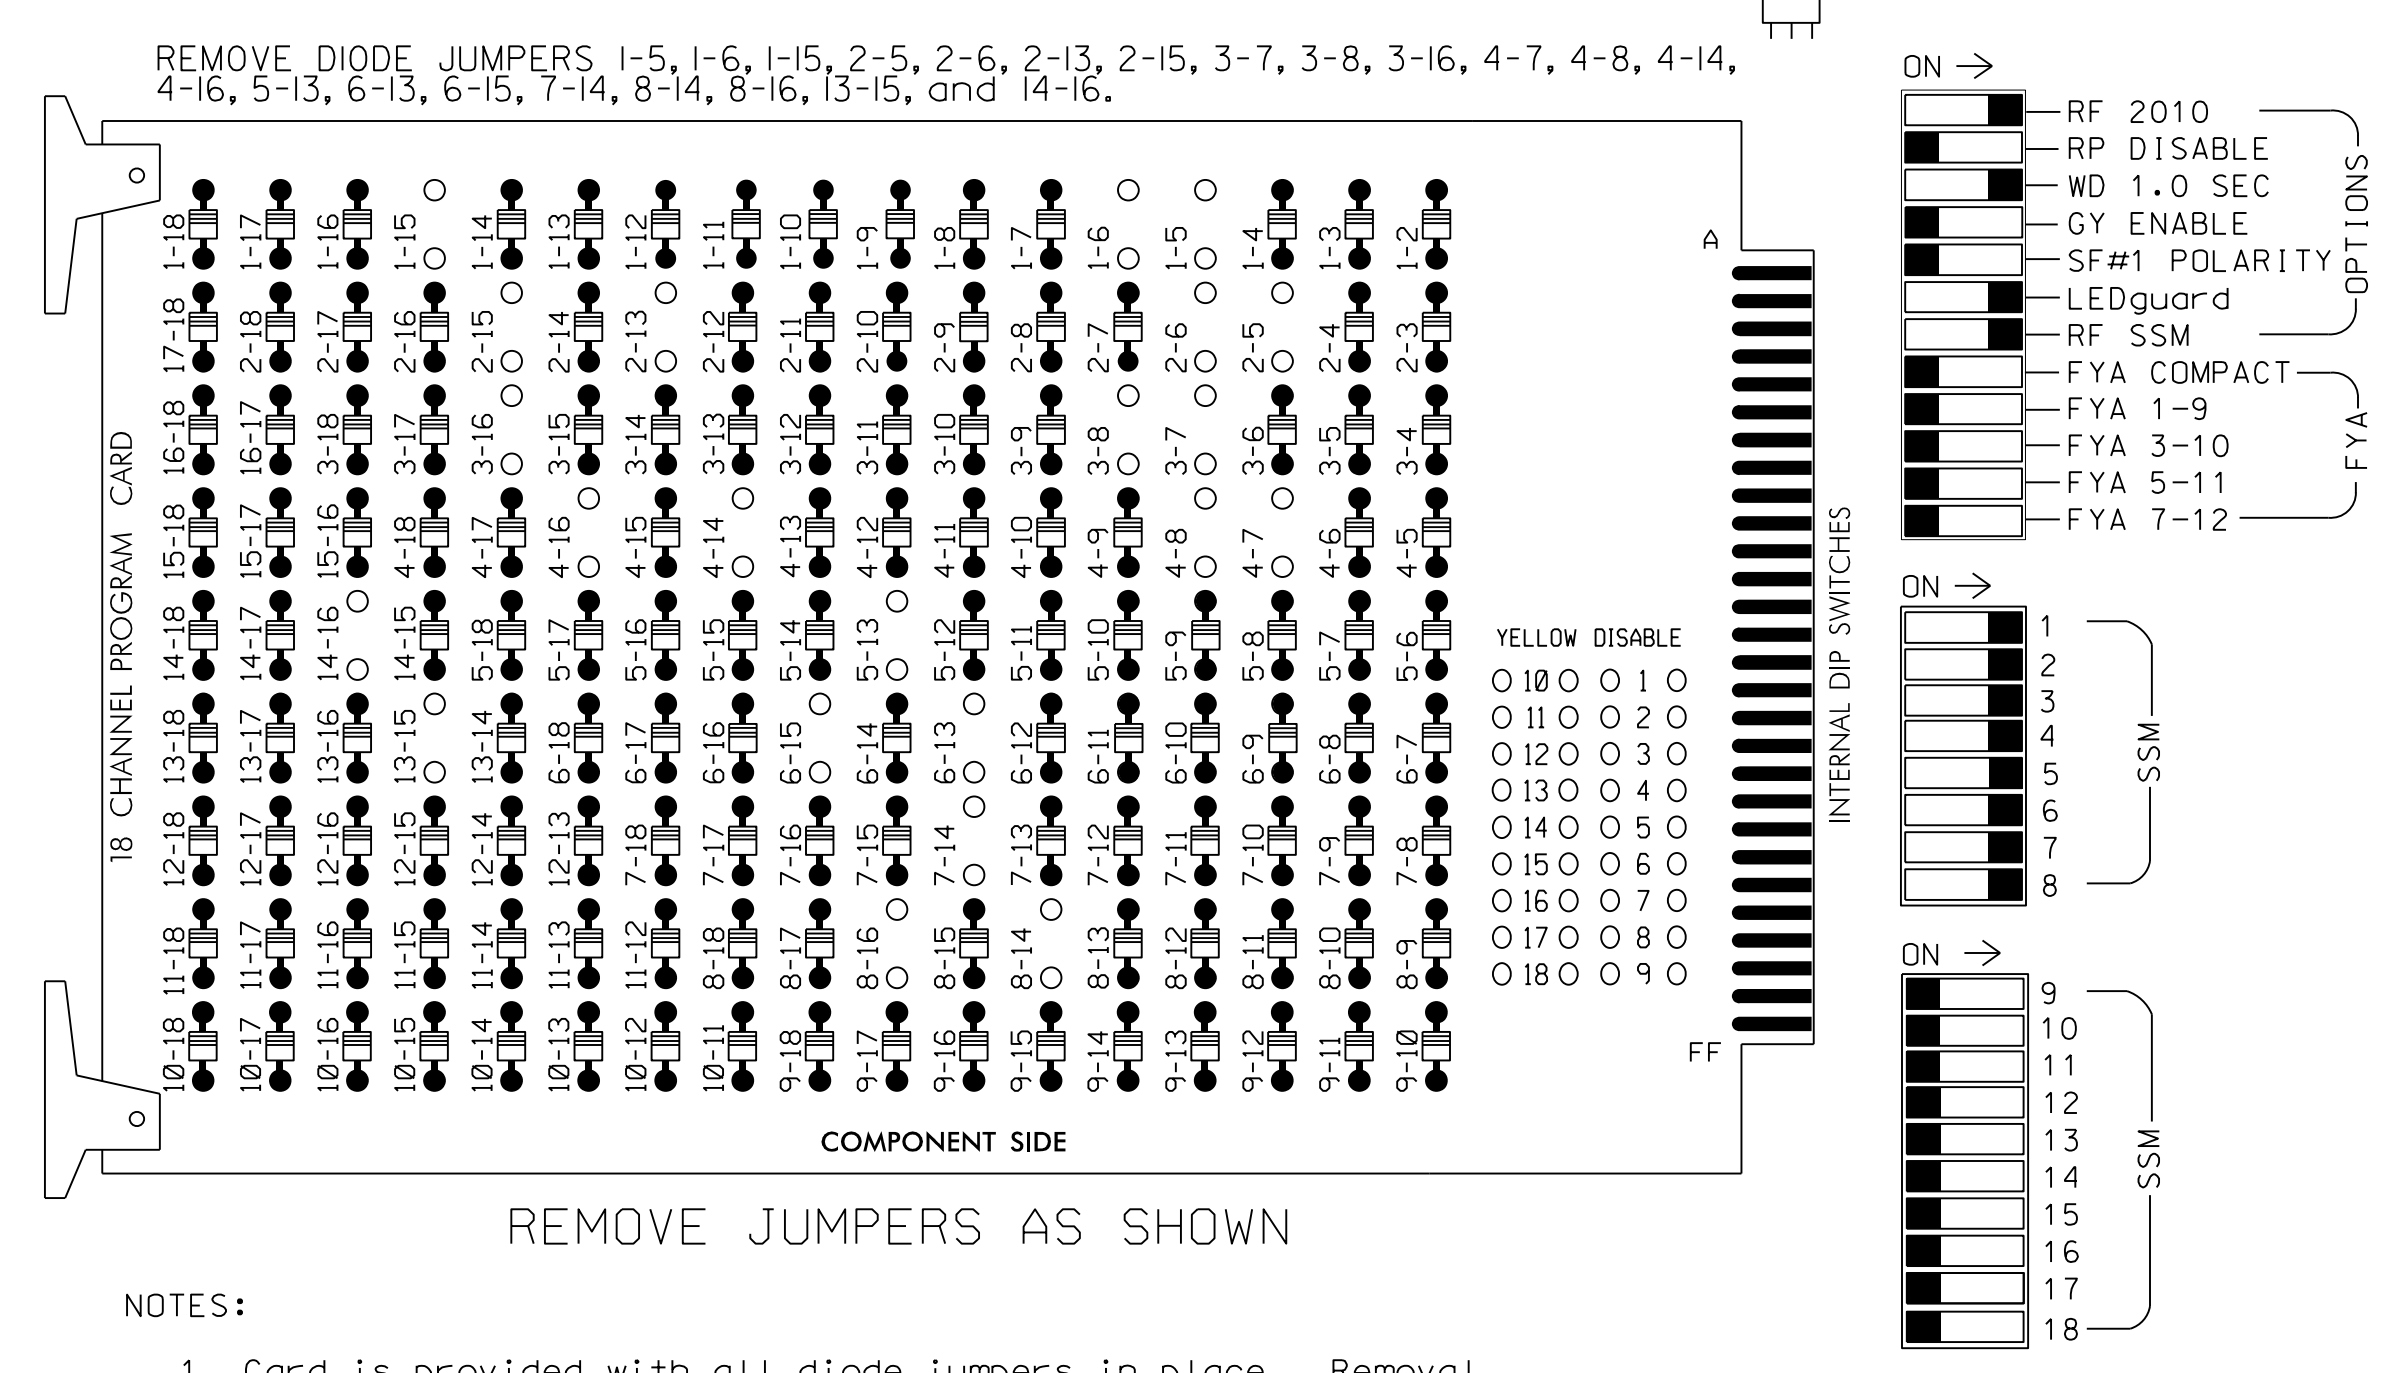

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to Start Up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12			
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16			
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED			
SIGNAL HEAD NO.	11	82	21, 22, 23	P21, P22	31	41, 42	P41, P42	51	42	61, 62	P61, P62	71	62	81, 82	P81, P82
RED		128			101				134			107			
YELLOW		129			102				135			108			
GREEN		130			103				136			109			
RED ARROW	125				116			131			122				
YELLOW ARROW	126	126			117			132	132		123	123			
GREEN ARROW	127	127			118			133	133		124	124			
Hand					113			104			119				110
Walker					115			106			121				112

NU = Not Used

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,6PED,7,8,8PED
 OVERLAPS.....NONE


COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE CONNECTION & PROGRAMMING CHART

INPUT FILE POSITION LAYOUT


(front view)

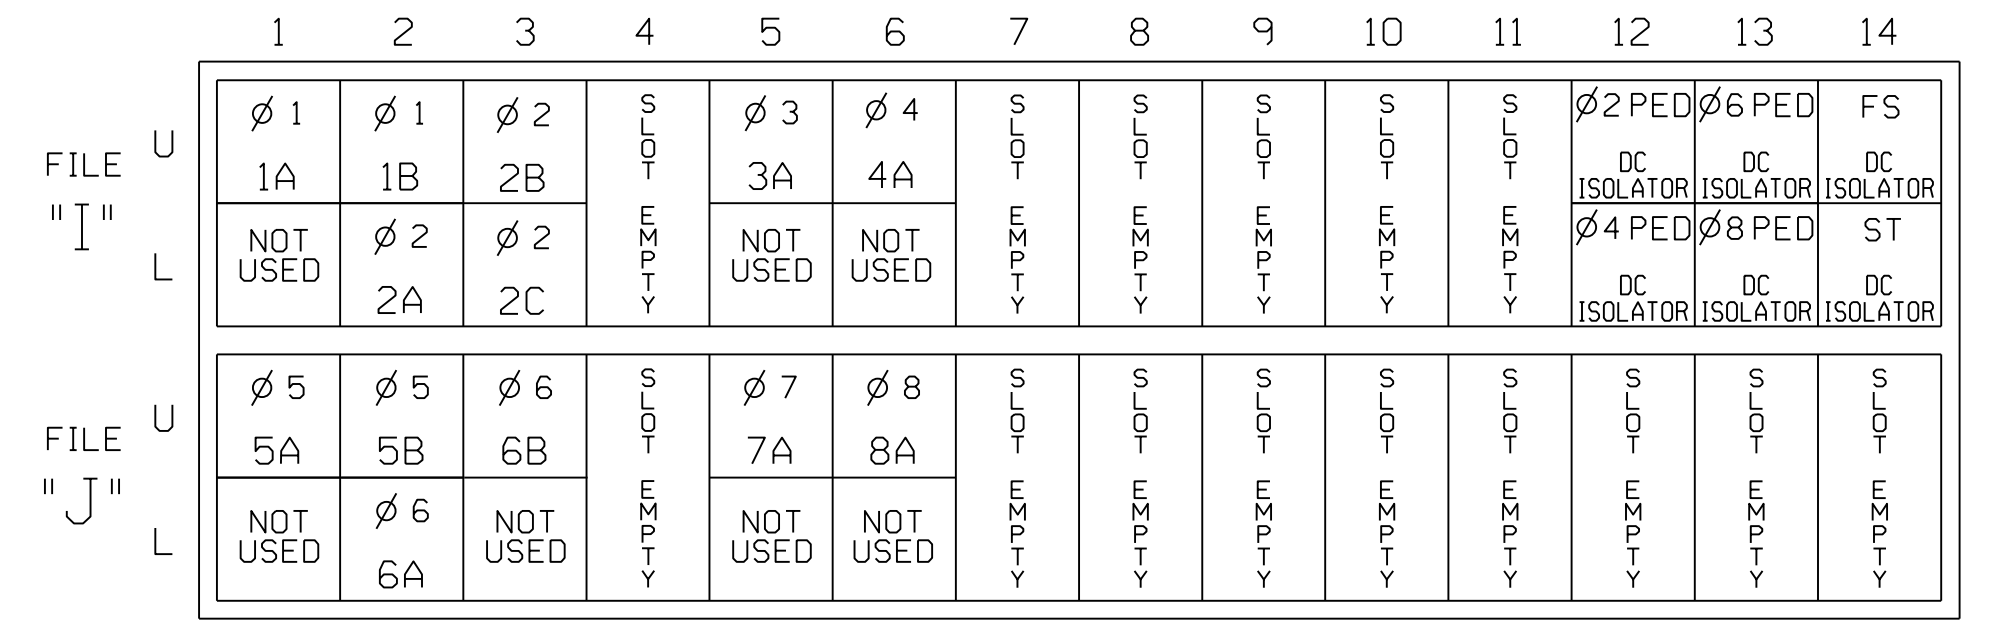

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
1A	TB2-1,2	I1U	56	1	1	YES				S
1B	TB2-5,6	I2U	39	2	1	YES		15		S
2A	TB2-7,8	I2L	43	12	2	YES			X	N
2B	TB2-9,10	I3U	63	32	2	YES			X	N
2C	TB2-11,12	I3L	76	42	2	YES			X	N
3A	TB4-5,6	I5U	58	3	3	YES		3		S
4A	TB4-9,10	I6U	41	4	4	YES				S
5A	TB3-1,2	J1U	55	5	5	YES				S
5B	TB3-5,6	J2U	40	6	5	YES		15		S
6A	TB3-7,8	J2L	44	16	6	YES			X	N
6B	TB3-9,10	J3U	64	36	6	YES			X	N
7A	TB5-5,6	J5U	57	7	7	YES		3		S
8A	TB5-9,10	J6U	42	8	8	YES				S

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE
PED PUSH BUTTONS					
P21,P22	TB8-4,6	I12U	67	PED 2	2 PED
P41,P42	TB8-5,6	I12L	69	PED 4	4 PED
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED
P81,P82	TB8-8,9	I13L	70	PED 8	8 PED

NOTE:
 INSTALL DC ISOLATORS IN INPUT FILE SLOTS 112 AND 113.

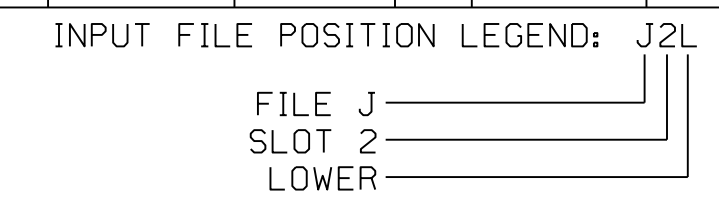

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0516
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Final Design
 Electrical Detail

Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared in the Offices of:

750 N. Greenfield Pkwy, Garner, NC 27529

US 401 (Raeford Road) at SR 1409 (71st School Road) / SR 1105 (Graham Road)

Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn

PREPARED BY: M RG WILSON REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL

3/29/2018

SIG. INVENTORY NO. 06-0516

PHASING DIAGRAM


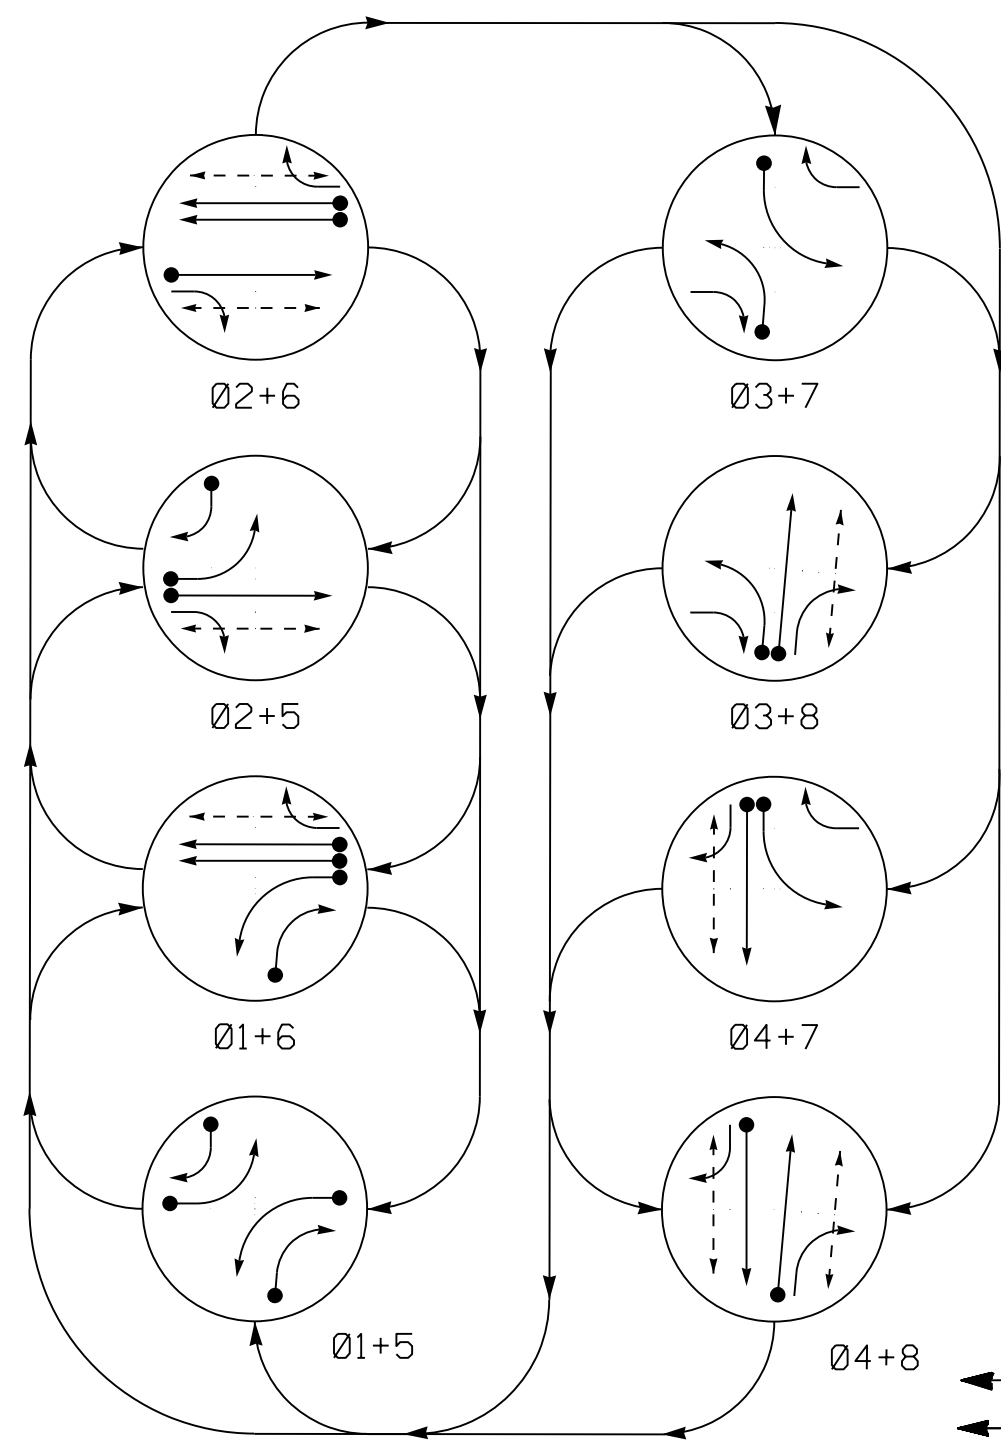


TABLE OF OPERATION

SIGNAL FACE	PHASE								FLASH	
	Ø1+5	Ø2+6	Ø3+7	Ø4+8	Ø1+6	Ø2+5	Ø3+8	Ø4+7		
11	←	←	←	←	←	←	←	←	←	
21	R	R	G	G	R	R	R	R	Y	
22	R	R	G	G	R	R	R	R	Y	
31	←	←	←	←	←	←	←	←	←	
41	R	R	R	R	R	R	G	G	R	
42	R	R	R	R	R	R	G	G	R	
51	←	←	←	←	←	←	←	←	←	
61	R	G	R	G	R	R	R	R	Y	
62	R	G	R	G	R	R	R	R	Y	
71	←	←	←	←	←	←	←	←	←	
81	R	R	R	R	R	R	G	G	R	
82	R	R	R	R	R	R	G	G	R	
P21,P22	DW	DW	W	W	DW	DW	DW	DRK		
P41,P42	DW	DW	DW	DW	DW	DW	W	DRK		
P61,P62	DW	W	DW	W	DW	DW	DW	DRK		
P81,P82	DW	DW	DW	DW	W	DW	W	DRK		

PHASING DIAGRAM DETECTION LEGEND
 ● DETECTED MOVEMENT
 ← UNDETECTED MOVEMENT (OVERLAP)
 - - - UNSIGNALIZED MOVEMENT
 - - - PEDESTRIAN MOVEMENT

SIGNAL FACE I.D.

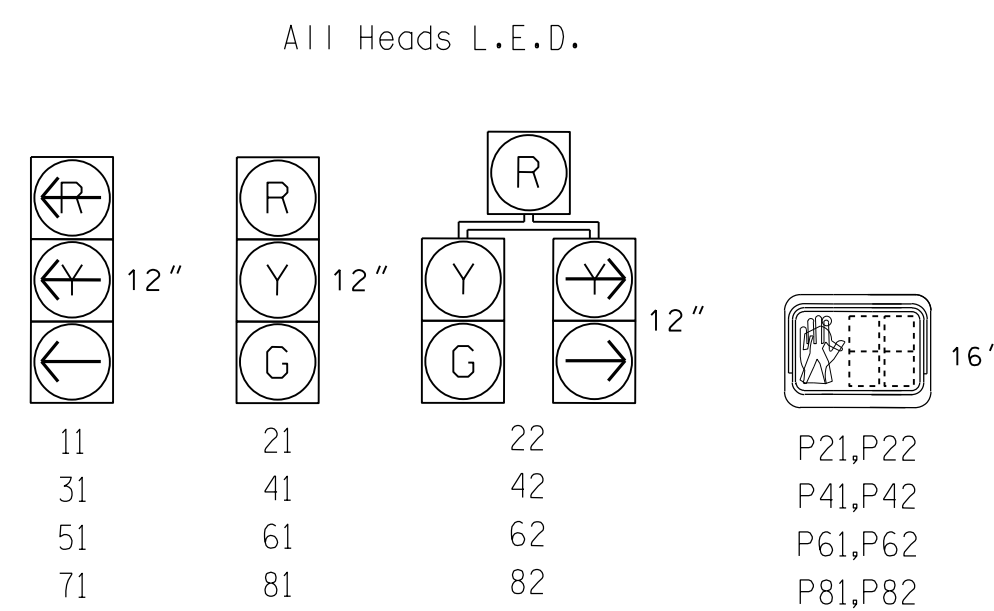


ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	LOOP	NEW CARD
1A	6X40	0	*	-	1	Yes	-	-	-	S	-	X
1B	6X40	0	*	-	1	Yes	-	15	-	S	-	X
2A	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2B	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
3A	6X40	0	*	-	3	Yes	-	-	-	S	-	X
4A	6X40	0	*	-	4	Yes	-	-	-	S	-	X
5A	6X40	0	*	-	5	Yes	-	-	-	S	-	X
5B	6X40	0	*	-	5	Yes	-	15	-	S	-	X
6A	6X6	300	*	-	6	Yes	-	-	-	N	-	X
6B	6X6	300	*	-	6	Yes	-	-	-	N	-	X
6C	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
6D	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
7A	6X40	0	*	-	7	Yes	-	-	-	S	-	X
8A	6X40	0	*	-	8	Yes	-	-	-	S	-	X

*Video Detection Area
 Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

8 Phase Fully Actuated Fayetteville Signal System NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Set all detector units to presence mode.
- Locate new cabinet foundation so as not to obstruct sight distance of vehicles turning right on red. Relocate existing cabinet and controller onto new foundation.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Pedestrian pedestals are conceptual and are shown for reference only. See 2018 NCDOT Roadway Standard Drawings 1705.04 sheets 1-3 for push button details.
- Field adjust temporary poles as needed.

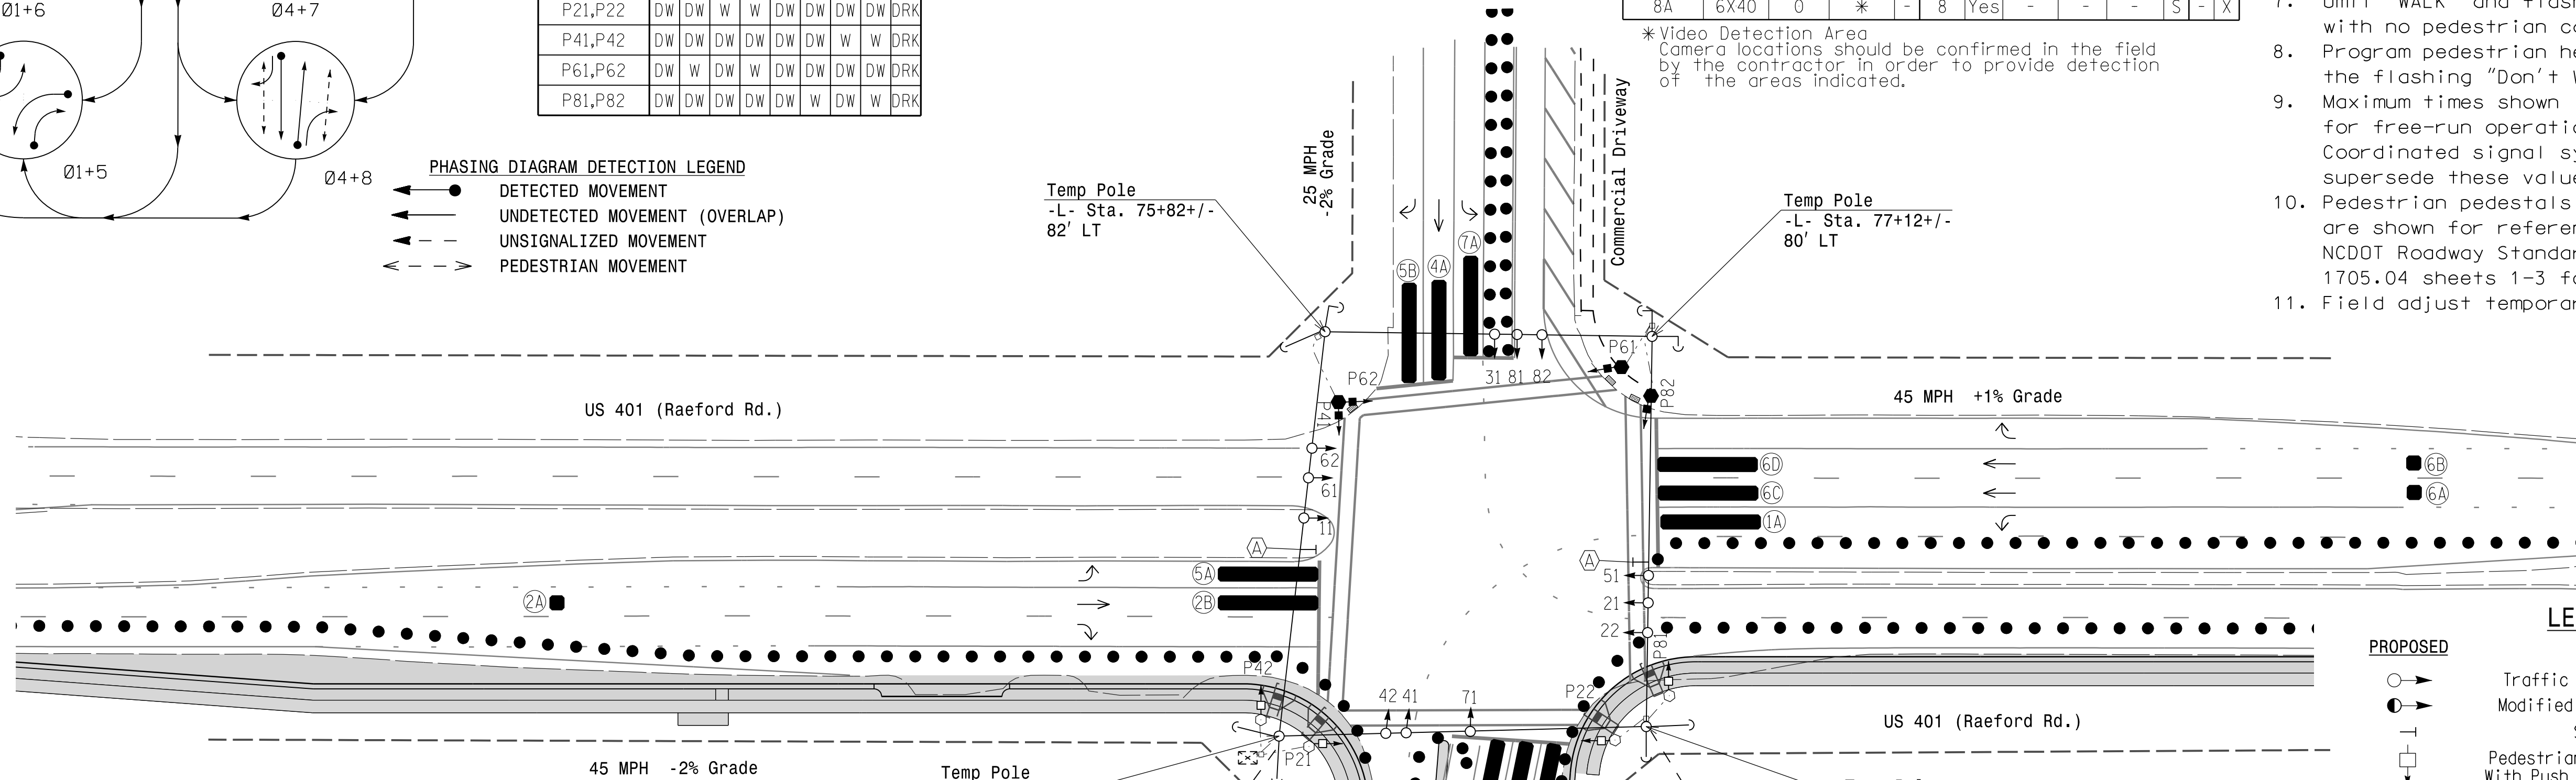

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	7	-	7	-	7	-	7
Ped Clear	-	23	-	31	-	25	-	28
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max I *	30	90	25	25	30	90	25	25
Yellow	3.0	4.7	3.0	3.3	3.0	4.4	3.0	3.9
Red Clear	3.7	1.9	3.5	3.4	3.4	1.9	3.6	2.8
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds / Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	30	-	-	-	30	-	-
Minimum Gap	-	3.0	-	-	-	3.0	-	-
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

PROPOSED	EXISTING
○ → Traffic Signal Head	● → Traffic Signal Head
○ → Modified Signal Head	N/A
○ → Sign	N/A
○ → Pedestrian Signal Head With Push Button & Sign	○ → Pedestrian Signal Head
○ → Signal Pole with Guy	○ → Signal Pole with Guy
○ → Signal Pole with Sidewalk Guy	○ → Signal Pole with Sidewalk Guy
○ → Inductive Loop Detector	○ → Inductive Loop Detector
○ → Controller & Cabinet	○ → Controller & Cabinet
○ → Junction Box	○ → Junction Box
○ → 2-in Underground Conduit	○ → 2-in Underground Conduit
N/A → Right of Way	N/A
→ Directional Arrow	→ Directional Arrow
▬ Video Detection Area	N/A
○ Type II Signal Pedestal	○ Type II Signal Pedestal
▬ Construction Zone	N/A
● Drums	N/A
○ "U-TURN YIELD TO RIGHT TURN" Sign (R10-16)	○ "U-TURN YIELD TO RIGHT TURN" Sign (R10-16)

Signal Upgrade Temporary Signal Design 1 - TMP Phase I

Stantec
 Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared for the Offices of:
 Transportation Mobility and Safety Division
 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
 Signal Design Section
 750 N. Greenfield Pkwy, Garner, NC 27526

US 401 (Raeford Road) at SR 1104 (Strickland Bridge Road)
 Division 6 Cumberland County Fayetteville
 PLAN DATE: March 2018 REVIEWED BY: E D Harris
 PREPARED BY: A D Smith REVIEWED BY: B L Watson


REVISIONS	INIT.	DATE

Seal of the Professional Engineer
 SEAL 29449
 JEFFREY L. WATSON
 3/29/2018
 SIG. INVENTORY NO. 06-059611

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

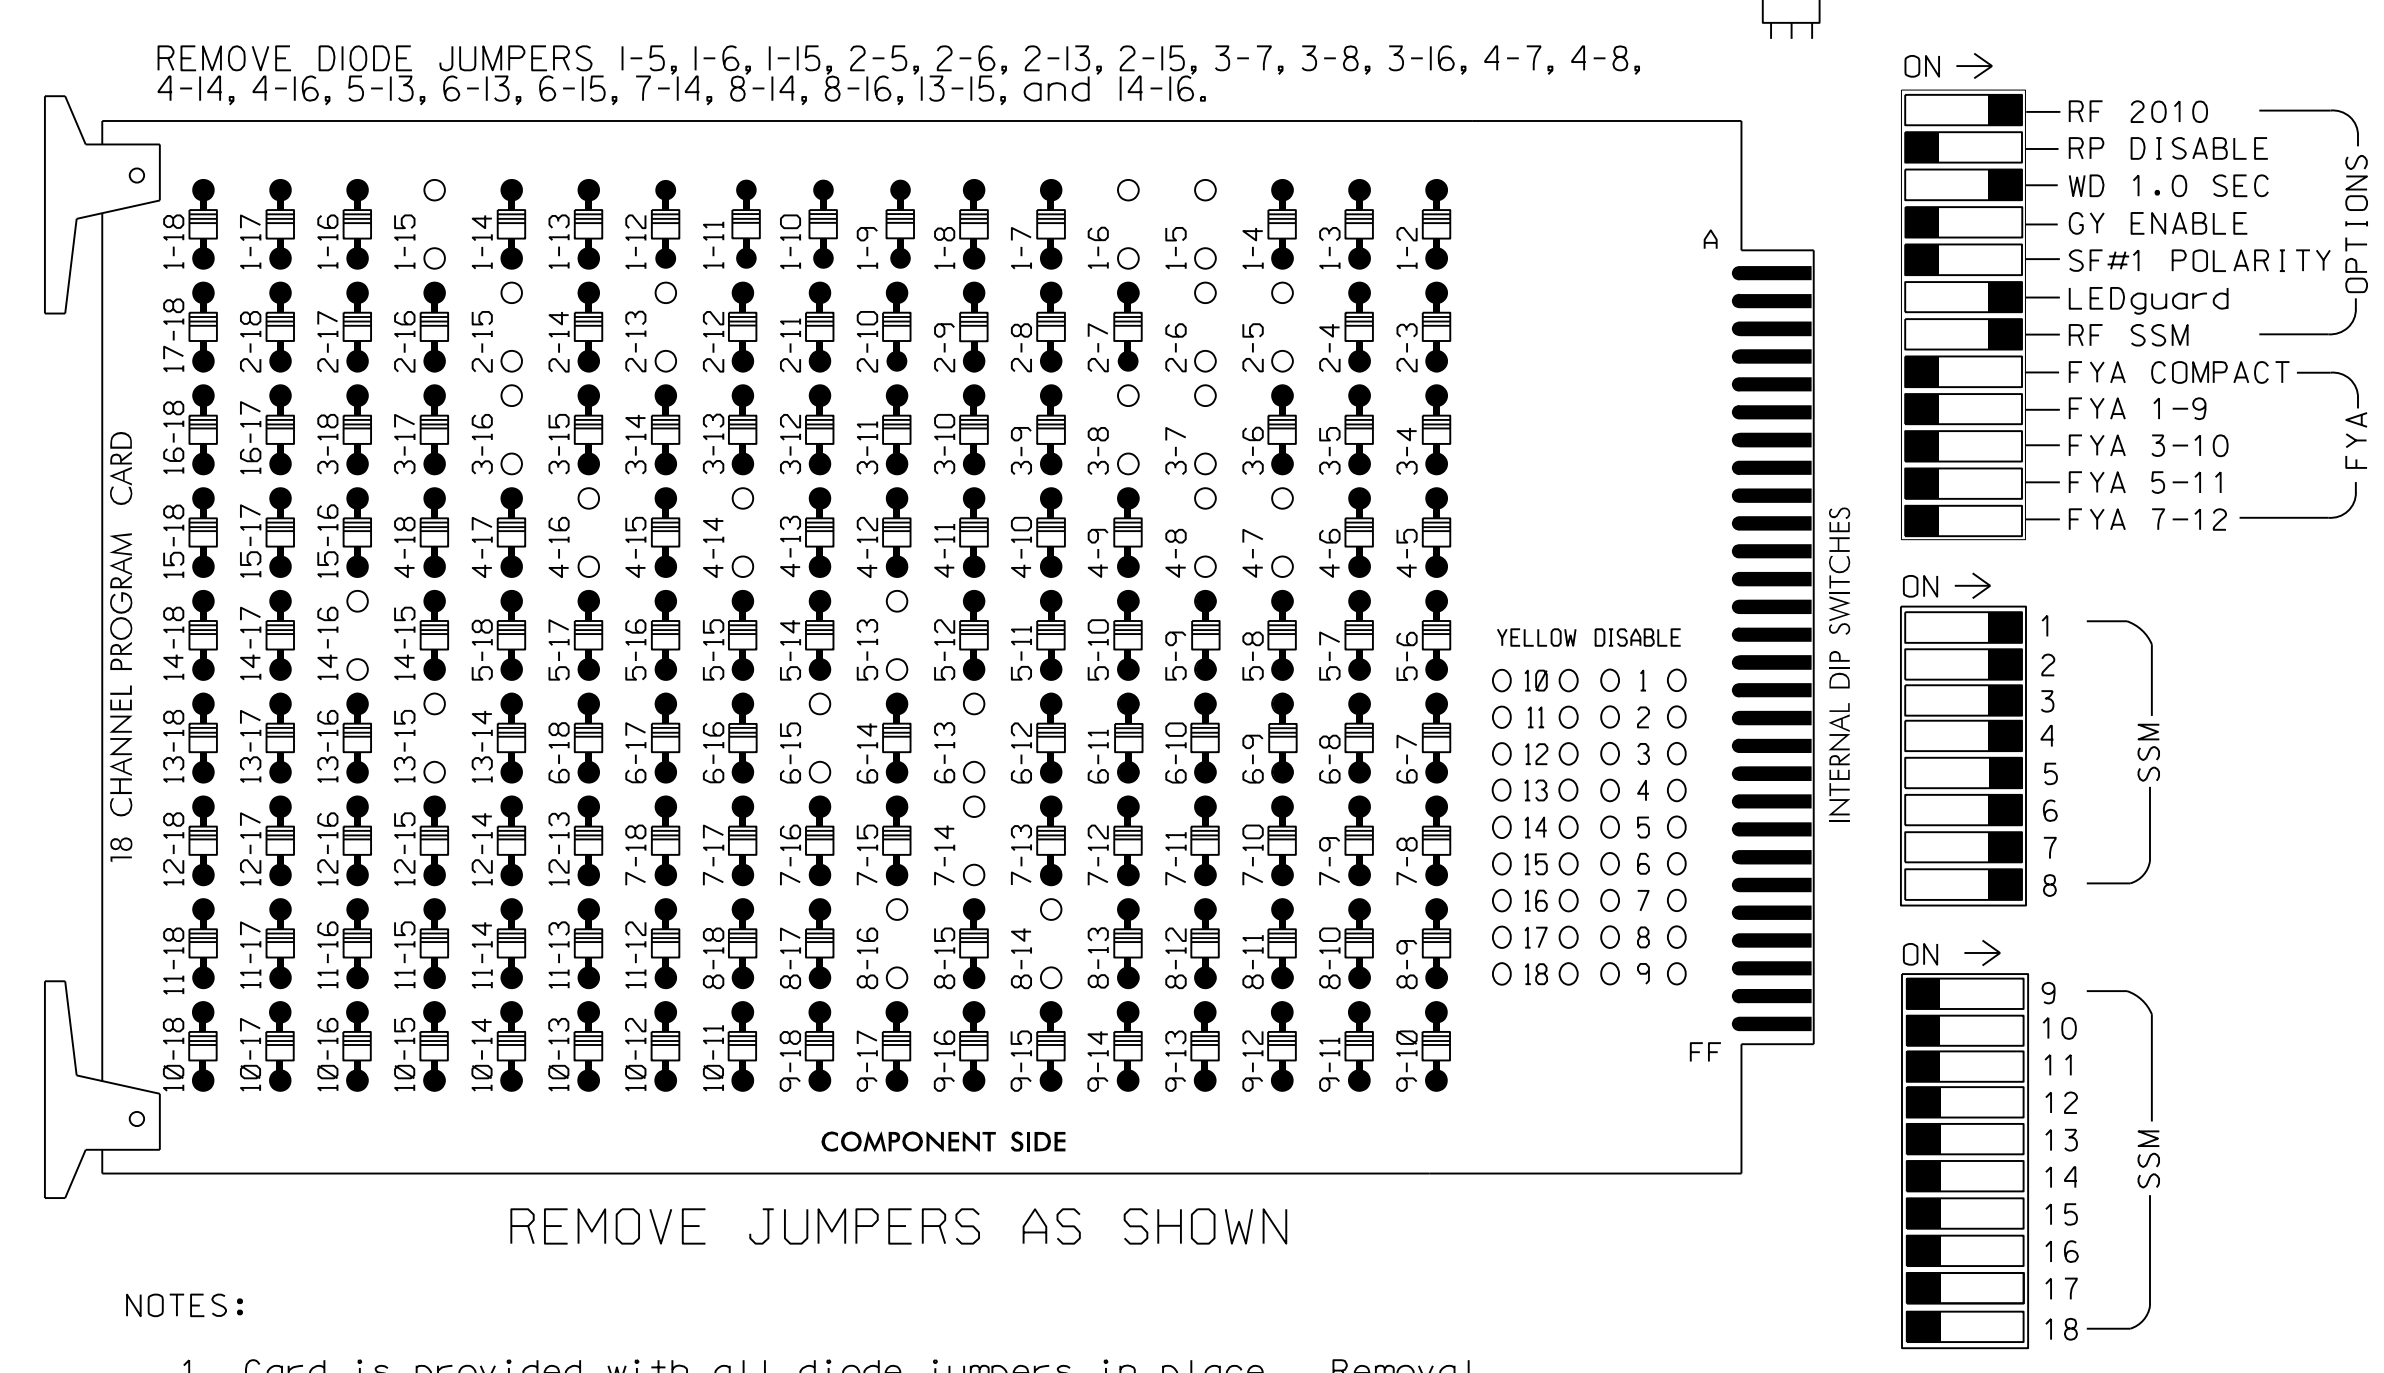

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to Start Up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,
 S7,S8,S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,
 6,6PED,7,8,8PED

OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....NOT USED

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11	82	21,22	P21, P22	31	22	41,42	P41, P42	51	42	61,62	P61, P62	71	62	81,82	P81, P82	NU	NU	NU
RED			128			101				134					107				
YELLOW			129			102				135					108				
GREEN			130			103				136					109				
RED ARROW	125				116				131				122						
YELLOW ARROW	126	126			117	117			132	132			123	123					
GREEN ARROW	127	127			118	118			133	133			124	124					
Hand icon					113				104				119						110
Walking person icon					115				106				121						112


NU = Not Used

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE POSITION LAYOUT


(front view)

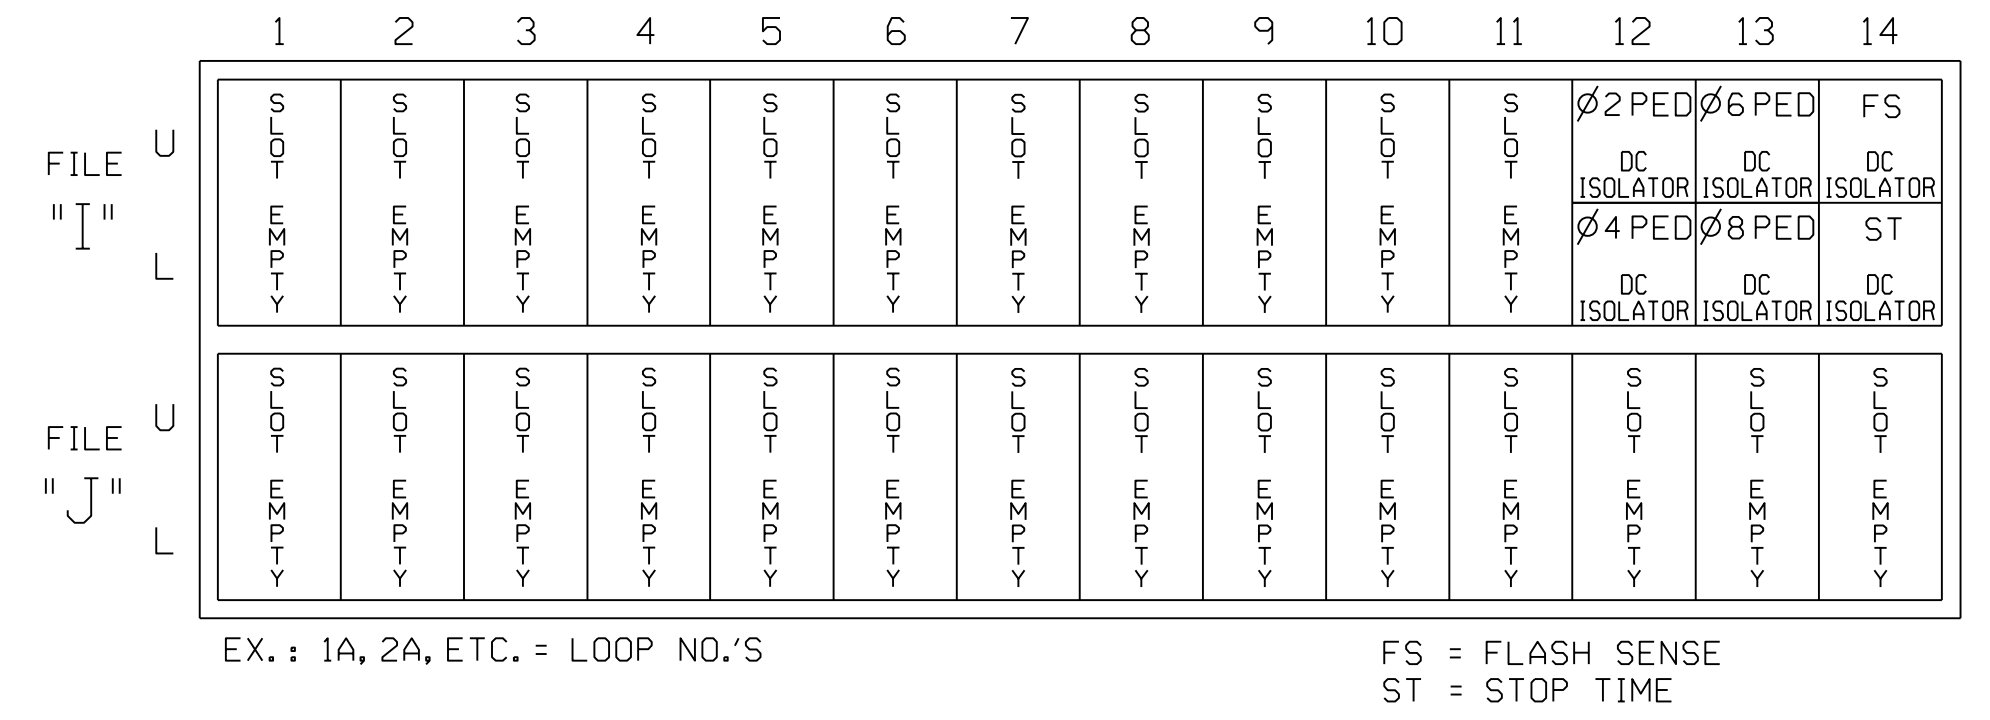

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE
PED PUSH BUTTONS					
P21,P22	TB8-4,6	I12U	67	PED 2	2 PED
P41,P42	TB8-5,6	I12L	69	PED 4	4 PED
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED
P81,P82	TB8-8,9	I13L	70	PED 8	8 PED

NOTE:
INSTALL DC ISOLATORS IN INPUT FILE SLOTS 112 AND 113.

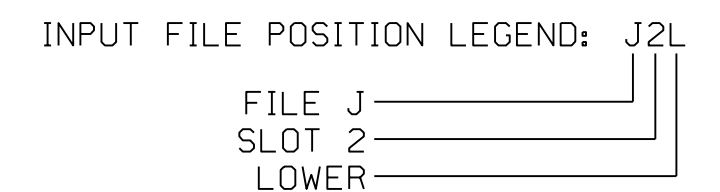

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0596T1
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 1 - TMP Phase I Electrical Detail

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p>	<p>US 401 (Raeford Road) at SR 1104 (Strickland Bridge Road)</p> <p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: M RG WILSON REVIEWED BY:</p>	<p>SEAL</p> <p>NORTH CAROLINA PROFESSIONAL ENGINEER</p> <p>LAURENCE E. OVERN</p> <p>3/29/2018</p>							
	<p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>REVISIONS</p> <table border="1"> <tr> <th>NO.</th> <th>DATE</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	NO.	DATE	INIT.	DATE				
NO.	DATE	INIT.	DATE							

PHASING DIAGRAM


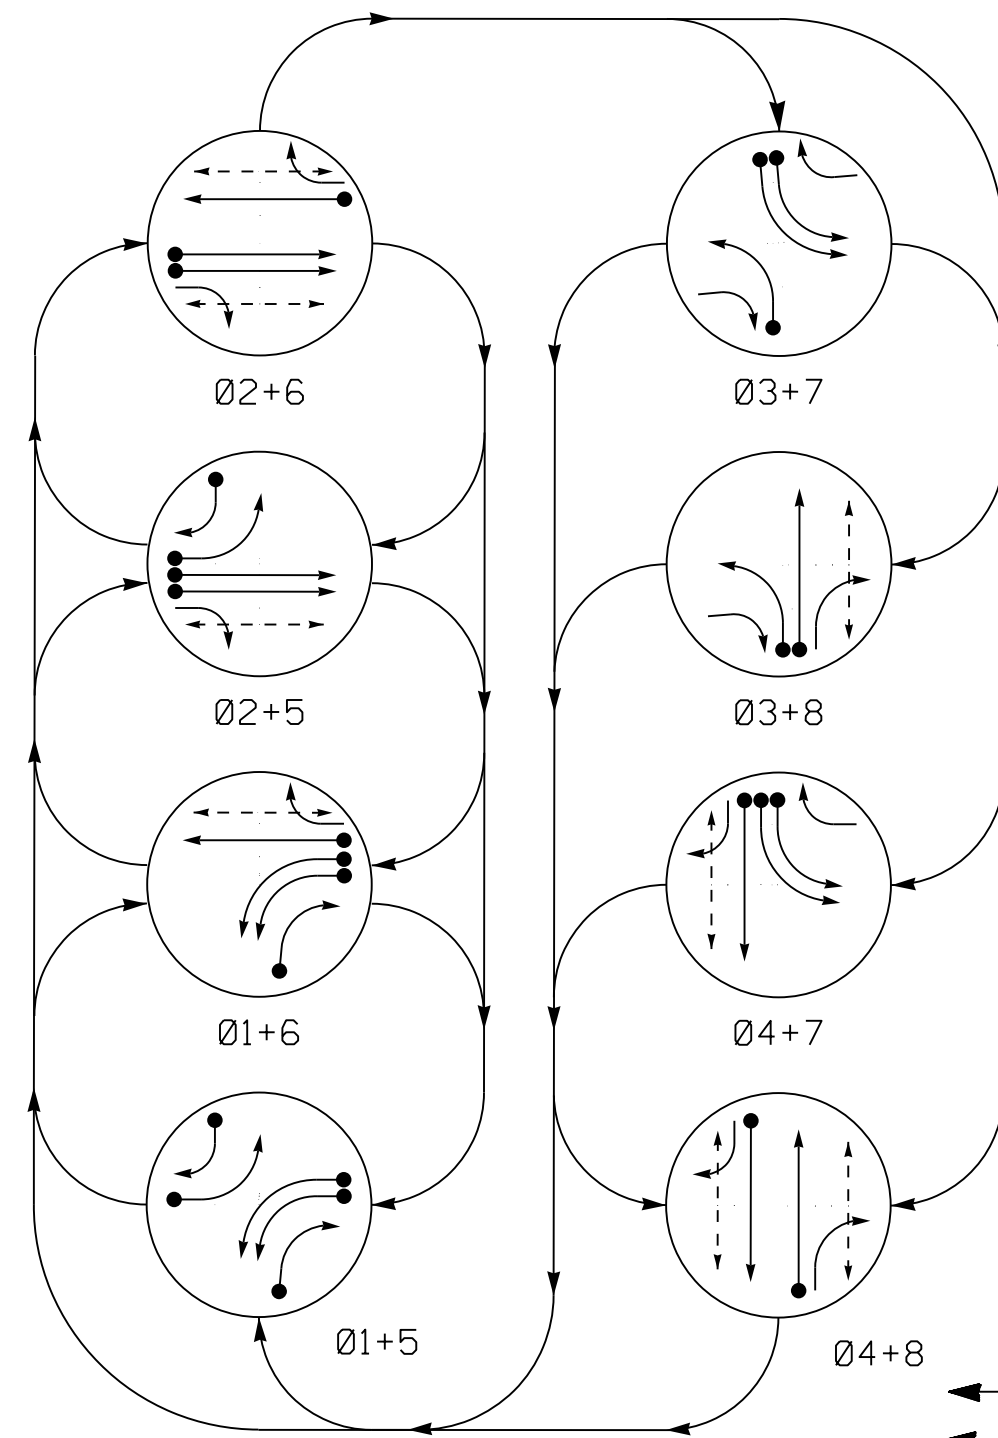


TABLE OF OPERATION

SIGNAL FACE	PHASE								FLASH	
	01+5	01+6	02+5	02+6	03+7	03+8	04+7	04+8		
11,12	←	←	←	←	←	←	←	←	←	
21	R	R	G	G	R	R	R	R	Y	
22	R	R	G	G	R	R	R	R	Y	
31	←	←	←	←	←	←	←	←	←	
41	R	R	R	R	R	R	G	G	R	
42	R	R	R	R	R	R	G	G	R	
51	←	←	←	←	←	←	←	←	←	
61	R	G	R	G	R	R	R	R	Y	
62	R	G	R	G	R	R	R	R	Y	
71,72	←	←	←	←	←	←	←	←	←	
81	R	R	R	R	R	G	R	G	R	
82	R	R	R	R	R	G	R	G	R	
P21,P22	DW	DW	W	W	DW	DW	DW	DRK		
P41,P42	DW	DW	DW	DW	DW	W	W	DRK		
P61,P62	DW	W	DW	DW	DW	DW	DW	DRK		
P81,P82	DW	DW	DW	DW	W	DW	W	DRK		

PHASING DIAGRAM DETECTION LEGEND
 ● DETECTED MOVEMENT
 ○ UNDETECTED MOVEMENT (OVERLAP)
 - UNSIGNALIZED MOVEMENT
 - PEDESTRIAN MOVEMENT

SIGNAL FACE I.D.

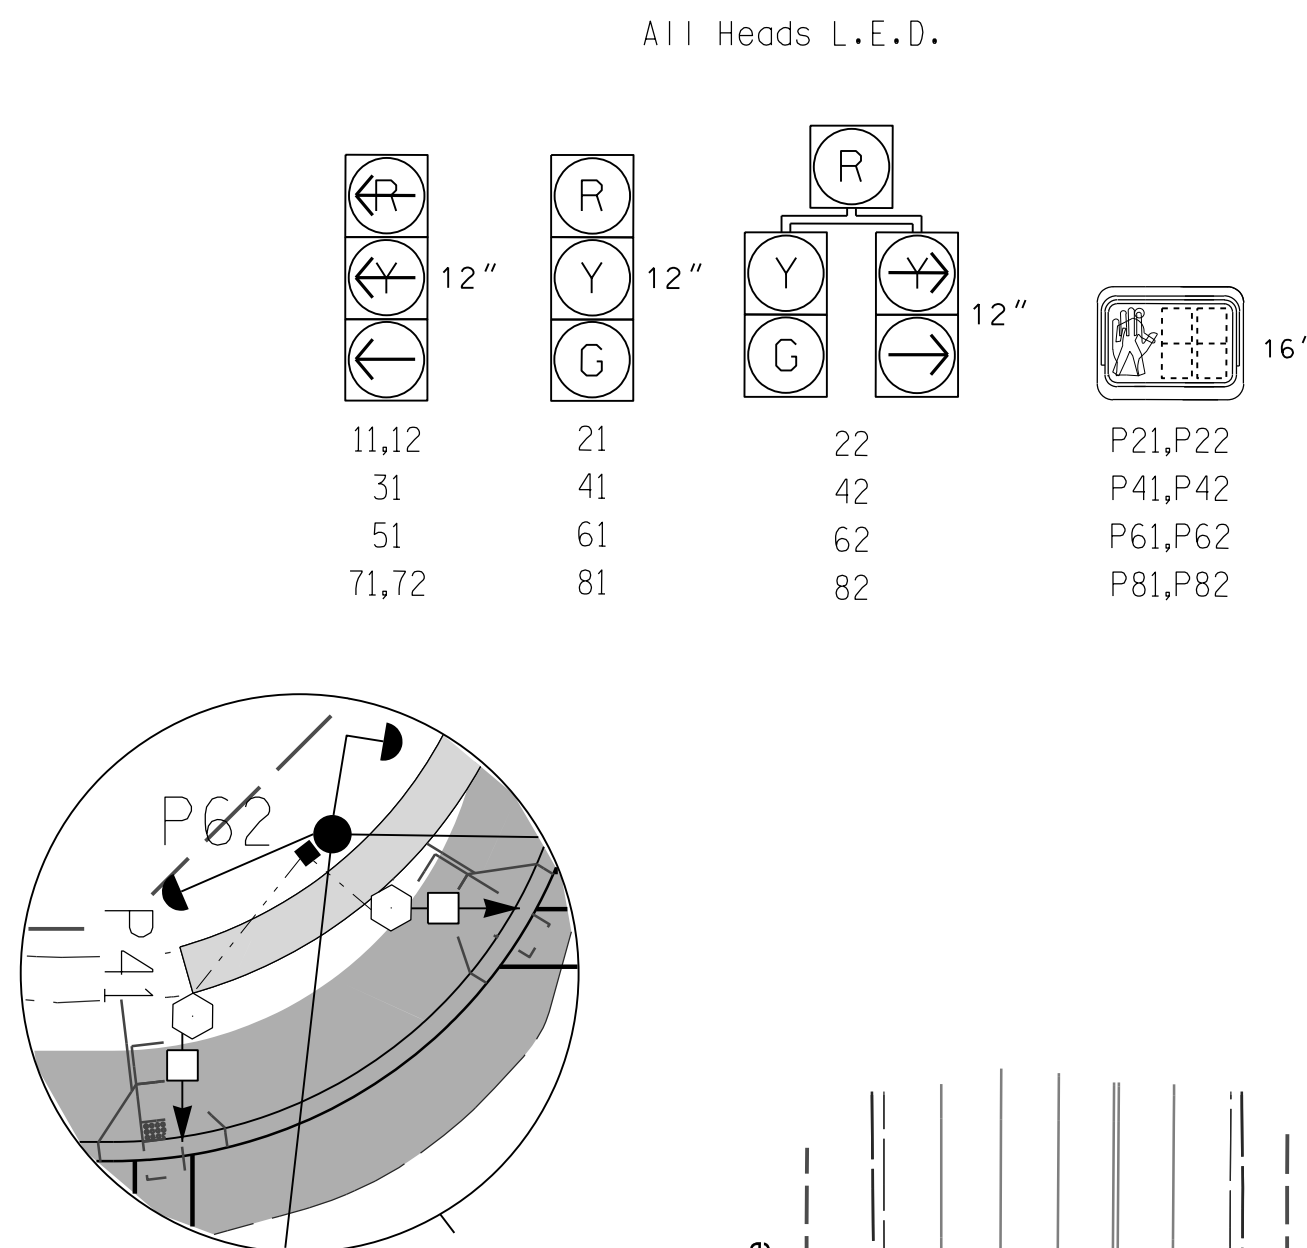

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING						
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP
1A	6X40	0	*	-	1	Yes	-	-	-	S	-
1B	6X40	0	*	-	1	Yes	-	-	-	S	-
1C	6X40	0	*	-	1	Yes	-	15	-	S	-
2A	6X6	300	*	-	2	Yes	-	-	-	N	-
2B	6X6	300	*	-	2	Yes	-	-	-	N	-
2C	6X40	0	*	-	2	Yes	2.0	5	-	G	x
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	x
3A	6X40	0	*	-	3	Yes	-	-	-	S	-
4A	6X40	0	*	-	4	Yes	-	-	-	S	-
5A	6X40	0	*	-	5	Yes	-	-	-	S	-
5B	6X40	0	*	-	5	Yes	-	15	-	S	-
6A	6X6	300	*	-	6	Yes	-	-	-	N	-
6B	6X40	0	*	-	6	Yes	2.0	5	-	G	-
7A	6X40	0	*	-	7	Yes	-	3	-	S	-
7B	6X40	0	*	-	7	Yes	-	-	-	S	-
8A	6X40	0	*	-	8	Yes	-	-	-	S	-

*Video Detection Area
 Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal heads numbered 11,21,22,41,42,61,62.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Pedestrian pedestals are conceptual and shown for reference only. See 2018 NCDOT Roadway Standard Drawings 1705.04 Sheets 1-3 for push button location details.

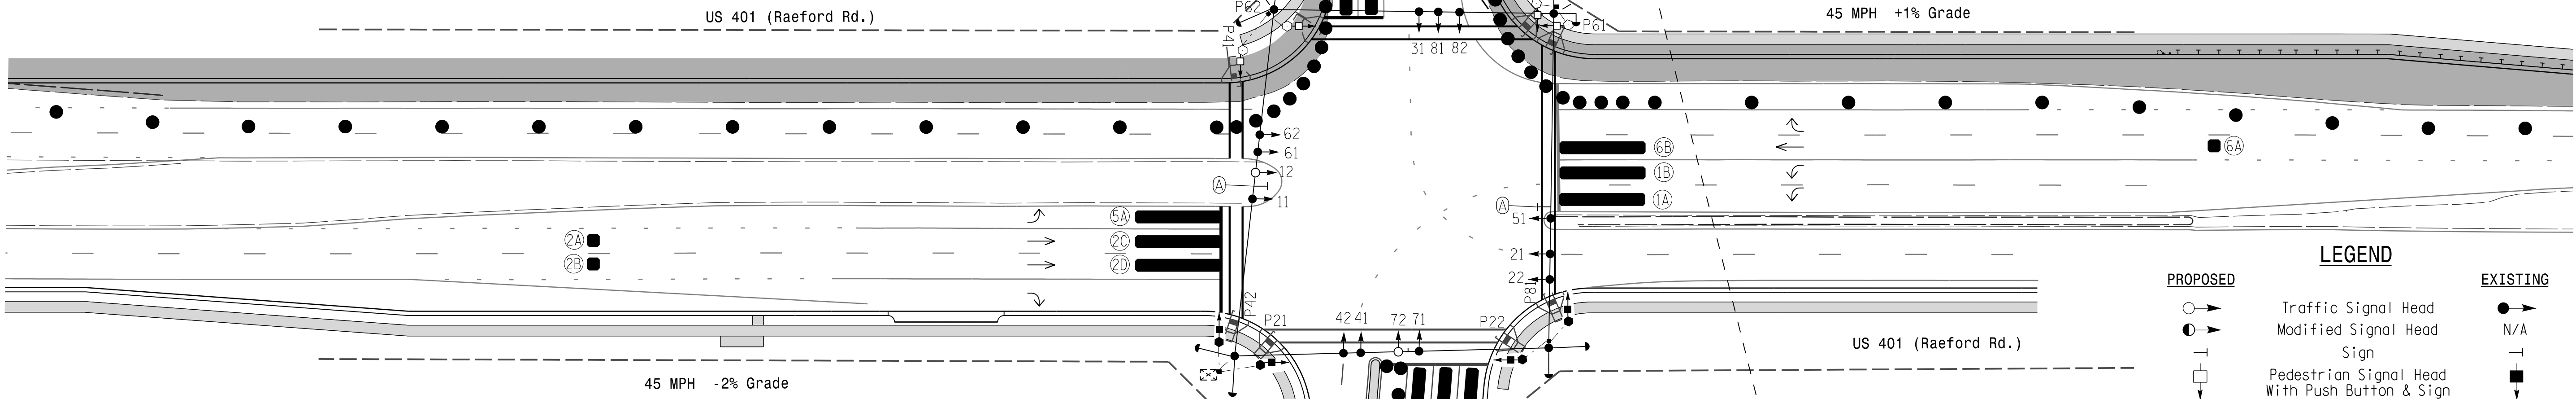

LEGEND

PROPOSED	EXISTING
○ → Traffic Signal Head	● →
○ → Modified Signal Head	N/A
○ → Sign	○ →
○ → Pedestrian Signal Head With Push Button & Sign	○ →
○ → Signal Pole with Guy	○ →
○ → Signal Pole with Sidewalk Guy	○ →
○ → Inductive Loop Detector	○ →
○ → Controller & Cabinet	○ →
○ → Junction Box	○ →
○ → 2-in Underground Conduit	○ →
○ → Right of Way	○ →
○ → Directional Arrow	○ →
○ → Video Detection Area	N/A
○ → Type II Signal Pedestal	○ →
○ → Construction Zone	N/A
○ → Drums	N/A
○ → "U-TURN YIELD TO RIGHT TURN" Sign (R10-16)	○ →

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	7	-	7	-	7	-	7
Ped Clear	-	27	-	29	-	22	-	31
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max I *	30	90	25	25	30	90	25	25
Yellow	3.0	4.7	3.0	3.3	3.0	4.4	3.0	3.9
Red Clear	3.8	2.3	4.1	3.6	4.2	2.3	4.0	3.1
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds /Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	30	-	-	-	30	-	-
Minimum Gap	-	3.0	-	-	-	3.0	-	-
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

Signal Upgrade Temporary Signal Design 2 - TMP Phase II

Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared for the Offices of:

750 N. Greenfield Pkwy, Garner, NC 27526

SCALE: 0 40
1"=40'

US 401 (Raeford Road) at SR 1104 (Strickland Bridge Road)

Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: E D Harris

PREPARED BY: A D Smith REVIEWED BY: B L Watson

REVISIONS	INIT.	DATE


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

3/29/2018
 DATE: 3/29/2018
 SIG. INVENTORY NO. 06-059612

3/29/2018
 User: rfmuncy
 Path: \\pfs01\csm\signal\Design\Phase 2\U-4405.sig.dgn, 06-059612.dgn

EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

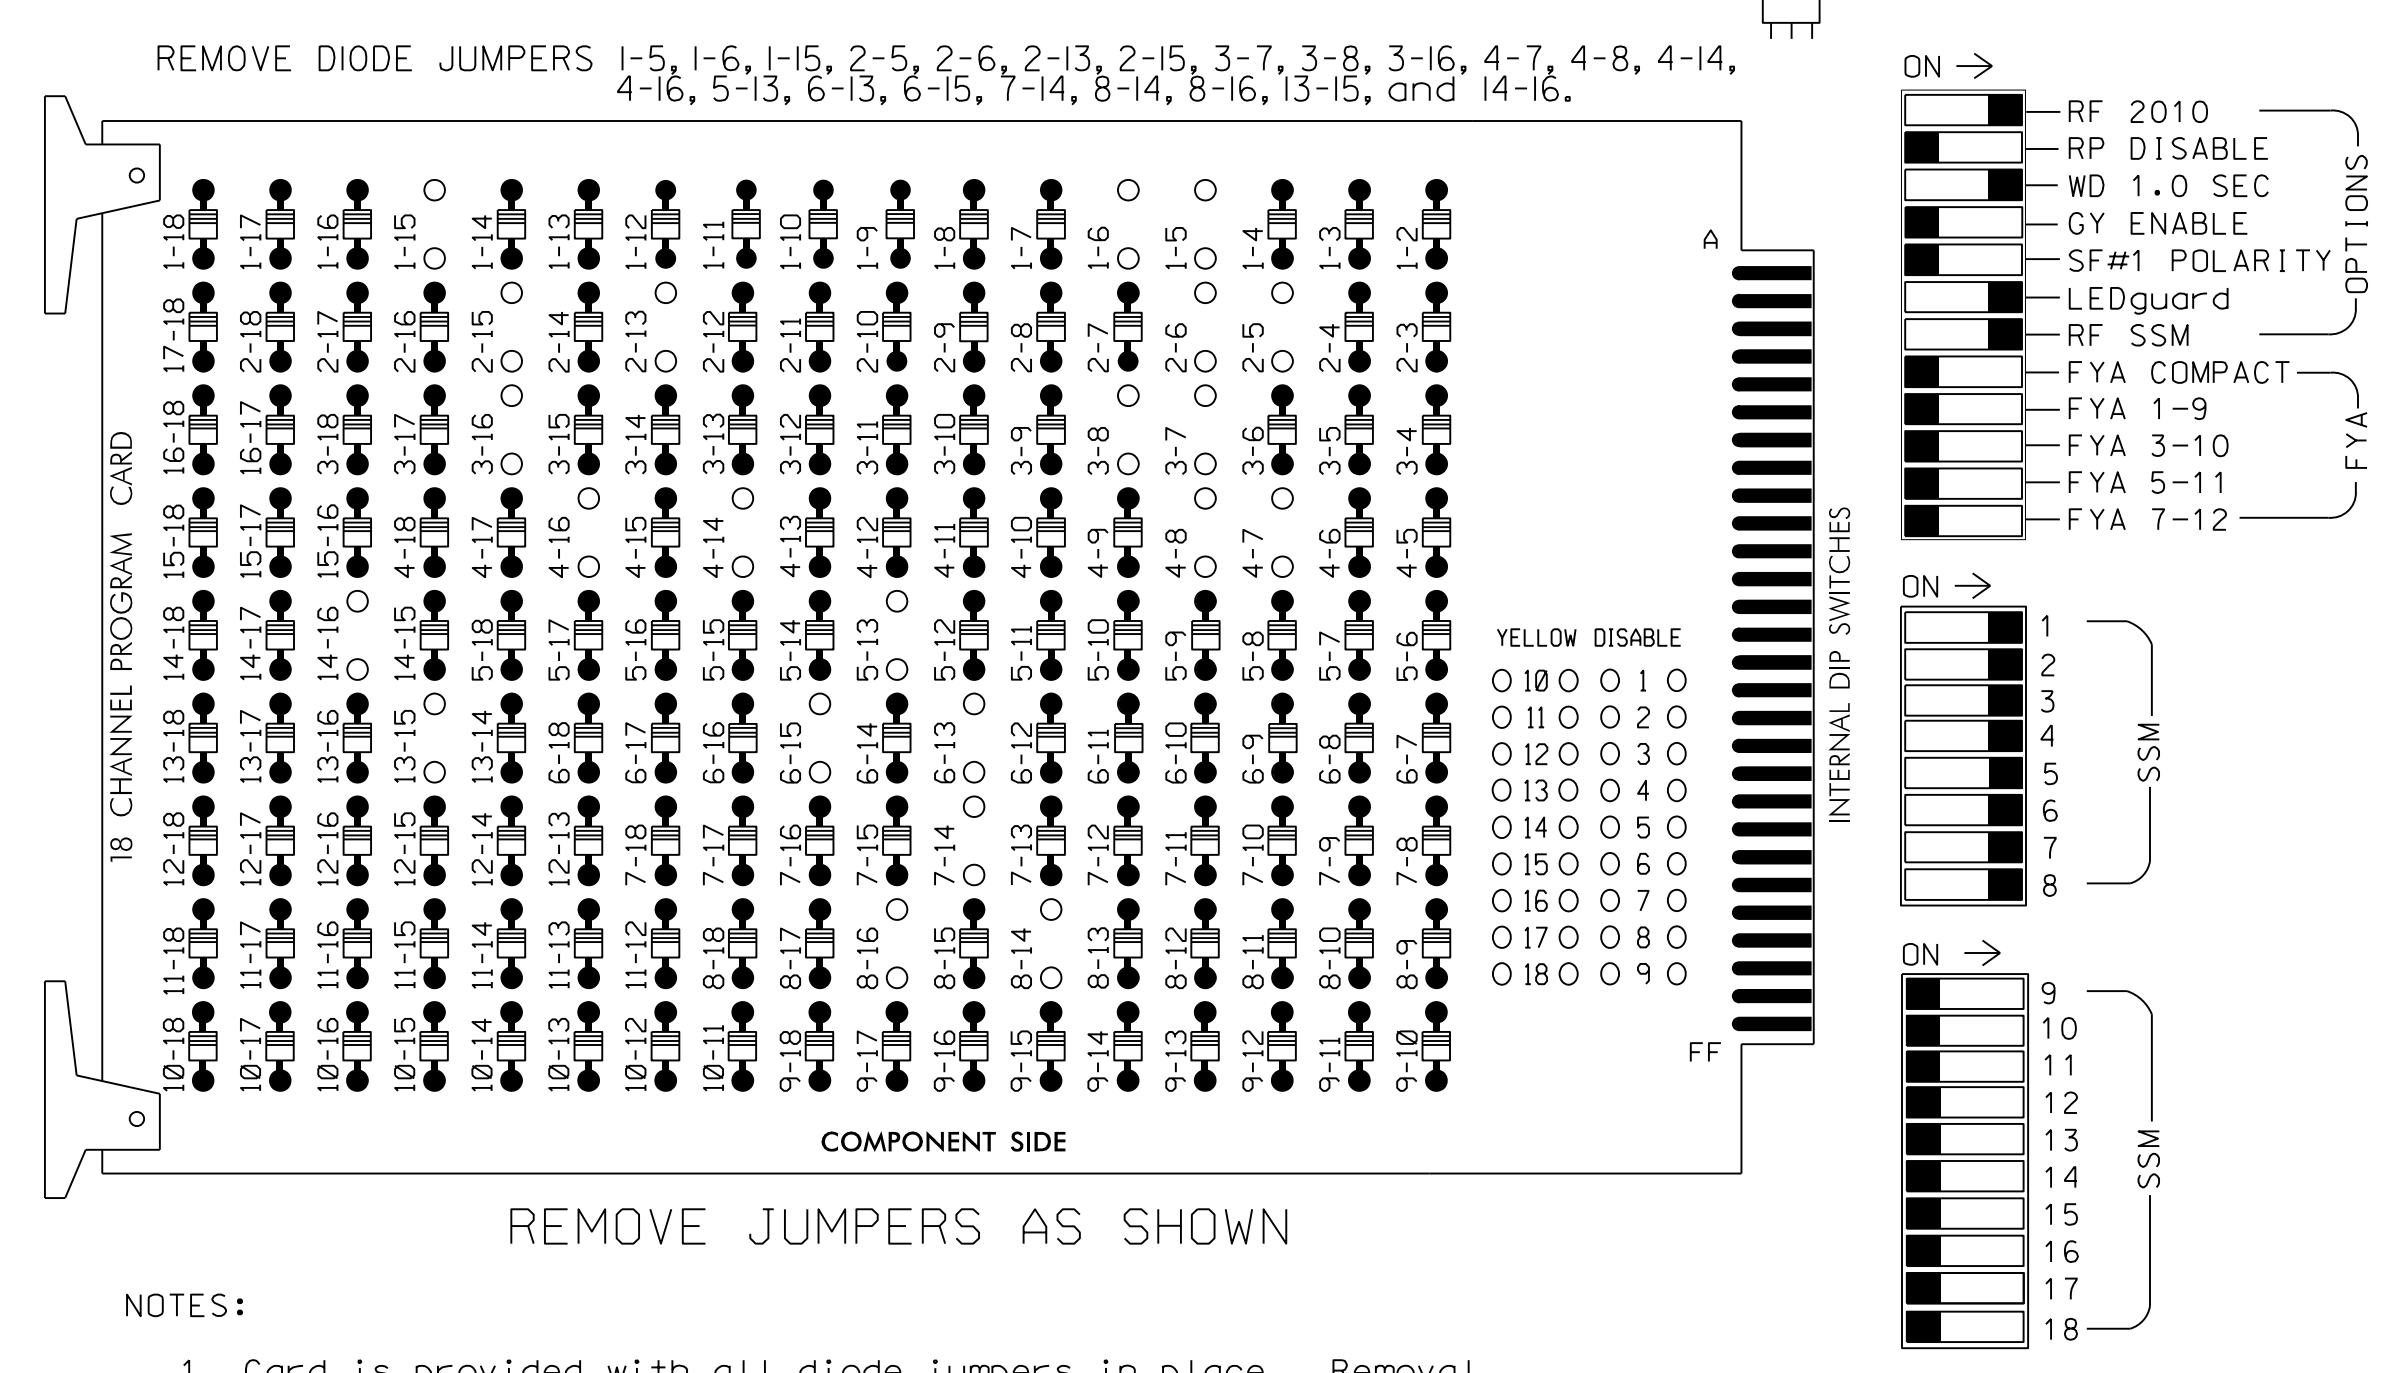

- NOTES:**
- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
 - Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
 - Ensure that Red Enable is active at all times during normal operation.
 - Integrate monitor with Ethernet network in cabinet.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6				
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18				
PHASE	1 8	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE				
SIGNAL HEAD NO.	11, 12	82	21,22	P21, P22	31	22	41,42	P41, P42	51	42	61,62	P61, P62	71,72	62	81,82	P81, P82	NU	NU	NU	NU	NU	NU
RED			128			101				134					107							
YELLOW			129			102				135					108							
GREEN			130			103				136					109							
RED ARROW	125				116			131				122										
YELLOW ARROW	126	126			117	117		132	132			123	123									
GREEN ARROW	127	127			118	118		133	133			124	124									
Hand							113		104			119										110
Walking									106			121										112

NU = Not Used

EQUIPMENT INFORMATION


CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,
 S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,
 6PED,7,8,8PED
 OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....NOT USED

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE POSITION LAYOUT

(front view)

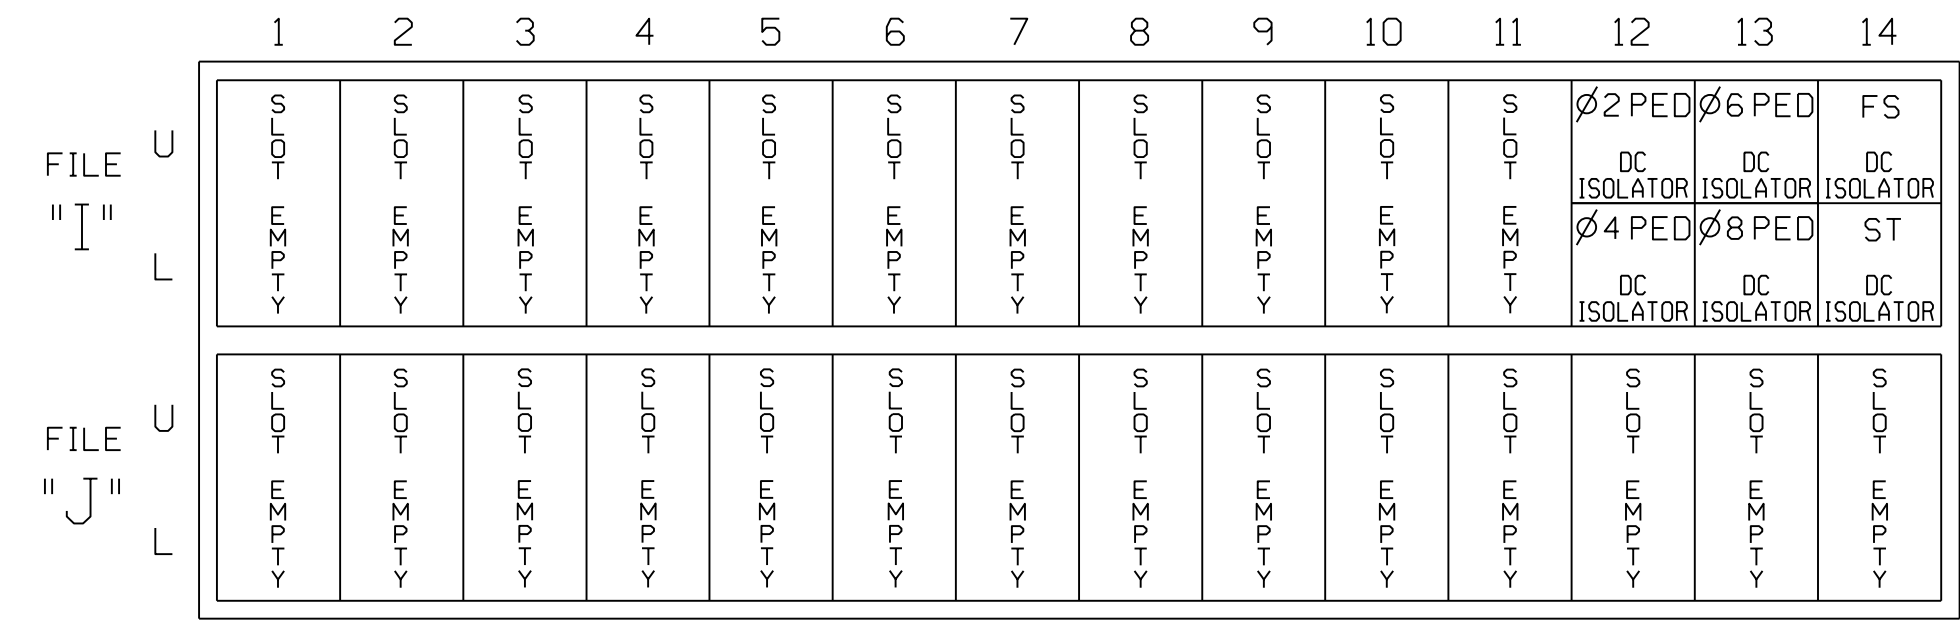


EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE
PED PUSH BUTTONS					
P21,P22	TB8-4,6	I12U	67	PED 2	2 PED
P41,P42	TB8-5,6	I12L	69	PED 4	4 PED
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED
P81,P82	TB8-8,9	I13L	70	PED 8	8 PED

NOTE:
 INSTALL DC ISOLATORS IN INPUT FILE SLOTS 112 AND 113.

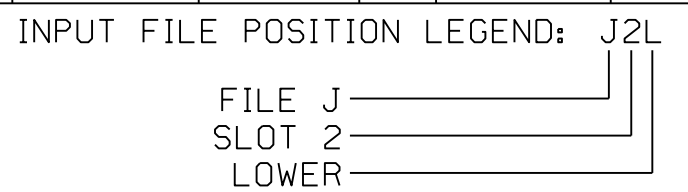

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0596T2
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 2 - TMP Phase II Electrical Detail

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p>	<p>US 401 (Raeford Road) at SR 1104 (Strickland Bridge Road)</p> <p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: M RG WILSON REVIEWED BY:</p>	<p>SEAL</p> <p>3/29/2018</p>								
	<p>REVISIONS</p> <table border="1"> <thead> <tr> <th>NO.</th> <th>DESCRIPTION</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	NO.	DESCRIPTION	INIT.	DATE					<p>DATE</p> <p>3/29/2018</p>	<p>DATE</p> <p>3/29/2018</p>
NO.	DESCRIPTION	INIT.	DATE								

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

PHASING DIAGRAM


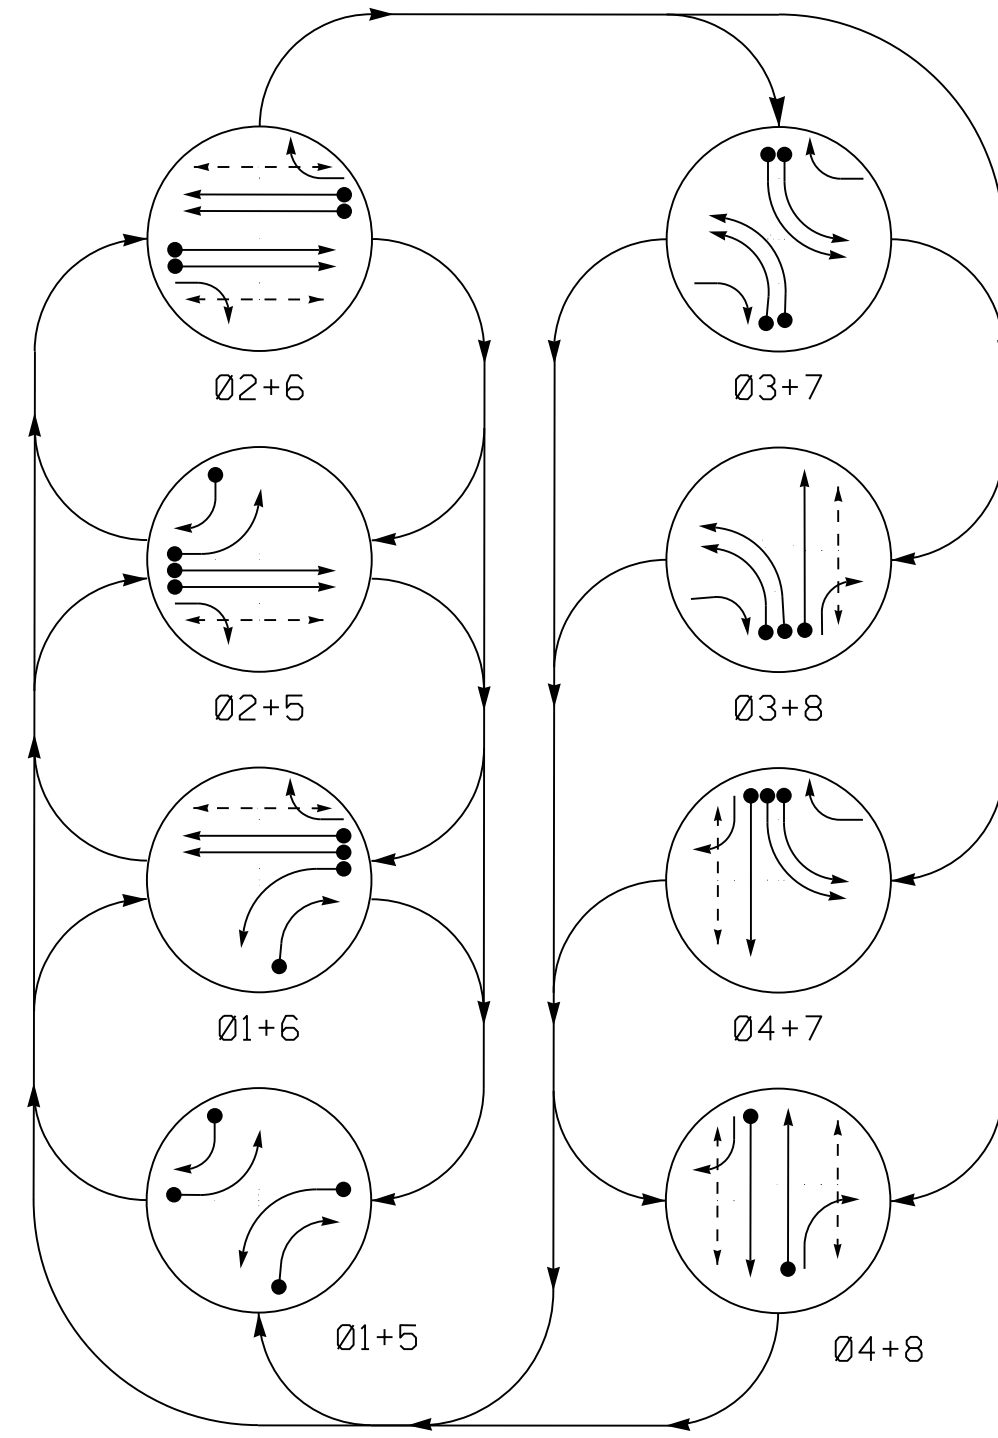


TABLE OF OPERATION

SIGNAL FACE	PHASE								FLASH
	01+5	02+6	03+7	04+8	01+6	02+5	03+8	04+7	
11	←	←	←	←	←	←	←	←	←
21	R	R	G	G	R	R	R	R	Y
22	R	R	G	G	R	R	R	R	Y
31, 32	←	←	←	←	←	←	←	←	←
41	R	R	R	R	R	R	G	G	R
42	R	R	R	R	R	R	G	G	R
51	←	←	←	←	←	←	←	←	←
61	R	G	R	G	R	R	R	R	Y
62	R	G	R	G	R	R	R	R	Y
71, 72	←	←	←	←	←	←	←	←	←
81	R	R	R	R	R	G	R	G	R
82	R	R	R	R	R	G	R	G	R
P21,P22	DW	DW	W	W	DW	DW	W	W	DRK
P41,P42	DW	DW	W	W	DW	DW	W	W	DRK
P61,P62	DW	W	DW	W	DW	DW	DW	DW	DRK
P81,P82	DW	DW	DW	DW	W	DW	W	W	DRK

PHASING DIAGRAM DETECTION LEGEND
 ● DETECTED MOVEMENT
 ○ UNDETECTED MOVEMENT (OVERLAP)
 - - - UNSIGNALIZED MOVEMENT
 - - - PEDESTRIAN MOVEMENT

SIGNAL FACE I.D.

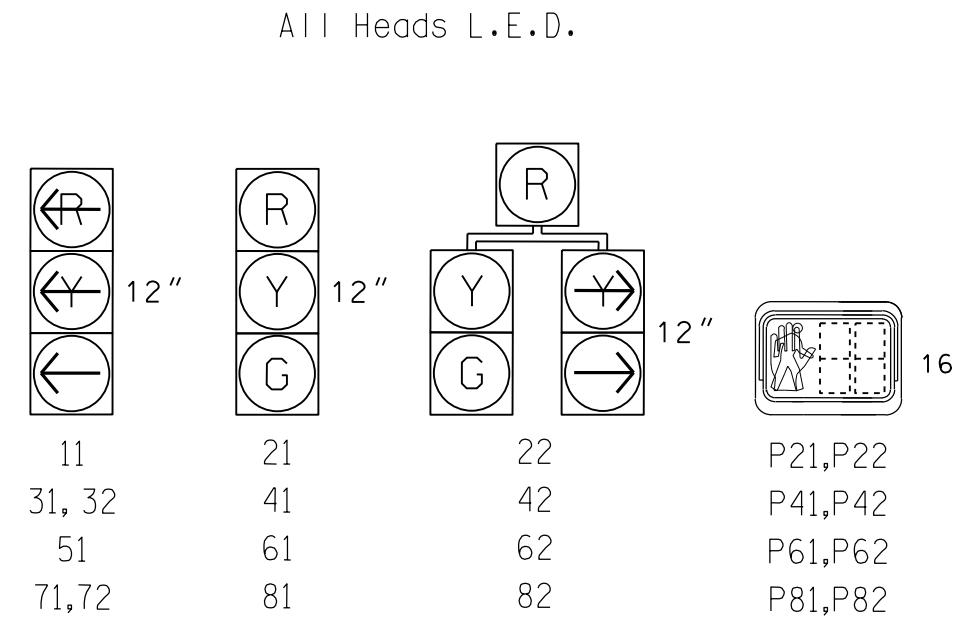

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING						
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP
1A	6X40	0	*	-	1	Yes	-	-	-	S	-
1B	6X40	0	*	-	1	Yes	-	15	-	S	-
2A	6X6	300	*	-	2	Yes	-	-	-	N	-
2B	6X6	300	*	-	2	Yes	-	-	-	N	-
2C	6X40	0	*	-	2	Yes	2.0	5	-	G	-
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-
3A	6X40	0	*	-	3	Yes	-	-	-	S	-
3B	6X40	0	*	-	3	Yes	-	-	-	S	-
4A	6X40	0	*	-	4	Yes	-	-	-	S	-
5A	6X40	0	*	-	5	Yes	-	-	-	S	-
5B	6X40	0	*	-	5	Yes	-	15	-	S	-
6A	6X6	300	*	-	6	Yes	-	-	-	N	-
6B	6X6	300	*	-	6	Yes	-	-	-	N	-
6C	6X40	0	*	-	6	Yes	2.0	5	-	G	-
6D	6X40	0	*	-	6	Yes	2.0	5	-	G	-
7A	6X40	0	*	-	7	Yes	-	3	-	S	-
7B	6X40	0	*	-	7	Yes	-	-	-	S	-
8A	6X40	0	*	-	8	Yes	-	-	-	S	-

* Video Detection Area
 Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal heads numbered 11, 21, 22, 51, 61, 62, & sign A.
- Set all detector units to presence mode. Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

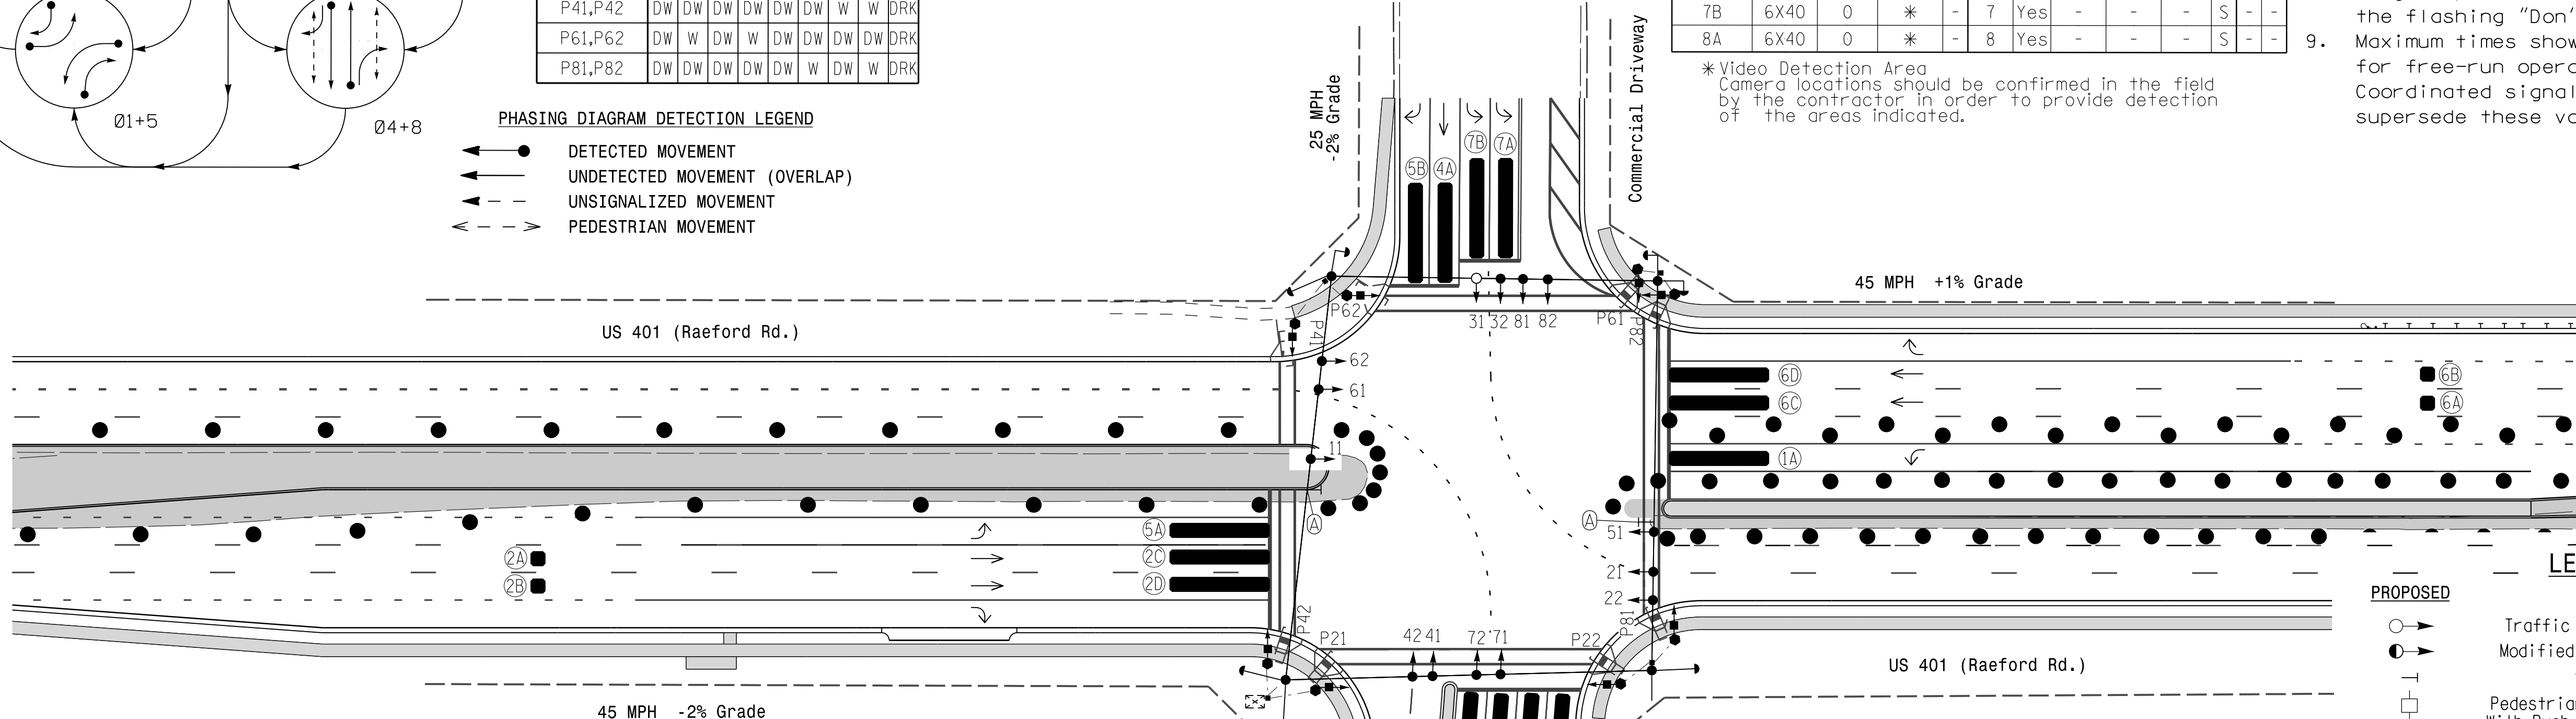

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	7	-	7	-	7	-	7
Ped Clear	-	27	-	29	-	25	-	29
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max I *	30	90	25	25	30	90	25	25
Yellow	3.0	4.7	3.0	3.3	3.0	4.4	3.0	3.9
Red Clear	3.7	2.3	4.4	3.6	4.3	2.3	4.0	3.1
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds /Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	30	-	-	-	30	-	-
Minimum Gap	-	3.0	-	-	-	3.0	-	-
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | | | | |
|-------|--|-------|----------|
| ○ | Traffic Signal Head | ● | EXISTING |
| ○ | Modified Signal Head | N/A | |
| ○ | Sign | - | |
| ○ | Pedestrian Signal Head With Push Button & Sign | ○ | |
| ○ | Signal Pole with Guy | ○ | |
| ○ | Signal Pole with Sidewalk Guy | ○ | |
| ○ | Inductive Loop Detector | ○ | |
| ○ | Controller & Cabinet | ○ | |
| ○ | Junction Box | ○ | |
| - - - | 2-in Underground Conduit | - - - | |
| - - - | Right of Way | - - - | |
| → | Directional Arrow | → | |
| ▬ | Video Detection Area | N/A | |
| ○ | Type II Signal Pedestal | ● | |
| ▬ | Construction Zone | N/A | |
| ● | Drums | N/A | |
| ⓐ | "U-TURN YIELD TO RIGHT TURN" Sign (R10-16) | ⓐ | |

Signal Upgrade Temporary Signal Design 3 - TMP Phase III

Stantec
 Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared for the Offices of:

 TRANSPORTATION MOBILITY AND SAFETY DIVISION
 STATE OF NORTH CAROLINA
 Signal Design Section
 750 N. Greenfield Pkwy, Garner, NC 27526
 SCALE: 0 40
 1"=40'

US 401 (Raeford Road) at SR 1104 (Strickland Bridge Road)
 Division 6 Cumberland County Fayetteville
 PLAN DATE: March 2018 REVIEWED BY: E D Harris
 PREPARED BY: A D Smith REVIEWED BY: B L Watson
 REVISIONS: INIT. DATE


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

 DATE: 3/29/2018
 SIG. INVENTORY NO. 06-059613

3/29/2018 10:41:11 AM
 User: rfmccoy
 Path: \\server\projects\signal\Design\Phase 3\U-4405\sig.dgn
 User: rfmccoy

EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

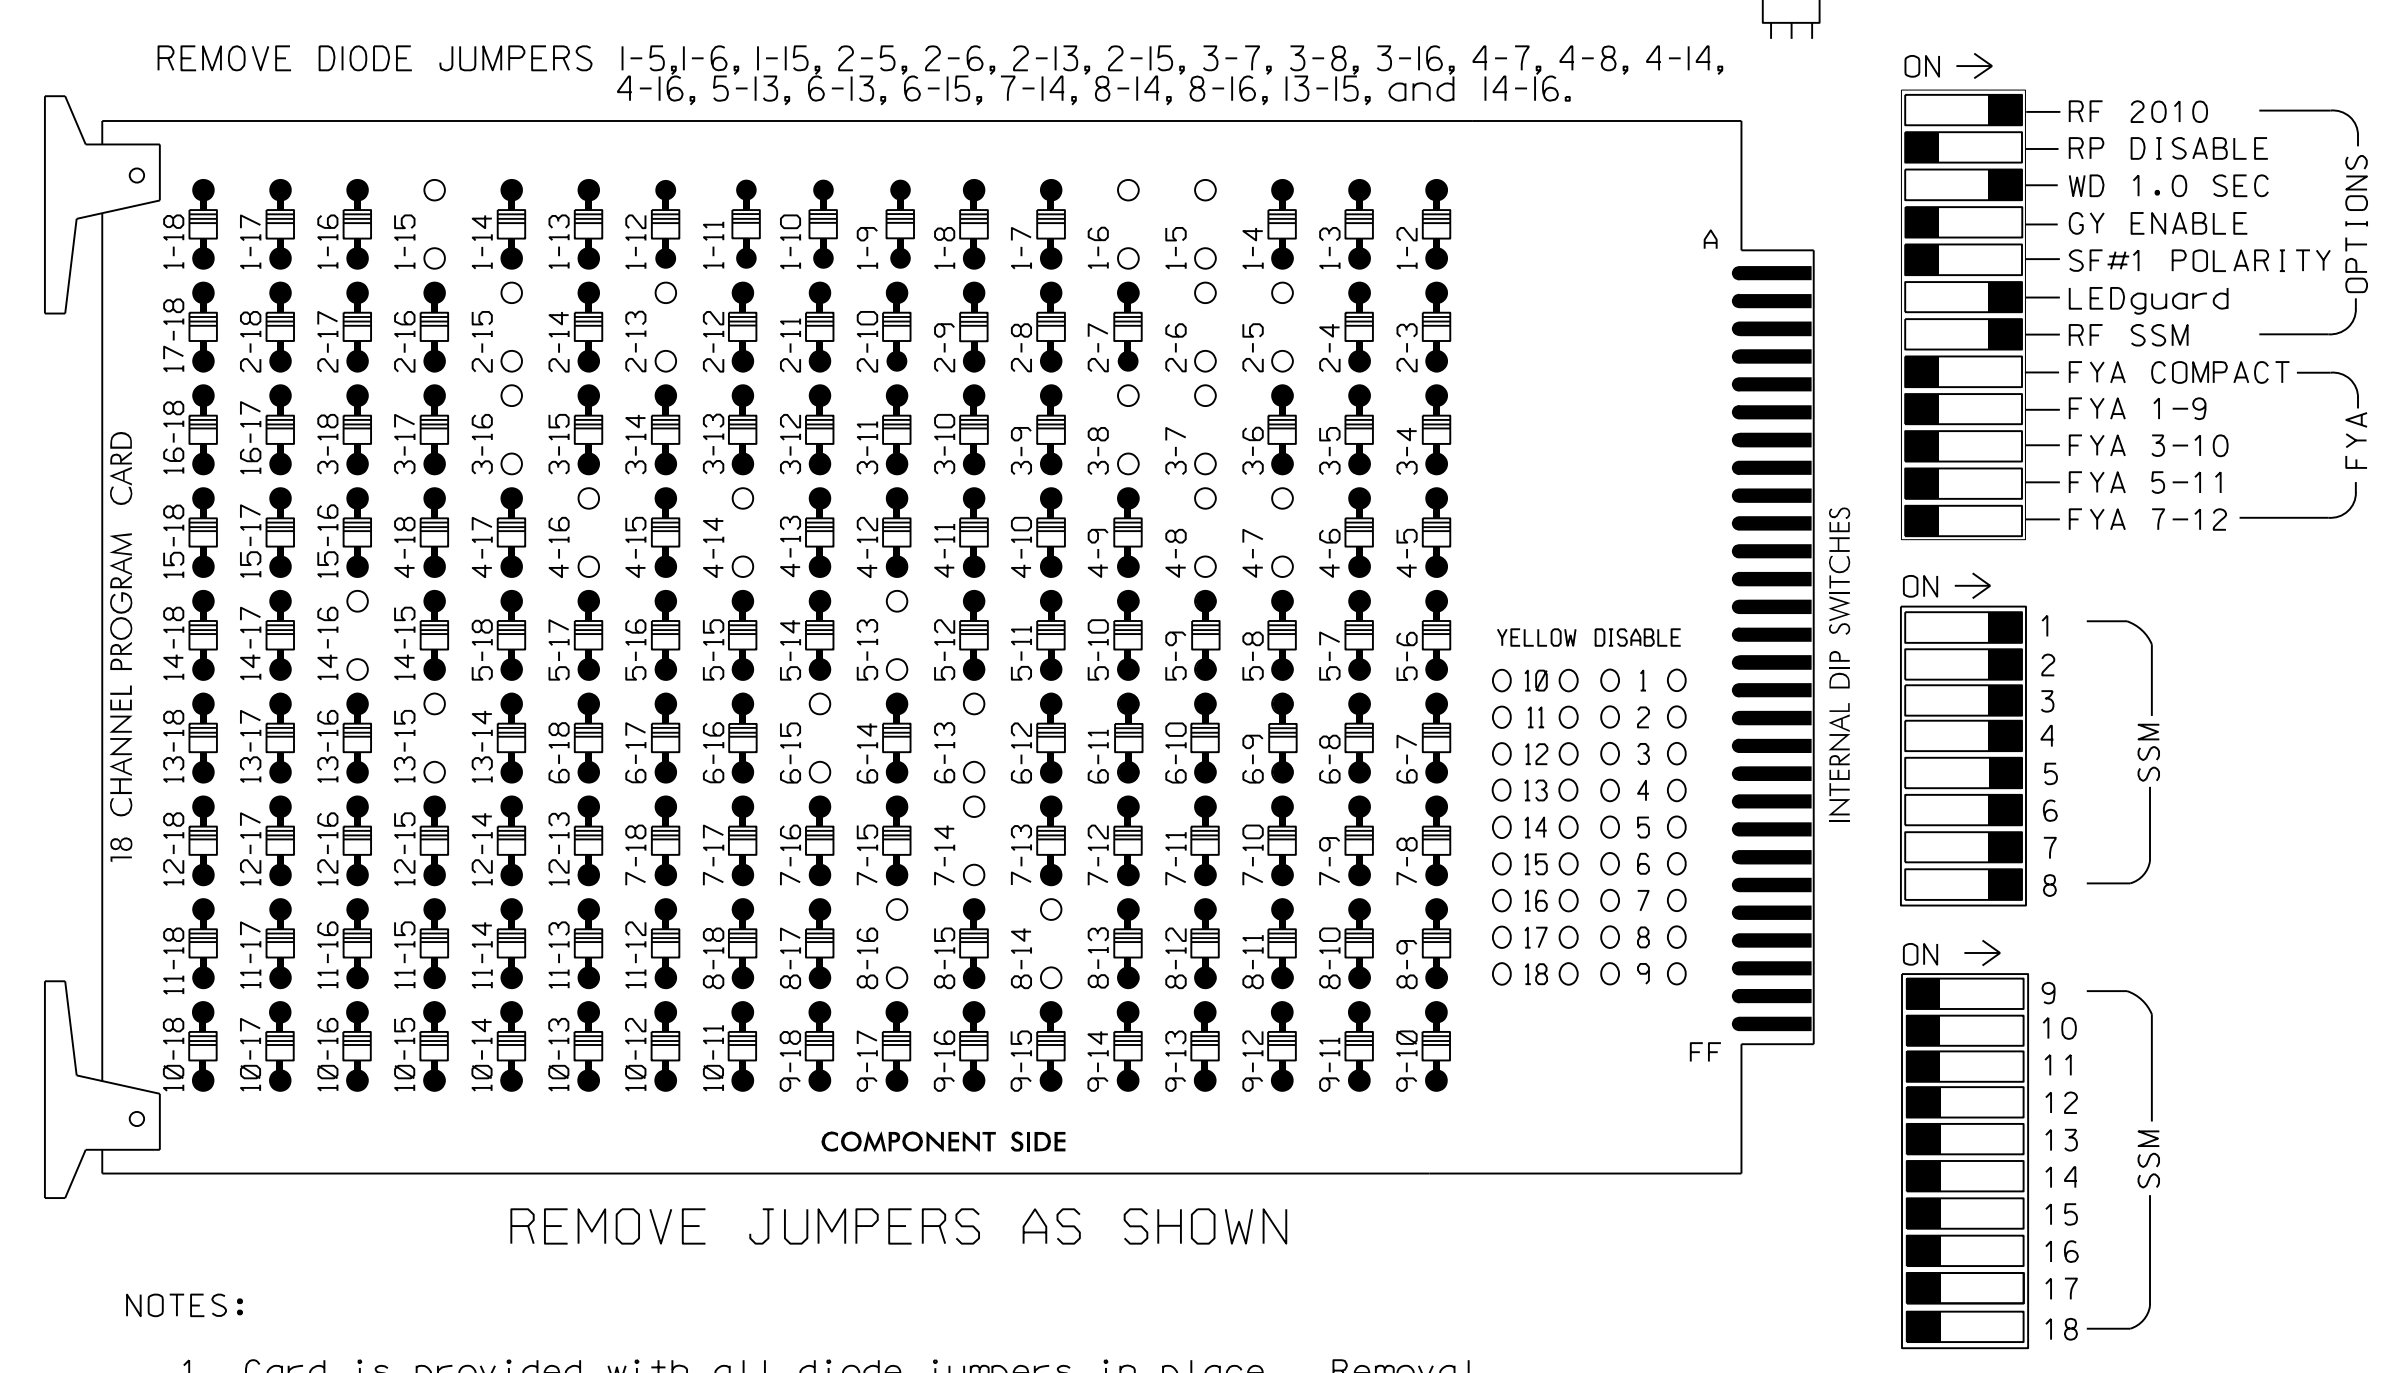

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,
 S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,
 6PED,7,8,8PED

OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....NOT USED

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11	82	21,22	P21, P22	31, 32	22	41,42	P41, P42	51	42	61,62	P61, P62	71,72	62	81,82	P81, P82	NU	NU	NU
RED			128			101				134			107						
YELLOW			129			102				135			108						
GREEN			130			103				136			109						
RED ARROW	125			116			131				122								
YELLOW ARROW	126	126		117	117		132	132			123	123							
GREEN ARROW	127	127		118	118		133	133			124	124							
Hand				113			104			119			110						
Walking				115			106			121			112						


NU = Not Used

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE POSITION LAYOUT


(front view)

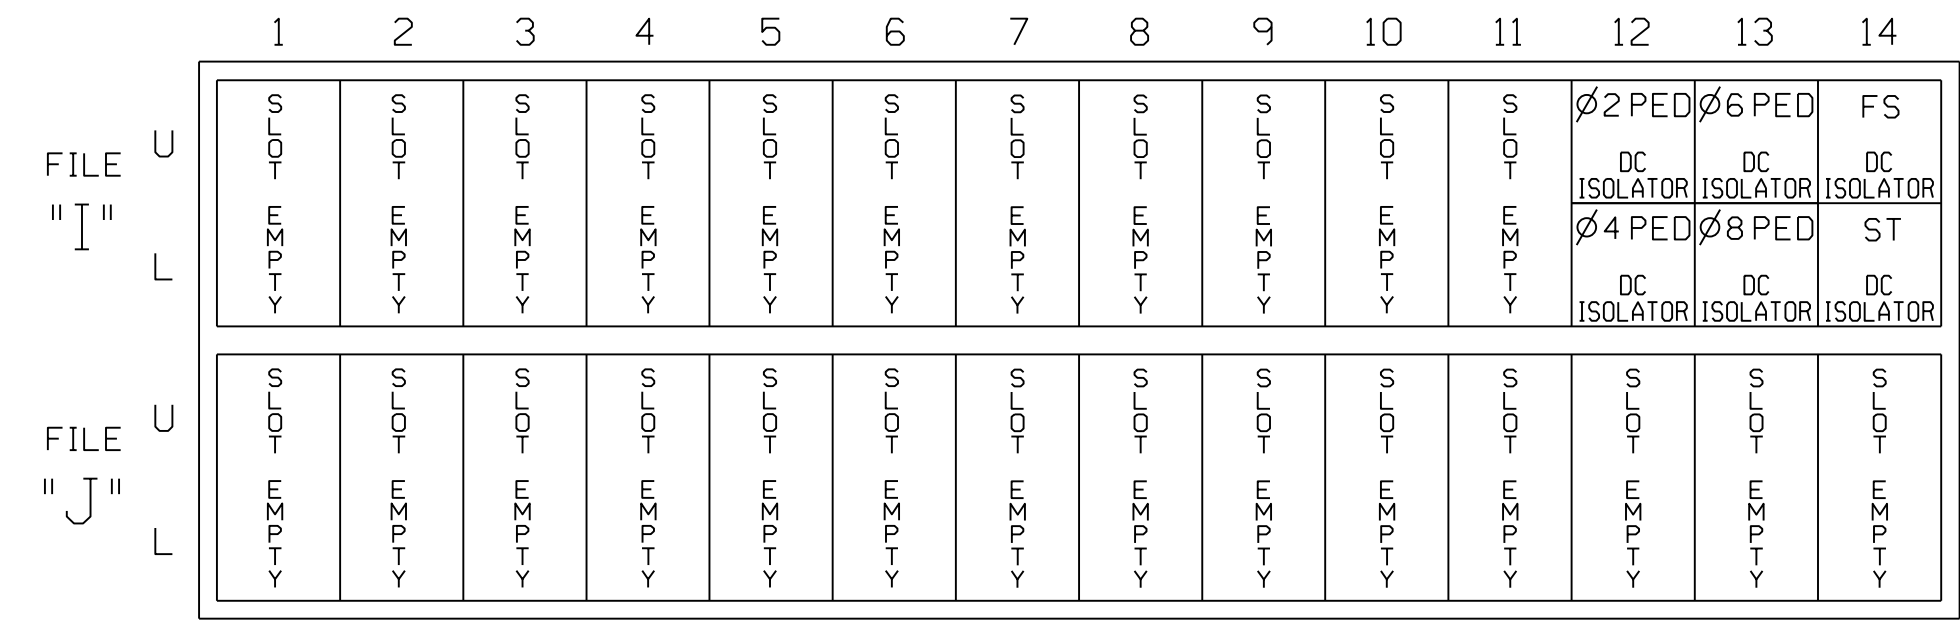

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE
PED PUSH BUTTONS					
P21,P22	TB8-4,6	I12U	67	PED 2	2 PED
P41,P42	TB8-5,6	I12L	69	PED 4	4 PED
P61,P62	TB8-7,9	I13U	68	PED 6	6 PED
P81,P82	TB8-8,9	I13L	70	PED 8	8 PED

NOTE:
INSTALL DC ISOLATORS IN INPUT FILE SLOTS 112 AND 113.

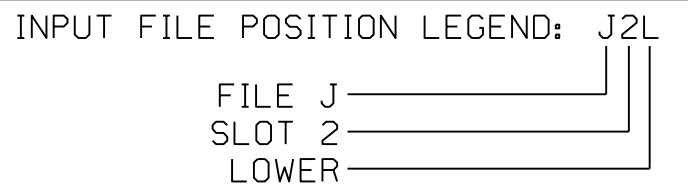

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

Temporary Design 3 - TMP Phase III Electrical Detail

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p> <p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>US 401 (Raeford Road) at SR 1104 (Strickland Bridge Road)</p> <p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: M RG WILSON REVIEWED BY:</p>	<p>SEAL</p> <p>3/29/2018</p>								
	<p>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</p>		<p>REVISIONS</p> <table border="1"> <tr> <th>NO.</th> <th>DESCRIPTION</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	NO.	DESCRIPTION	INIT.	DATE				
NO.	DESCRIPTION	INIT.	DATE								

PHASING DIAGRAM


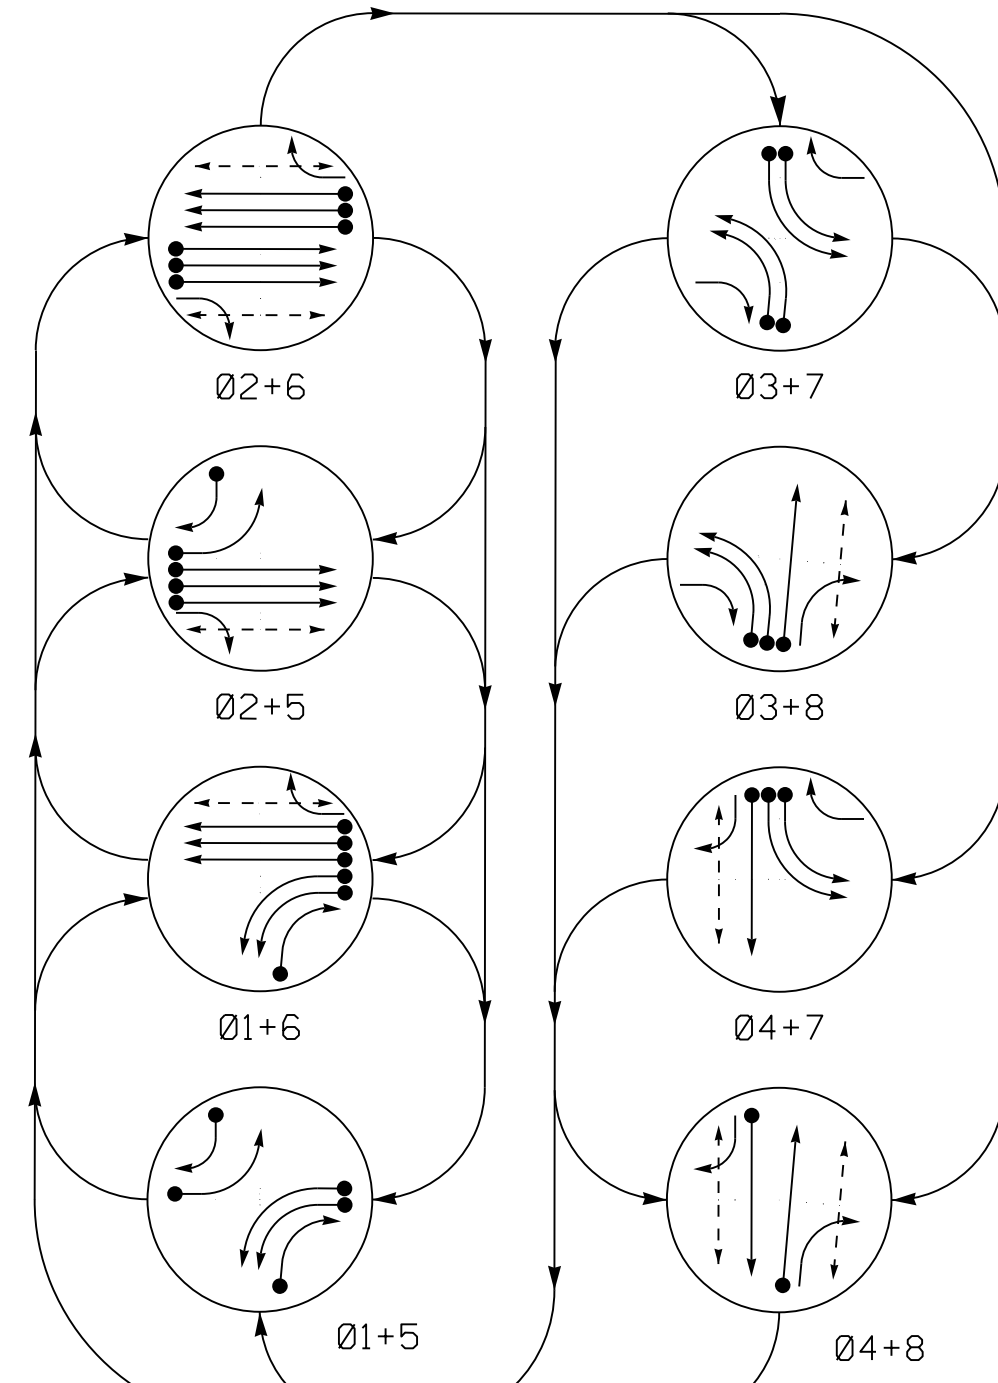


TABLE OF OPERATION

SIGNAL FACE	PHASE								FLASH
	01+5	01+6	02+5	02+6	03+7	03+8	04+7	04+8	
11,12	←	←	←	←	←	←	←	←	←
21,22	R	R	G	G	R	R	R	R	Y
23	R	R	G	G	R	R	R	R	Y
31	←	←	←	←	←	←	←	←	←
41	R	R	R	R	R	R	G	G	R
42	R	R	R	R	R	R	G	G	R
51	←	←	←	←	←	←	←	←	←
61,62	R	G	R	G	R	R	R	R	Y
63	R	G	R	G	R	R	R	R	Y
71,72	←	←	←	←	←	←	←	←	←
81	R	R	R	R	R	G	R	G	R
82	R	R	R	R	R	G	R	G	R
P21,P22	DW	DW	W	DW	DW	DW	DRK	DRK	
P41,P42	DW	DW	DW	DW	DW	W	W	DRK	
P61,P62	DW	W	DW	W	DW	DW	DW	DRK	
P81,P82	DW	DW	DW	DW	W	DW	W	DRK	

SIGNAL FACE I.D.

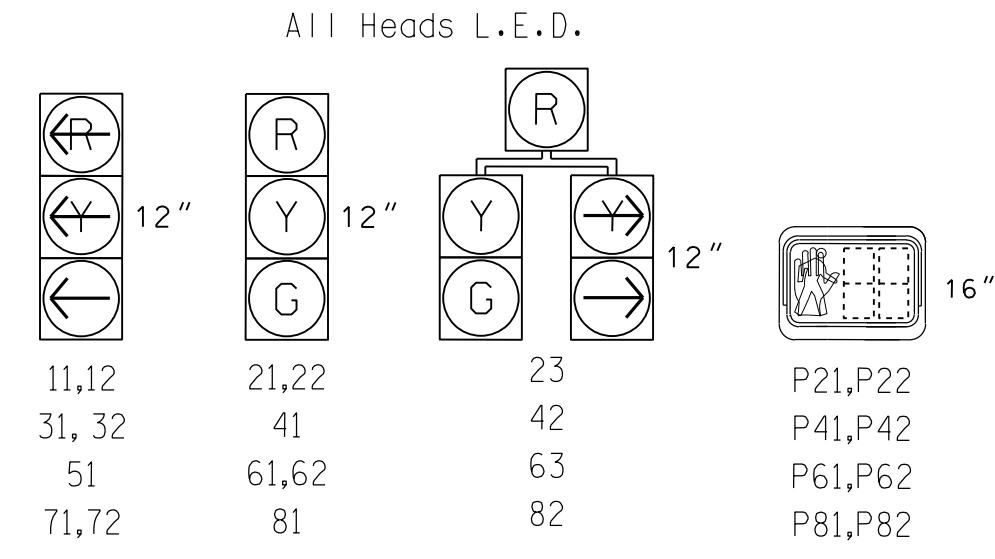

ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	UUSE ADDED INITIAL	TYPE	LOOP	NEW CARD
1A	6X40	0	2-4-2	X	1	Yes	-	-	-	S	-	X
1B	6X40	0	2-4-2	X	1	Yes	-	-	-	S	-	X
1C	6X40	0	2-4-2	X	1	Yes	-	15	-	S	-	X
2A	6X6	300	4	X	2	Yes	-	-	X	N	-	X
2B	6X6	300	4	X	2	Yes	-	-	X	N	-	X
2C	6X6	300	4	X	2	Yes	-	-	X	N	-	X
3A	6X40	0	2-4-2	X	3	Yes	-	-	-	S	-	X
3B	6X40	0	2-4-2	X	3	Yes	-	-	-	S	-	X
4A	6X40	0	2-4-2	X	4	Yes	-	-	-	S	-	X
5A	6X40	0	2-4-2	X	5	Yes	-	-	-	S	-	X
5B	6X40	0	2-4-2	X	5	Yes	-	15	-	S	-	X
6A	6X6	300	4	X	6	Yes	-	-	X	N	-	X
6B	6X6	300	4	X	6	Yes	-	-	X	N	-	X
6C	6X6	300	4	X	6	Yes	-	-	X	N	-	X
7A	6X40	0	2-4-2	X	7	Yes	-	3	-	S	-	X
7B	6X40	0	2-4-2	X	7	Yes	-	-	-	S	-	X
8A	6X40	0	2-4-2	X	8	Yes	-	-	-	S	-	X


8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

PHASING DIAGRAM DETECTION LEGEND

- DETECTED MOVEMENT
- ← UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- ↔ PEDESTRIAN MOVEMENT

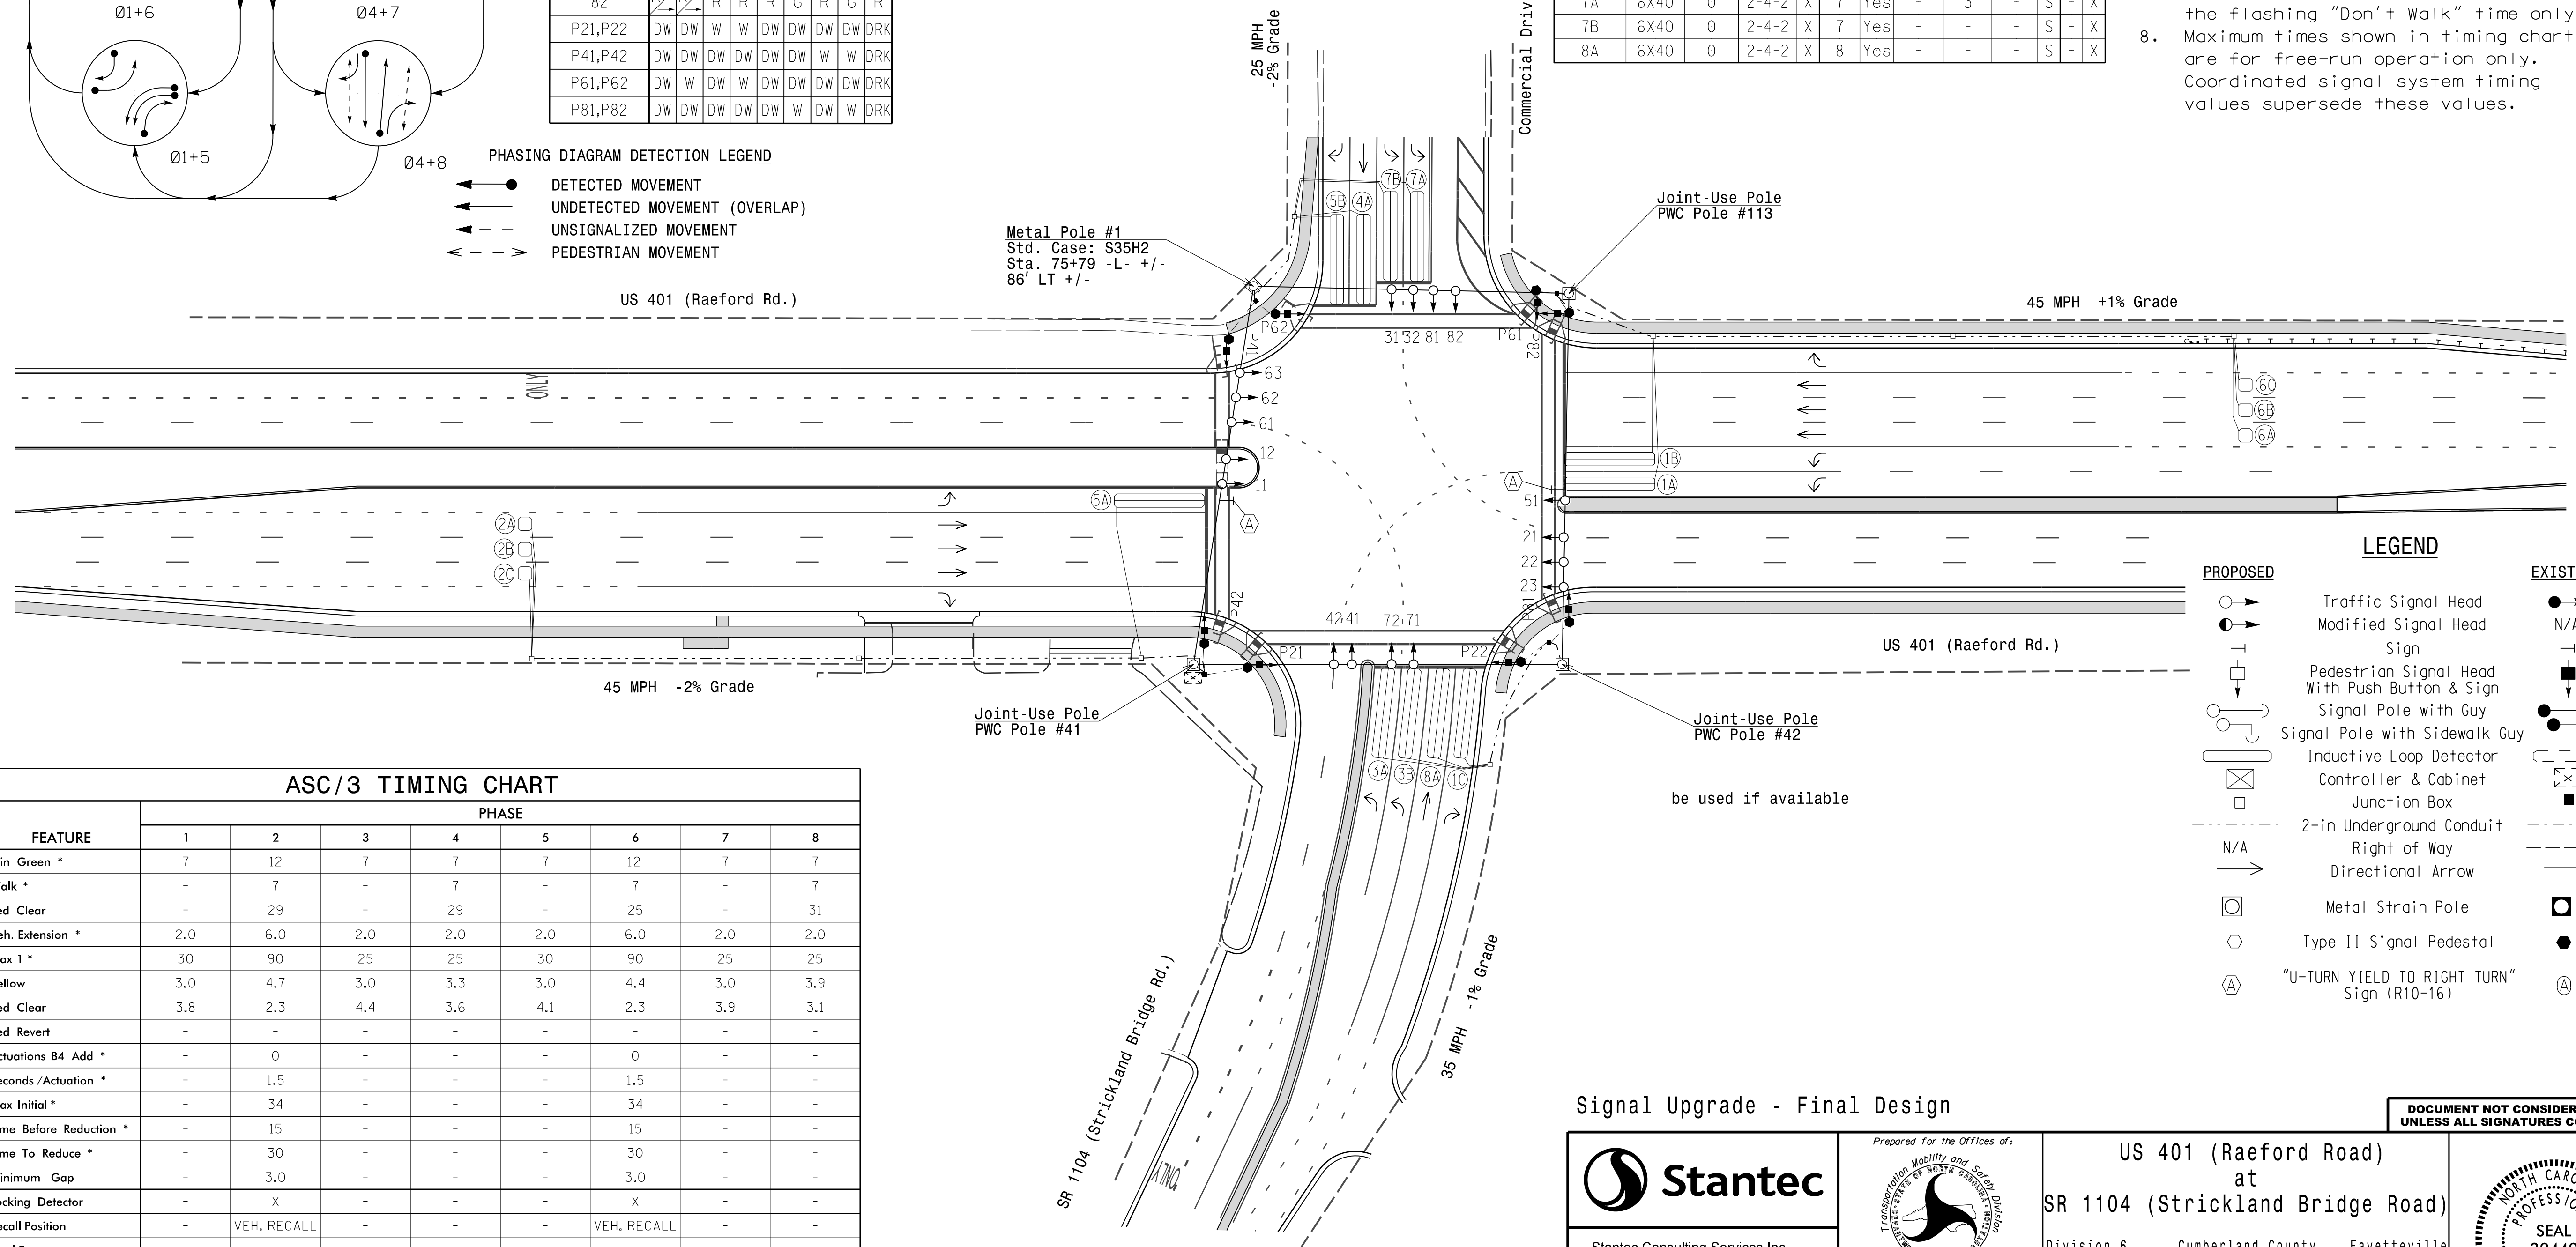

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	7	-	7	-	7	-	7
Ped Clear	-	29	-	29	-	25	-	31
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max 1 *	30	90	25	25	30	90	25	25
Yellow	3.0	4.7	3.0	3.3	3.0	4.4	3.0	3.9
Red Clear	3.8	2.3	4.4	3.6	4.1	2.3	3.9	3.1
Red Revert	-	-	-	-	-	-	-	-
Actions B4 Add *	-	0	-	-	-	0	-	-
Seconds /Actuation *	-	1.5	-	-	-	1.5	-	-
Max Initial *	-	34	-	-	-	34	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	30	-	-	-	30	-	-
Minimum Gap	-	3.0	-	-	-	3.0	-	-
Locking Detector	-	X	-	-	-	X	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | PROPOSED | EXISTING |
|--|--|
| ○ → Traffic Signal Head | ● → N/A |
| ● → Modified Signal Head | ○ → N/A |
| ⊥ Sign | ⊥ Sign |
| ⊥ Pedestrian Signal Head With Push Button & Sign | ⊥ Sign |
| ⊥ Signal Pole with Guy | ⊥ Sign |
| ⊥ Signal Pole with Sidewalk Guy | ⊥ Sign |
| ⊥ Inductive Loop Detector | ⊥ Sign |
| ⊥ Controller & Cabinet | ⊥ Sign |
| ⊥ Junction Box | ⊥ Sign |
| ⊥ 2-in Underground Conduit | ⊥ Sign |
| ⊥ Right of Way | ⊥ Sign |
| → Directional Arrow | → Directional Arrow |
| ○ Metal Strain Pole | ○ Metal Strain Pole |
| ○ Type II Signal Pedestal | ○ Type II Signal Pedestal |
| ⊥ "U-TURN YIELD TO RIGHT TURN" Sign (R10-16) | ⊥ "U-TURN YIELD TO RIGHT TURN" Sign (R10-16) |

Signal Upgrade - Final Design

Stantec
 Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

Prepared for the Offices of:
 Transportation Mobility and Safety Division
 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
 Signal Design Section
 750 N. Greenfield Pkwy, Garner, NC 27526
 SCALE: 0 40
 1" = 40'

US 401 (Raeford Road) at SR 1104 (Strickland Bridge Road)
 Division 6 Cumberland County Fayetteville
 PLAN DATE: March 2018 REVIEWED BY: E D Harris
 PREPARED BY: A D Smith REVIEWED BY: B L Watson
 REVISIONS: INIT. DATE


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Professional Engineer Seal: 29449
 Signature: B L Watson
 DATE: 3/29/2018
 SIG. INVENTORY NO. 06-0596

3/29/2018 10:41:11 AM
 User: rfmancey

EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

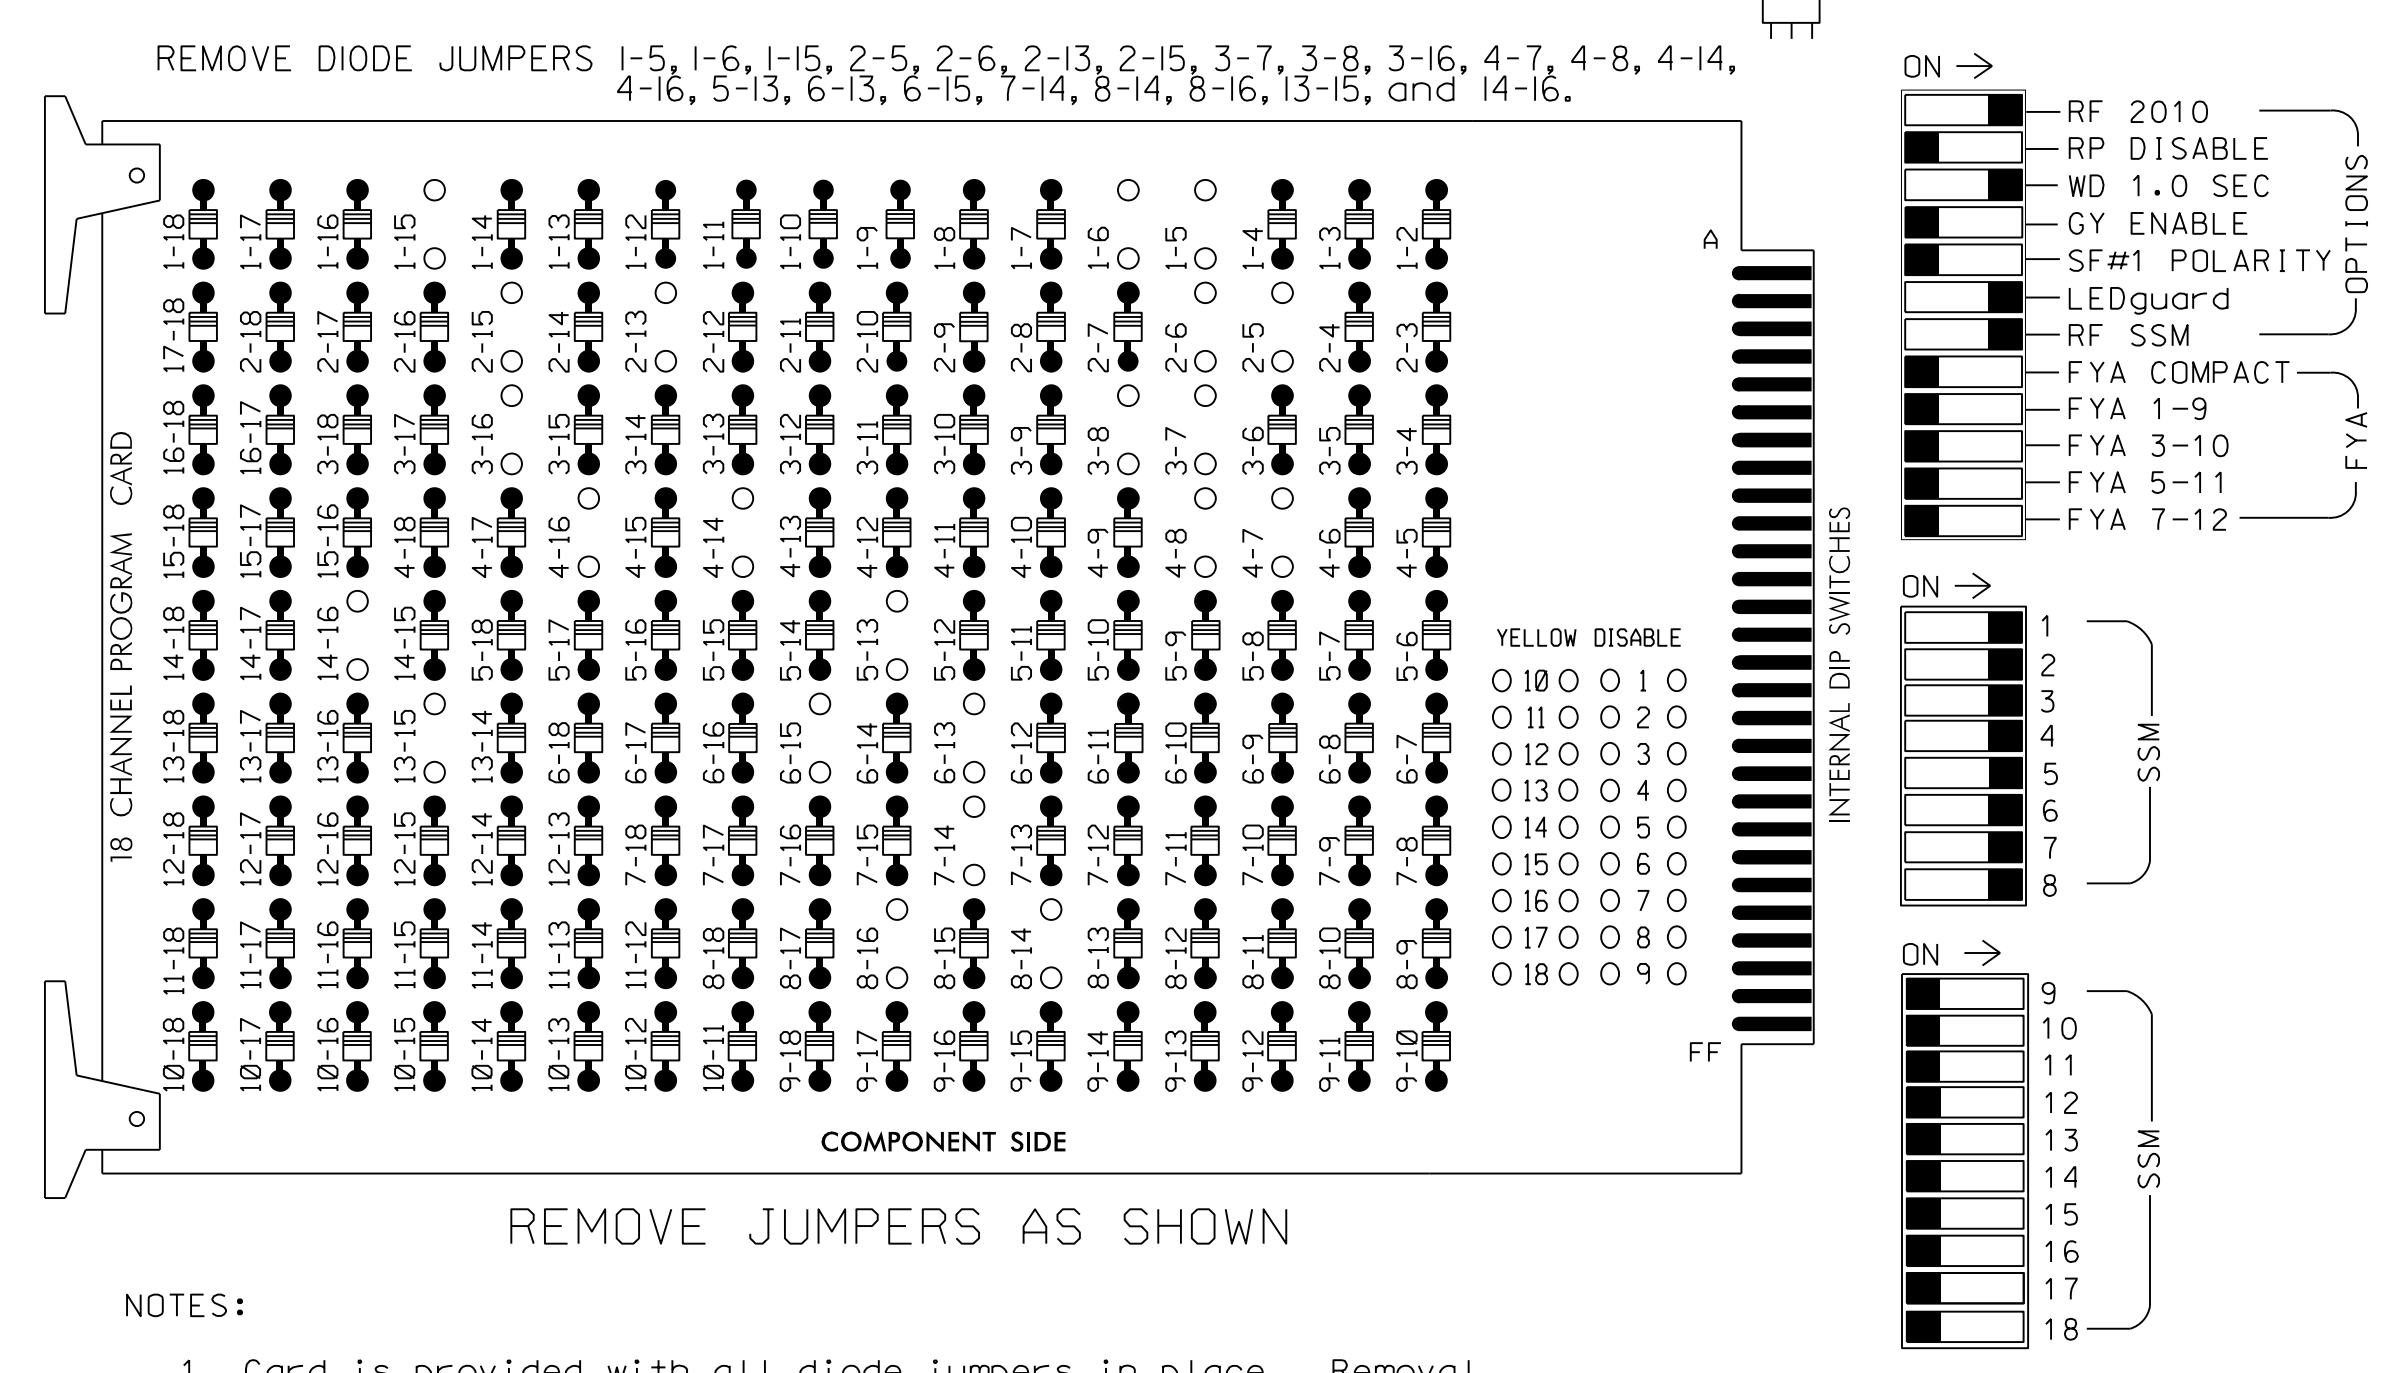

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Integrate monitor with Ethernet network in cabinet.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,
 S9,S10,S11,S12
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,
 6PED,7,8,8PED
 OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....NOT USED

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO. / CMU CHANNEL NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11,12	82	21,22, 23	P21, P22	31,32	23	41,42	P41, P42	51	42	61,62, 63	P61, P62	71,72	63	81,82	P81, P82	NU	NU	NU
RED		128			101			134			107								
YELLOW		129			102			135			108								
GREEN		130			103			136			109								
RED ARROW	125			116			131			122									
YELLOW ARROW	126	126		117	117		132	132		123	123								
GREEN ARROW	127	127		118	118		133	133		124	124								
Hand icon				113			104			119			110						
Walking person icon				115			106			121			112						


NU = Not Used

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE POSITION LAYOUT


(front view)

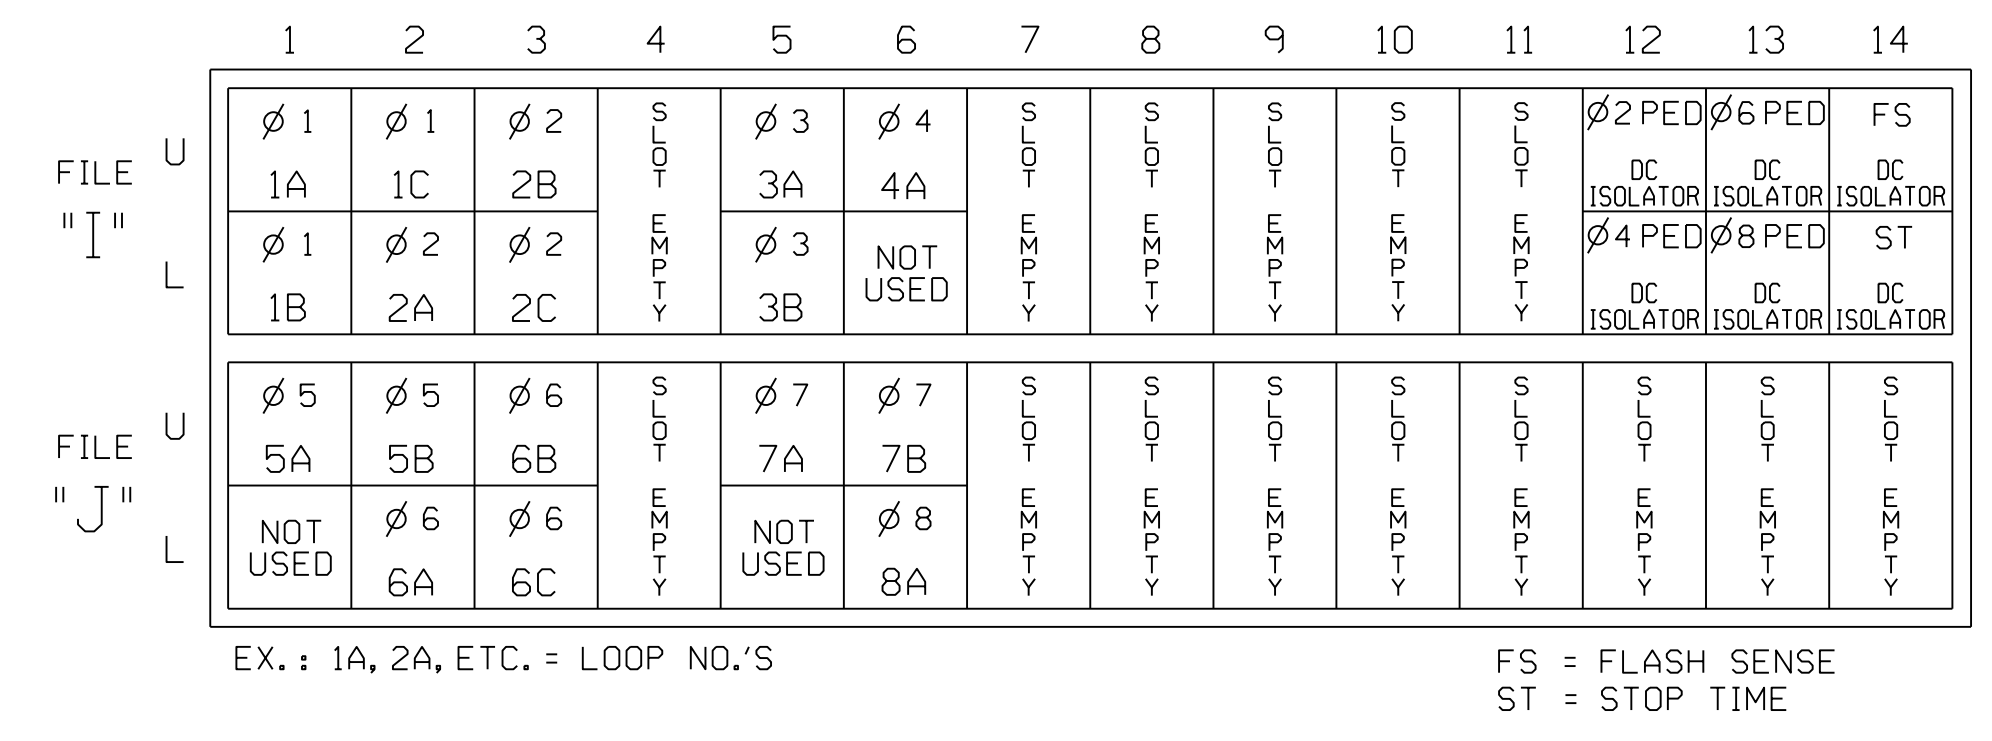

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
1A	TB2-1,2	I1U	56	1	1	YES				S
1B	TB2-3,4	I1L	56	1	1	YES				S
1C	TB2-5,6	I2U	39	2	1	YES		15		S
2A	TB2-7,8	I2L	43	12	2	YES			X	N
2B	TB2-9,10	I3U	63	32	2	YES			X	N
2C	TB2-11,12	I3L	76	42	2	YES			X	N
3A	TB4-5,6	I5U	58	3	3	YES				S
3B	TB4-7,8	I5L	58	3	3	YES				S
4A	TB4-9,10	I6U	41	4	4	YES				S
5A	TB3-1,2	J1U	55	5	5	YES				S
5B	TB3-5,6	J2U	40	6	5	YES		15		S
6A	TB3-7,8	J2L	44	16	6	YES			X	N
6B	TB3-9,10	J3U	64	36	6	YES			X	N
6C	TB3-11,12	J3L	77	46	6	YES			X	N
7A	TB5-5,6	J5U	57	7	7	YES		3		S
7B	TB5-9,10	J6U	42	8	7	YES				S
8A	TB5-11,12	J6L	46	18	8	YES				S

NOTE:
INSTALL DC ISOLATORS IN INPUT FILE SLOTS I12 AND I13.

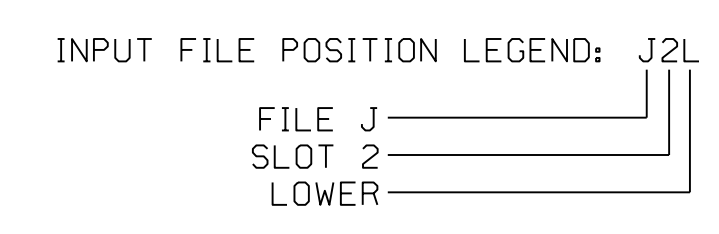

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0596
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Final Design
Electrical Detail

Stantec
 Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

ELECTRICAL AND PROGRAMMING DETAILS FOR:
 Prepared in the Offices of:

 750 N. Greenfield Pkwy, Garner, NC 27529


US 401 (Raeford Road)
 at
 SR 1104 (Strickland Bridge Road)
 Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn
 PREPARED BY: M RG WILSON REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL
 NORTH CAROLINA PROFESSIONAL ENGINEER
 SEAL 045933
 LAWRENCE E. OVERN
 3/29/2018
 DATE
 SIG. INVENTORY NO. 06-0596

PHASING DIAGRAM

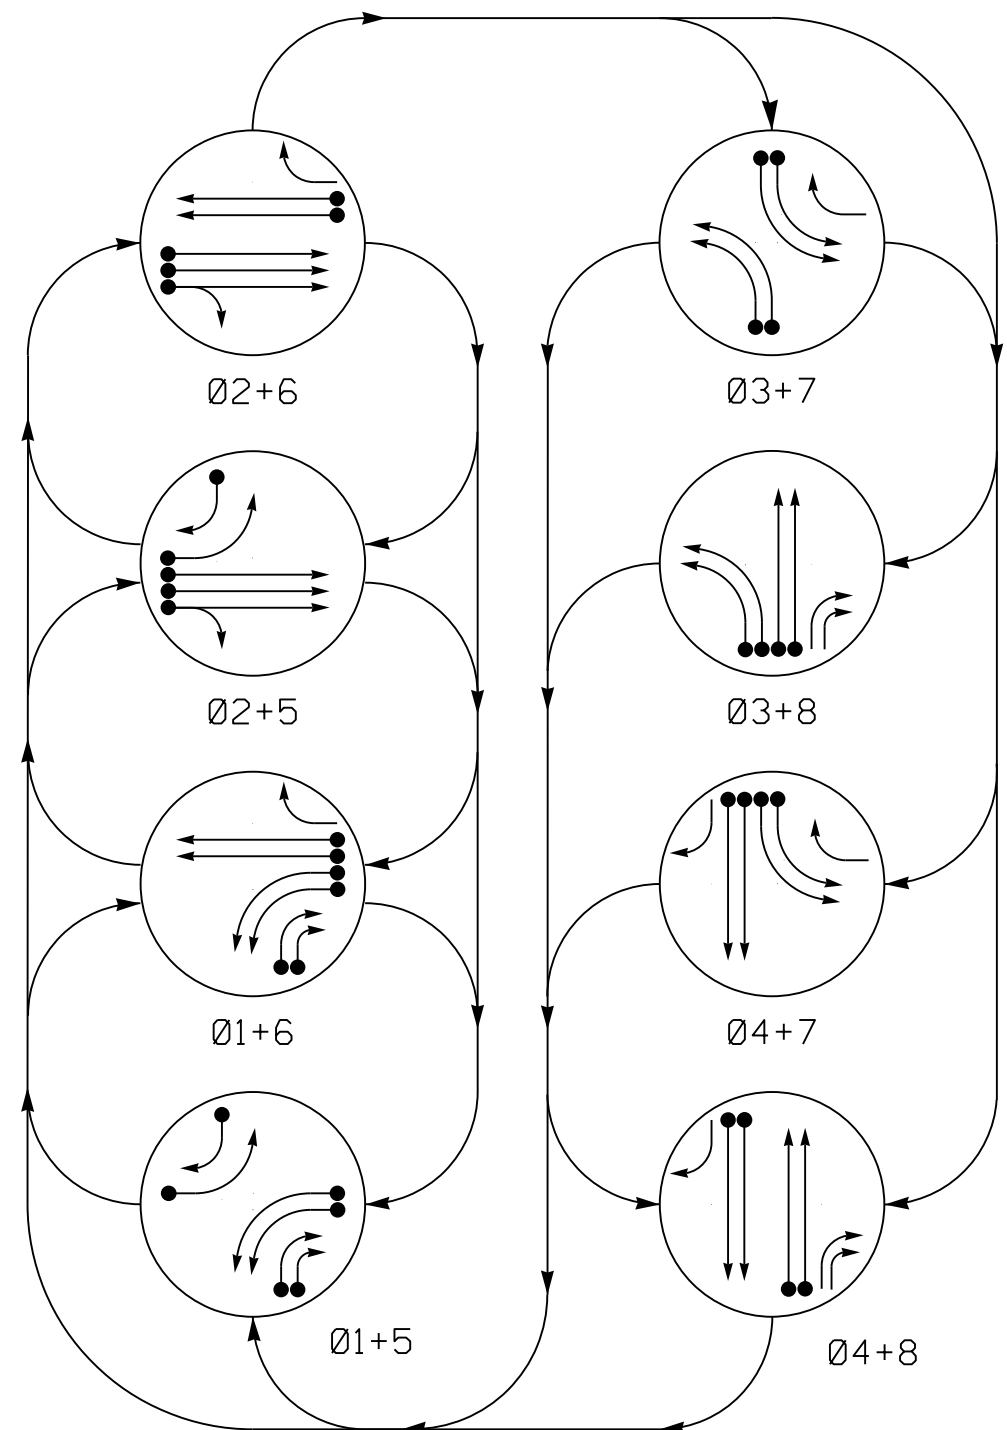

PHASING DIAGRAM DETECTION LEGEND


- ◀ ● DETECTED MOVEMENT
- ◀ ○ UNDETECTED MOVEMENT (OVERLAP)
- ◀ - - UNSIGNALIZED MOVEMENT
- ◀ - - - PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE							
	01+5	01+6	02+5	02+6	03+7	03+8	04+7	04+8
11, 12	←	←	←	←	←	←	←	←
21, 22, 23, 24	←	←	←	←	←	←	←	←
31, 32	←	←	←	←	←	←	←	←
41, 43	←	←	←	←	←	←	←	←
42	←	←	←	←	←	←	←	←
51	←	←	←	←	←	←	←	←
61, 63	←	←	←	←	←	←	←	←
62	←	←	←	←	←	←	←	←
71, 72	←	←	←	←	←	←	←	←
81, 82, 85	←	←	←	←	←	←	←	←
83, 84	←	←	←	←	←	←	←	←

SIGNAL FACE I.D.

All Heads L.E.D.

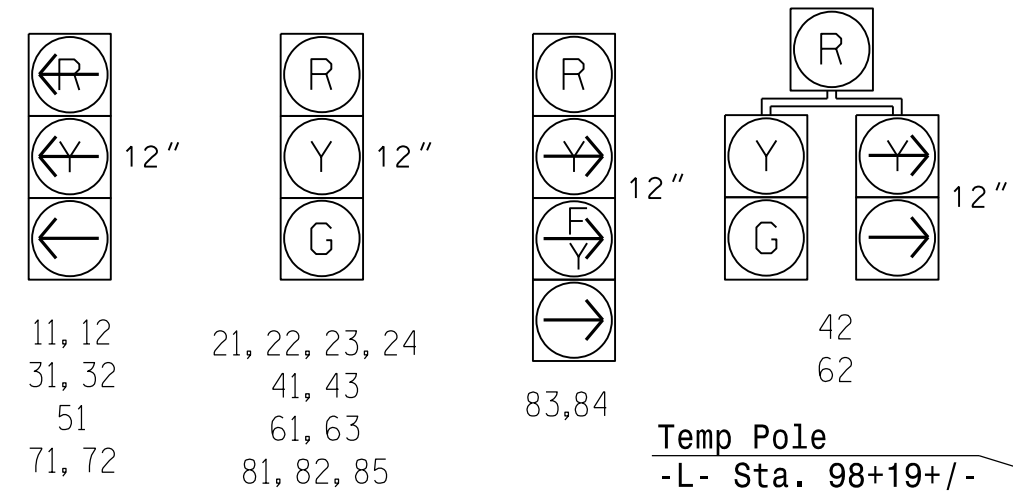

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
1A	6X40	0	*	-	1	Yes	-	-	-	S	-	X
1B	6X40	0	*	-	1	Yes	-	-	-	S	-	X
1C	6X40	0	*	-	1	Yes	-	15	-	S	-	X
1D	6X40	0	*	-	1	Yes	-	15	-	S	-	X
2A	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2B	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2C	6X6	300	*	-	2	Yes	-	-	-	N	-	X
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
2E	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
2F	6X40	0	*	-	2	Yes	2.0	5	-	G	-	X
3A	6X40	0	*	-	3	Yes	-	-	-	S	-	X
3B	6X40	0	*	-	3	Yes	-	-	-	S	-	X
4A	6X6	250	*	-	4	No	-	-	-	N	-	X
4B	6X6	250	*	-	4	No	-	-	-	N	-	X
4C	6X40	0	*	-	4	Yes	2.0	5	-	G	-	X
4D	6X40	0	*	-	4	Yes	2.0	5	-	G	-	X
5A	6X40	0	*	-	5	Yes	-	-	-	S	-	X
5B	6X40	0	*	-	5	Yes	-	15	-	S	-	X
6A	6X6	300	*	-	6	Yes	-	-	-	N	-	X
6B	6X6	300	*	-	6	Yes	-	-	-	N	-	X
6C	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
6D	6X40	0	*	-	6	Yes	2.0	5	-	G	-	X
7A	6X40	0	*	-	7	Yes	-	-	-	S	-	X
7B	6X40	0	*	-	7	Yes	-	-	-	S	-	X

*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal heads numbered 21 & 22.
- Set all detector units to presence mode.
- Locate new cabinet foundation so as not to obstruct sight distance of vehicles turning right on red.
- The cabinet should be designed to include an Auxiliary Output File for future use.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Field adjust temporary poles as needed.

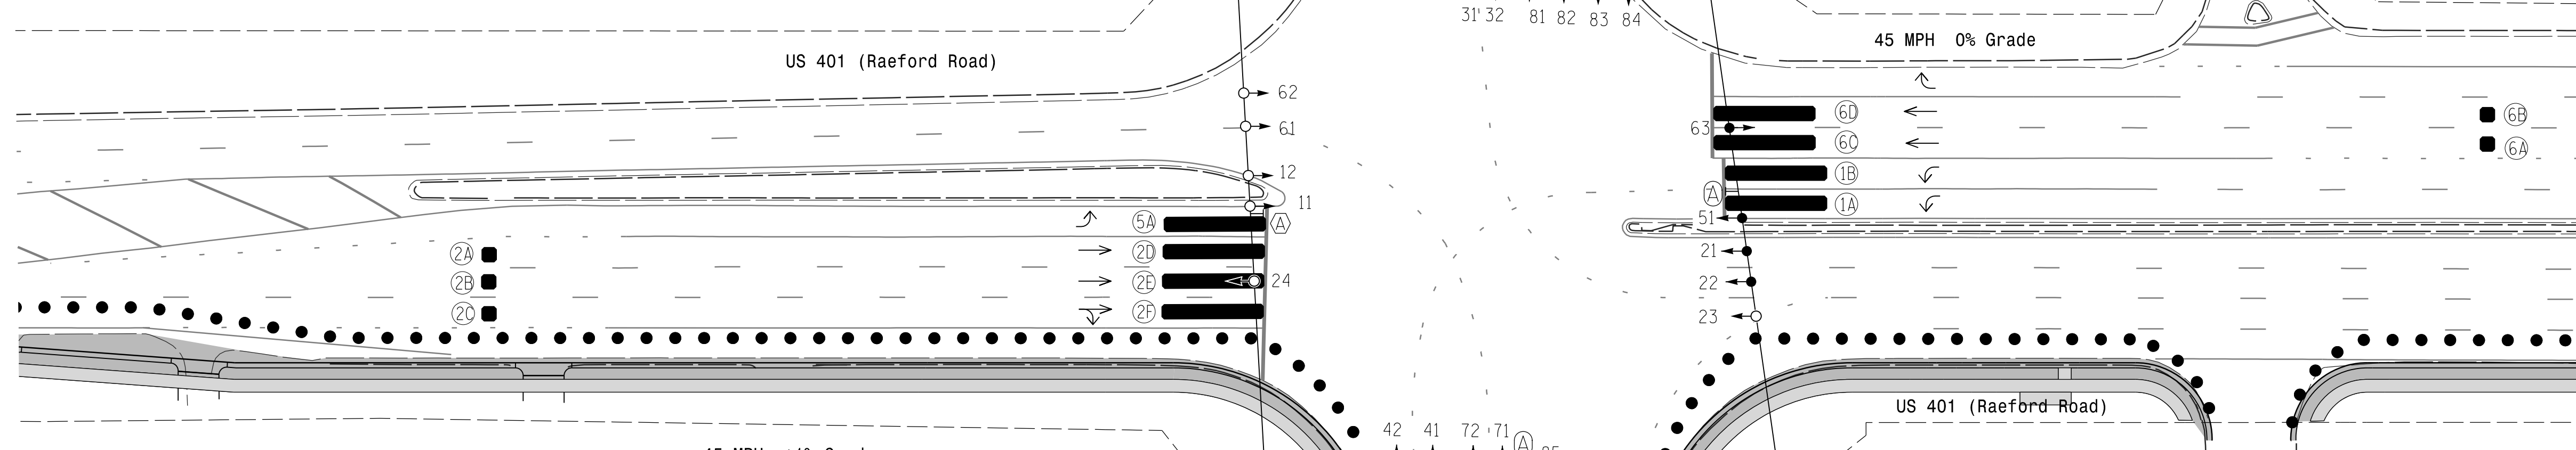

ASC/3 TIMING CHART


FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	-	-	-	-	-	-	-
Ped Clear	-	-	-	-	-	-	-	-
Veh. Extension *	2.0	6.0	2.0	6.0	2.0	6.0	2.0	6.0
Max 1 *	20	60	30	40	20	60	30	40
Yellow	3.0	4.4	3.0	4.2	3.0	4.5	3.0	4.4
Red Clear	4.1	2.4	4.2	2.4	3.7	2.2	4.2	2.5
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds / Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	5	-	15	-	5
Time To Reduce *	-	30	-	20	-	30	-	20
Minimum Gap	-	3.0	-	3.0	-	3.0	-	3.0
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
8A	6X6	300	*	-	8	No	-	-	-	N	-	X
8B	6X6	300	*	-	8	No	-	-	-	N	-	X
8C	6X40	0	*	-	8	Yes	2.0	5	-	G	-	X
8D	6X40	0	*	-	8	Yes	2.0	5	-	G	-	X

*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

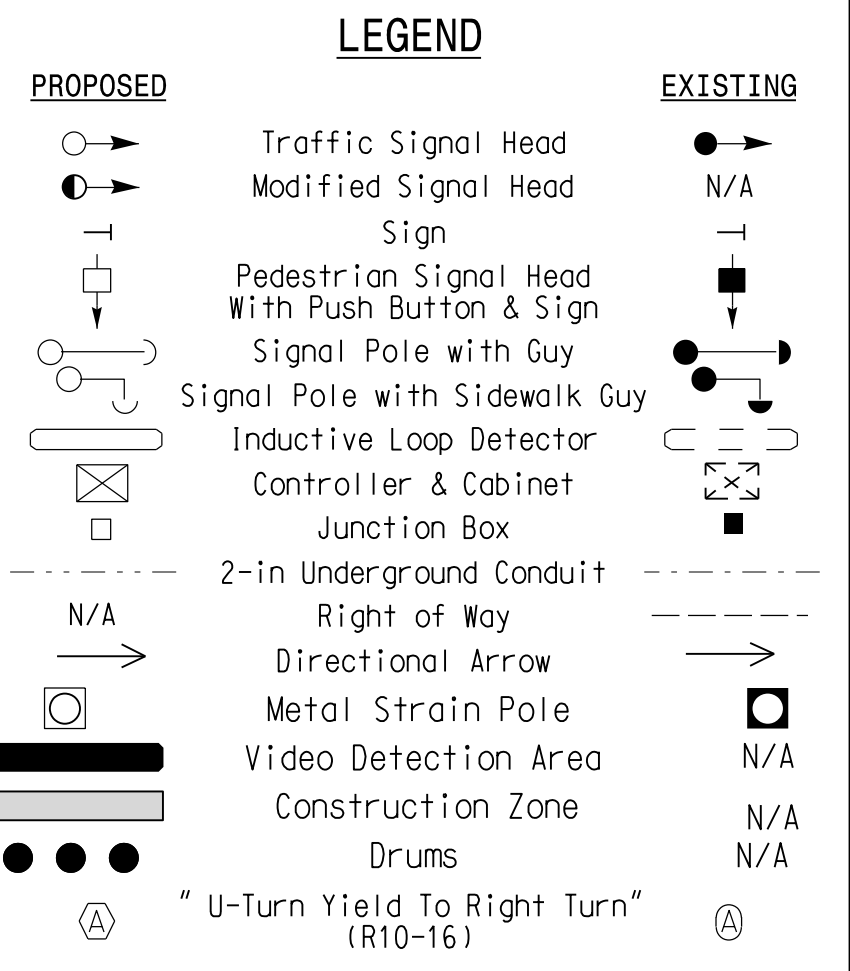

Signal Upgrade Temporary Signal Design 1 - TMP Phase I

Stantec Consulting Services Inc.
801 Jones Franklin Road-Suite 300
Raleigh, NC 27606
Tel. (919) 851-6866
Fax. (919) 851-7024
www.stantec.com
License No. F-0672

Prepared for the Offices of:

750 N. Greenfield Pkwy, Garner, NC 27526

US 401 (Raeford Road)
at
NC 162 (Bunce Road) /
SR 1411 (Bunce Road)

Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: E D Harris

PREPARED BY: K Williams REVIEWED BY: B L Watson

REVISIONS: INIT. DATE

3/29/2018



SIG. INVENTORY NO. 06-027411

3/29/2018 10:58:11 AM
 U:\Projects\4405\SIG-15.0\Drawings\Signal\Design\Phase 1\U-4405-SIG-15.0-027411.dgn
 User: rfmccoy

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

REMOVE DIODE JUMPERS 1-5, 1-6, 1-9, 2-5, 2-6, 3-7, 3-8, 3-9, 4-7, 4-8, 4-9, 5-9, 6-9, and 8-9.

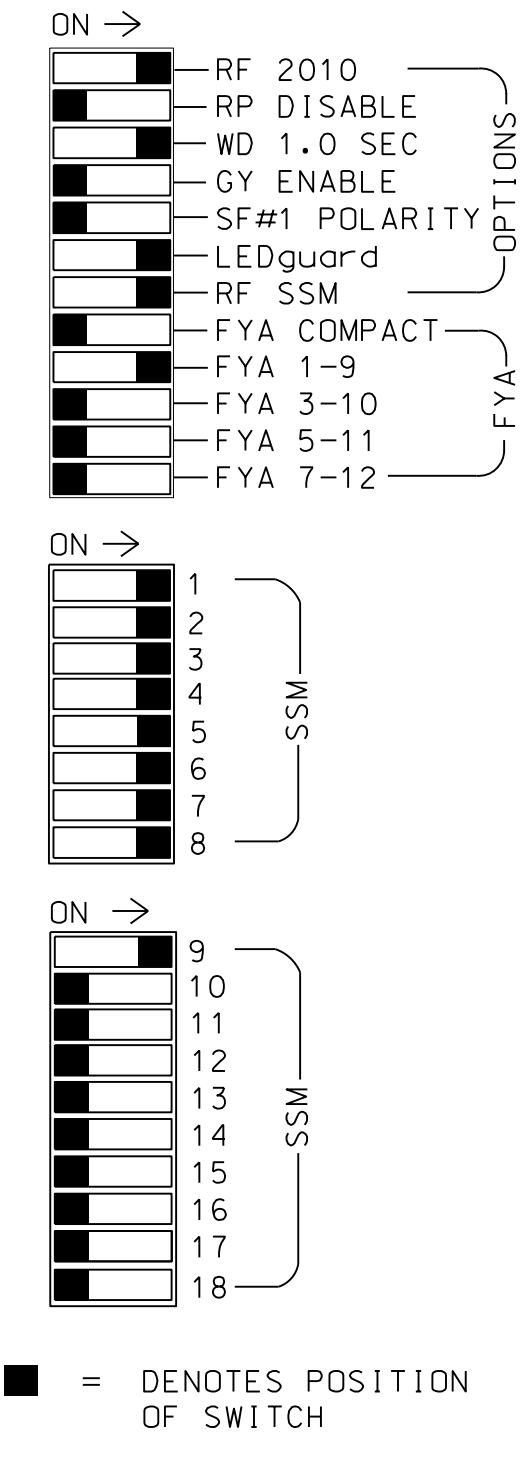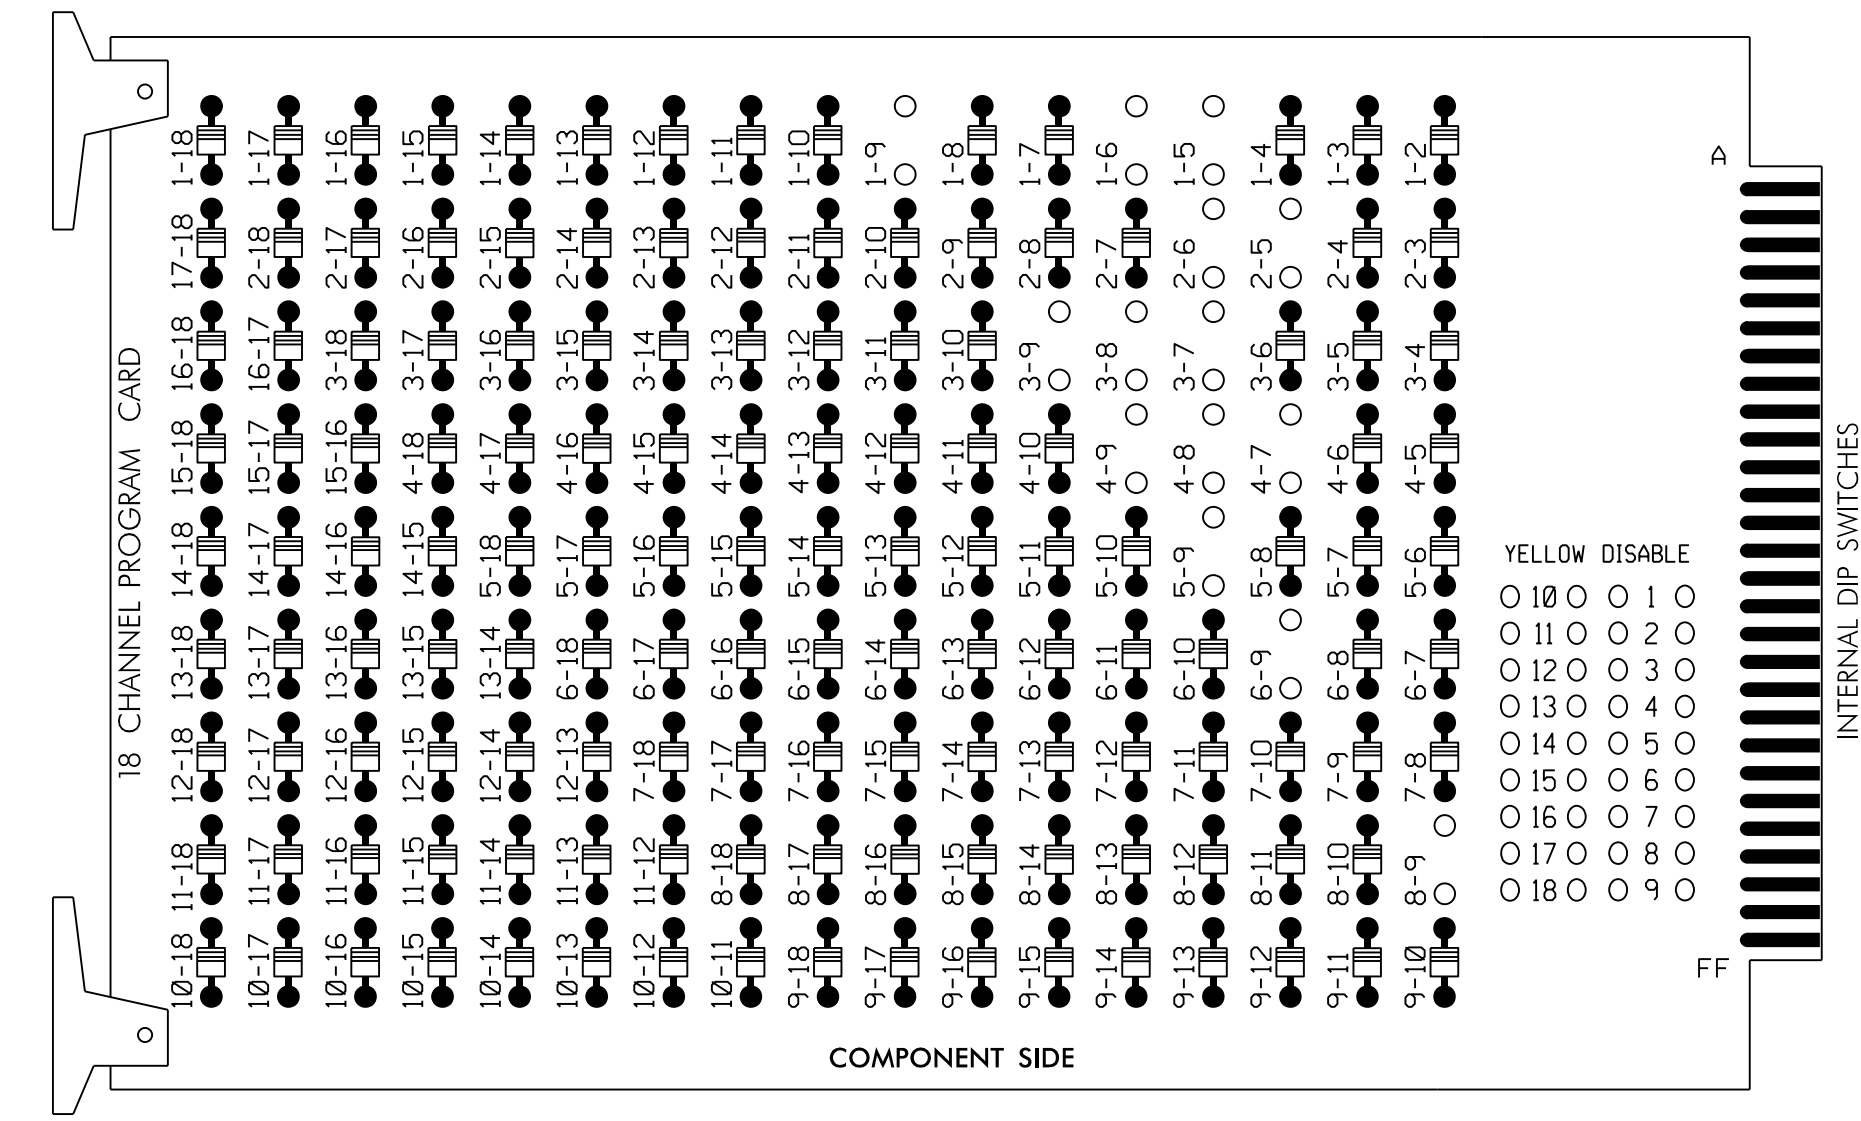

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

REMOVE JUMPERS AS SHOWN

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Program controller to start up in phase 2 and 6 Green.
3. The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....Contractor Supplied
 ECONOLITE 2070LX
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,S10,
 S11,AUX S1
 PHASES USED.....1,2,3,4,5,6,7,8
 OVERLAP A.....*
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....NOT USED
 OVERLAP G.....*

* See Overlap Programming Detail on Sheet 2

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11,12	83,84	21,22, 23,24	NU	31,32	41,42, 43	NU	51	42	61,62, 63	NU	71,72	62	81,82, 85	NU	83,84	NU	NU
RED			128			101				134						107		A121
YELLOW			129			102				135						108		
GREEN			130			103				136						109		
RED ARROW	125					116			131							122		
YELLOW ARROW	126					117			132	132						123	123	A122
FLASHING YELLOW ARROW																		A123
GREEN ARROW	127	127				118			133	133						124	124	

NU = Not Used
 * See pictorial of head wiring in detail this sheet.

INPUT FILE POSITION LAYOUT

(front view)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
FILE U	U	U	U	U	U	U	U	U	U	U	U	U	U	U	FS
"I"	U	U	U	U	U	U	U	U	U	U	U	U	U	U	DC ISOLATOR
L	U	U	U	U	U	U	U	U	U	U	U	U	U	U	ST
FILE U	U	U	U	U	U	U	U	U	U	U	U	U	U	U	DC ISOLATOR
"J"	U	U	U	U	U	U	U	U	U	U	U	U	U	U	
L	U	U	U	U	U	U	U	U	U	U	U	U	U	U	


EX.: 1A, 2A, ETC. = LOOP NO.'S
 FS = FLASH SENSE
 ST = STOP TIME

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

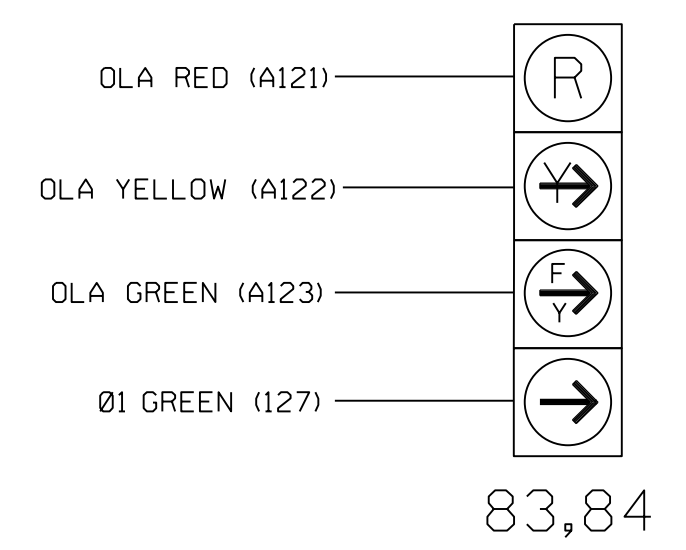

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0274T1
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 1 - TMP Phase I
 Electrical Detail - Sheet 1 of 2

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared in the Offices of: 	US 401 (Raeford Road) at NC 162 (Bunce Road)/ SR 1411 (Bunce Road) Division 6 Cumberland County Fayetteville	SEAL
	PLAN DATE: March 2018 PREPARED BY: G B Spell	REVIEWED BY: L Overn REVIEWED BY:	REVISIONS INIT. DATE

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

Toggle Until Positioned
on Overlap G

OVERLAP G

Select TMG VEH OVLP [G] and 'NORMAL'

```

TMG VEH OVLP...[G] TYPE: .....NORMAL
PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
INCLUDED . . . . . X . . . . .
LAG GRN 0.0 YEL 0.0 RED 0.0

```

Toggle Until Positioned
on Overlap A

OVERLAP A

Select TMG VEH OVLP [A] and 'PPLT FYA'

```

TMG VEH OVLP...[A] TYPE: .....PPLT FYA
PROTECTED LEFT TURN.... PHASE 1
OPPOSING THROUGH..... OVERLAP G

FLASHING ARROW OUTPUT.....CH9 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0

```

END PROGRAMMING

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0274T1
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A


Temporary Design 1 - TMP Phase I
 Electrical Detail - Sheet 2 of 2

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Stantec <small>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</small>	<small>ELECTRICAL AND PROGRAMMING DETAILS FOR:</small> <small>Prepared in the Offices of: Mobility and Signal Division STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION Signal Management Section 750 N. Greenfield Pkwy, Garner, NC 27529</small>	US 401 (Raeford Road) at NC 162 (Bunce Road) / SR 1411 (Bunce Road) Division 6 Cumberland County Fayetteville PLAN DATE: March 2018 REVIEWED BY: L Overn PREPARED BY: G B Spell REVIEWED BY:	SEAL LAWRENCE E. OVERN ENGINEER 045933 3/29/2018
			DATE User: rfmunce

DATE: 3/29/2018 10:45:12 AM
 User: rfmunce
 File: \\server\projects\signal\signal\electrical\detail\signal\temporary\signal\phase 1\U-4405\sig.ele_06-0274T1.dgn

PHASING DIAGRAM

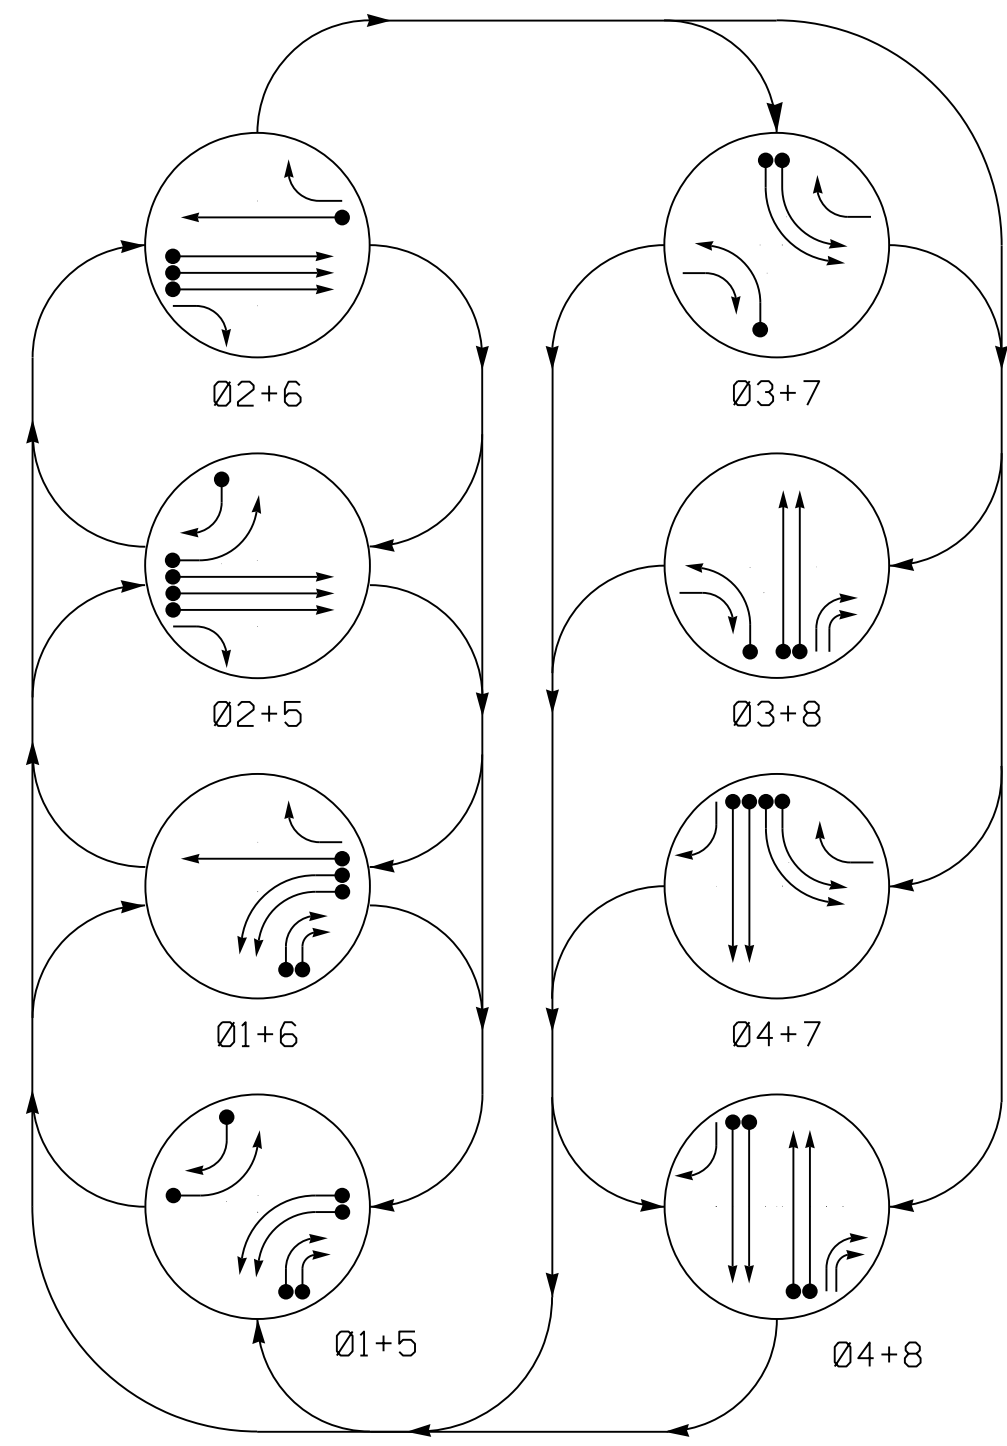


PHASING DIAGRAM DETECTION LEGEND

- DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- PEDESTRIAN MOVEMENT

SIGNAL FACE	PHASE							
	Ø 1 + 5	Ø 1 + 6	Ø 2 + 5	Ø 2 + 6	Ø 3 + 7	Ø 3 + 8	Ø 4 + 7	Ø 4 + 8
11, 12	←	←	←	←	←	←	←	←
21, 22, 24	R	R	G	G	R	R	R	Y
23	R	R	G	G	R	R	R	Y
31	←	←	←	←	←	←	←	←
41, 43	R	R	R	R	R	R	G	G
42	R	R	R	R	R	R	G	G
51	←	←	←	←	←	←	←	←
61, 63	R	G	R	G	R	R	R	Y
62	R	G	R	G	R	R	R	Y
71, 72	←	←	←	←	←	←	←	←
81, 82, 85	R	R	R	R	R	G	R	G
83, 84	←	←	R	R	R	R	R	Y

SIGNAL FACE I.D.

All Heads L.E.D.

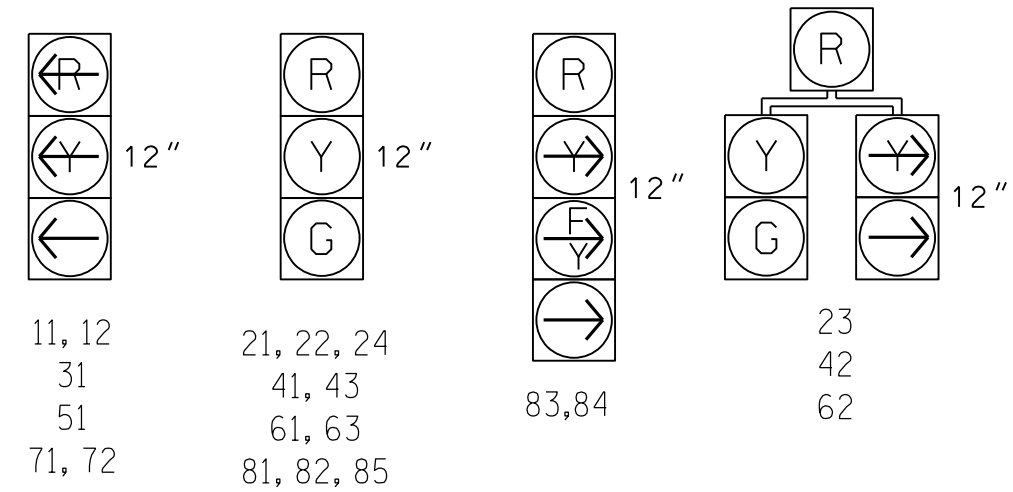

ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
1A	6X40	0	*	-	1	Yes	-	-	-	S	-	-
1B	6X40	0	*	-	1	Yes	-	-	-	S	-	-
1C	6X40	0	*	-	1	Yes	-	15	-	S	-	-
1D	6X40	0	*	-	1	Yes	-	15	-	S	-	-
2A	6X6	300	*	-	2	Yes	-	-	-	N	-	-
2B	6X6	300	*	-	2	Yes	-	-	-	N	-	-
2C	6X6	300	*	-	2	Yes	-	-	-	N	-	-
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-	-
2E	6X40	0	*	-	2	Yes	2.0	5	-	G	-	-
2F	6X40	0	*	-	2	Yes	2.0	5	-	G	-	-
3A	6X40	0	*	-	3	Yes	-	-	-	S	-	-
4A	6X6	250	*	-	4	No	-	-	-	N	-	-
4B	6X6	250	*	-	4	No	-	-	-	N	-	-
4C	6X40	0	*	-	4	Yes	2.0	5	-	G	-	-
4D	6X40	0	*	-	4	Yes	2.0	5	-	G	-	-
5A	6X40	0	*	-	5	Yes	-	-	-	S	-	-
5B	6X40	0	*	-	5	Yes	-	15	-	S	-	-
6A	6X6	300	*	-	6	Yes	-	-	-	N	-	-
6B	6X40	0	*	-	6	Yes	2.0	5	-	G	-	-
7A	6X40	0	*	-	7	Yes	-	-	-	S	-	-
7B	6X40	0	*	-	7	Yes	-	-	-	S	-	-

*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

DETECTOR INSTALLATION CHART CONTINUED BELOW

8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal heads numbered #21, 22, 61, and 62.
- Set all detector units to presence mode.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

US 401 (Raeford Road)

45 MPH +1% Grade

US 401 (Raeford Road)

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
8A	6X6	300	*	-	8	No	-	-	-	N	-	X
8B	6X6	300	*	-	8	No	-	-	-	N	-	X
8C	6X40	0	*	-	8	Yes	2.0	5	-	G	-	X
8D	6X40	0	*	-	8	Yes	2.0	5	-	G	-	X

*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	-	-	-	-	-	-	-
Ped Clear	-	-	-	-	-	-	-	-
Veh. Extension *	2.0	6.0	2.0	6.0	2.0	6.0	2.0	6.0
Max 1 *	20	60	30	40	20	60	30	40
Yellow	3.0	4.4	3.0	4.2	3.0	4.5	3.0	4.4
Red Clear	4.2	2.4	3.9	2.7	3.6	2.2	4.0	2.3
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds / Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	5	-	15	-	5
Time To Reduce *	-	30	-	20	-	30	-	20
Minimum Gap	-	3.0	-	3.0	-	3.0	-	3.0
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

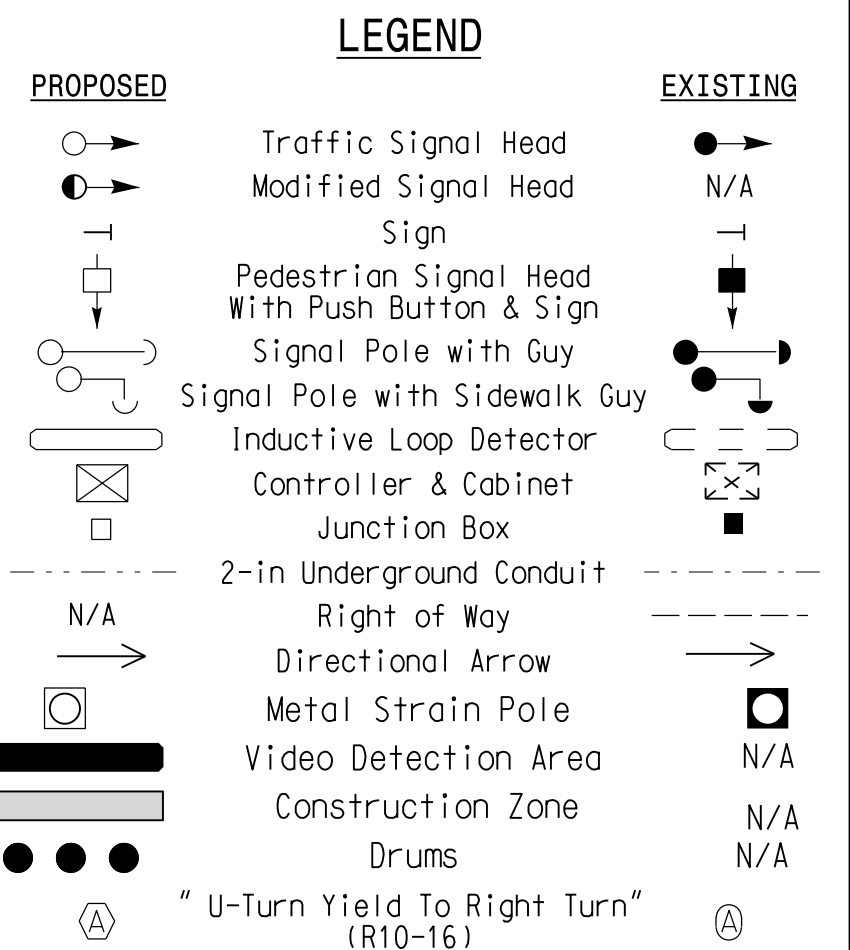

Signal Upgrade Temporary Signal Design 2 - TMP Phase II

Stantec
Stantec Consulting Services Inc.
801 Jones Franklin Road-Suite 300
Raleigh, NC 27606
Tel. (919) 851-6866
Fax. (919) 851-7024
www.stantec.com
License No. F-0672

Prepared for the Offices of:
Transportation Mobility and Safety Division
750 N. Greenfield Pkwy, Garner, NC 27526
SCALE: 0 40
1"=40'

US 401 (Raeford Road) at NC 162 (Bunce Road) / SR 1411 (Bunce Road)
Division 6 Cumberland County Fayetteville
PLAN DATE: March 2018 REVIEWED BY: E D Harris
PREPARED BY: K Williams REVIEWED BY: B L Watson


PROFESSIONAL SEAL
29449
BENJAMIN WATSON
ENGINEER
FAYETTEVILLE, NC
3/29/2018
DATE
SIG. INVENTORY NO. 06-027412

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

3/29/2018 10:58:11 AM User: rfmccoy

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

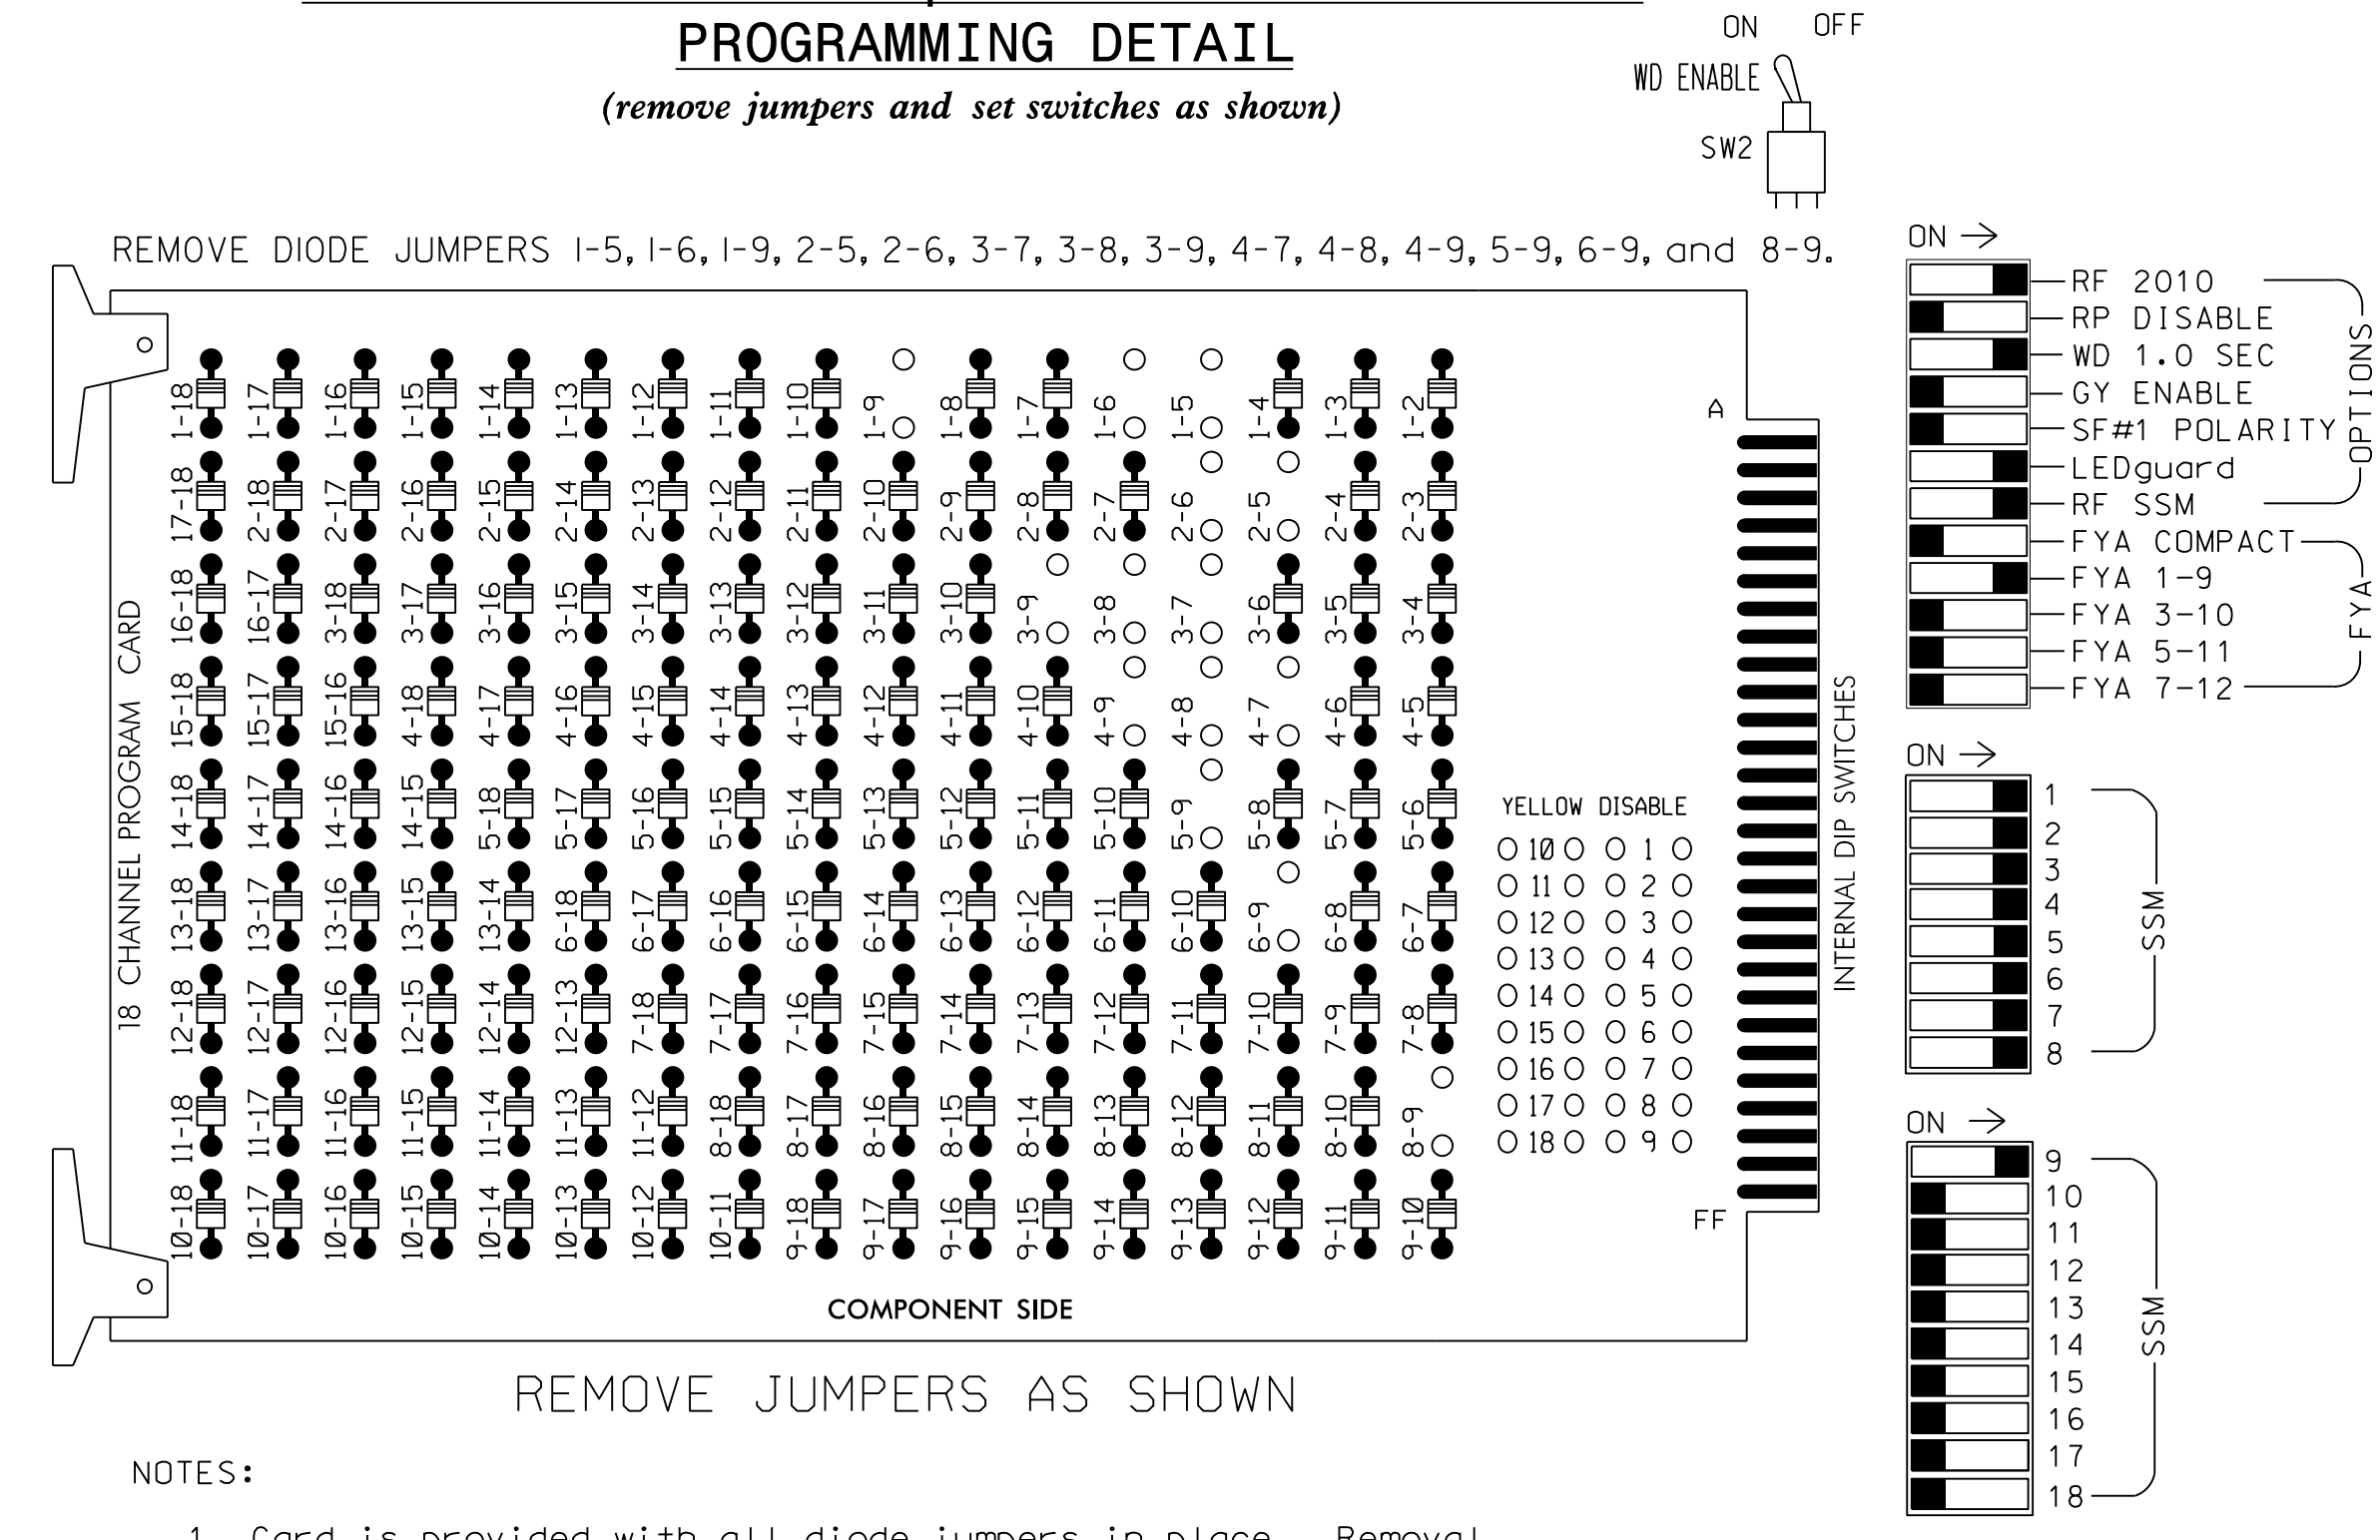

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 and 6 Green.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....Contractor Supplied
ECONOLITE 2070LX
CABINET.....332 W/AUX
SOFTWARE.....ECONOLITE ASC/3-2070
CABINET MOUNT.....BASE
OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,S10,
S11,AUX S1

PHASES USED.....1,2,3,4,5,6,7,8
OVERLAP A.....*
OVERLAP B.....NOT USED
OVERLAP C.....NOT USED
OVERLAP D.....NOT USED
OVERLAP G.....*

* See Overlap Programming Detail on Sheet 2


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11,12	83,84	21,22, 23,24	31	23	41,42, 43	51	42	61,62, 63	71,72	62	81,82, 85	83,84	NU	NU	NU	NU	NU
RED			128			101			134			107				A121		
YELLOW			129			102			135			108						
GREEN			130			103			136			109						
RED ARROW	125			116			131			122								
YELLOW ARROW	126			117	117		132	132		123	123					A122		
FLASHING YELLOW ARROW																A123		
GREEN ARROW	127	127		118	118		133	133		124	124							

NU = Not Used
★ See pictorial of head wiring in detail this sheet.

INPUT FILE POSITION LAYOUT

(front view)

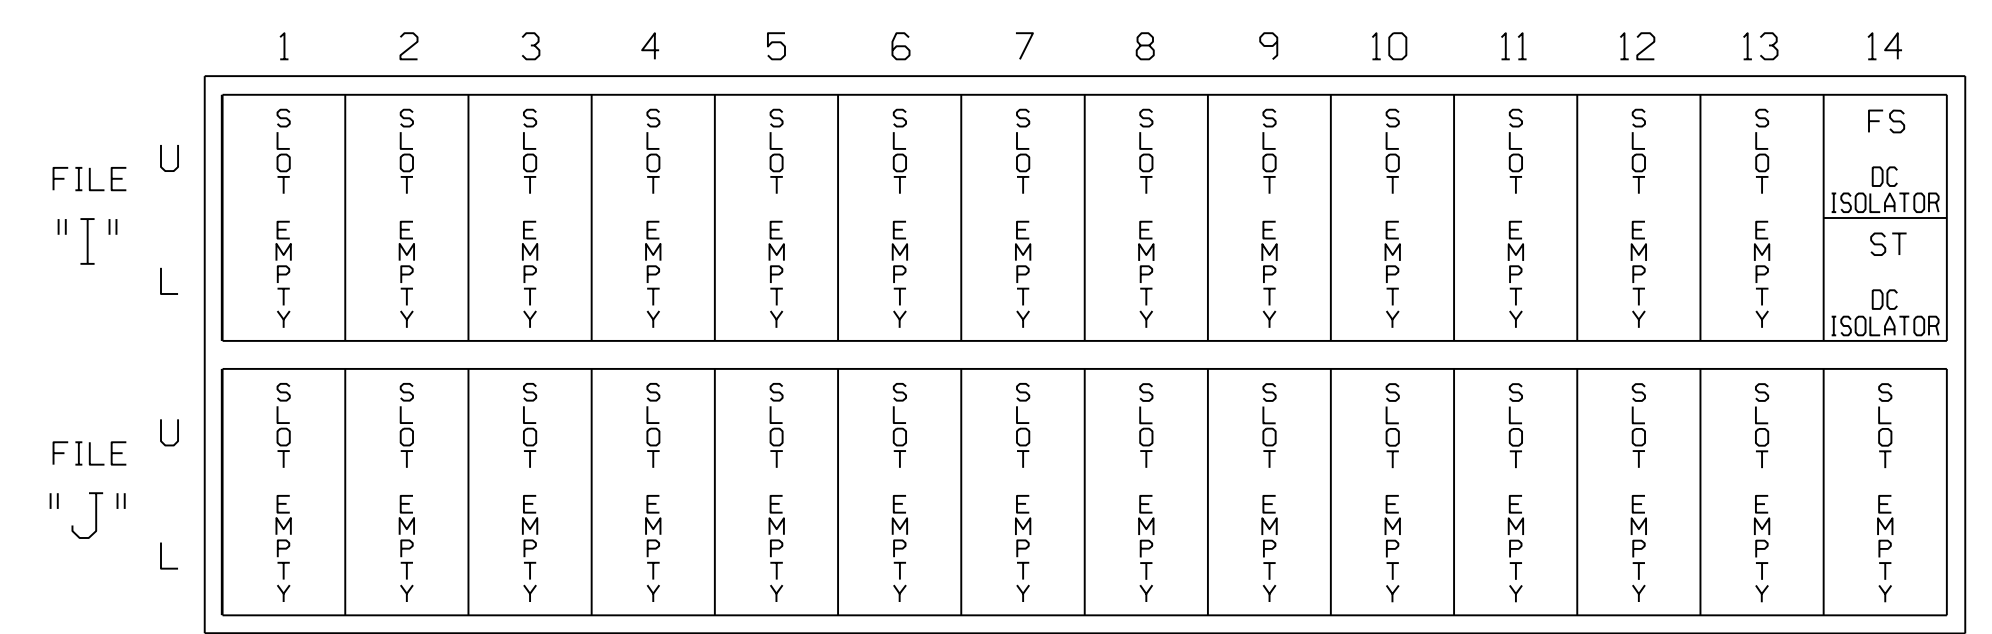


EX.: 1A, 2A, ETC. = LOOP NO.'S
FS = FLASH SENSE
ST = STOP TIME

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

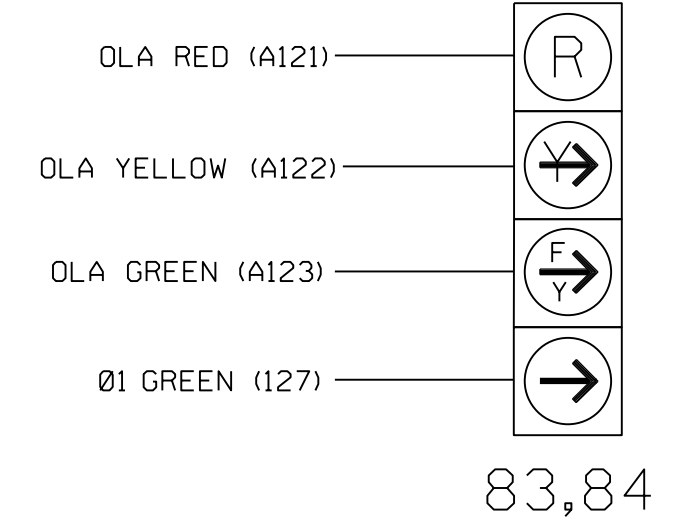

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0274T2
DESIGNED: March 2018
SEALED: 03-29-2018
REVISED: N/A

Temporary Design 2 - TMP Phase II
Electrical Detail - Sheet 1 of 2

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p> <p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>US 401 (Raeford Road) at NC 162 (Bunce Road)/ SR 1411 (Bunce Road)</p> <p>Division 6 Cumberland County Fayetteville</p>		<p>SEAL</p> <p>3/29/2018</p>							
		<p>PLAN DATE: March 2018</p> <p>PREPARED BY: G B Spell</p>	<p>REVIEWED BY: L Overn</p> <p>REVIEWED BY:</p>		<p>REVISIONS</p> <table border="1"> <tr> <th>NO.</th> <th>DATE</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	NO.	DATE	INIT.	DATE		
NO.	DATE	INIT.	DATE								

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

Toggle Until Positioned
on Overlap G

OVERLAP G

Select TMG VEH OVLP [G] and 'NORMAL'

```

TMG VEH OVLP...[G] TYPE: .....NORMAL
PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
INCLUDED . . . . . X . . . . .
LAG GRN 0.0 YEL 0.0 RED 0.0

```

Toggle Until Positioned
on Overlap A

OVERLAP A

Select TMG VEH OVLP [A] and 'PPLT FYA'

```

TMG VEH OVLP...[A] TYPE: .....PPLT FYA
PROTECTED LEFT TURN.... PHASE 1
OPPOSING THROUGH..... OVERLAP G

FLASHING ARROW OUTPUT.....CH9 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0

```

END PROGRAMMING

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 06-0274T2
DESIGNED: March 2018
SEALED: 03-29-2018
REVISED: N/A


Temporary Design 2 - TMP Phase II
Electrical Detail - Sheet 2 of 2

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Stantec <small>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</small>	<small>ELECTRICAL AND PROGRAMMING DETAILS FOR:</small> <small>Prepared in the Offices of: The Department of Transportation Mobility and Safety Division STATE OF NORTH CAROLINA Office of Signal Management 750 N. Greenfield Pkwy, Garner, NC 27529</small>	US 401 (Raeford Road) at NC 162 (Bunce Road) / SR 1411 (Bunce Road) <small>Division 6 Cumberland County Fayetteville</small>	<small>SEAL</small> <small>SEAL 045933 ENGINEER LAWRENCE E. OVERN</small>											
	<small>PLAN DATE: March 2018 REVIEWED BY: L Overn</small> <small>PREPARED BY: G B Spell REVIEWED BY:</small>	<table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	REVISIONS	INIT.	DATE									
REVISIONS	INIT.	DATE												

DATE: 03/29/2018 10:45:12 AM
USER: rfmancey
FILE: \\server\projects\signal\signal\electrical\Temporary Signal\Phase 2\U-4405\sig.ele_06-0274T2.dgn

PHASING DIAGRAM

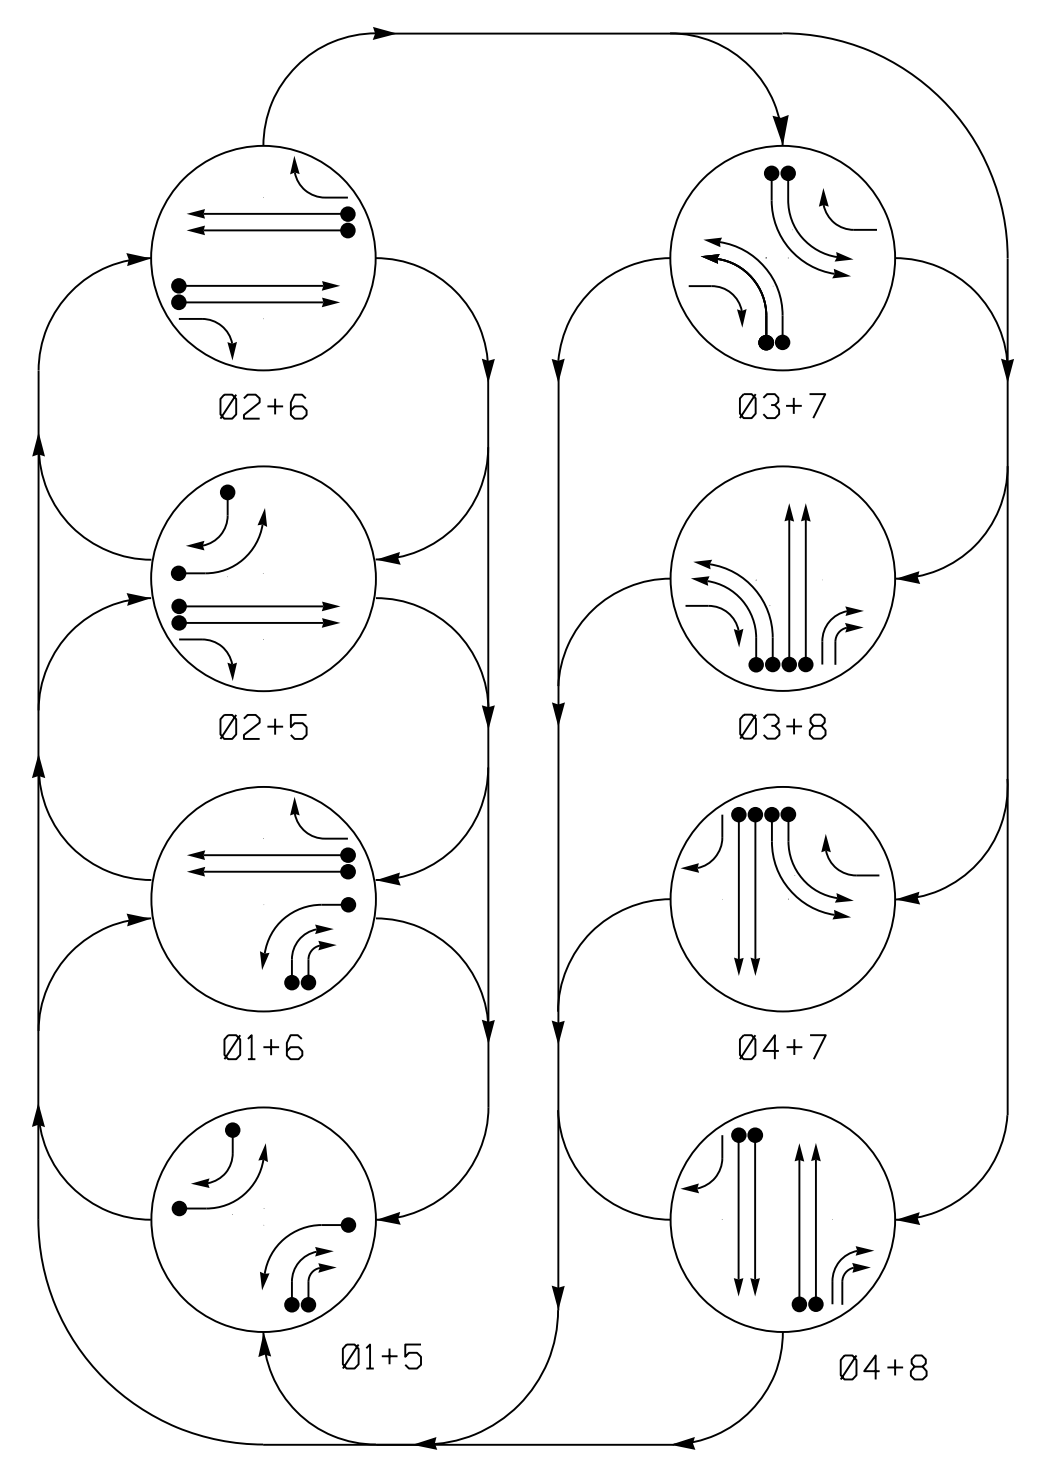

PHASING DIAGRAM DETECTION LEGEND


- DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- ▲ UNSIGNALIZED MOVEMENT
- ⬄ PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE							
	01+5	01+6	02+5	02+6	03+7	03+8	04+7	04+8
11	←	←	←	←	←	←	←	←
22, 23	R	R	G	G	R	R	R	Y
22	R	R	G	G	R	R	R	Y
31, 32	←	←	←	←	←	←	←	←
41, 43	R	R	R	R	R	R	G	G
42	R	R	R	R	R	R	G	G
51	←	←	←	←	←	←	←	←
61, 63	R	G	R	G	R	R	R	Y
62	R	G	R	G	R	R	R	Y
71, 72	←	←	←	←	←	←	←	←
81, 82, 85	R	R	R	R	R	G	R	G
83, 84	←	←	←	←	←	←	←	←

SIGNAL FACE I.D.

All Heads L.E.D.

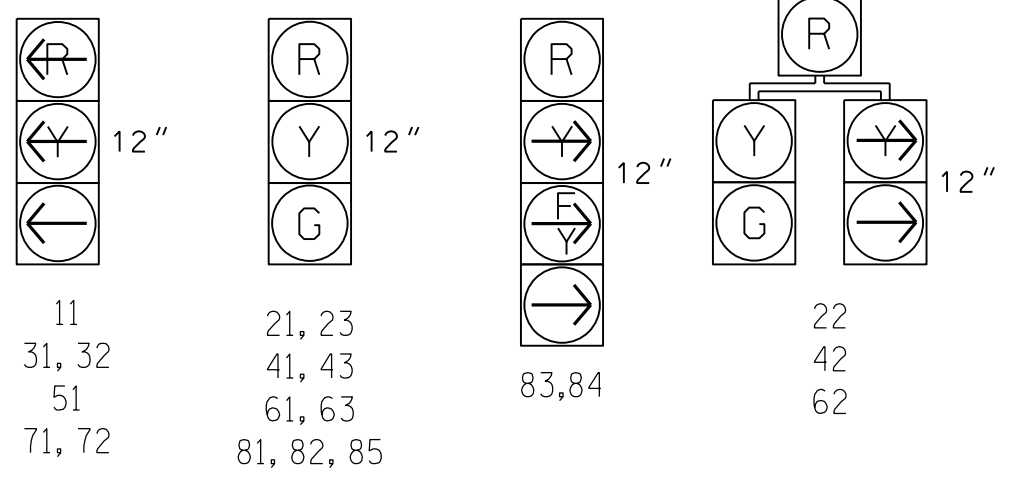

ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
1A	6X40	0	*	-	1	Yes	-	-	-	S	-	-
1B	6X40	0	*	-	1	Yes	-	15	-	S	-	-
1C	6X40	0	*	-	1	Yes	-	15	-	S	-	-
2A	6X6	300	*	-	2	Yes	-	-	-	N	-	-
2B	6X6	300	*	-	2	Yes	-	-	-	N	-	-
2C	6X40	0	*	-	2	Yes	2.0	5	-	G	-	-
2D	6X40	0	*	-	2	Yes	2.0	5	-	G	-	-
3A	6X40	0	*	-	3	Yes	-	-	-	S	-	-
3B	6X40	0	*	-	3	Yes	-	-	-	S	-	-
4A	6X6	250	*	-	4	No	-	-	-	N	-	-
4B	6X6	250	*	-	4	No	-	-	-	N	-	-
4C	6X40	0	*	-	4	Yes	2.0	5	-	G	-	-
4D	6X40	0	*	-	4	Yes	2.0	5	-	G	-	-
5A	6X40	0	*	-	5	Yes	-	-	-	S	-	-
5B	6X40	0	*	-	5	Yes	-	15	-	S	-	-
6A	6X6	300	*	-	6	Yes	-	-	-	N	-	-
6B	6X6	300	*	-	6	Yes	-	-	-	N	-	-
6C	6X40	0	*	-	6	Yes	2.0	5	-	G	-	-
6D	6X40	0	*	-	6	Yes	2.0	5	-	G	-	-
7A	6X40	0	*	-	7	Yes	-	-	-	S	-	-
7B	6X40	0	*	-	7	Yes	-	-	-	S	-	-


*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal heads numbered #11, 21, 22, 51, 61, and 62.
- Set all detector units to presence mode.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

DETECTOR INSTALLATION CHART CONTINUED BELOW

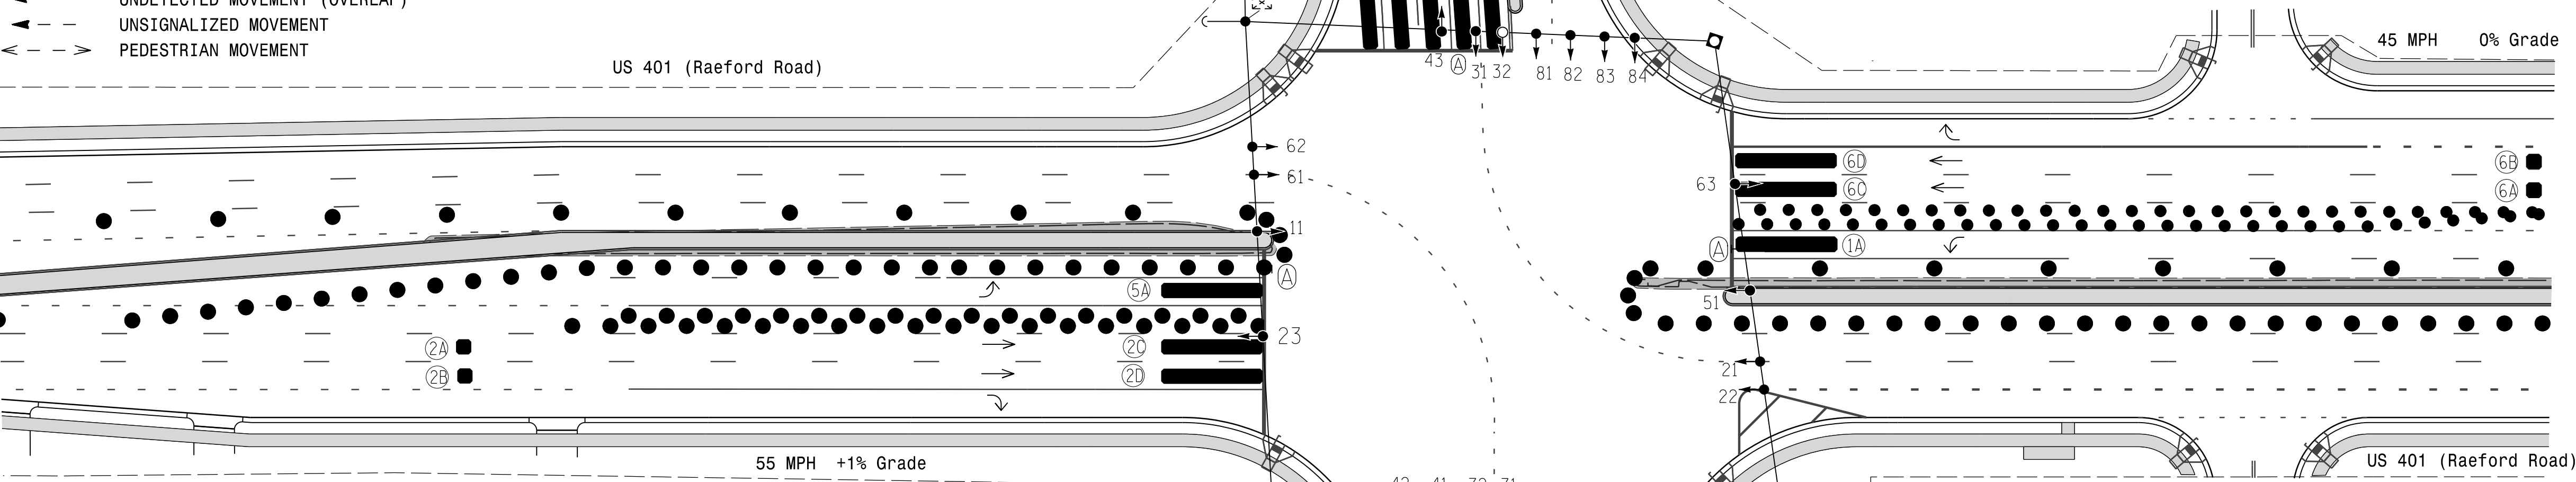

ASC/3 TIMING CHART


FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	-	-	-	-	-	-	-
Ped Clear	-	-	-	-	-	-	-	-
Veh. Extension *	2.0	6.0	2.0	6.0	2.0	6.0	2.0	6.0
Max 1 *	20	60	30	40	20	60	30	40
Yellow	3.0	4.4	3.0	4.2	3.0	4.5	3.0	4.4
Red Clear	4.0	2.4	4.2	2.5	3.8	2.2	4.1	2.5
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-	-	-
Seconds / Actuation *	-	-	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-	-	-
Time Before Reduction *	-	15	-	5	-	15	-	5
Time To Reduce *	-	30	-	20	-	30	-	20
Minimum Gap	-	3.0	-	3.0	-	3.0	-	3.0
Locking Detector	-	-	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
8A	6X6	300	*	-	8	No	-	-	-	N	-	-
8B	6X6	300	*	-	8	No	-	-	-	N	-	-
8C	6X40	0	*	-	8	Yes	2.0	5	-	G	-	-
8D	6X40	0	*	-	8	Yes	2.0	5	-	G	-	-

*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

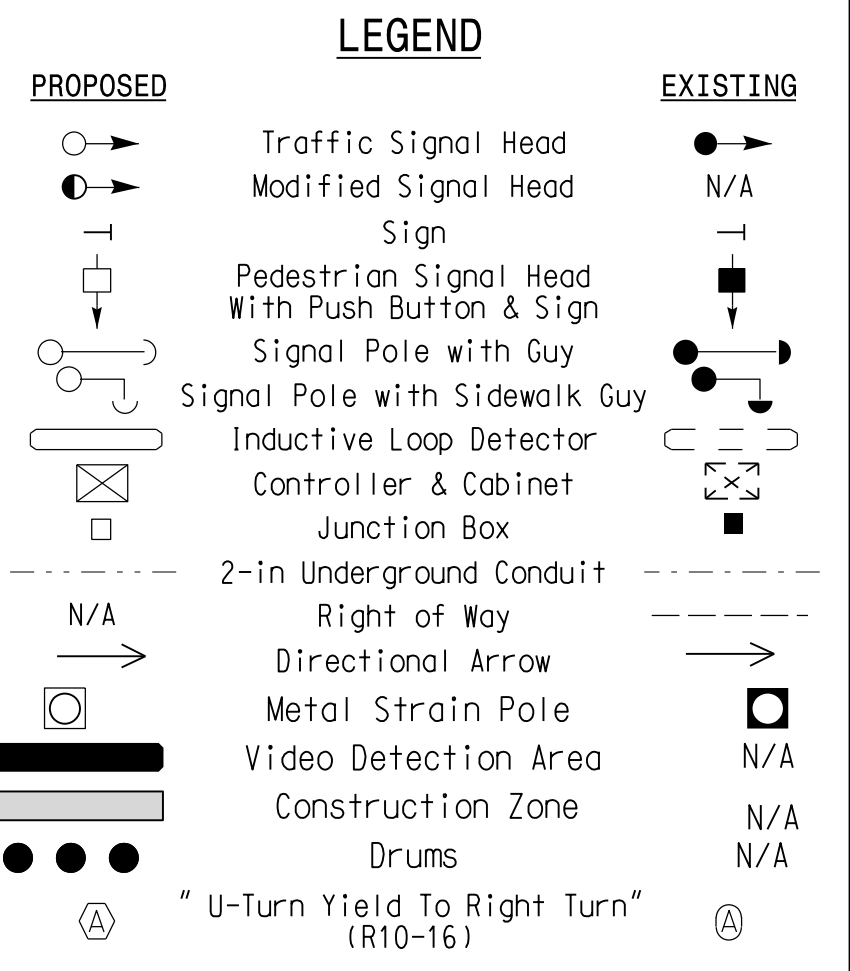

Signal Upgrade Temporary Signal Design 3 - TMP Phase III

Stantec
Stantec Consulting Services Inc.
801 Jones Franklin Road-Suite 300
Raleigh, NC 27606
Tel. (919) 851-6866
Fax. (919) 851-7024
www.stantec.com
License No. F-0672

Prepared for the Offices of:
Transportation Mobility and Safety Division
STATE OF NORTH CAROLINA
SIGNAL DESIGN SECTION
750 N. Greenfield Pkwy, Garner, NC 27526
SCALE
0 40
1"=40'

US 401 (Raeford Road) at NC 162 (Bunce Road) / SR 1411 (Bunce Road)
Division 6 Cumberland County Fayetteville
PLAN DATE: March 2018 REVIEWED BY: E D Harris
PREPARED BY: K Williams REVIEWED BY: B L Watson


PROFESSIONAL SEAL 29449
ENGINEER
BENJY L. WATSON
3/29/2018
SIG. INVENTORY NO. 06-027413

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

3/29/2018 10:51:11 AM User: rfmccoy

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

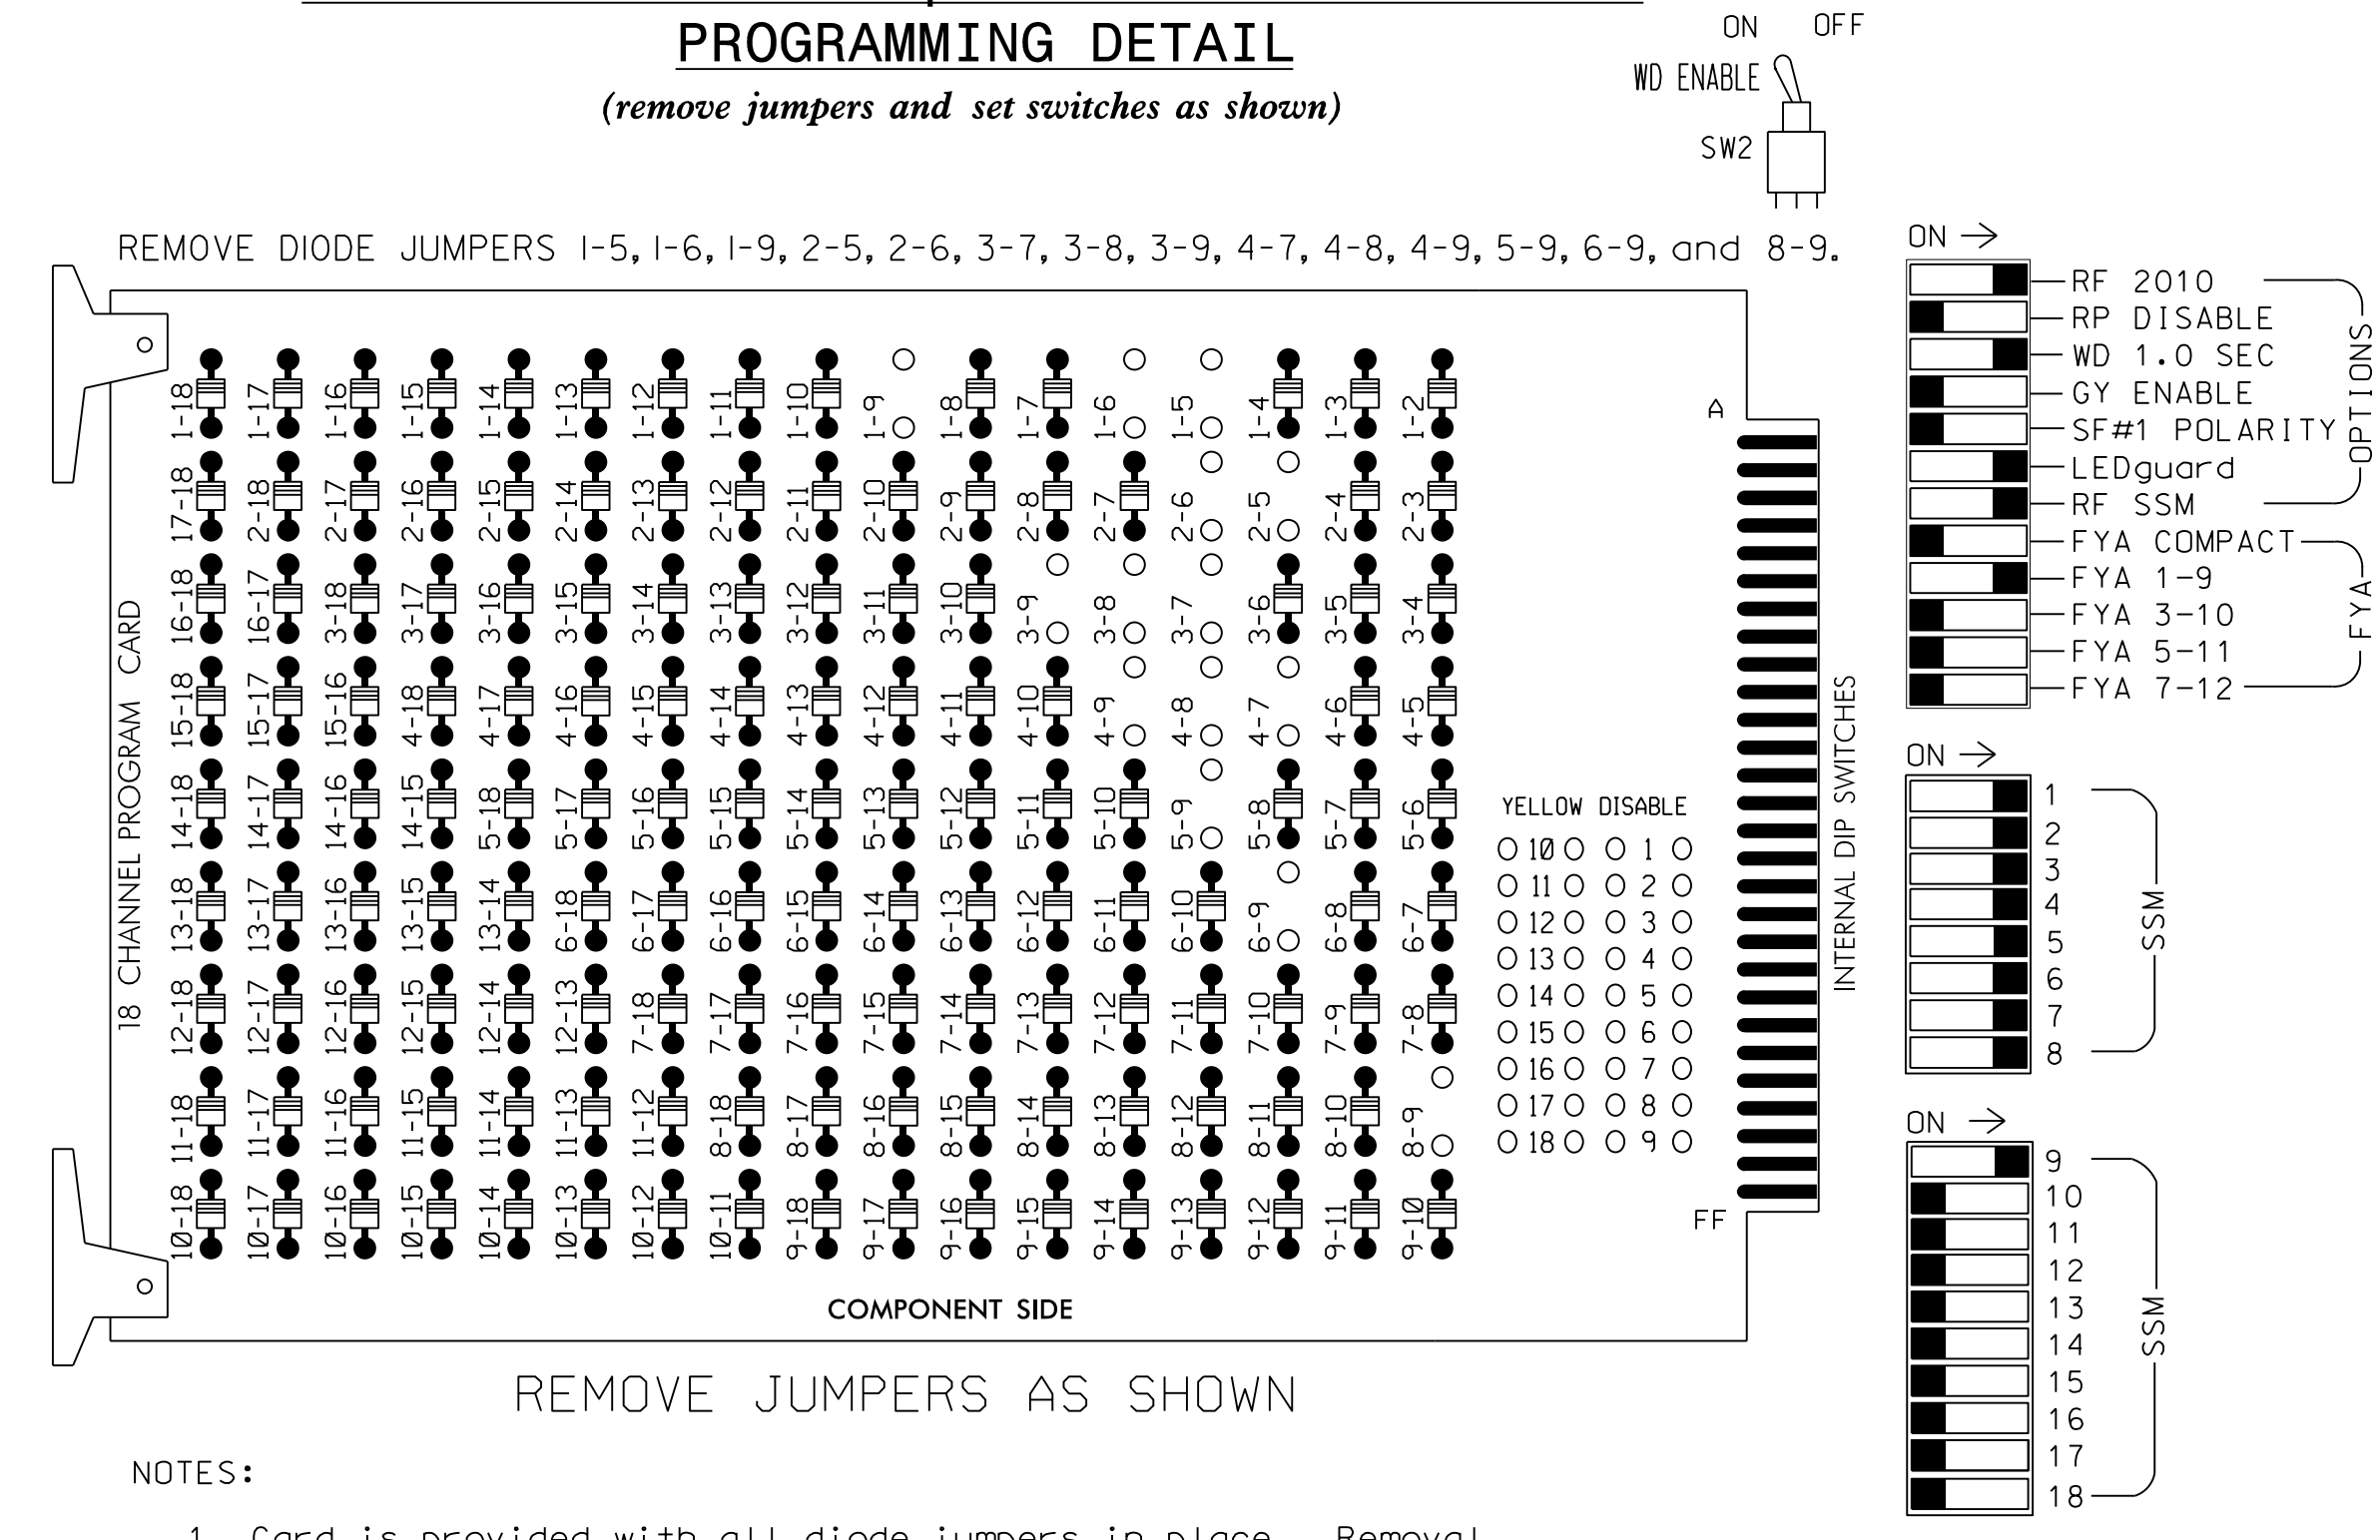

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Program controller to start up in phase 2 and 6 Green.
3. The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....Contractor Supplied
ECONOLITE 2070LX
CABINET.....332 W/AUX
SOFTWARE.....ECONOLITE ASC/3-2070
CABINET MOUNT.....BASE
OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,S10,
S11,AUX S1
PHASES USED.....1,2,3,4,5,6,7,8
OVERLAP A.....*
OVERLAP B.....NOT USED
OVERLAP C.....NOT USED
OVERLAP D.....NOT USED
OVERLAP G.....*

* See Overlap Programming Detail on Sheet 2


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11	83,84	21,22,23	NU	31,32	22	41,42,43	NU	51	42	61,62,63	NU	71,72	62	81,82,85	NU	83,84	NU	NU
RED			128			101				134			107			A121			
YELLOW			129			102				135			108						
GREEN			130			103				136			109						
RED ARROW	125			116						131			122						
YELLOW ARROW	126			117	117					132	132		123	123		A122			
FLASHING YELLOW ARROW																A123			
GREEN ARROW	127	127		118	118					133	133		124	124					

NU = Not Used
★ See pictorial of head wiring in detail this sheet.

INPUT FILE POSITION LAYOUT

(front view)

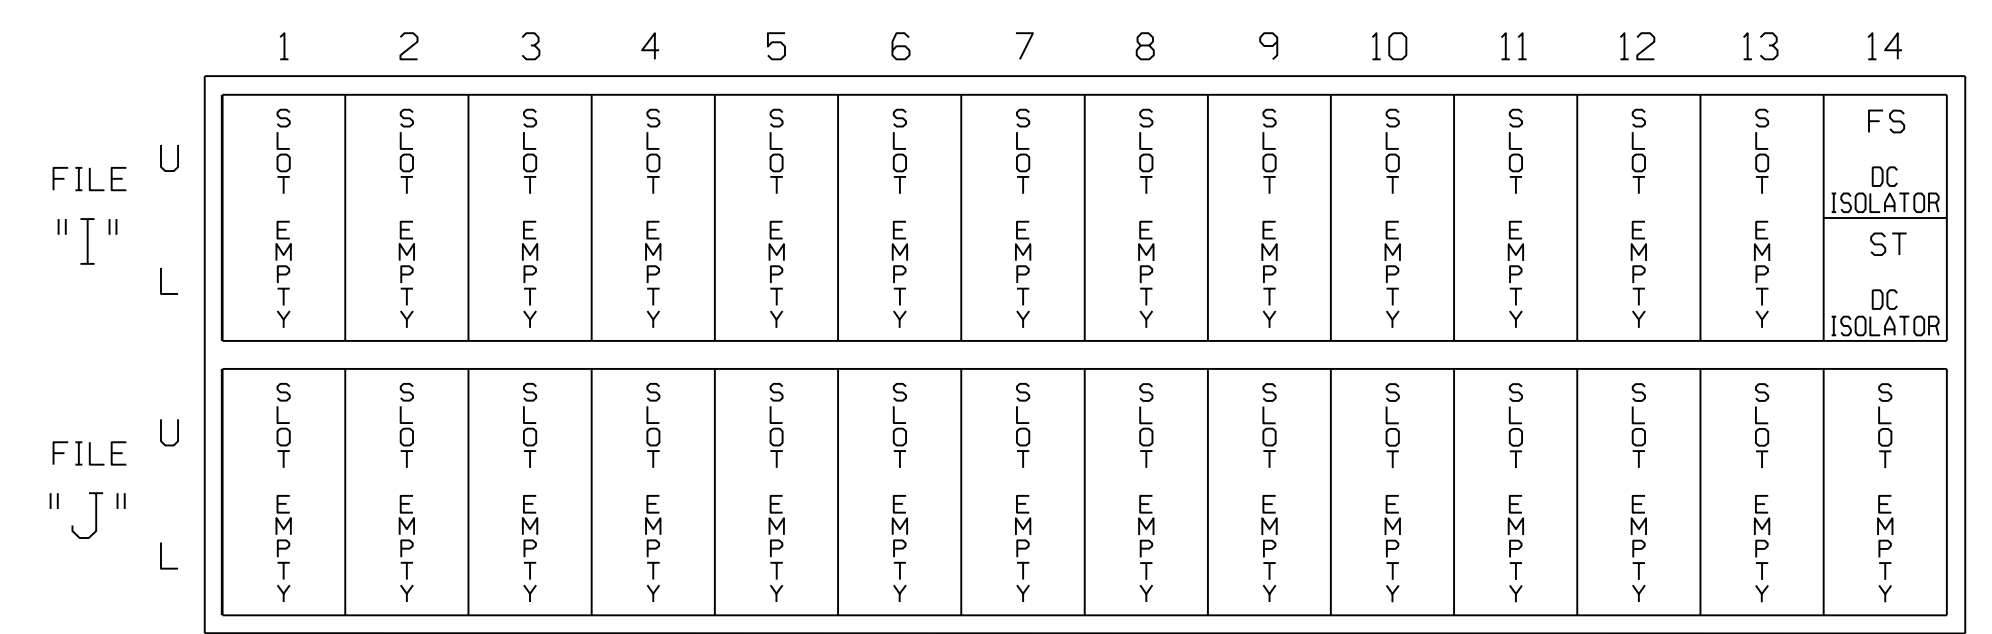


EX.: 1A, 2A, ETC. = LOOP NO.'S
FS = FLASH SENSE
ST = STOP TIME

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

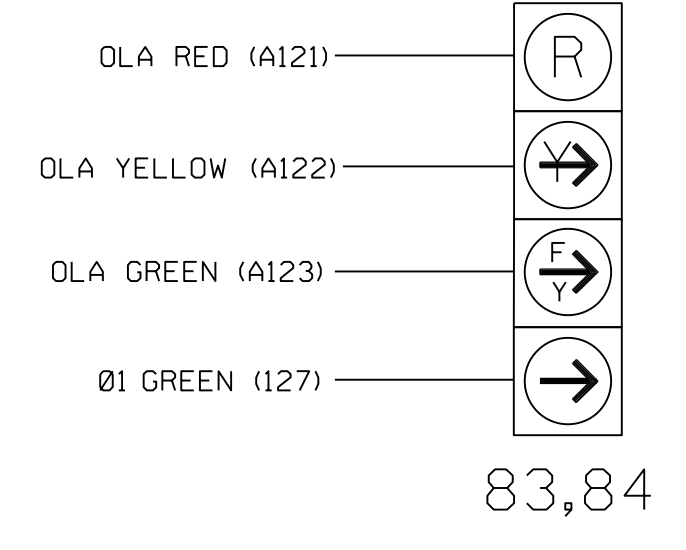

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0274T3
DESIGNED: March 2018
SEALED: 03-29-2018
REVISED: N/A

Temporary Design 3 - TMP Phase III
Electrical Detail - Sheet 1 of 2

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>Prepared in the Offices of:</p> <p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>US 401 (Raeford Road) at NC 162 (Bunce Road)/ SR 1411 (Bunce Road)</p>		<p>SEAL NORTH CAROLINA PROFESSIONAL ENGINEER LAURENCE E. OVERN 045933</p>
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: G B Spell REVIEWED BY:</p>		

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

Toggle Until Positioned
on Overlap G

OVERLAP G

Select TMG VEH OVLP [G] and 'NORMAL'

```

TMG VEH OVLP...[G] TYPE: .....NORMAL
PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
INCLUDED . . . . . X . . . . .
LAG GRN 0.0 YEL 0.0 RED 0.0

```

Toggle Until Positioned
on Overlap A

OVERLAP A

Select TMG VEH OVLP [A] and 'PPLT FYA'

```

TMG VEH OVLP...[A] TYPE: .....PPLT FYA
PROTECTED LEFT TURN.... PHASE 1
OPPOSING THROUGH..... OVERLAP G

FLASHING ARROW OUTPUT.....CH9 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 0

```

END PROGRAMMING

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0274T3
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 3 - TMP Phase III
 Electrical Detail - Sheet 2 of 2

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

<p style="font-size: x-small;">Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	ELECTRICAL AND PROGRAMMING DETAILS FOR:	US 401 (Raeford Road) at NC 162 (Bunce Road) / SR 1411 (Bunce Road) Division 6 Cumberland County Fayetteville	SEAL LAWRENCE E. OVERN ENGINEER 045933
	Prepared in the Offices of: 750 N. Greenfield Pkwy, Garner, NC 27529	PLAN DATE: March 2018 REVIEWED BY: L Overn PREPARED BY: G B Spell REVIEWED BY:	


REVISIONS	INIT.	DATE

DocuSigned by:
 3/29/2018
 DATE

SIG. INVENTORY NO. 06-0274T3

DATE: 03/29/2018 10:45:12 AM
 User: rfmancey
 Location: C:\Users\rfmancey\Documents\Electrical\Detail\Signal\Phase 3\U-4405\SigEle_06-0274T3.dgn

PHASING DIAGRAM

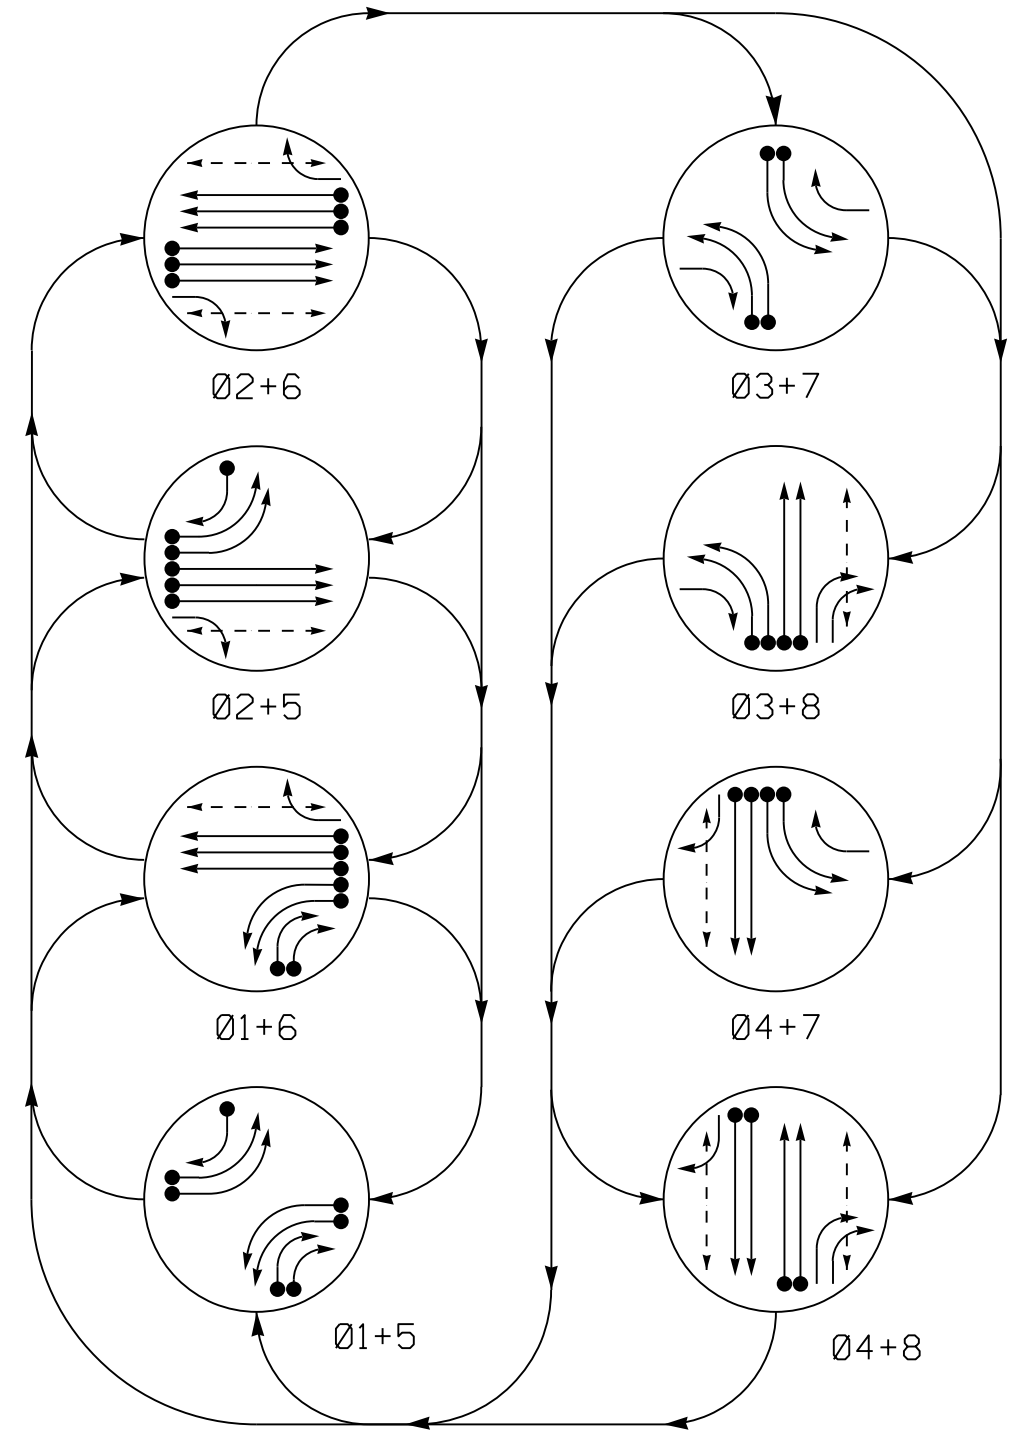

PHASING DIAGRAM DETECTION LEGEND


- ◀ ● ▶ DETECTED MOVEMENT
- ◀ ◯ ▶ UNDETECTED MOVEMENT (OVERLAP)
- ◀ ◯ ▶ UNSIGNALIZED MOVEMENT
- ◀ ◯ ▶ PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE								FLASH	
	01+5	02+6	03+7	04+8	01+6	02+5	03+8	04+7		
11,12	←	←	←	←	←	←	←	←	←	
21,22,24	R	R	G	G	R	R	R	R	R	Y
23	R	R	G	G	R	R	R	R	R	Y
31,32	←	←	←	←	←	←	←	←	←	
41,43	R	R	R	R	R	R	G	G	R	
42	R	R	R	R	R	R	G	G	R	
51,52	←	←	←	←	←	←	←	←	←	
61,62,64	R	G	R	G	R	R	R	R	R	Y
63	R	G	R	G	R	R	R	R	R	Y
71,72	←	←	←	←	←	←	←	←	←	
81,82,85	R	R	R	R	G	R	G	R		
83,84	←	←	←	←	←	←	←	←	←	
P21,22	DW	DW	W	W	DW	DW	DW	DRK		
P41,42	DW	DW	DW	DW	DW	DW	W	DRK		
P61,62	DW	W	DW	W	DW	DW	DW	DRK		
P81,82	DW	DW	DW	DW	DW	W	DW	DRK		

SIGNAL FACE I.D.

All Heads L.E.D.

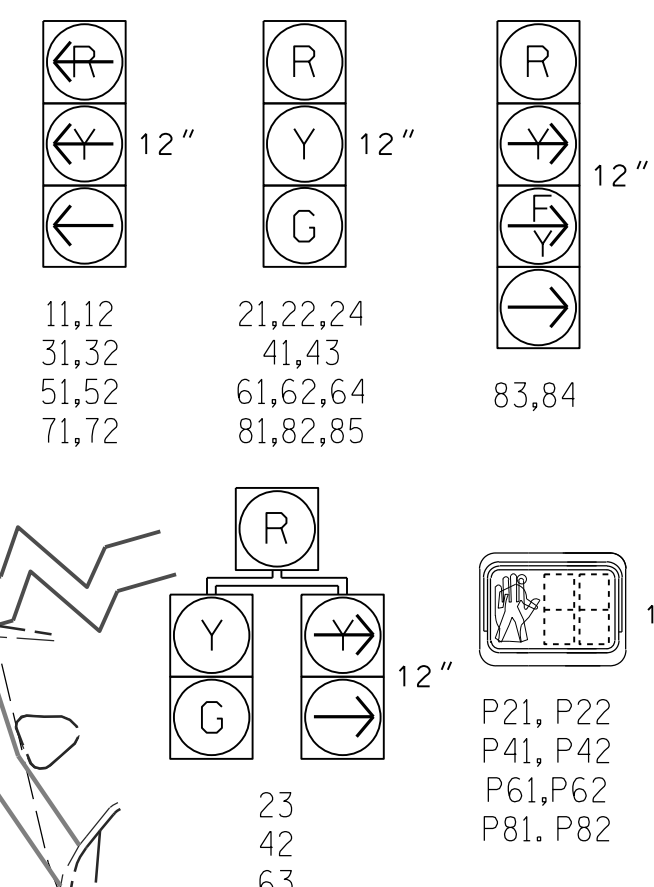


ASC/3 DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP	NEW CARD
1A	6X40	0	2-4-2	X	1	Yes	-	-	-	S	-	X
1B	6X40	0	2-4-2	X	1	Yes	-	-	-	S	-	X
1C	6X40	0	2-4-2	X	1	Yes	-	15	-	S	-	X
1D	6X40	0	2-4-2	X	1	Yes	-	15	-	S	-	X
2A	6X6	300	5	X	2	Yes	-	-	-	N	-	X
2B	6X6	300	5	X	2	Yes	-	-	-	N	-	X
2C	6X6	300	5	X	2	Yes	-	-	-	N	-	X
3A	6X40	0	2-4-2	X	3	Yes	-	-	-	S	-	X
3B	6X40	0	2-4-2	X	3	Yes	-	-	-	S	-	X
4A	6X6	250	4	X	4	No	-	-	-	N	-	X
4B	6X6	250	4	X	4	No	-	-	-	N	-	X
4C	6X40	0	2-4-2	X	4	Yes	2.0	5	-	G	-	X
4D	6X40	0	2-4-2	X	4	Yes	2.0	5	-	G	-	X
5A	6X40	0	2-4-2	X	5	Yes	-	-	-	S	-	X
5B	6X40	0	2-4-2	X	5	Yes	-	-	-	S	-	X
5C	6X40	0	2-4-2	X	5	Yes	-	15	-	S	-	X
6A	6X6	300	5	X	6	Yes	-	-	-	N	-	X
6B	6X6	300	5	X	6	Yes	-	-	-	N	-	X
6C	6X6	300	5	X	6	Yes	-	-	-	N	-	X
7A	6X40	0	2-4-2	X	7	Yes	-	-	-	S	-	X
7B	6X40	0	2-4-2	X	7	Yes	-	-	-	S	-	X
8A	6X6	300	5	X	8	No	-	-	-	N	-	X
8B	6X6	300	5	X	8	No	-	-	-	N	-	X
8C	6X40	0	2-4-2	Y	8	Yes	2.0	5	-	G	-	X
8D	6X40	0	2-4-2	X	8	Yes	2.0	5	-	G	-	X

8 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer. Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Reposition existing signal head numbered #51.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Pedestrian pedestals are conceptual and shown for reference only. See 2018 NCDOT Roadway Standard Drawings 1705.04 Sheets 1-3 for push button location details.

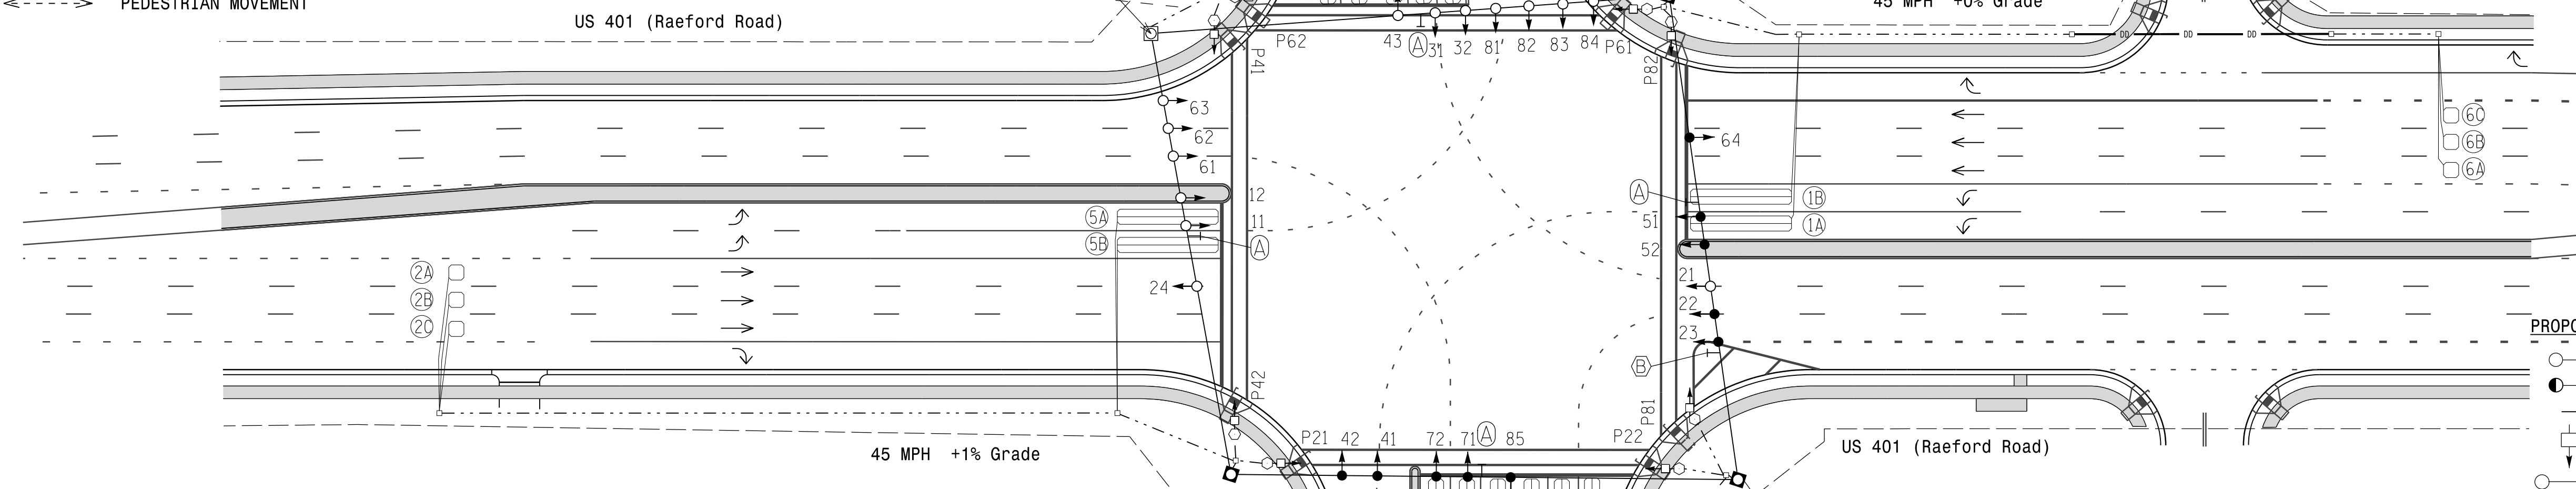

ASC/3 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green *	7	12	7	7	7	12	7	7
Walk *	-	7	-	7	-	7	-	7
Ped Clear	-	35	-	36	-	36	-	38
Veh. Extension *	2.0	6.0	2.0	6.0	2.0	6.0	2.0	6.0
Max 1 *	20	60	30	40	20	60	30	40
Yellow	3.0	4.4	3.0	4.2	3.0	4.5	3.0	4.4
Red Clear	4.4	2.7	4.3	3.1	4.0	2.7	4.1	2.8
Red Revert	-	-	-	-	-	-	-	-
Actuations B4 Add *	-	0	-	-	-	0	-	-
Seconds / Actuation *	-	1.5	-	-	-	1.5	-	-
Max Initial *	-	34	-	-	-	34	-	-
Time Before Reduction *	-	15	-	5	-	15	-	5
Time To Reduce *	-	30	-	20	-	30	-	20
Minimum Gap	-	3.0	-	3.0	-	3.0	-	3.0
Locking Detector	-	X	-	-	-	X	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | PROPOSED | EXISTING |
|--|--|
| ○ Traffic Signal Head | ● Traffic Signal Head |
| ○ Modified Signal Head | N/A |
| ○ Sign | ○ Sign |
| ○ Pedestrian Signal Head With Push Button & Sign | ○ Pedestrian Signal Head With Push Button & Sign |
| ○ Signal Pole with Guy | ○ Signal Pole with Guy |
| ○ Signal Pole with Sidewalk Guy | ○ Signal Pole with Sidewalk Guy |
| ○ Inductive Loop Detector | ○ Inductive Loop Detector |
| ○ Controller & Cabinet | ○ Controller & Cabinet |
| ○ Junction Box | ○ Junction Box |
| ○ 2-in Underground Conduit | ○ 2-in Underground Conduit |
| N/A Right of Way | ○ Right of Way |
| → Directional Arrow | → Directional Arrow |
| ○ Directional Drill | N/A |
| ○ Metal Strain Pole | ○ Metal Strain Pole |
| ○ Type II Signal Pedestal | ○ Type II Signal Pedestal |
| ○ "U-Turn Yield to Right Turn" (R10-16) | ○ "U-Turn Yield to Right Turn" (R10-16) |
| ○ Right Arrow "ONLY" Sign (R3-5R) | ○ Right Arrow "ONLY" Sign (R3-5R) |


Signal Upgrade - Final Design

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>		<p>US 401 (Raeford Road) at NC 162 (Bunce Road) / SR 1411 (Bunce Road)</p>	
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: E D Harris</p> <p>PREPARED BY: K Williams REVIEWED BY: B L Watson</p>	<p>3/29/2018</p> <p>DATE</p>

3/29/2018 10:41:11 AM C:\Users\jgarnar\OneDrive\Documents\Signal Design\U-4405\Sig-18.0.dgn User: jgarnar

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

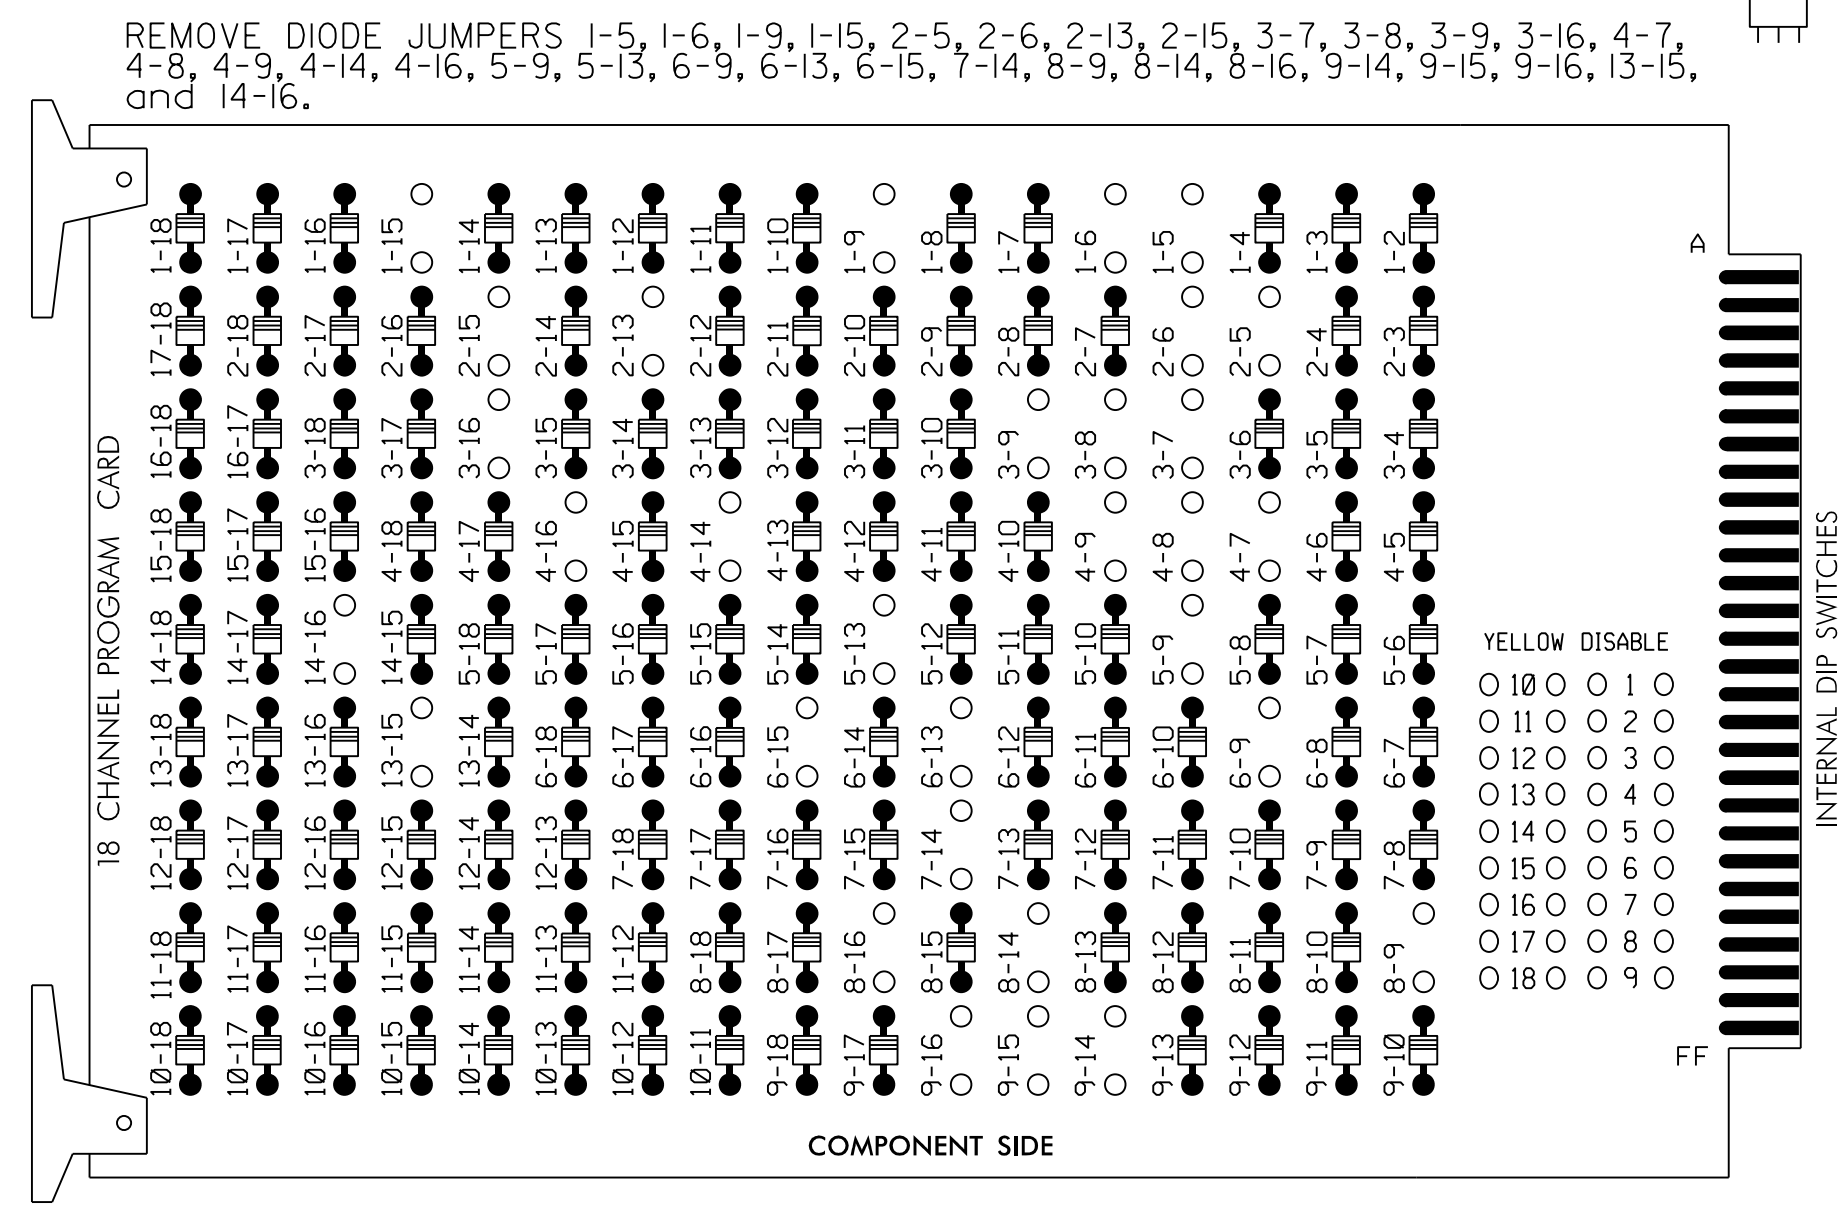

REMOVE JUMPERS AS SHOWN

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Integrate monitor with Ethernet network in cabinet.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 WALK and phase 6 WALK.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....Contractor Supplied
ECONOLITE 2070LX
CABINET.....332 W/AUX
SOFTWARE.....ECONOLITE ASC/3-2070
CABINET MOUNT.....BASE
OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,
S9,S10,S11,S12,AUX S1
PHASES USED.....1,2,2PED,3,4,4PED,5,6,
6PED,7,8,8PED
OVERLAP A.....*
OVERLAP B.....NOT USED
OVERLAP C.....NOT USED
OVERLAP D.....NOT USED
OVERLAP G.....*

* See Overlap Programming Detail on Sheet 2

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6				
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18				
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	OLE	OLC	OLD	OLF				
SIGNAL HEAD NO.	11,12	83,84	21,22, 23,24	P21, P22	31,32	23	41,42, 43	P41, P42	51,52	42	61,62, 63,64	P61, P62	71,72	63	81,82, 83	P81, P82	83,84	NU	NU	NU	NU	NU
RED			128			101					134				107		A121					
YELLOW			129			102					135				108							
GREEN			130			103					136				109							
RED ARROW	125				116					131					122							
YELLOW ARROW	126				117	117				132	132				123	123						A122
FLASHING YELLOW ARROW																						A123
GREEN ARROW	127	127			118	118				133	133				124	124						
Hand icon					113					104					119							110
Person icon					115					106					121							112

NU = Not Used

* See pictorial of head wiring in detail this sheet.

COUNTDOWN PEDESTRIAN SIGNAL OPERATION


Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND TIME	DELAY TIME	ADDED INITIAL	DETECTOR TYPE
1A	TB2-1,2	I1U	56	1	1	YES				S
1B	TB2-3,4	I1L	56	1	1	YES				S
1C	TB2-5,6	I2U	39	2	1	YES		15		S
1D	TB2-7,8	I2L	43	12	1	YES		15		S
2A	TB2-9,10	I3U	63	32	2	YES			X	N
2B	TB2-11,12	I3L	76	42	2	YES			X	N
2C	TB4-1,2	I4U	47	22	2	YES			X	N
3A	TB4-5,6	I5U	58	3	3	YES				S
3B	TB4-7,8	I5L	58	3	3	YES				S
4A	TB4-9,10	I6U	41	4	4	NO				N
4B	TB4-11,12	I6L	45	14	4	NO				N
4C	TB6-1,2	I7U	65	34	4	YES	2.0	5		G
4D	TB6-3,4	I7L	78	44	4	YES	2.0	5		G
5A	TB3-1,2	J1U	55	5	5	YES				S
5B	TB3-3,4	J1L	55	5	5	YES				S
5C	TB3-5,6	J2U	40	6	5	YES		15		S
6A	TB3-9,10	J3U	64	36	6	YES			X	N
6B	TB3-11,12	J3L	77	46	6	YES			X	N
6C	TB5-1,2	J4U	48	26	6	YES			X	N
7A	TB5-5,6	J5U	57	7	7	YES				S
7B	TB5-7,8	J5L	57	7	7	YES				S
8A	TB5-9,10	J6U	42	8	8	NO				N
8B	TB5-11,12	J6L	46	18	8	NO				N
8C	TB7-1,2	J7U	66	38	8	YES	2.0	5		G
8D	TB7-3,4	J7L	79	48	8	YES	2.0	5		G
PED PUSH BUTTONS										
P21,P22	TB8-4,6	I12U	67	PED 2	2	PED				
P41,P42	TB8-5,6	I12L	69	PED 4	4	PED				
P61,P62	TB8-7,9	I13U	68	PED 6	6	PED				
P81,P82	TB8-8,9	I13L	70	PED 8	8	PED				


NOTE:
INSTALL DC ISOLATORS
IN INPUT FILE SLOTS
112 AND 113.

INPUT FILE POSITION LEGEND: J2L



INPUT FILE POSITION LAYOUT

(front view)

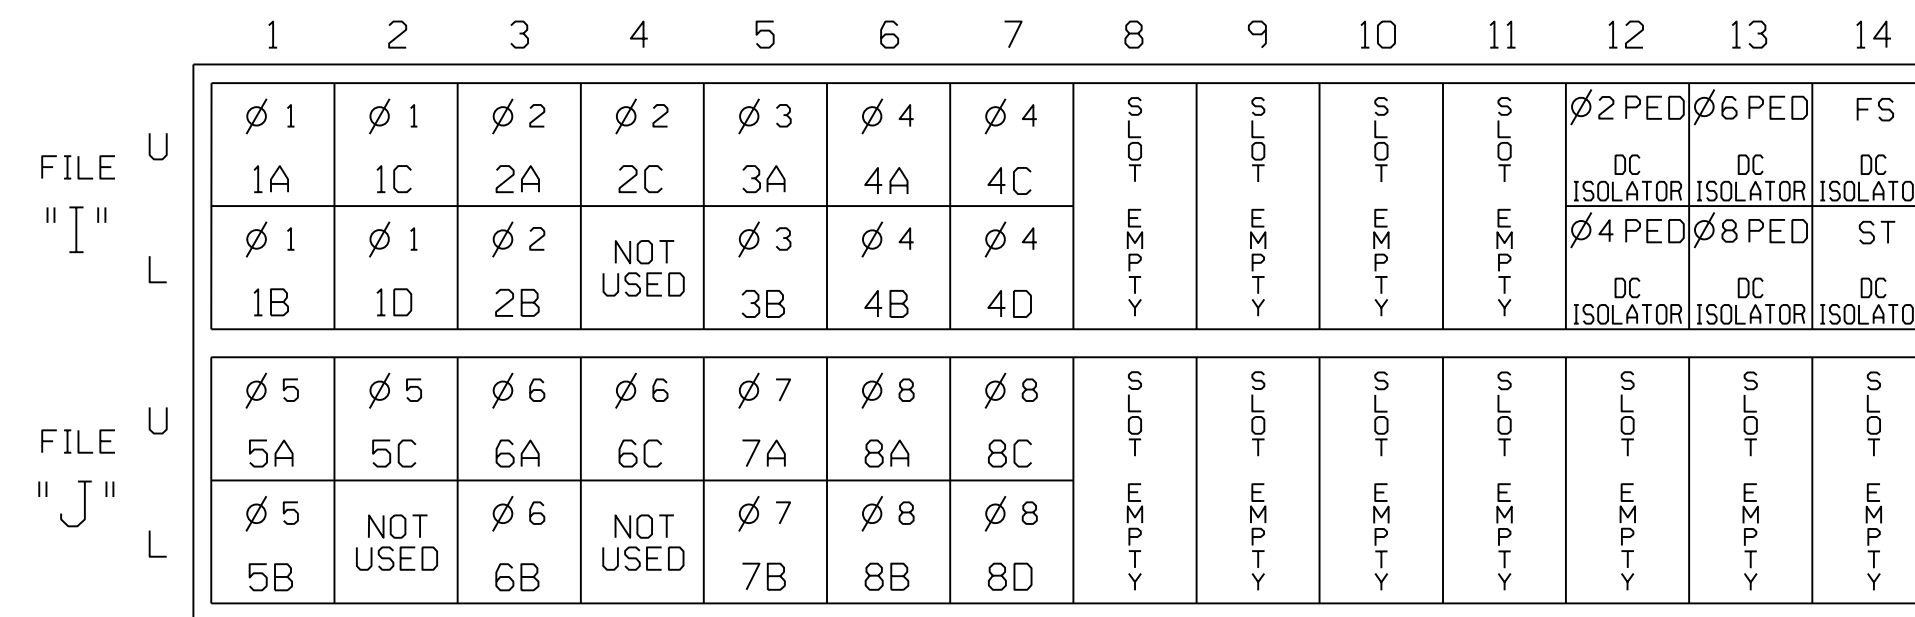


EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

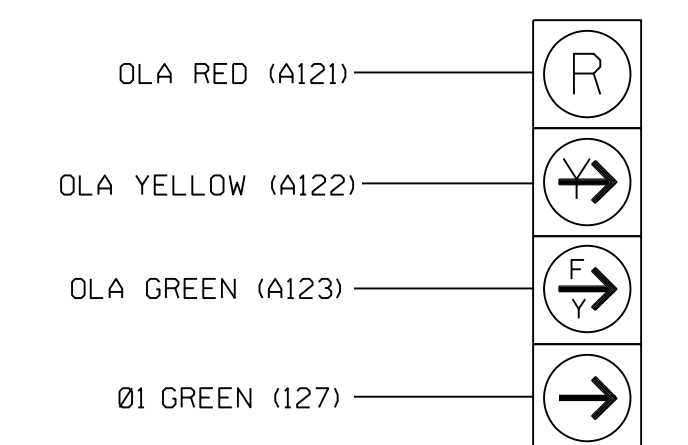

83,84

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 06-0274
DESIGNED: March 2018
SEALED: 03-29-2018
REVISED: N/A

Final Design
Electrical Detail - Sheet 1 of 2

Prepared in the Offices of:

US 401 (Raeford Road) at NC 162 (Bunce Road)/ SR 1411 (Bunce Road)	
Division 6	Cumberland County Fayetteville
PLAN DATE: March 2018	REVIEWED BY: L Overn
PREPARED BY: G B Spell	REVIEWED BY:
REVISIONS	INIT. DATE

SEAL

DATE: 3/29/2018
 SIG. INVENTORY NO. 06-0274

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

Toggle Until Positioned
on Overlap G

OVERLAP G

Select TMG VEH OVLP [G] and 'NORMAL'

TMG VEH OVLP...[G] TYPE:NORMAL

PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6

INCLUDED X

LAG GRN 0.0 YEL 0.0 RED 0.0

Toggle Until Positioned
on Overlap A

OVERLAP A

Select TMG VEH OVLP [A] and 'PPLT FYA'

TMG VEH OVLP...[A] TYPE:PPLT FYA

PROTECTED LEFT TURN.... PHASE 1

OPPOSING THROUGH..... OVERLAP G

FLASHING ARROW OUTPUT.....CH9 ISOLATE

DELAY START OF: FYA..0.0 CLEARANCE..0.0

ACTION PLAN SF BIT DISABLE..... 0

END PROGRAMMING

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 06-0274
DESIGNED: March 2018
SEALED: 03-29-2018
REVISED: N/A

Final Design
Electrical Detail - Sheet 2 of 2



DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

 Stantec <small>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</small>	<small>ELECTRICAL AND PROGRAMMING DETAILS FOR:</small> <small>Prepared in the Offices of: Transportation, Mobility and Safety Division STATE OF NORTH CAROLINA Department of Transportation 750 N. Greenfield Pkwy, Garner, NC 27529</small>	US 401 (Raeford Road) at NC 162 (Bunce Road) / SR 1411 (Bunce Road) <small>Division 6 Cumberland County Fayetteville</small>	<small>SEAL</small> <small>PROFESSIONAL ENGINEER LAWRENCE E. OVERN 045933</small>								
	<small>PLAN DATE: March 2018 REVIEWED BY: L Overn</small> <small>PREPARED BY: G B Spell REVIEWED BY:</small>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 70%;">REVISIONS</th> <th style="width: 10%;">INIT.</th> <th style="width: 20%;">DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	REVISIONS	INIT.	DATE						
REVISIONS	INIT.	DATE									

DATE: 03/29/2018 10:45:11 AM
USER: rfmancey
FILE: \\server\projects\signal\4405\electrical\detail\asc\asc_elec_06-0274.dgn

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

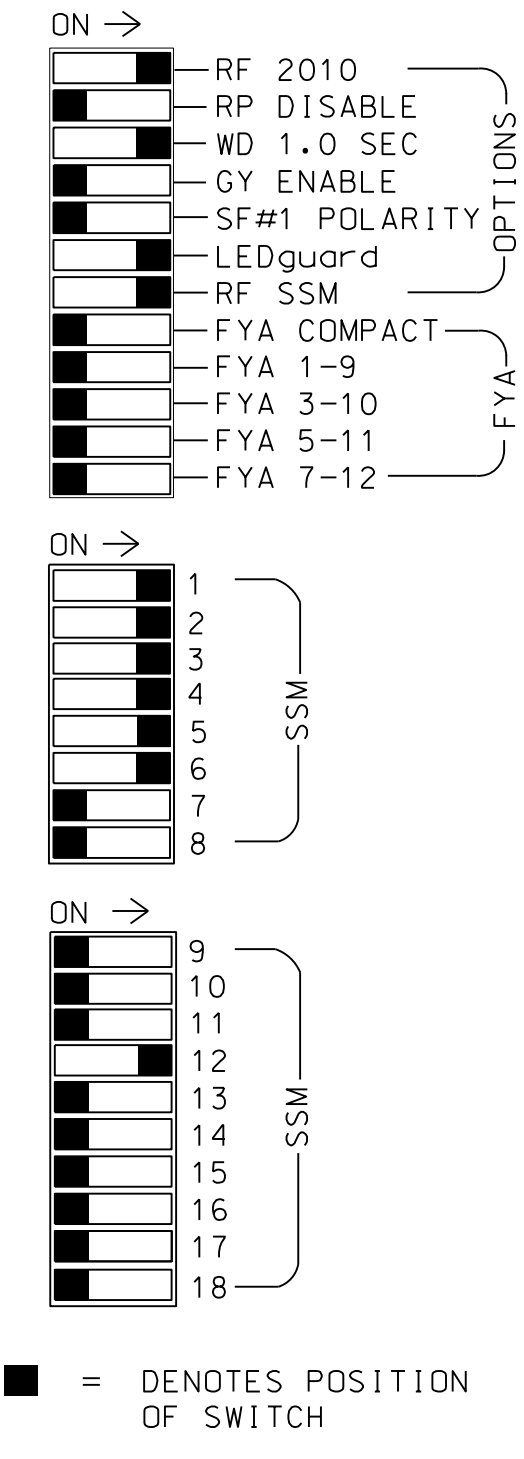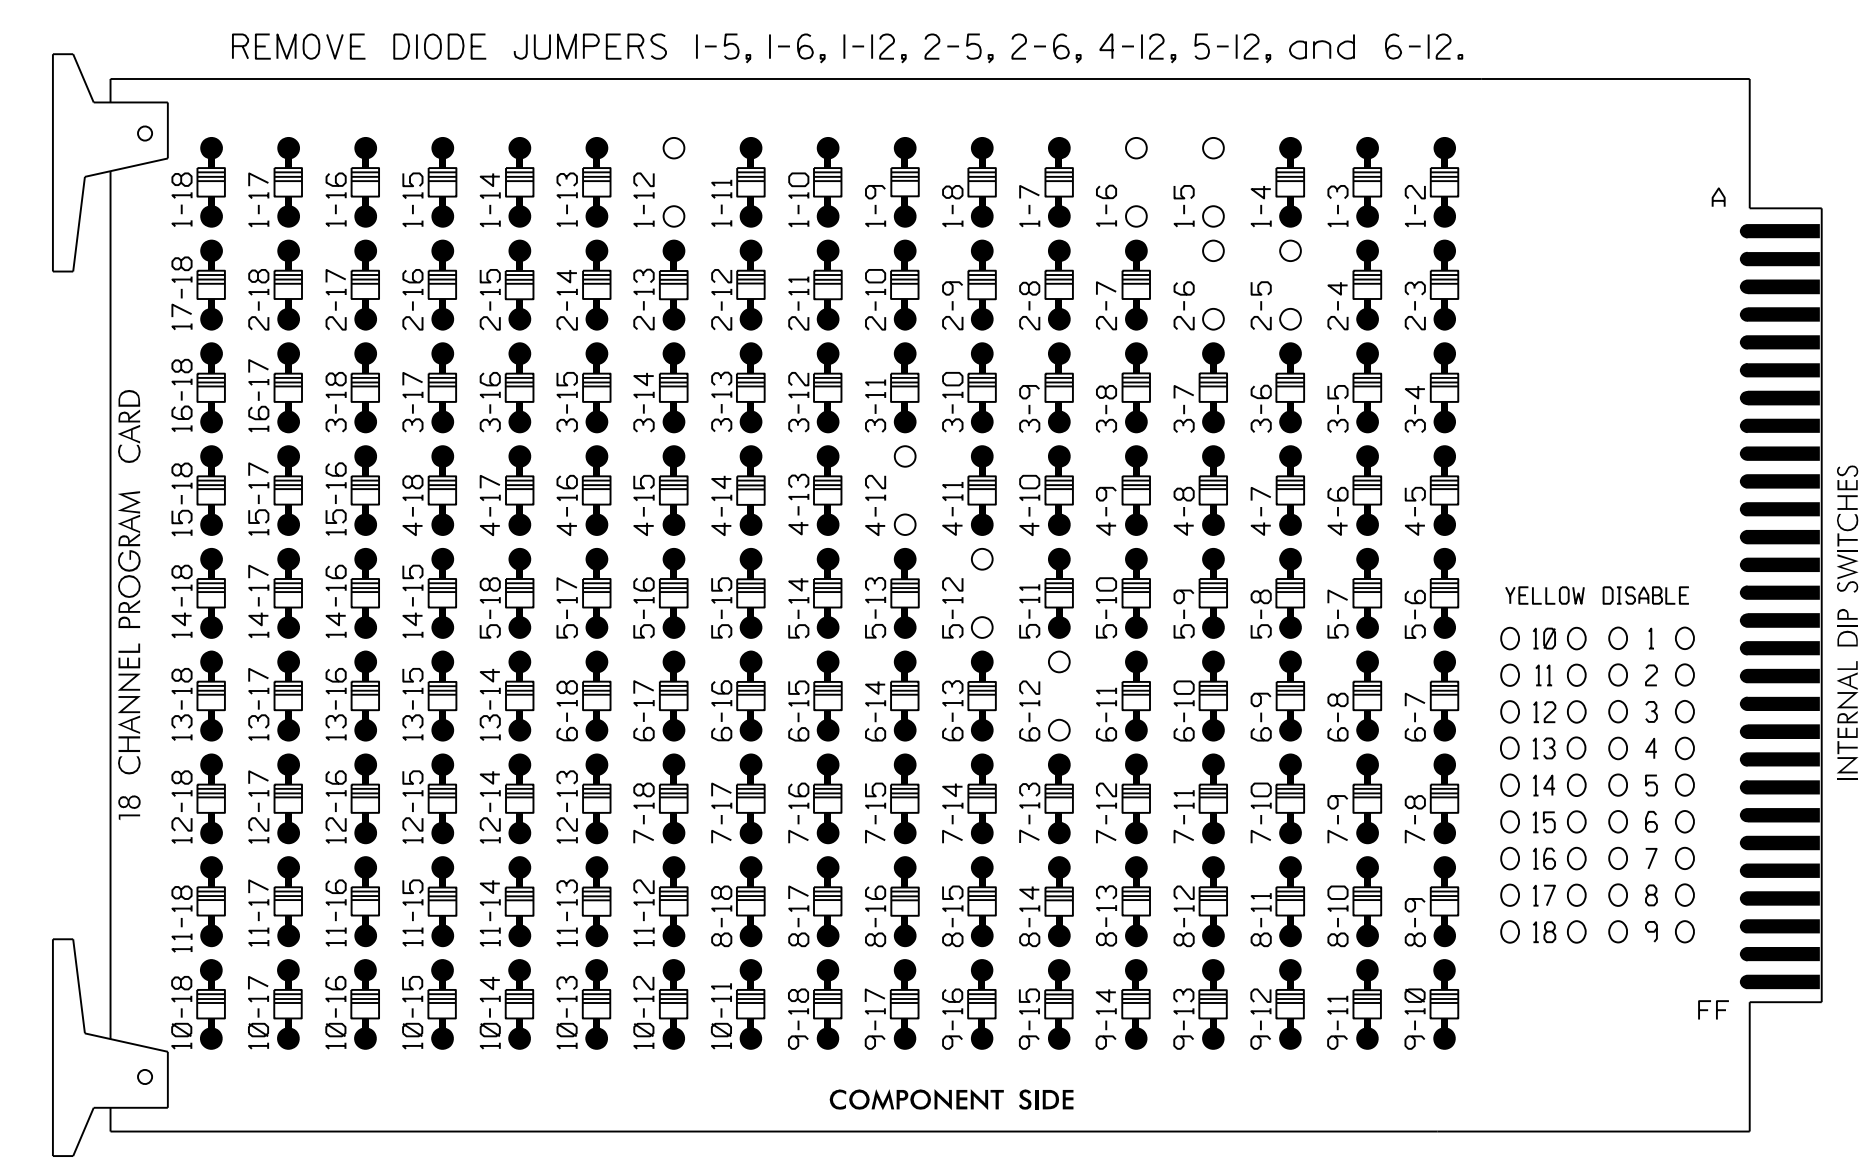

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Program controller to start up in phase 2 Green and 6 Green.
3. The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,AUX S5
 PHASES USED.....1,2,3,4,5,6
 OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....*

* See Overlap Programming Detail on this sheet


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11,12	21,22	NU	31	32	41	42	22	NU	51	61,62	NU	NU	NU	NU	NU	NU	43,44	NU
RED		128		116	116	101	101				134								A114
YELLOW		129		117	117	102	102				135								
GREEN		130		118	118	103	103				136								
RED ARROW	125										131								
YELLOW ARROW	126						102	132											A115
GREEN ARROW	127			118		103	103	133											A116

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

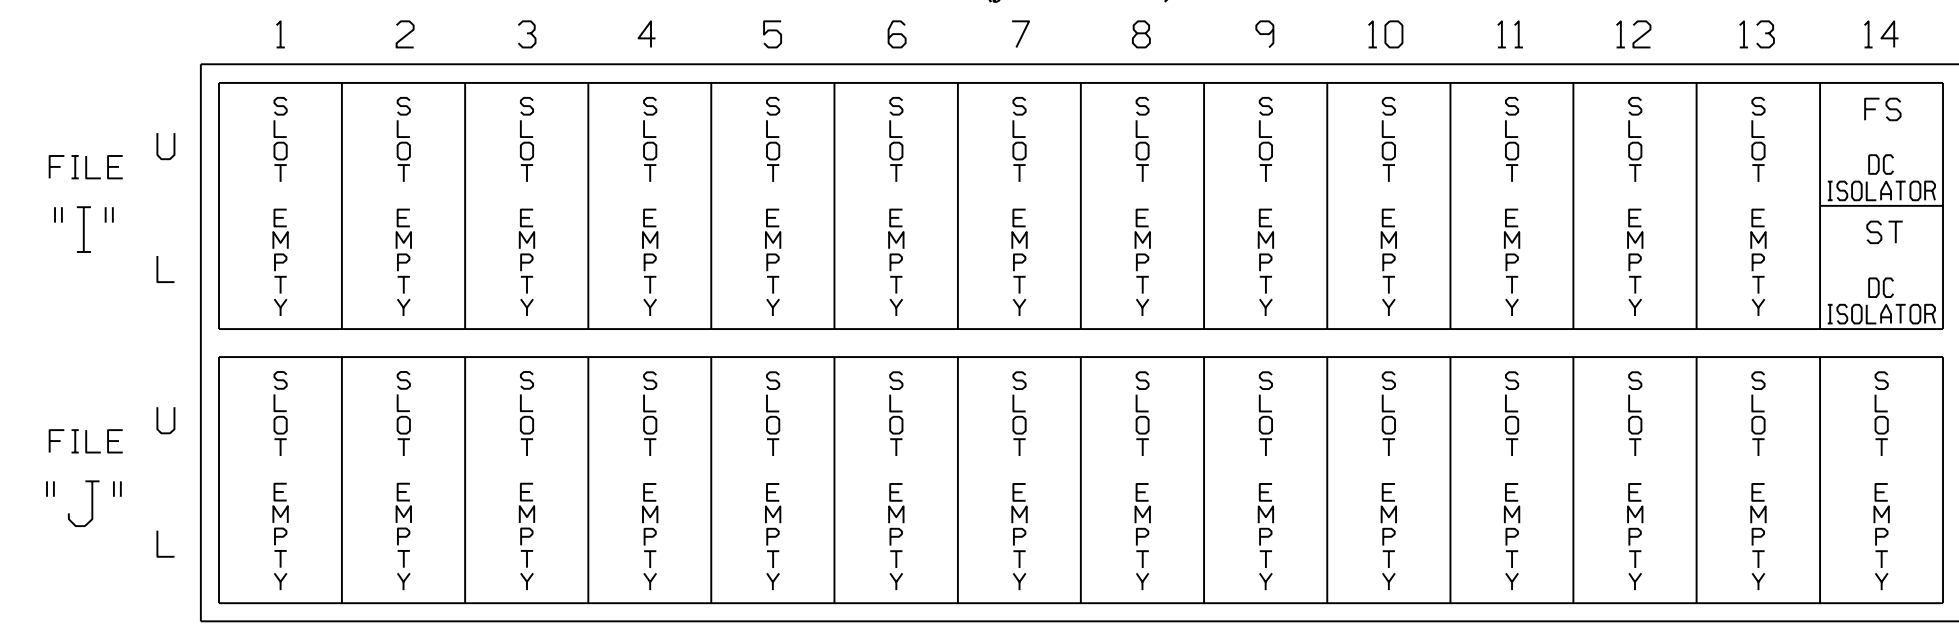

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select **2. CONTROLLER**
2. From CONTROLLER Submenu select **2. VEHICLE OVERLAPS**

OVERLAP D Toggle Three Times

Select TMG VEH OVLP [D] and 'NORMAL'

TMG VEH OVLP...[D] TYPE:**NORMAL**
 PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
 INCLUDED X . . X
 LAG GRN 0.0 YEL 0.0 RED 0.0

END PROGRAMMING


THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0358T1
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 1 - TMP Phase I
 Electrical Detail

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p>	<p>US 401 (Raeford Road) at SR 1141 (Bingham Drive)</p>		<p>SEAL NORTH CAROLINA PROFESSIONAL ENGINEER LAWRENCE E. OVERN License No. 045933 3/29/2018</p>			
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: G B Spell REVIEWED BY:</p>	<table border="1"> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </table>		REVISIONS	INIT.	DATE
REVISIONS	INIT.	DATE					

PHASING DIAGRAM

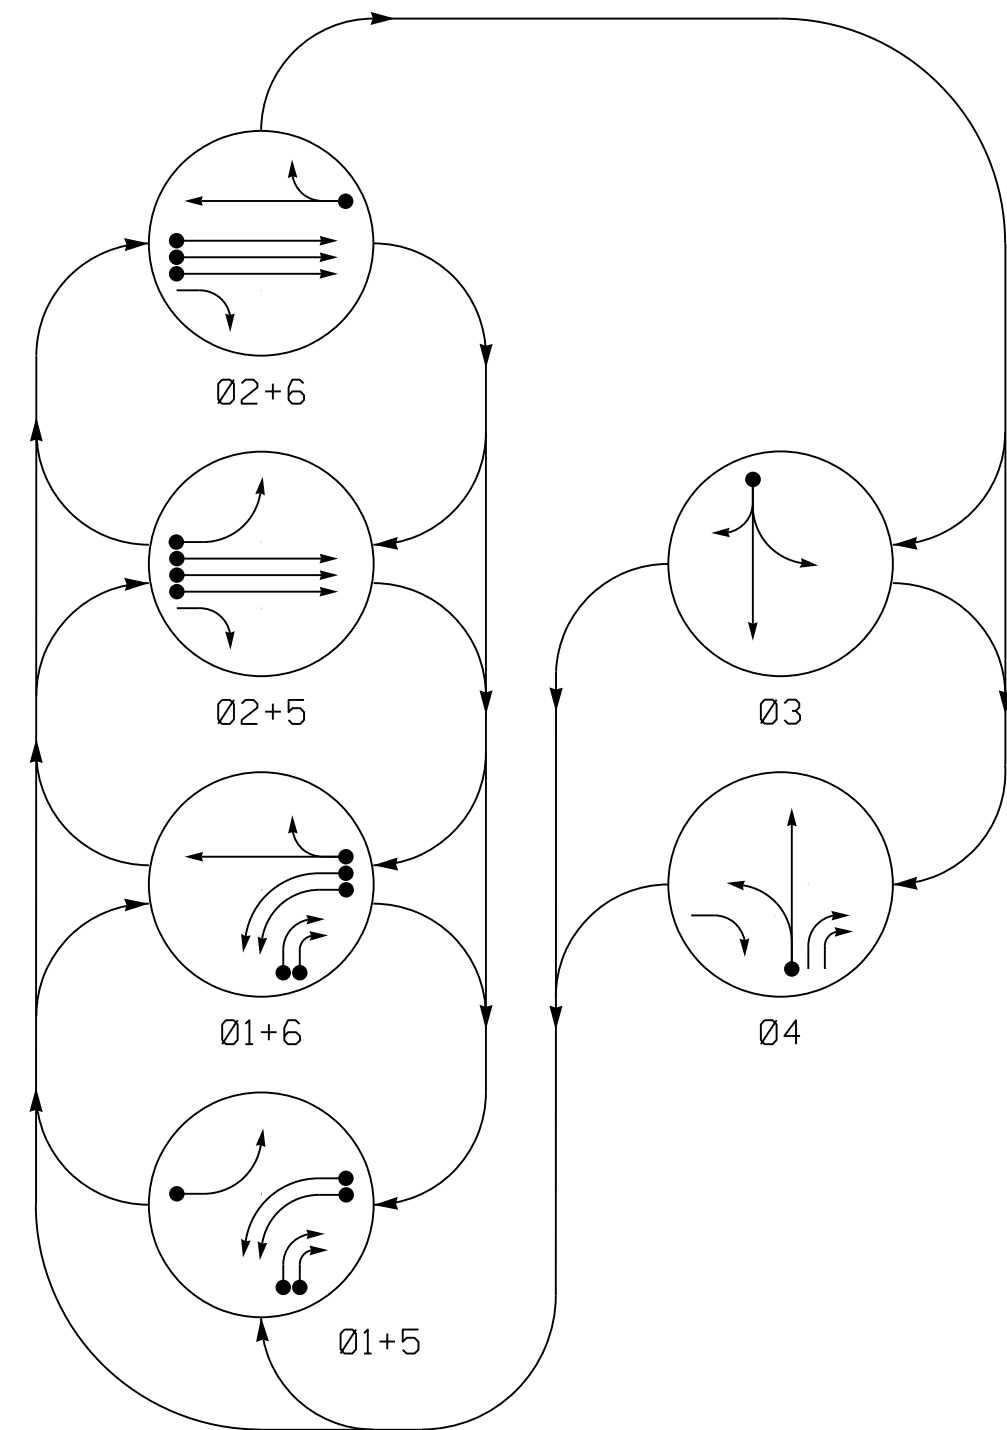

PHASING DIAGRAM DETECTION LEGEND


- DETECTED MOVEMENT
- ← UNDETECTED MOVEMENT (OVERLAP)
- ⚡ UNSIGNALIZED MOVEMENT
- ⚡ PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE						FLIGHT
	01+5	01+6	02+5	02+6	03	04	
11,12	←	←	←	←	←	←	←
21,22	R	R	G	G	R	R	Y
23	R	R	G	G	R	R	Y
31	R	R	R	R	G	R	R
32	R	R	R	R	G	R	R
41	R	R	R	R	R	G	R
42	R	R	R	R	R	G	R
43,44	→	→	R	R	R	→	R
51	←	←	←	←	←	←	←
61,62	R	G	R	G	R	R	Y

SIGNAL FACE I.D.

All Heads L.E.D.

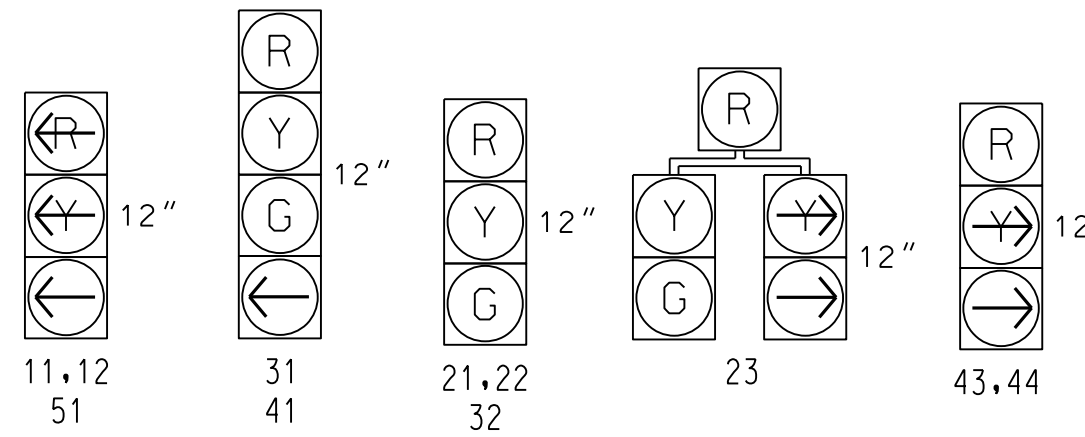

ASC/3 DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING						
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	SYSTEM LOOP
1A	6X40	0	-	-	1	Yes	-	3	-	S	-
1B	6X40	0	-	-	1	Yes	-	-	-	S	-
1C	6X40	0	-	-	1	Yes	-	15	-	S	-
1D	6X40	0	-	-	1	Yes	-	15	-	S	-
2A	6X6	300	-	-	2	Yes	-	-	-	N	-
2B	6X6	300	-	-	2	Yes	-	-	-	N	-
2C	6X6	300	-	-	2	Yes	-	-	-	N	-
2D	6X40	0	-	-	2	Yes	2.0	5	-	G	-
2E	6X40	0	-	-	2	Yes	2.0	5	-	G	-
2F	6X40	0	-	-	2	Yes	2.0	5	-	G	-
3A	6X40	0	-	-	3	Yes	-	5	-	S	-
4A	6X40	0	-	-	4	Yes	-	3	-	S	-
5A	6X40	0	-	-	5	Yes	-	-	-	S	-
6A	6X6	300	-	-	6	Yes	-	-	-	N	-
6B	6X40	0	-	-	6	Yes	2.0	5	-	G	-

*Video Detection Area. Camera locations should be confirmed in the field by the contractor in order to provide detection of the areas indicated.

6 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or Phase 5 may be lagged.
- The order of Phase 3 and Phase 4 may be reversed.
- Set all detector units to presence mode.
- Reposition existing signal heads numbered 23,61 and 62. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

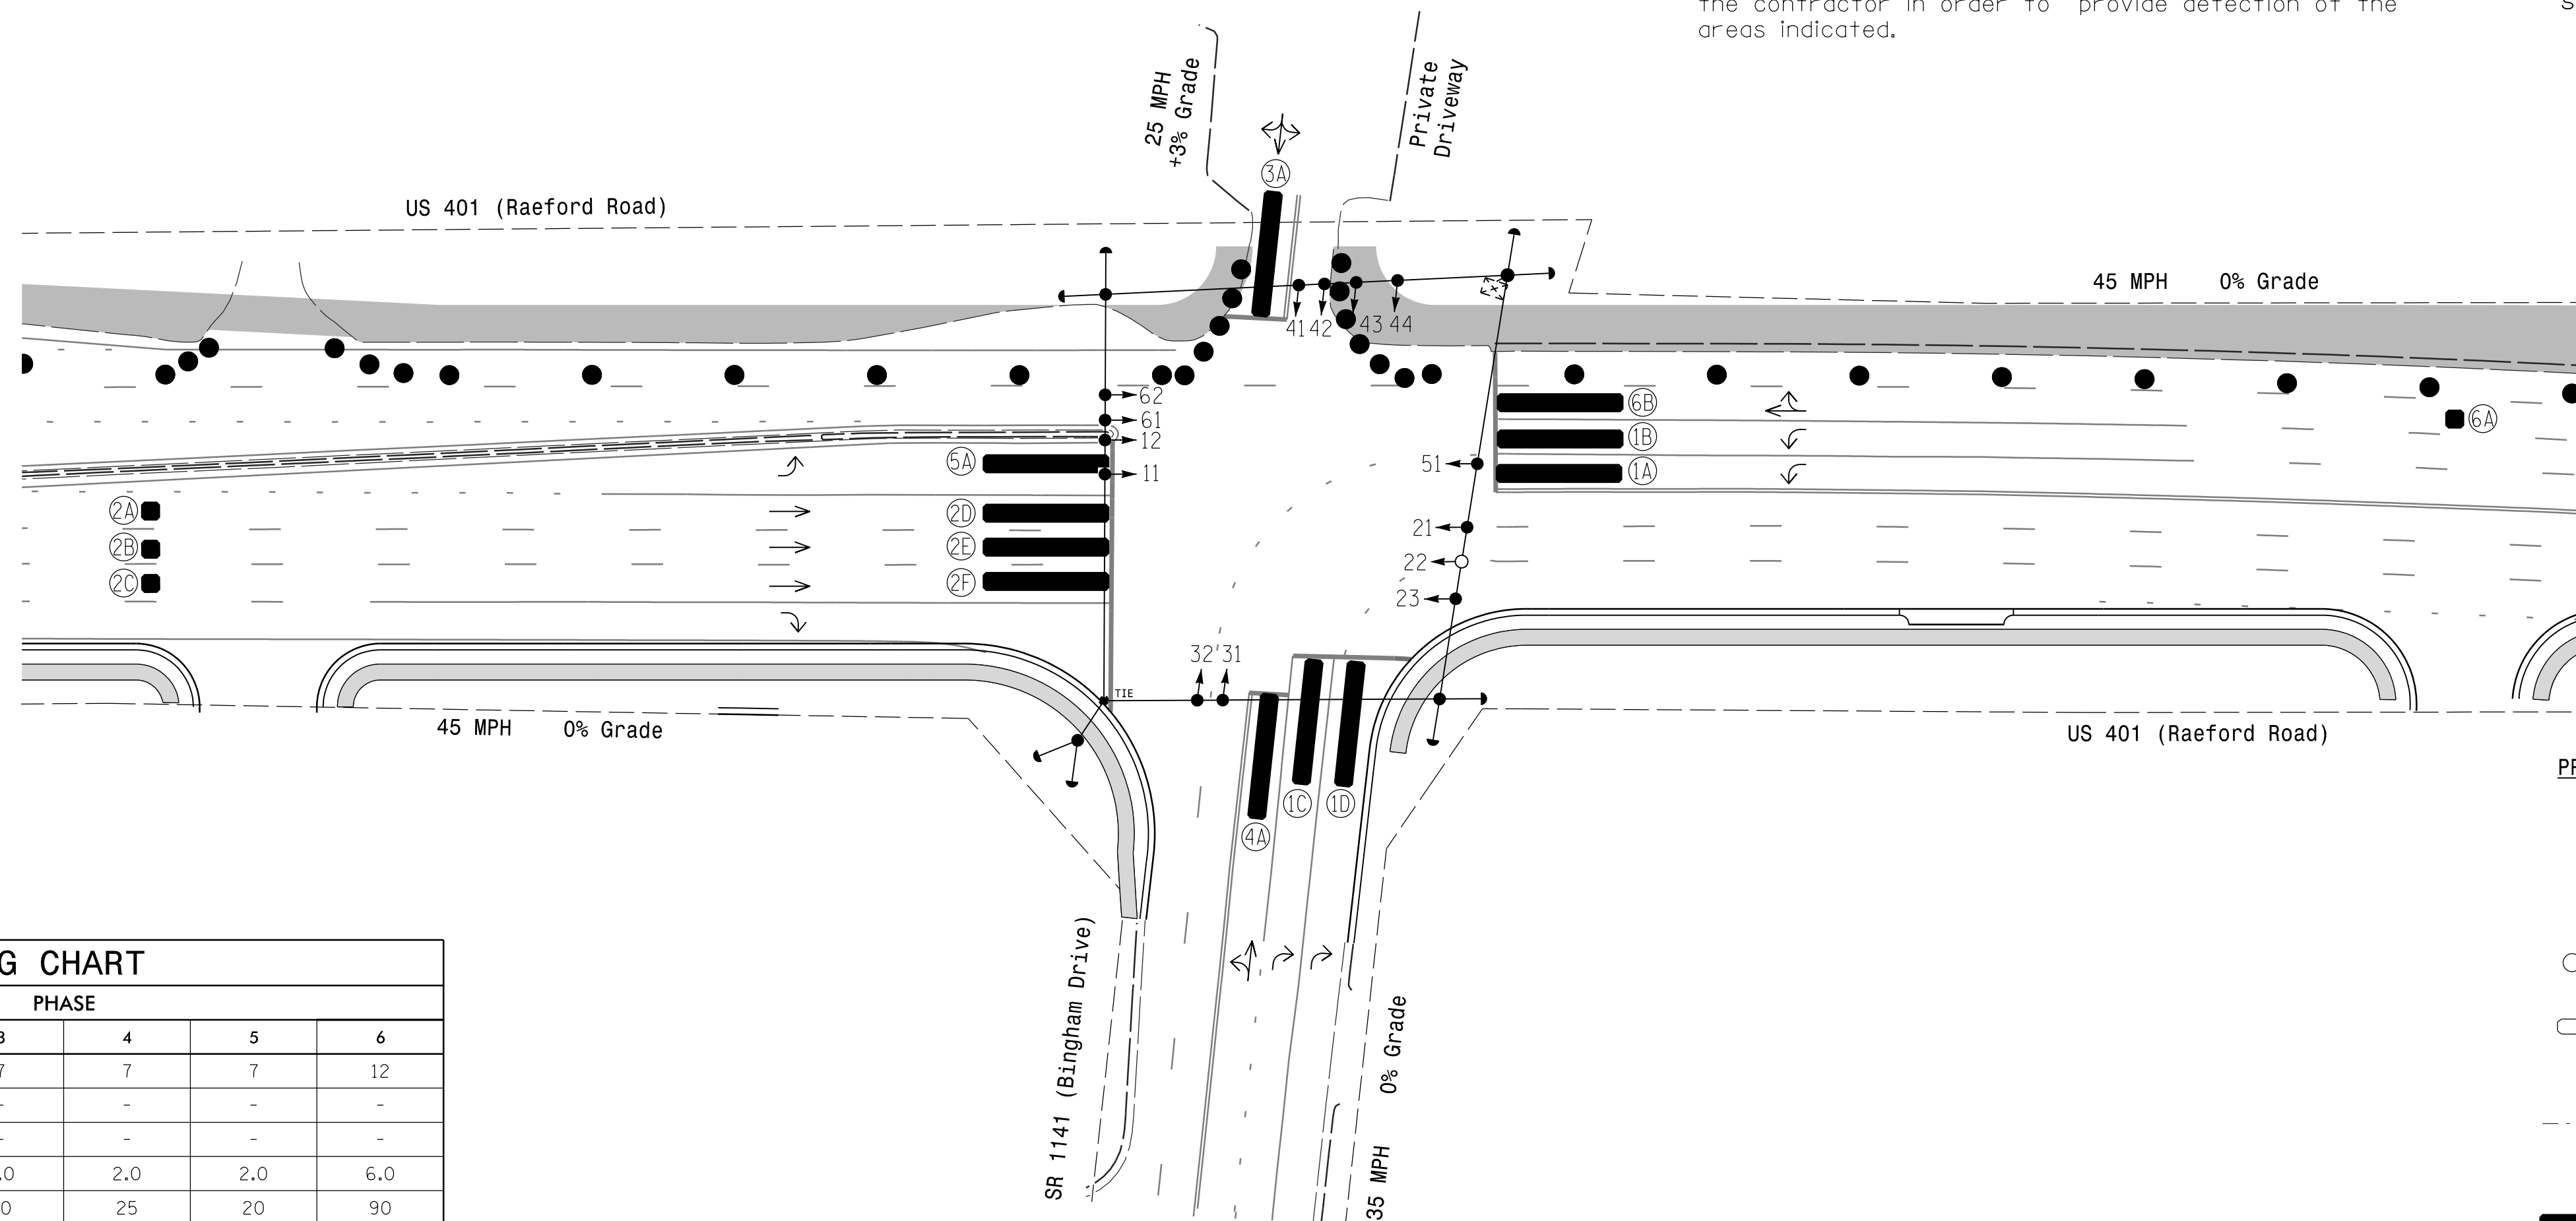

FEATURE	ASC/3 TIMING CHART					
	1	2	3	4	5	6
Min Green *	7	12	7	7	7	12
Walk *	-	-	-	-	-	-
Ped Clear	-	-	-	-	-	-
Veh. Extension *	2.0	6.0	2.0	2.0	2.0	6.0
Max I *	50	90	20	25	20	90
Yellow	3.0	4.5	3.1	3.8	3.0	4.5
Red Clear	3.5	1.4	2.9	2.3	2.3	1.4
Red Revert	-	-	-	-	-	-
Actuations B4 Add *	-	-	-	-	-	-
Seconds /Actuation *	-	-	-	-	-	-
Max Initial *	-	-	-	-	-	-
Time Before Reduction *	-	15	-	-	-	15
Time To Reduce *	-	30	-	-	-	30
Minimum Gap	-	3.0	-	-	-	3.0
Locking Detector	-	-	-	-	-	-
Recall Position	-	VEH. RECALL	-	-	-	VEH. RECALL
Dual Entry	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND


- | PROPOSED | EXISTING |
|---|-----------------------------|
| ○ → Traffic Signal Head | ● → N/A |
| ○ → Modified Signal Head | ○ → N/A |
| ○ → Pedestrian Signal Head | ○ → N/A |
| ○ → Signal Pole with Push Button & Sign | ○ → N/A |
| ○ → Signal Pole with Guy | ○ → N/A |
| ○ → Signal Pole with Sidewalk Guy | ○ → N/A |
| □ ⊗ Inductive Loop Detector | □ ⊗ Inductive Loop Detector |
| □ ⊗ Controller & Cabinet | □ ⊗ Junction Box |
| □ ⊗ 2-in Underground Conduit | □ ⊗ Right of Way |
| → Directional Arrow | → Directional Arrow |
| ▬ Video Detection Area | ▬ Construction Zone |
| ● ● ● Drums | ● ● ● Drums |

Signal Upgrade
Temporary Signal Design 2 - TMP Phase II

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>Prepared For the Offices of: Transportation Mobility and Safety Division STATE OF NORTH CAROLINA Signal Design Section 750 N. Greenfield Pkwy, Garner, NC 27526</p>	<p>US 401 (Raeford Road) at SR 1141 (Bingham Drive)</p>		<p>Division 6 Cumberland County Fayetteville PLAN DATE: March 2018 REVIEWED BY: E D Harris PREPARED BY: G B Spell REVIEWED BY: B L Watson</p>					
		<p>SCALE 0 40 1" = 40'</p>	<p>REVISIONS</p> <table border="1"> <tr><th>NO.</th><th>INIT.</th><th>DATE</th></tr> <tr><td> </td><td> </td><td> </td></tr> </table>		NO.	INIT.	DATE		
NO.	INIT.	DATE							

EDI MODEL 2018EClip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

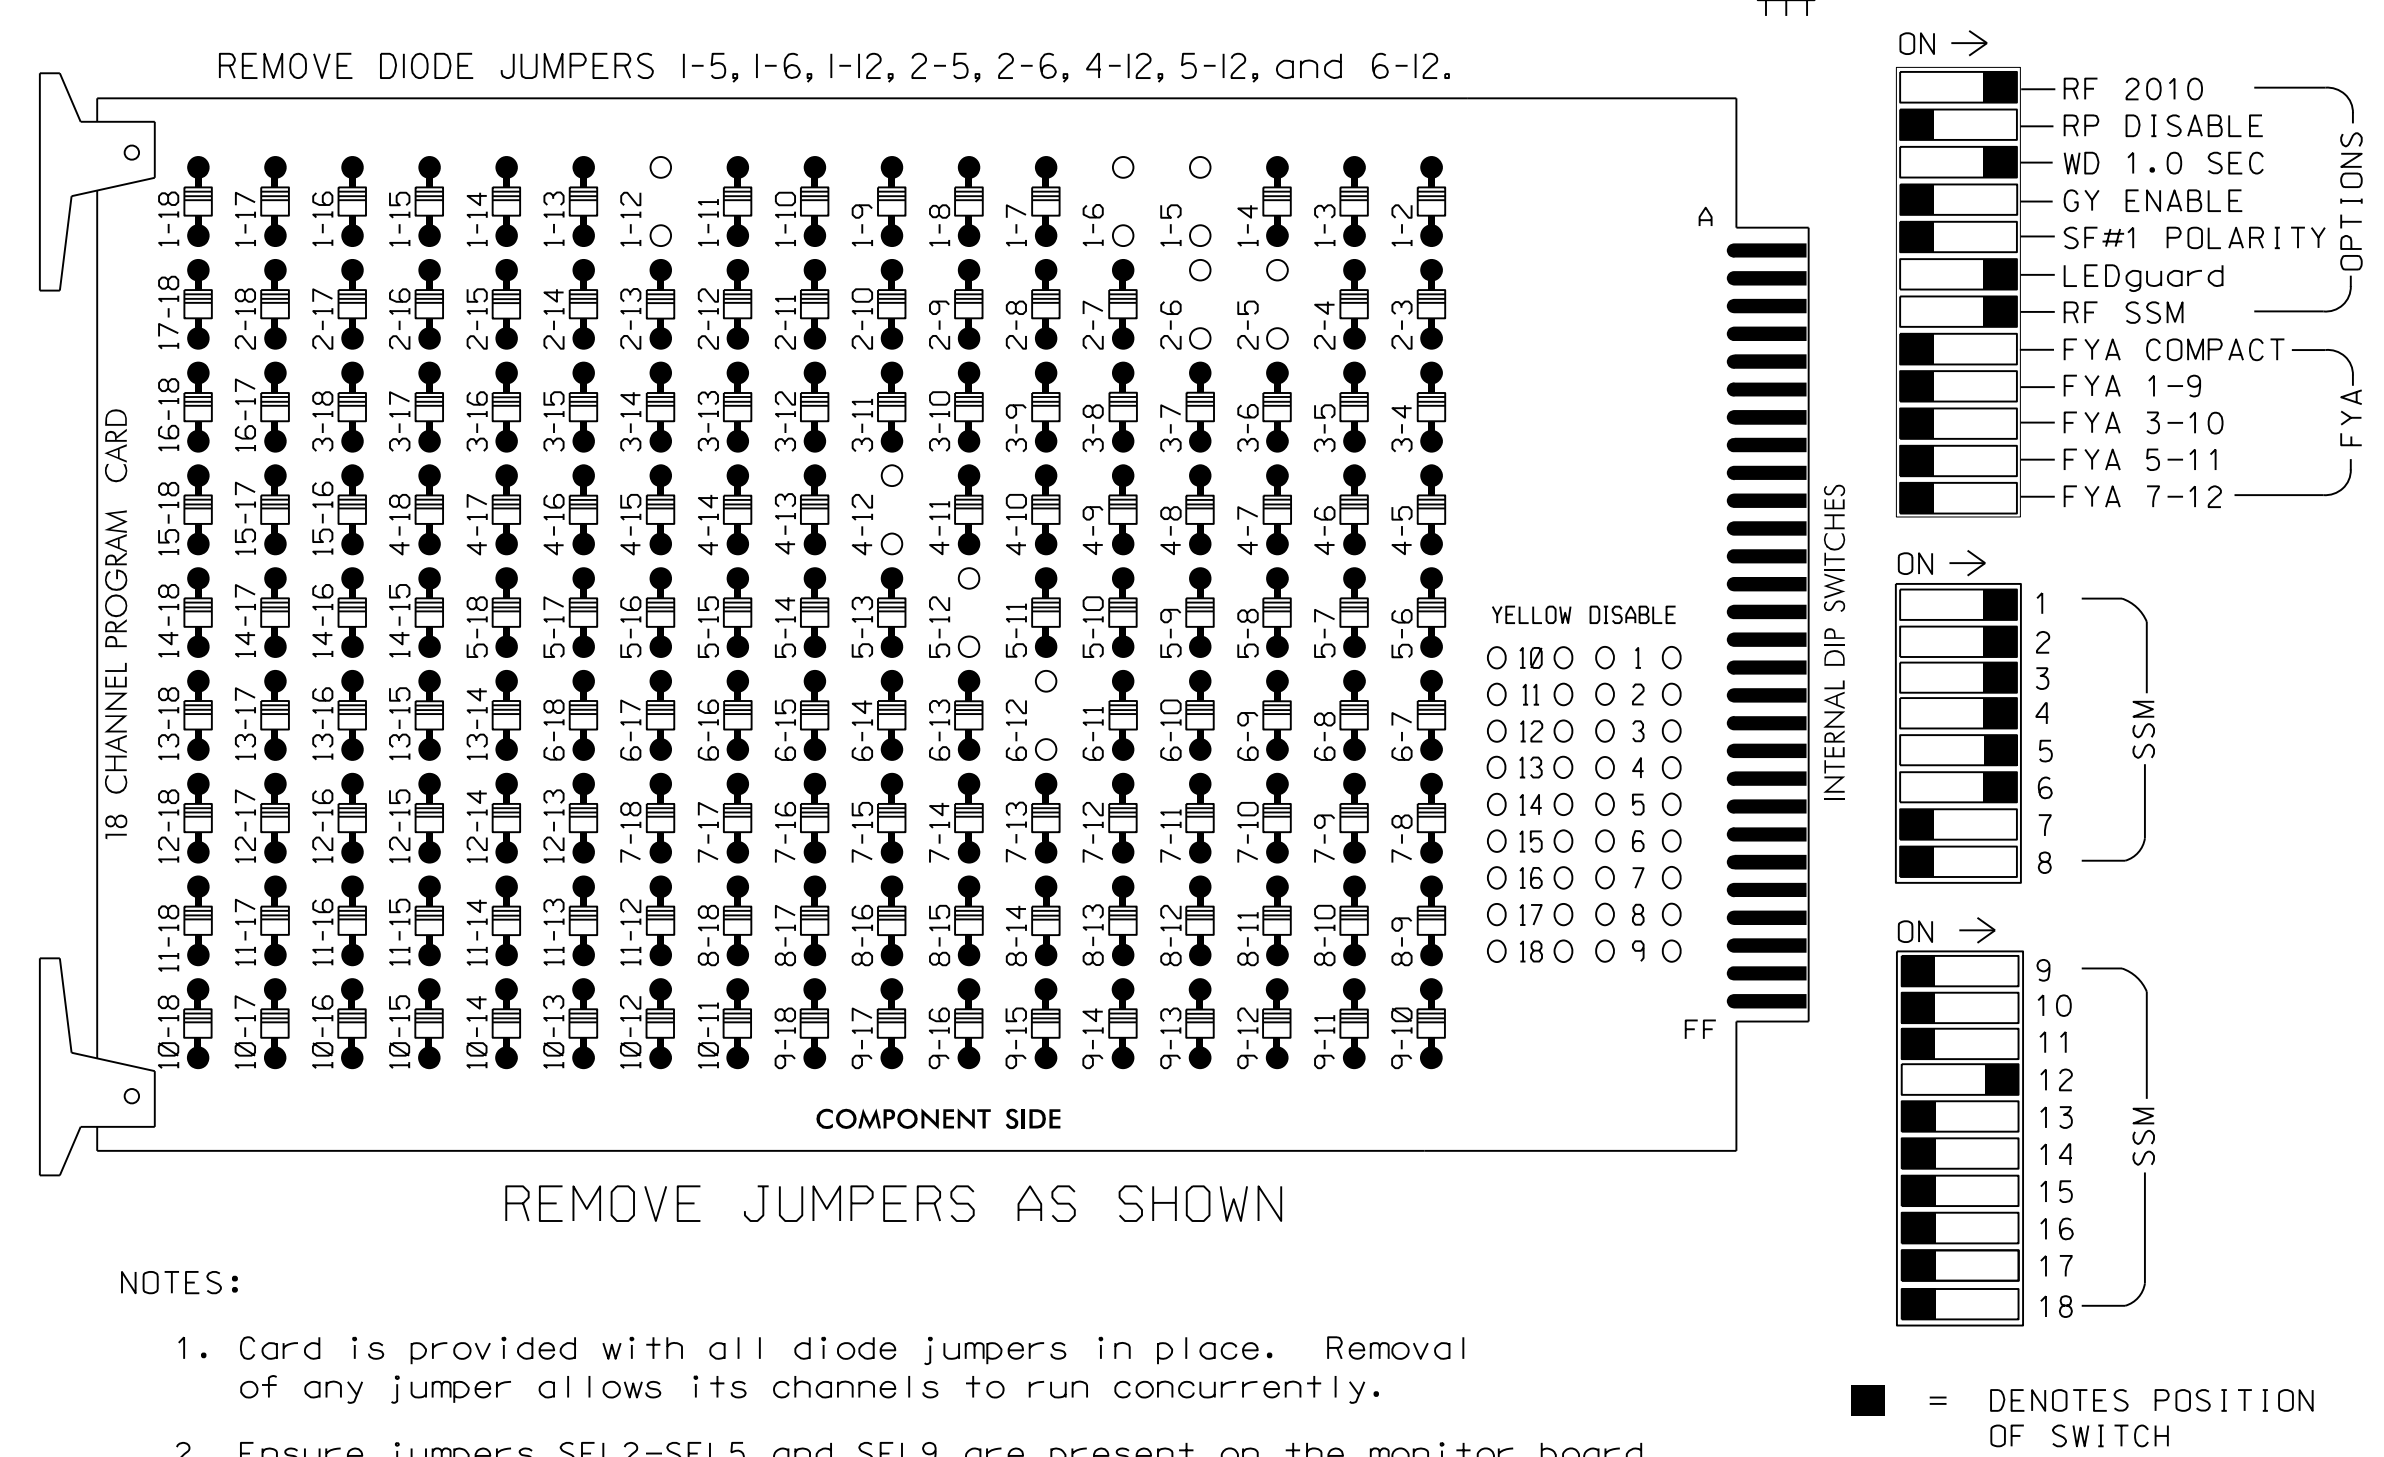

- NOTES:
- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
 - Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
 - Ensure that Red Enable is active at all times during normal operation.
 - Integrate monitor with Ethernet network in cabinet.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 Green and 6 Green.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,AUX S5
 PHASES USED.....1,2,3,4,5,6
 OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....*


* See Overlap Programming Detail on this sheet

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11,12	21,22,23	NU	31	32	41	42	23	NU	51	61,62	NU	NU	NU	NU	NU	NU	43,44	NU
RED	128			116	116	101	101					134							A114
YELLOW	129			117	117	102	102					135							
GREEN	130			118	118	103	103					136							
RED ARROW	125											131							
YELLOW ARROW	126							102	132										A115
GREEN ARROW	127			118	103	103	133												A116

NU = Not Used

INPUT FILE POSITION LAYOUT

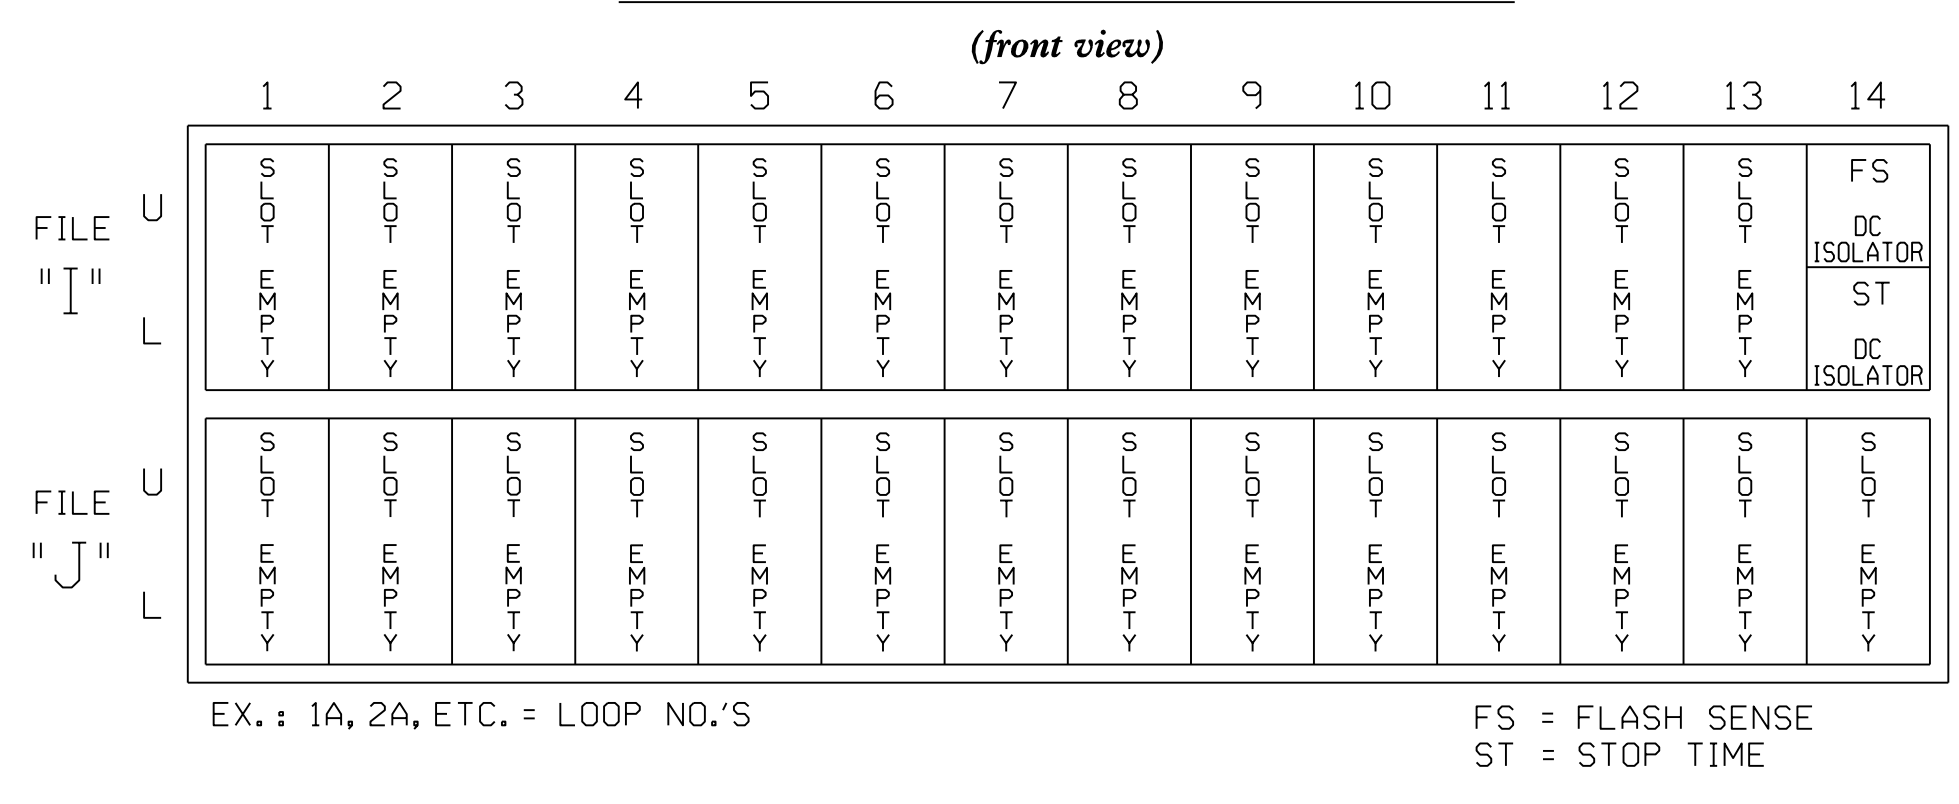

SPECIAL DETECTOR NOTE
 Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
- REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select **2. CONTROLLER**
- From CONTROLLER Submenu select **2. VEHICLE OVERLAPS**

OVERLAP D Toggle Three Times

Select TMG VEH OVLP [D] and 'NORMAL'

TMG VEH OVLP...[D] TYPE:**NORMAL**

PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6

INCLUDED X . . X

LAG GRN 0.0 YEL 0.0 RED 0.0

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0358T2
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A


Temporary Design 2 - TMP Phase II
 Electrical Detail

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p> <p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>US 401 (Raeford Road) at SR 1141 (Bingham Drive)</p>		<p>SEAL</p> <p>3/29/2018</p>			
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: G B Spell REVIEWED BY:</p>	<p>REVISIONS</p> <table border="1"> <tr> <th>NO.</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </table>		NO.	INIT.	DATE
NO.	INIT.	DATE					

EDI MODEL 2018ECLIP-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

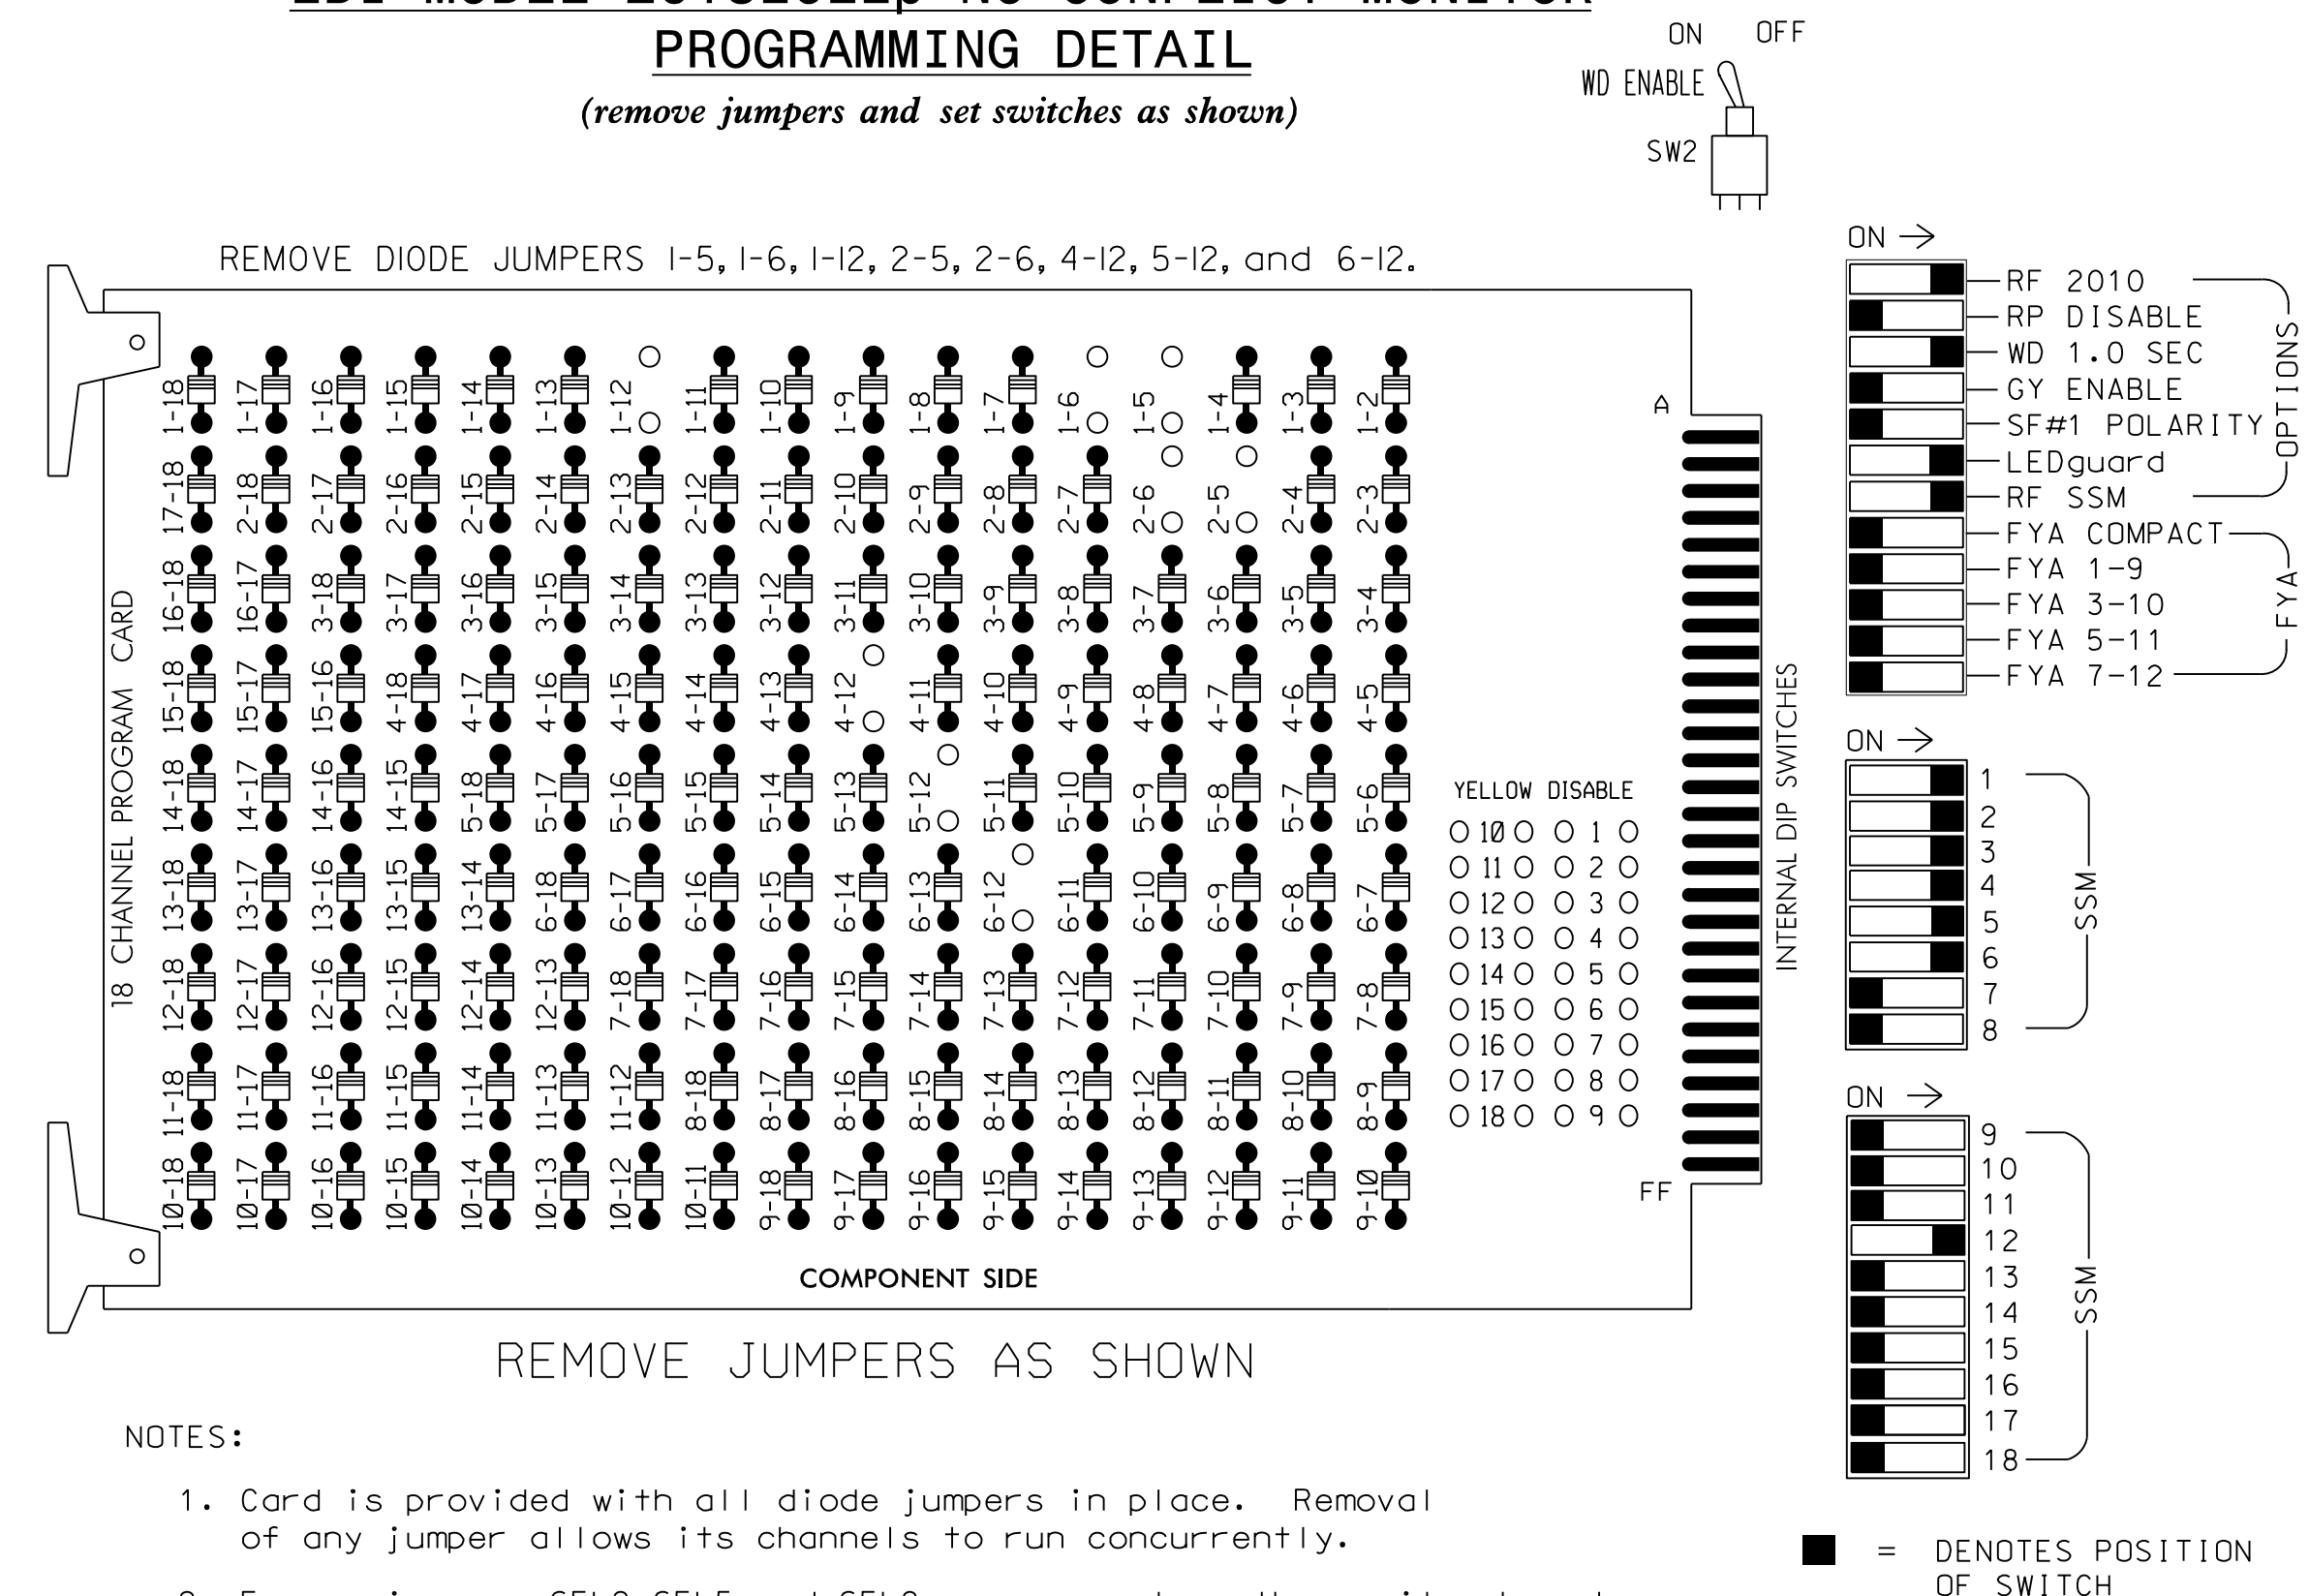

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program controller to start up in phase 2 Green and 6 Green.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/AUX
 SOFTWARE.....ECONOLITE ASC/3-2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,AUX S5
 PHASES USED.....1,2,3,4,5,6
 OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....*

* See Overlap Programming Detail on this sheet


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11	21,22	NU	31	32	41	42	22	NU	51	61,62	NU	NU	NU	NU	NU	NU	43,44	NU
RED	128			116	116	101	101				134								A114
YELLOW	129			117	117	102	102				135								
GREEN	130			118	118	103	103				136								
RED ARROW	125									131									
YELLOW ARROW	126						102		132										A115
GREEN ARROW	127			118		103		103	133										A116

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

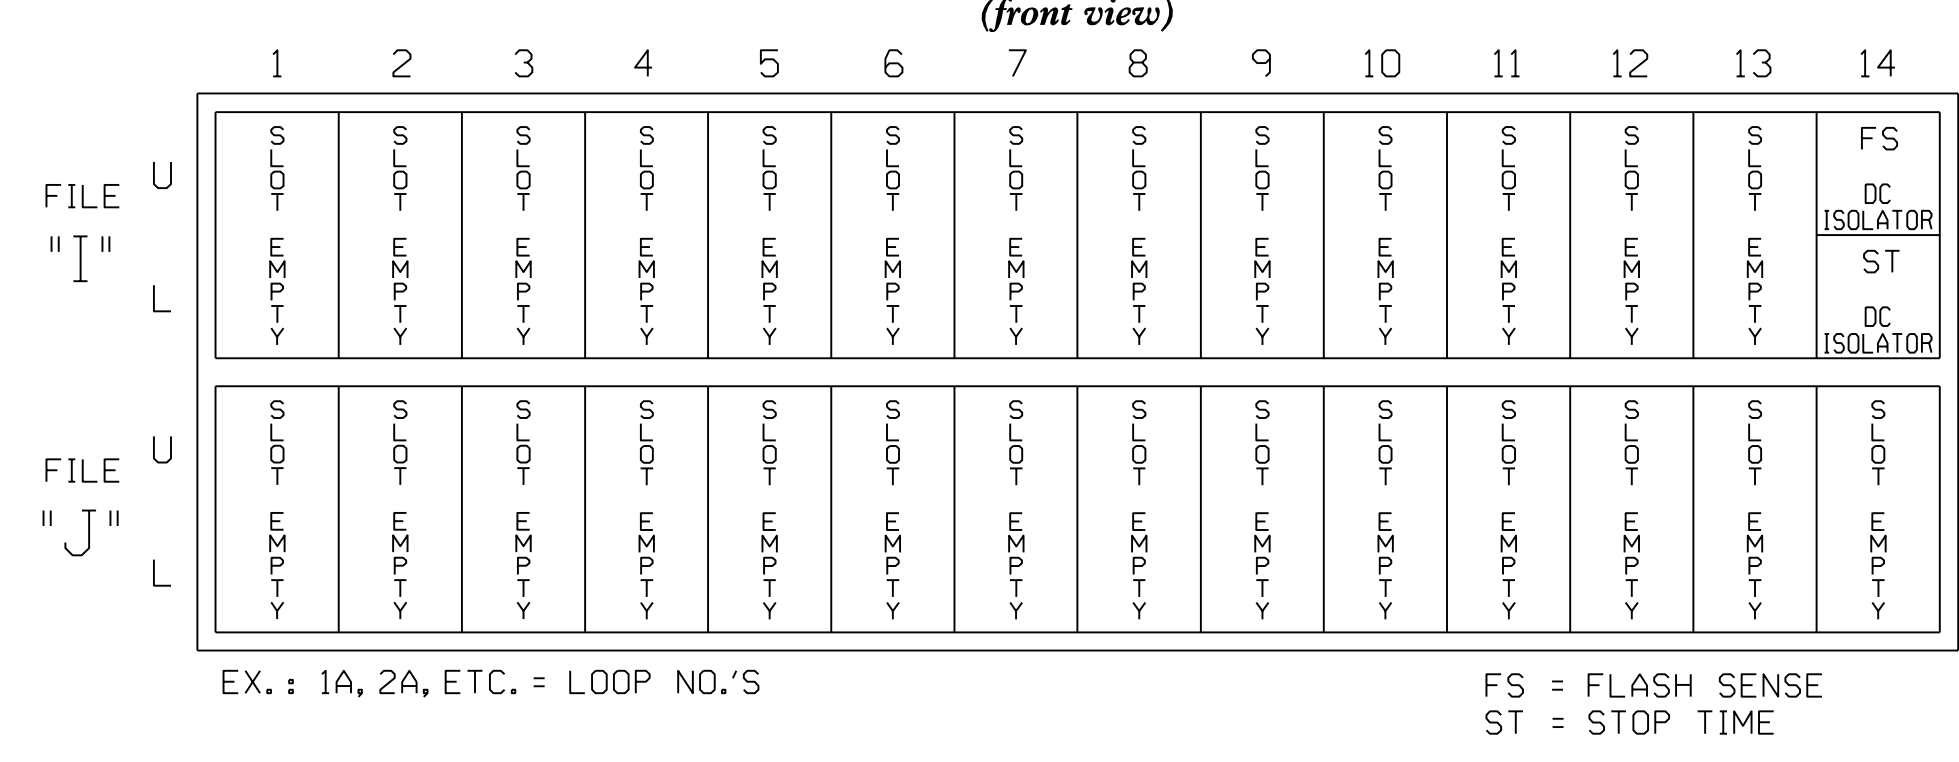

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
- REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select **2. CONTROLLER**
- From CONTROLLER Submenu select **2. VEHICLE OVERLAPS**

OVERLAP D Toggle Three Times

Select TMG VEH OVLP [D] and 'NORMAL'

TMG VEH OVLP...[D] TYPE: [NORMAL]

PHASES 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6

INCLUDED X . . X

LAG GRN 0.0 YEL 0.0 RED 0.0

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0358T3
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A

Temporary Design 3 - TMP Phase III
 Electrical Detail

DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED

<p>Stantec Consulting Services Inc. 801 Jones Franklin Road-Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672</p>	<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared in the Offices of:</p>	<p>US 401 (Raeford Road) at SR 1141 (Bingham Drive)</p>		<p>SEAL</p> <p>STATE OF NORTH CAROLINA</p> <p>PROFESSIONAL ENGINEER</p> <p>LAURENCE E. OVERN</p> <p>3/29/2018</p>						
		<p>Division 6 Cumberland County Fayetteville</p> <p>PLAN DATE: March 2018 REVIEWED BY: L Overn</p> <p>PREPARED BY: G B Spell REVIEWED BY:</p>			<p>REVISIONS</p> <table border="1"> <tr> <th>NO.</th> <th>DESCRIPTION</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	NO.	DESCRIPTION	INIT.	DATE	
NO.	DESCRIPTION	INIT.	DATE							