


STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2020CPT.10.09.10041 2020CPT.10.09.20041 2020CPT.10.09.20042		
F.A. PROJECT NO.			

PAVEMENT SCHEDULE

(C1)	PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
(C2)	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
(C3)	PROP. APPROX. 1.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
(C4)	PROP. ASPHALT SURFACE TREATMENT, DOUBLE SEAL, (SEE S. P. FOR AGGREGATE TYPE.)
(D1)	PROPOSED 2.5" ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
(D2)	AST MAT COAT # 67
(E1)	PROP. APPROX. 5" ASPHALT BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS PER SQYD.
(T1)	SHOULDER RECONSTRUCTION
(T2)	SHOULDER CONSTRUCTION
(V1)	MILLING EXISTING ASPHALT, 1.5" DEPTH
(V2)	PROFILE MILLING EXISTING PAVEMENT, 0-1.5"
(V3)	MILLING EXISTING PAVEMENT, 5" IN DEPTH. (SEE S.P. FOR "TRENCHING FOR BASE COURSE BY MILLING.")
(U)	EXISTING PAVEMENT
(Z)	FULL DEPTH RECLAMATION

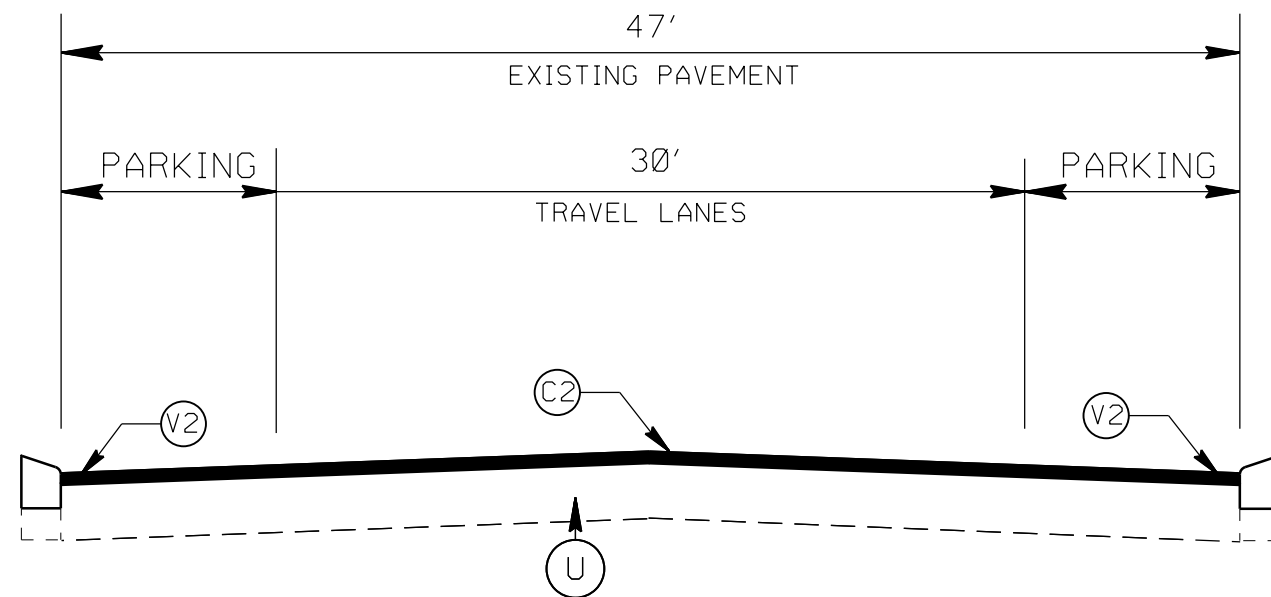

TYPICAL SECTION NO. 9
 SR 1403 W. PASSIAC STREET (MAP 6)
 APPROX. STA. 40+05 TO STA. 45+07

2019-2020
 ANSON COUNTY RESURFACING

SCALE	-NA-		REVISIONS	
DATE	08/18			
DWG. BY	AMO			
DESIGN BY	AMO			
APPROVED	CLA			