PROJECT REFERENCE NO.	SHEET NO.
B-5103	SCP.8

SPLICE ENCLOSURE NO.

C008

REDCROSS ST AT N. 4TH ST

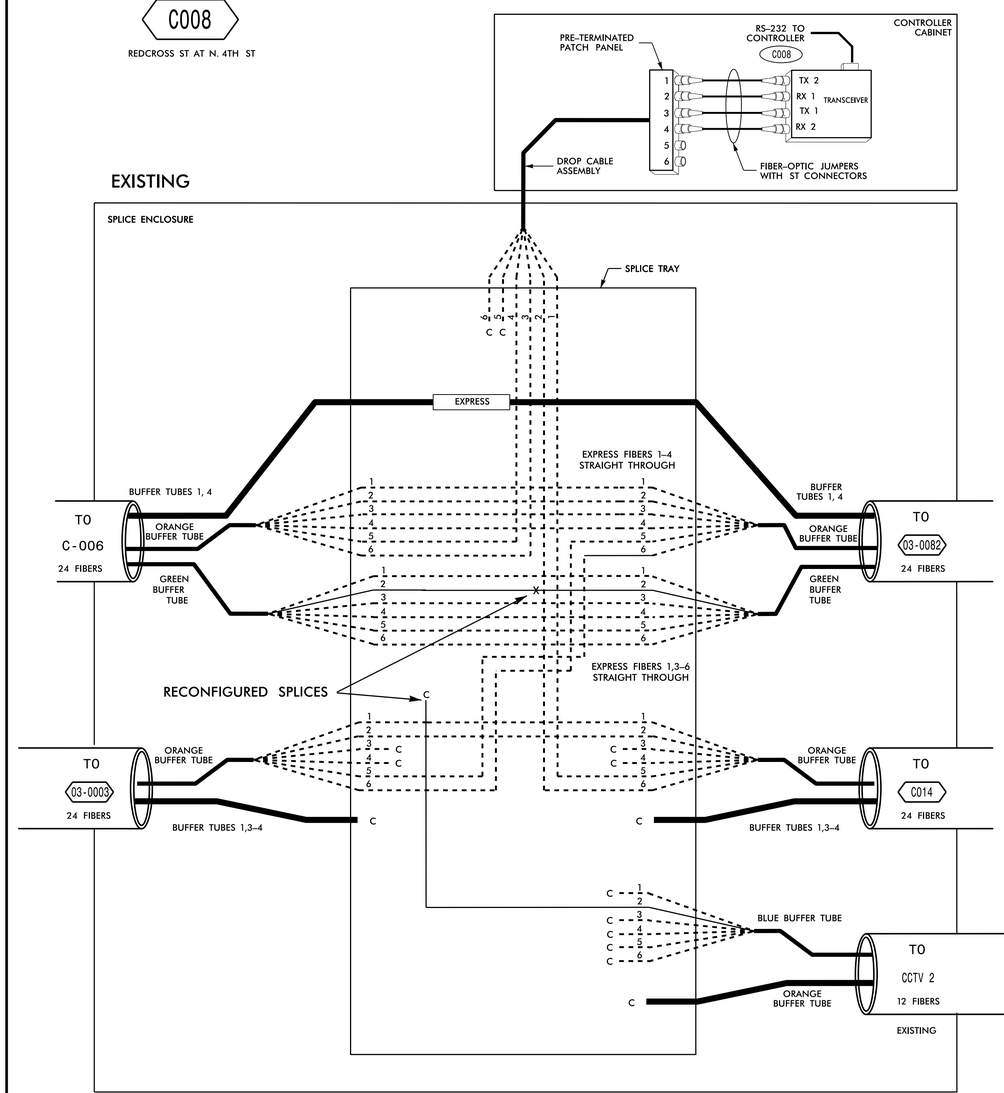

LEGEND

COLOR CODE TIA/EIA 598-A

(1) BLUE	(7) RED
(2) ORANGE	(8) BLACK
(3) GREEN	(9) YELLOW
(4) BROWN	(10) VIOLET
(5) SLATE	(11) ROSE
(6) WHITE	(12) AQUA

ETHERNET SWITCH TERMINATION CONFIGURATION ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMING / ENSURING PROPER TERMINATION.

X = FUSION SPLICE INDIVIDUAL FIBER

C = CAP AND SEAL

INCLUDE ON THE COVER OF EACH SPLICE TRAY THE FOLLOWING: REFERENCE SECTION 1731 "FIBER OPTIC SPLICE ENCLOSURE"

1) SPLICE LOCATION
2) DATE
3) COMPANY NAME
4) NAME OF INDIVIDUAL PERFORMING THE SPLICING

PRIOR TO INSTALLING THE COVER ON THE SPLICE TRAY TAKE A DIGITAL PHOTOGRAPH SHOWING THE SPLICE TRAY AND INFORMATION SHOWN ABOVE (1-4) AND SUBMIT PHOTOGRAPH ALONG WITH OTDR TEST RESULTS.

REMOVAL OF CCTV CAMERA #2 FROM N. 3RD ST. AT CAMPBELL ST.

CCTV CABINET

CCTV #2

N. 3RD ST AT CAMPBELL ST

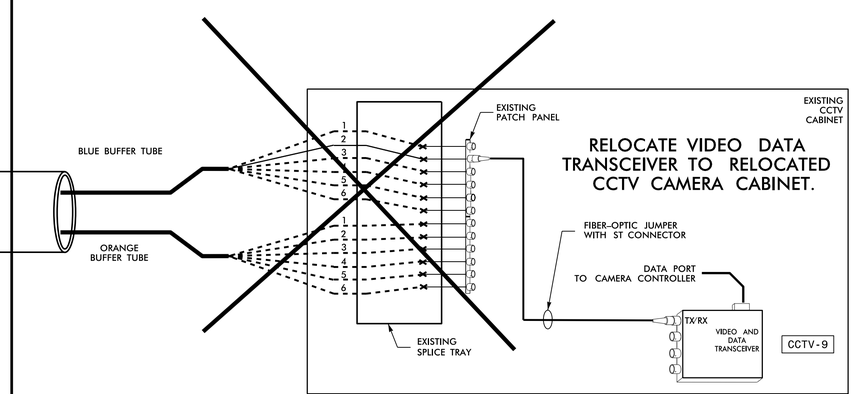

NOTE:

1) TRANSCEIVER TERMINATIONS CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING\ ENSURING PROPER TERMINATIONS.

Prepared in the Offices of:

Transportation Mobility and Safety Division
STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
Intelligent Transportation Systems Section

750 N. Greenfield Pkwy., Garner, NC 27529

SCALE 0

SPLICE DETAILS

DIVISION 03 NEW HANOVER COUNTY WILMINGTON

PLAN DATE: OCTOBER 2014 | REVIEWED BY: DocuSigned by: Nick Avery

PREPARED BY: P. C. LOUDER | REVIEWED BY: 09F5DB4CBED3443...

REVISIONS	INIT.	DATE

SEAL NORTH CAROLINA PROFESSIONAL SEAL 023919 ENGINEER GREGORY A. FULLER

DocuSigned by: Gregory A. Fuller 11/4/2014

7092CA0AEE874FF DATE

CADD Filename: