

**This electronic collection of documents is provided  
for the convenience of the user  
and is Not a Certified Document –**

**The documents contained herein were originally issued  
and sealed by the individuals whose names and license  
numbers appear on each page, on the dates appearing  
with their signature on that page.**

**This file or an individual page  
shall not be considered a certified document.**



T.I.P.: I-4400C

CONTRACT: C204265

**STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN  
BUNCOMBE / HENDERSON COUNTIES**

**LOCATION: I-26 FROM 0.05 MI SOUTH OF US 25 TO  
0.3 MI SOUTH OF NC 280 (AIRPORT ROAD)**

TIP NO. I - 4400C	SHEET NO. SIGN - 1
APPROVED:  <small>DocuSigned by: Andrew D. Klinksiek E3D78F84596E44B</small>	
DATE: 6/7/2019	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - CONTRACT STANDARDS AND DEVELOPMENT UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
901.10	TYPE 'A' SIGNS
901.20	TYPE 'B' SIGNS
901.50	ARROWS AND SHIELDS
901.70	SIGN STRINGERS AND SUPPORT SPACING
901.80	SIGN MOUNTING DETAILS - FOR TYPE A AND TYPE B SIGNS
903.10	GROUND MOUNTED SIGN SUPPORTS
903.30	BARRIER SIGN SUPPORT ASSEMBLY
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.20	SECONDARY SIGN MOUNTING
904.30	SUPPLEMENTAL SIGN MOUNTING
904.40	MILEPOST AND PLACEMENT
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

**PAY ITEM NOTES**

- 1 SIGN ERECTION, TYPE D, E OR F
- 2 SIGN ERECTION, TYPE A (GROUND MOUNTED)
- 3 SIGN ERECTION, TYPE B (GROUND MOUNTED)
- 4 SIGN ERECTION, MILEMARKERS
- 5 SIGN ERECTION, RELOCATE TYPE A (GROUND MOUNTED)
- 6 SIGN ERECTION, RELOCATE TYPE D (GROUND MOUNTED)
- 7 DISPOSAL OF SUPPORT, STEEL BEAM
- 8 DISPOSAL OF SIGN SYSTEM, OVERHEAD
- 9 DISPOSAL OF SIGN SYSTEM, STEEL BEAM
- 10 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 11 DISPOSAL OF SUPPORT, U-CHANNEL
- 12 DISPOSAL OF SIGN, A OR B (OVERHEAD)
- 13 DISPOSAL OF SIGN, A OR B (GROUND MOUNTED)
- 14 RELOCATE OPEN CLOSED SIGN

**I-4400C SUMMARY  
OF QUANTITIES**


ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.		
4048000000	902	REINFORCED CONCRETE SIGN FOUNDATION	25.00 CY
4054000000	902	PLAIN CONCRETE SIGN FOUNDATION	3.00 CY
4057000000	SP	OVERHEAD FOOTING	277.00 CY
4060000000	903	SUPPORTS, BREAKAWAY STEEL BEAM	21846.00 LB
4066000000	903	SUPPORTS, SIMPLE STEEL BEAM	4820.00 LB
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	2713.90 LF
4079000000	903	SUPPORTS, BARRIER (SMALL)	7 EA
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -L- 667+00	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -L- 687+50 LT	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -L- 714+00	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -L- 731+00	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -L- 767+00	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -L- 811+00	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -Y10- 326+75	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -Y10RPA- 23+90	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -Y10- 329+50	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -Y10RPC- 21+50	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -Y10- 337+25 LT	1 LS
4082100000	906	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STA -Y10- 334+50 LT	1 LS
4096000000	904	SIGN ERECTION, TYPE D	9 EA
4102000000	904	SIGN ERECTION, TYPE E	128 EA
4108000000	904	SIGN ERECTION, TYPE F	10 EA
4110000000	904	SIGN ERECTION, TYPE A (GROUND MOUNTED)	17 EA
4114000000	904	SIGN ERECTION, MILEMARKERS	14 EA
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE A (GROUND MOUNTED)	16 EA
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE D (GROUND MOUNTED)	7 EA
4138000000	907	DISPOSAL OF SUPPORT, STEEL BEAM	32 EA
4149000000	907	DISPOSAL OF SIGN SYSTEM, OVERHEAD	1 EA
4152000000	907	DISPOSAL OF SIGN SYSTEM, STEEL BEAM	14 EA
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	101 EA
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL	14 EA

**GENERAL NOTES**

- . SIGNS FURNISHED BY STATE.
- . ALL PROPOSED SIGNS SEE PAY ITEM NOTE 1 UNLESS OTHERWISE NOTED.
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . ALL TYPE D SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL TYPE E AND F SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E AND F SIGNS SHALL BE GRADE C REFLECTIVE SHEETING UNLESS OTHERWISE NOTED.
- . DO NOT BEGIN FABRICATION FOR TYPE A AND B SIGNS MOUNTED ON OVERHEAD STRUCTURES OR STEEL SUPPORTS UNTIL "S" DIMENSIONS HAVE BEEN FIELD VERIFIED.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

**PLANS SUBMITTED TO:**

ANNA G. HENDERSON, PE	DIVISION 13 TRAFFIC ENGINEER
STEVE BUCHANAN	DIVISION 14 TRAFFIC ENGINEER
SCOTT M. COLLIER, PE	REGIONAL TRAFFIC SAFETY ENGINEER
KELVIN JORDAN	WESTERN SIGNING & DELINEATION ENGINEER, DIVISIONS 07, 09-14



**PLANS PREPARED BY: HNTB NORTH CAROLINA, P.C.**

C.A. JOHNSON, III, PE	SIGNING PROJECT MANAGER
A.D. KLINGSIEK, PE, PTOE	SIGNING PROJECT ENGINEER
T.R. TERRELL	SIGNING DESIGN SENIOR TECHNICIAN




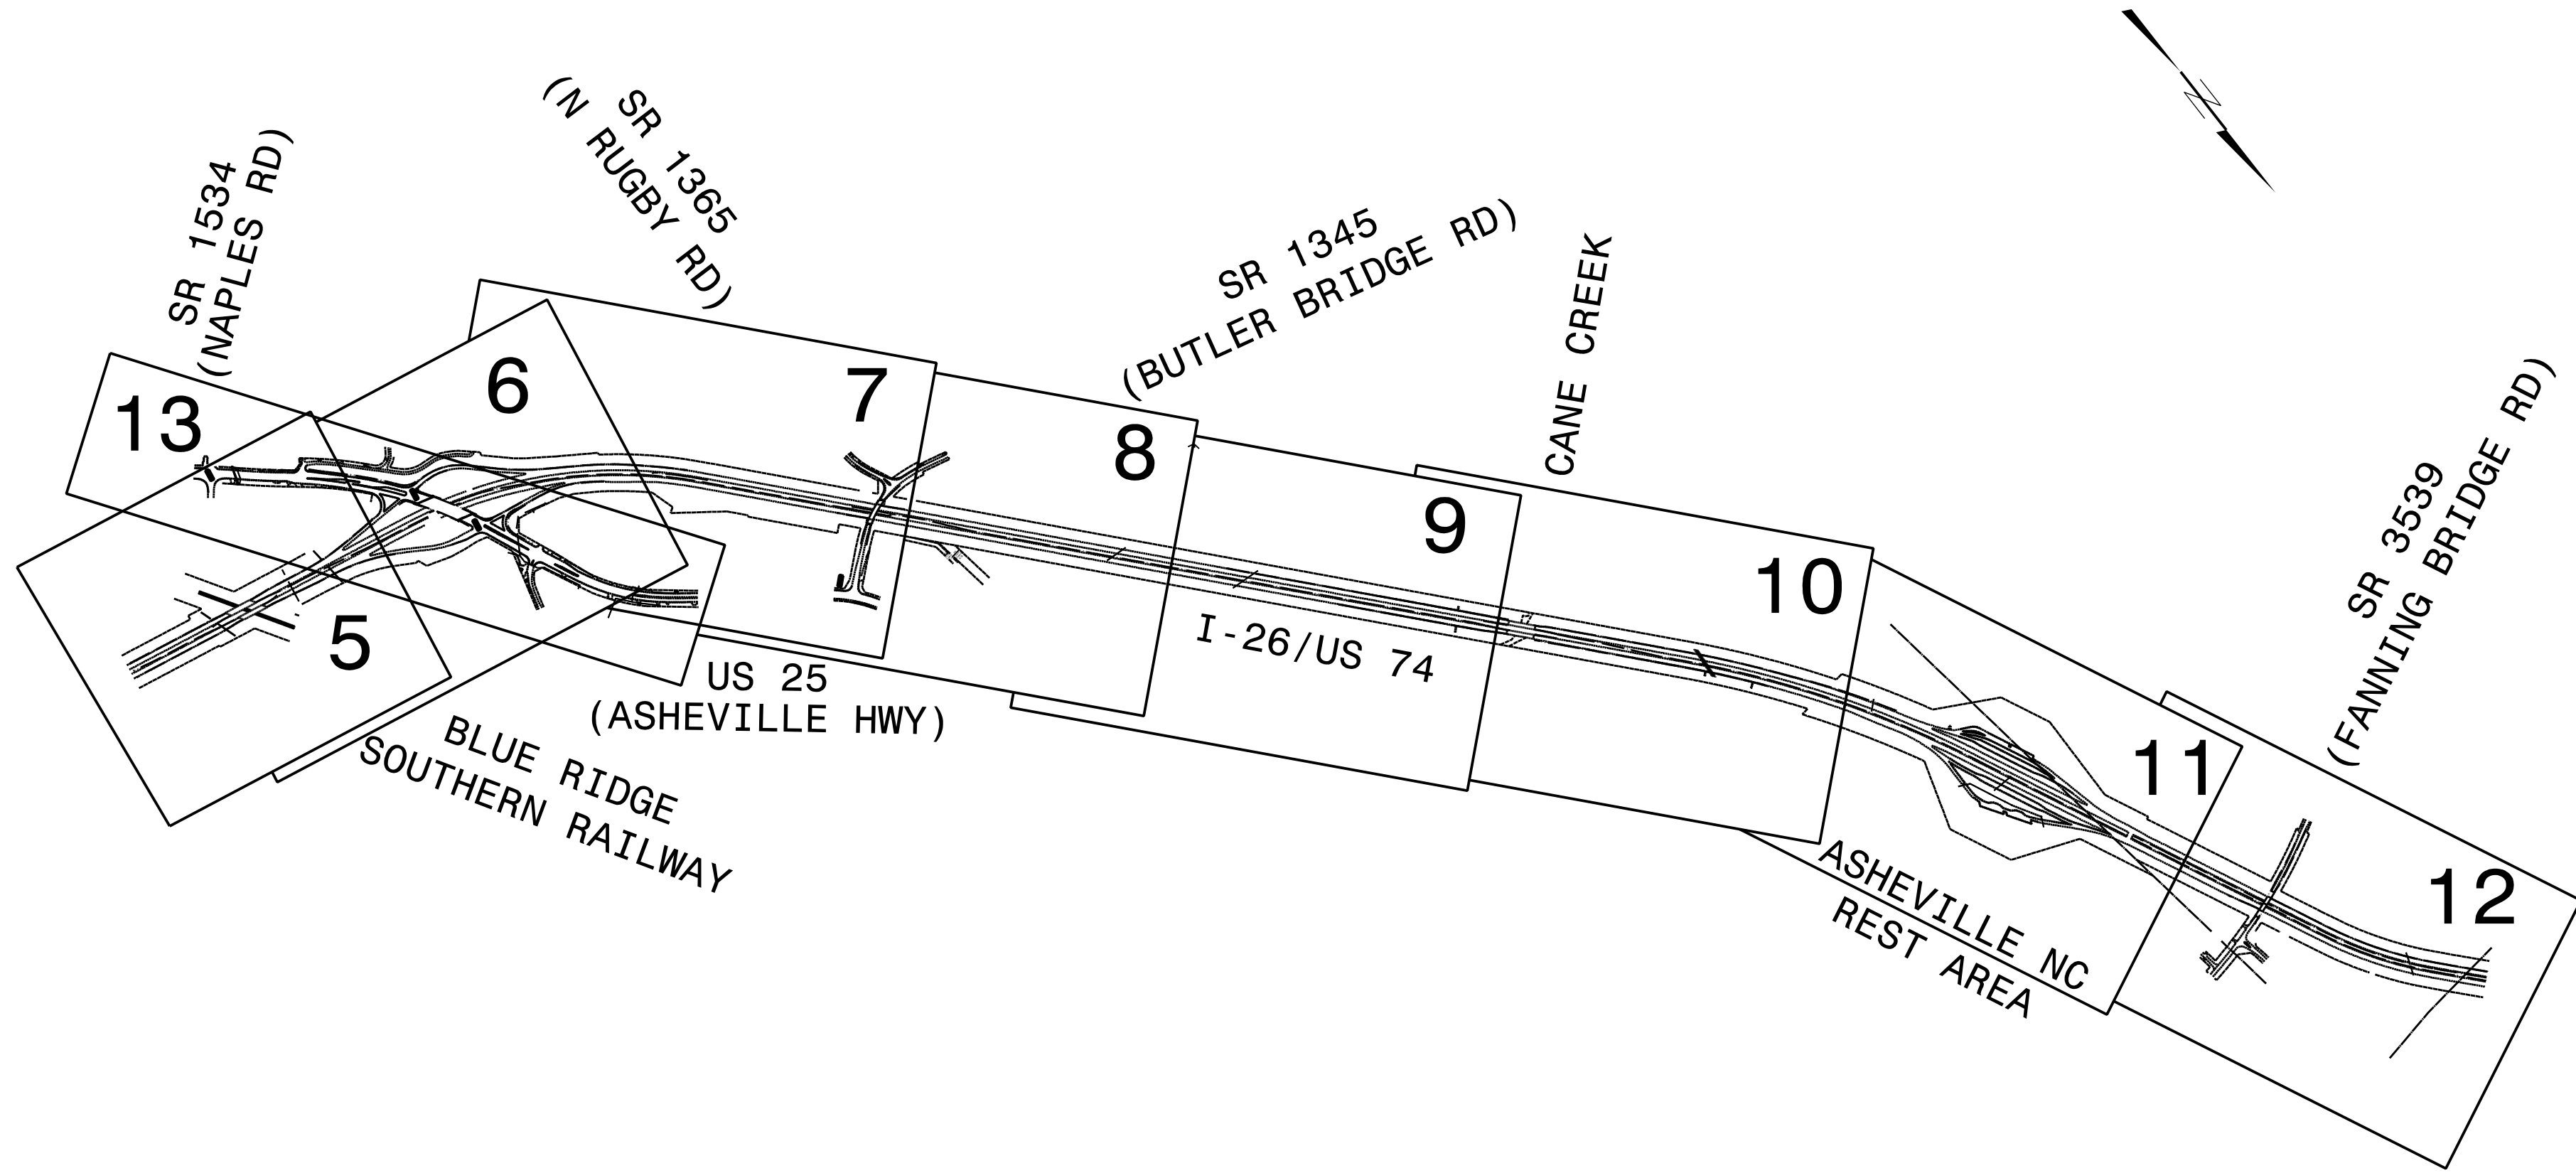
HNTB NORTH CAROLINA, P.C.  
343 E. Six Forks Road, Suite 200  
Raleigh, North Carolina 27609  
NC License No: C-1554  
(919) 546-8997

**INDEX**


SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-1A	KEY SHEET
SIGN-2-2A	SUPPORT INFORMATION
SIGN-3-3K	OVERHEAD STRUCTURE LINE DRAWINGS
SIGN-4-4M	SIGN DESIGNS, TYPE E, TYPE F, AND MILEMARKER SHEETS
SIGN-5-25	SIGNING PLAN SHEETS



TIP NO. I-4400C	SHEET NO. SIGN-1A
APPROVED: <u>Andrew D. Klinck</u> <small>DocuSigned by: E3D79F8496E44D</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




EXISTING SIGNING  
PROPOSED SIGNING

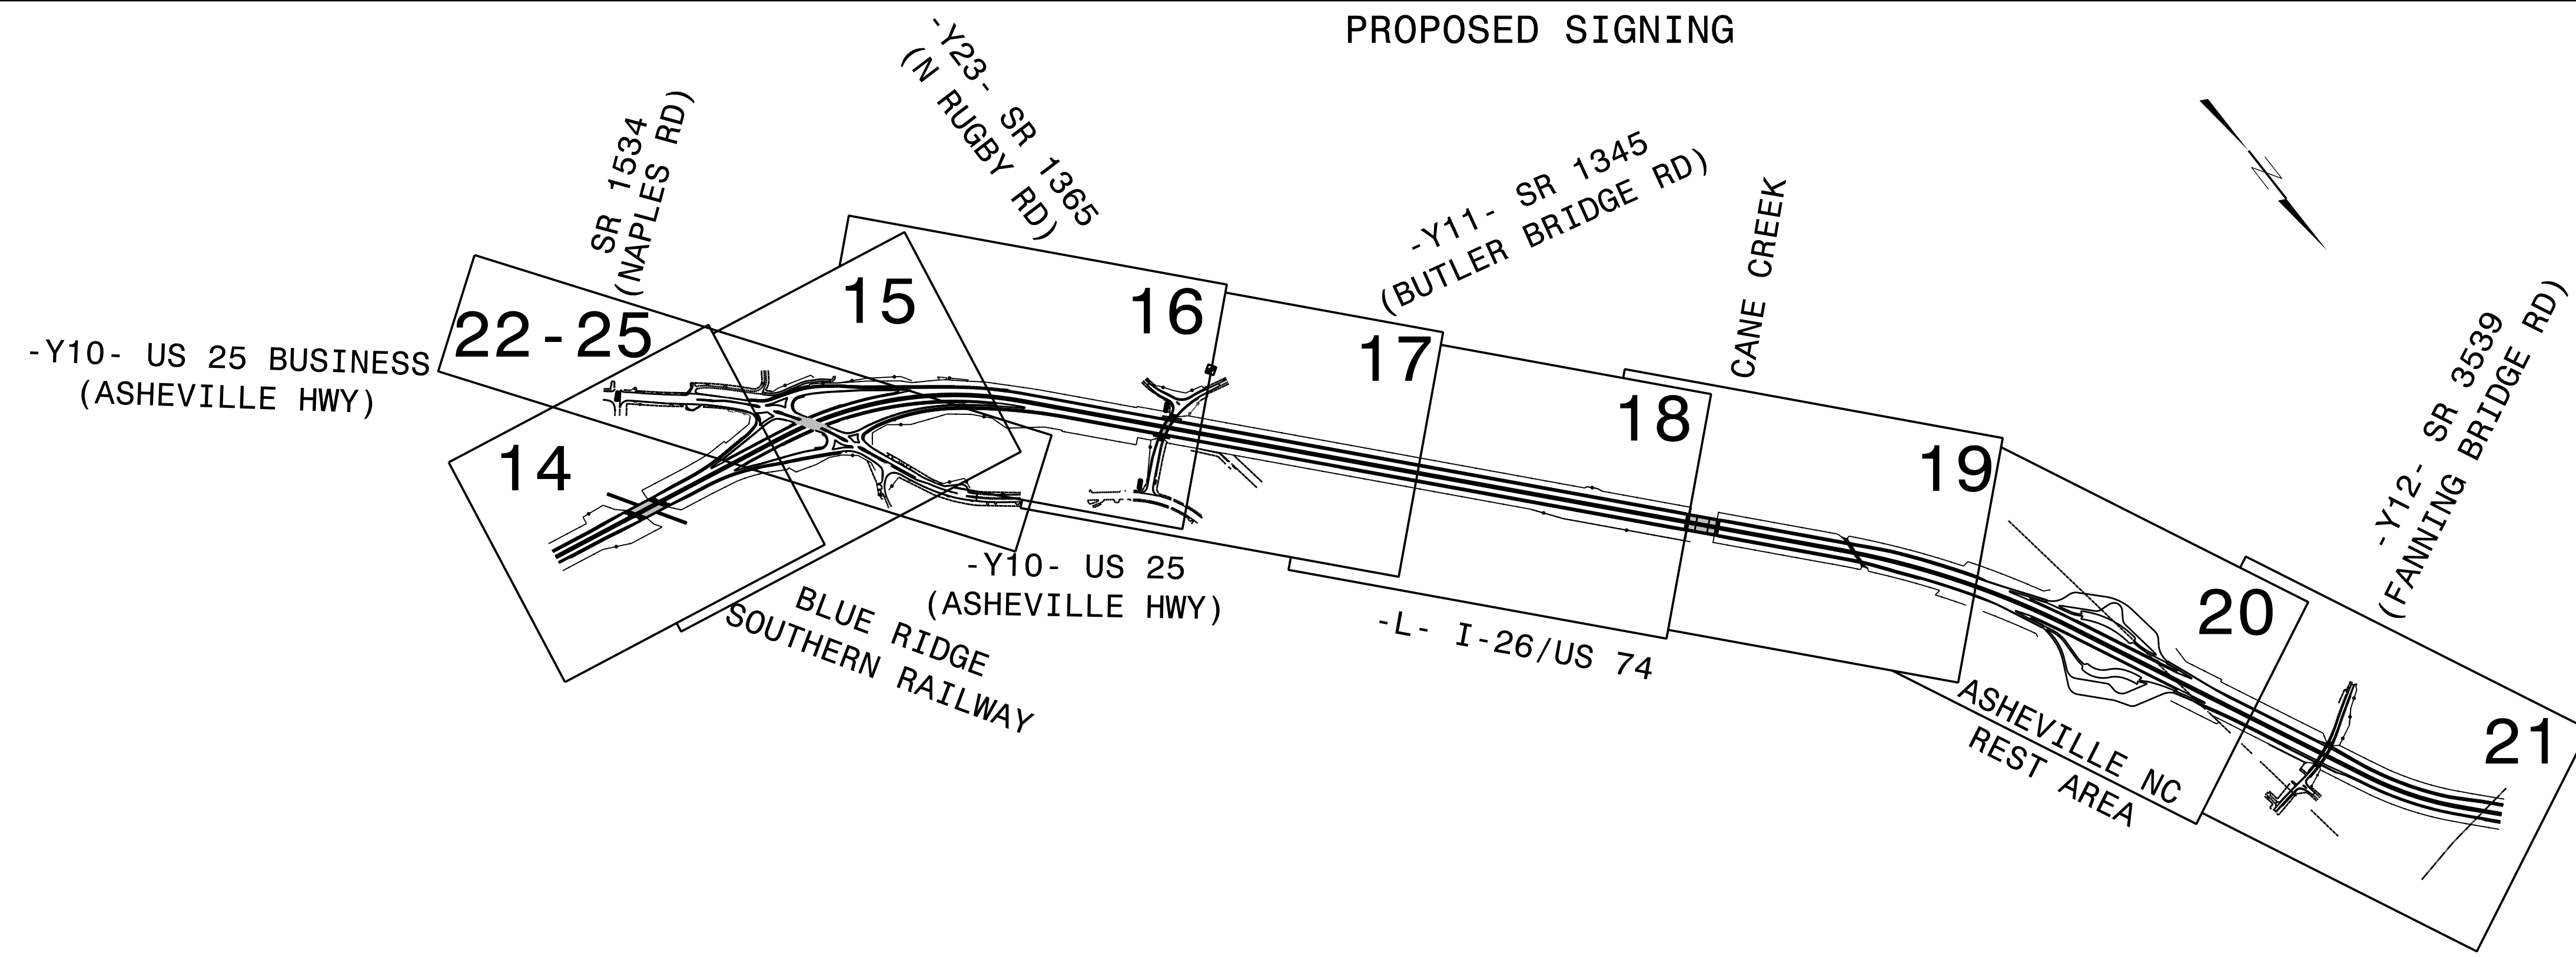


Version: 3.1 Posted: 6/2/2017

NUMBER	SIGN TYPE	SIGN SIZE (in.)			ROADWAY STATION	NUMBER OF SUPPORTS	BEAM SECTION	SUPPORT TYPE BA or S	OMNI COUPLER	ATTACHMENT METHOD	MOUNTING METHOD	HORIZONTAL CLEARANCE* (ft.)	SUPPORT SPACING	LENGTH (ft)			LEFT SUPPORT (ft)			CENTER SUPPORT (ft)			RIGHT SUPPORT (ft)			SUPPORT WEIGHTS		FOOTINGS				FIELD VERIFIED SEE NOTE 2 (mm/dd/yy)
		w	x	h										SNS HT	MTG HT	EMBED-MENT	S	L	LENGTH	S	L	LENGTH	S	L	LENGTH	B/A (lbs.)	SIMPLE (lbs.)	DIAMETER (ft.)	DEPTH (ft.)	REINFORCED (c.y.)	PLAIN (c.y.)	
		"H"	"C"																													
119	A	108	x	72	-Y10RPB- 15+50 LT	2	W6x9	S	N/A	N/A	N/A	25.00	5.27	6.00	7.00	3.0	3.57	16.57	19.57	0.00	0.00	0.00	6.21	19.21	22.21	0.00	376.02	1.5	3.5	0.46	0.00	_____
120	A	108	x	72	-Y10RPD- 22+00 LT	2	W6x12	S	N/A	N/A	N/A	21.00	5.27	6.00	7.00	3.0	3.58	16.58	19.58	0.00	0.00	0.00	6.22	19.22	22.22	0.00	501.6	1.5	3.5	0.46	0.00	_____
121	A	132	x	60	-L- 703+00	2	S4x7.7	S	N/A	N/A	N/A	20.50	6.45	5.00	7.00	3.5	0.36	12.36	15.86	0.00	0.00	0.00	-2.86	9.14	12.64	0.00	219.45	1.0	4	0.00	0.23	_____
122	A	114	x	102	-L- 722+00 LT	2	W6x16	S	N/A	N/A	N/A	21.00	5.57	8.50	7.00	3.5	3.45	18.95	22.45	0.00	0.00	0.00	6.24	21.74	25.24	0.00	763.04	1.5	4	0.52	0.00	_____
123	A	132	x	60	-L- 772+00	2	W6x12	S	N/A	N/A	N/A	21.00	6.45	5.00	7.00	3.0	3.61	15.61	18.61	0.00	0.00	0.00	6.84	18.84	21.84	0.00	485.4	1.5	3.5	0.46	0.00	_____
124	A	186	x	66	-L- 754+00 LT	2	W6x16	S	N/A	N/A	N/A	20.00	9.08	5.50	7.00	3.5	3.99	16.49	19.99	0.00	0.00	0.00	8.53	21.03	24.53	0.00	712.32	1.5	4	0.52	0.00	_____
125	A	216	x	168	-L- 823+50	3	W10x26	BA	N/A	N/A	N/A	32.00	7.5 NON-STD. SPACING	14.00	9.87	4.5	2.74	26.61	31.11	0.12	23.99	28.49	-2.87	21.00	25.50	2632.60	0	2.5	5	2.73	0.00	_____
126	A	144	x	66	-L- 831+50	2	W6x9	BA	N/A	N/A	N/A	32.00	7.03	5.50	7.00	3.0	3.50	16.00	19.00	0.00	0.00	0.00	3.48	15.98	18.98	405.82	0	1.5	3.5	0.46	0.00	_____
127	A	132	x	60	-L- 818+50 LT	2	S4x7.7	S	N/A	N/A	N/A	23.00	6.45	5.00	7.00	3.0	0.13	12.13	15.13	0.00	0.00	0.00	-0.98	11.02	14.02	0.00	224.455	1.0	3.5	0.00	0.20	_____
128	A	78	x	84	-Y10- 318+50	2	S4x7.7	BA	N/A	N/A	N/A	16.00	3.81	7.00	7.00	3.0	0.75	14.75	17.75	0.00	0.00	0.00	1.14	15.14	18.14	316.35	0	1.0	3.5	0.00	0.20	_____
129	A	114	x	102	-Y10- 343+00 LT	2	W6x9	BA	N/A	N/A	N/A	16.00	5.57	8.50	7.00	3.0	0.34	15.84	18.84	0.00	0.00	0.00	1.25	16.75	19.75	411.31	0	1.5	3.5	0.46	0.00	_____
132	A	144	x	96	-L- 727+00	2	W6x16	S	N/A	N/A	N/A	21.00	7.03	8.00	7.00	3.5	3.71	18.71	22.21	0.00	0.00	0.00	5.94	20.94	24.44	0.00	746.4	1.5	4	0.52	0.00	_____
133	A	144	x	96	-L- 826+50 LT	2	W6x16	S	N/A	N/A	N/A	21.00	7.03	8.00	7.00	4.0	3.95	18.95	22.95	0.00	0.00	0.00	7.47	22.47	26.47	0.00	790.72	1.5	4.5	0.59	0.00	_____
204	A	78	x	60	-L- 668+93 +/-	2	S3x5.7	BA	N/A	N/A	N/A	Δ	3.81	5.00	7.00	2.5	0.50	12.50	15.00	0.00	0.00	0.00	0.50	12.50	15.00	207.00	0	1.0	3	0.00	0.17	_____
205	A	78	x	60	-L- 684+13 +/- LT	2	S3x5.7	BA	N/A	N/A	N/A	Δ	3.81	5.00	7.00	2.5	0.50	12.50	15.00	0.00	0.00	0.00	0.50	12.50	15.00	207.00	0	1.0	3	0.00	0.17	_____
206	A	78	x	78	-L- 786+79 +/-	2	S3x5.7	BA	N/A	N/A	N/A	Δ	3.81	6.50	7.00	2.5	0.50	14.00	16.50	0.00	0.00	0.00	0.50	14.00	16.50	224.10	0	1.0	3	0.00	0.17	_____
207	A	78	x	78	-L- 800+25 +/- LT	2	S3x5.7	BA	N/A	N/A	N/A	Δ	3.81	6.50	7.00	2.5	0.50	14.00	16.50	0.00	0.00	0.00	0.50	14.00	16.50	224.10	0	1.0	3	0.00	0.17	_____

TIP NO. I-4400C	SHEET NO. SIGN-2
APPROVED: <i>Andrew D. Klinkisch</i> <small>DocuSigned by: Andrew D. Klinkisch E31078F84596E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

**NOTES:**

- DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF TRAVEL LANE.
- FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (\*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (\*) ARTICLE 1072-1. (\*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
- PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

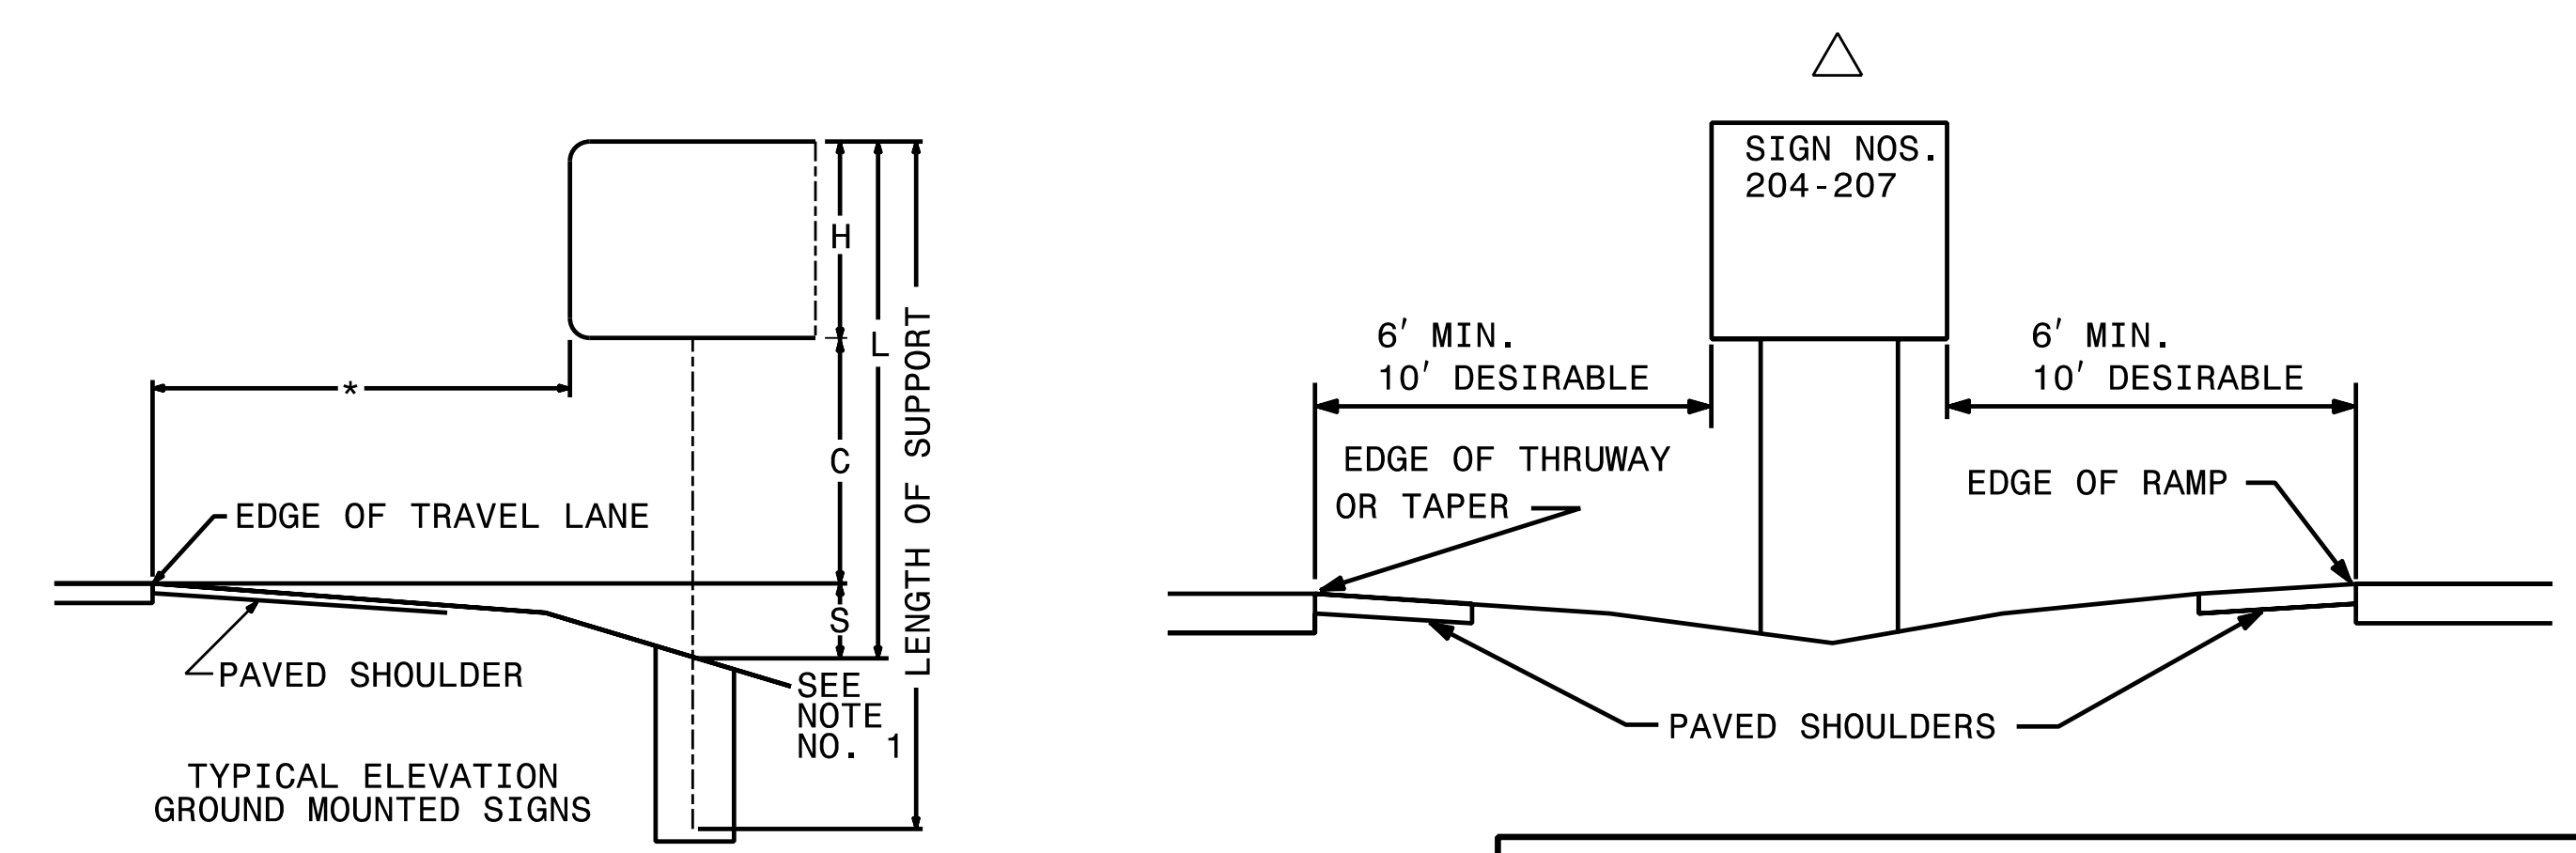

**TYPE A AND TYPE B  
GROUND MOUNTED SIGNS**




Version: 3.1 Posted: 6/2/2017

SIGN NUMBER	SIGN TYPE	SIGN SIZE (in.)			ROADWAY STATION	NUMBER OF SUPPORTS	BEAM SECTION	SUPPORT TYPE BA or S	OMNI COUPLER	ATTACHMENT METHOD	MOUNTING METHOD	HORIZONTAL CLEARANCE (ft.)	SUPPORT SPACING	LENGTH (ft)			LEFT SUPPORT (ft)			CENTER SUPPORT (ft)			RIGHT SUPPORT (ft)			SUPPORT WEIGHTS		FOOTINGS				FIELD VERIFIED SEE NOTE 2 (mm/dd/yy)
		w	x	h										SNS HT "H"	MTG HT "C"	EMBED-MENT	S	L	LENGTH	S	L	LENGTH	S	L	LENGTH	B/A (lbs.)	SIMPLE (lbs.)	DIAMETER (ft.)	DEPTH (ft.)	REINFORCED (c.y.)	PLAIN (c.y.)	
909	A	180	x	120	-L- 655+00	2	W10x22	BA	N/A	N/A	N/A	21.00	8.79	10.00	7.00	4.5	4.02	21.02	25.52	0.00	0.00	0.00	8.42	25.42	29.92	1457.68	0	2.5	5.0	1.82	0.00	_____
910	A	90	x	84	-Y10RPC- 17+00 LT	2	S4x7.7	BA	N/A	N/A	N/A	18.00	4.40	7.00	7.00	3.5	2.27	16.27	19.77	0.00	0.00	0.00	1.73	15.73	19.23	340.30	0	1.0	4.0	0.00	0.23	_____
911	A	90	x	72	-Y10RPC- 18+50 LT	2	S4x7.7	BA	N/A	N/A	N/A	18.00	4.40	6.00	7.00	3.5	2.66	15.66	19.16	0.00	0.00	0.00	1.98	14.98	18.48	329.83	0	1.0	4.0	0.00	0.23	_____
912	A	90	x	72	-Y10RPC- 20+00 LT	2	W6x9	BA	N/A	N/A	N/A	18.00	4.40	6.00	7.00	3.0	2.99	15.99	18.99	0.00	0.00	0.00	2.18	15.18	18.18	398.53	0	1.5	3.5	0.46	0.00	_____
913	A	90	x	72	-Y10RPC- 20+00	2	W6x9	BA	N/A	N/A	N/A	21.00	4.40	6.00	8.73	3.0	0.47	15.20	18.20	0.00	0.00	0.00	-1.73	13.00	16.00	371.80	0	1.5	3.5	0.46	0.00	_____
914	A	90	x	84	-Y10RPA- 18+00	2	W6x12	BA	N/A	N/A	N/A	21.00	4.40	7.00	7.00	3.0	3.25	17.25	20.25	0.00	0.00	0.00	5.45	19.45	22.45	590.40	0	1.5	3.5	0.46	0.00	_____
915	A	90	x	72	-Y10RPA- 18+00 LT	2	W6x9	BA	N/A	N/A	N/A	18.00	4.40	6.00	7.00	3.0	3.30	16.30	19.30	0.00	0.00	0.00	2.38	15.38	18.38	403.12	0	1.5	3.5	0.46	0.00	_____
916	A	90	x	72	-Y10RPA- 19+50 LT	2	S4x7.7	BA	N/A	N/A	N/A	18.00	4.40	6.00	7.00	3.0	2.19	15.19	18.19	0.00	0.00	0.00	1.67	14.67	17.67	316.12	0	1.0	3.5	0.00	0.20	_____
917	A	90	x	72	-Y10RPA- 19+50	2	W6x12	BA	N/A	N/A	N/A	21.00	4.40	6.00	7.00	3.0	3.25	16.25	19.25	0.00	0.00	0.00	5.45	18.45	21.45	566.40	0	1.5	3.5	0.46	0.00	_____
918	A	180	x	120	-L- 730+00 LT	2	W8x21	BA	N/A	N/A	N/A	21.00	8.79	10.00	7.00	4.5	4.02	21.02	25.52	0.00	0.00	0.00	5.92	22.92	27.42	1257.74	0	2.0	5.0	1.16	0.00	_____
919	A	180	x	120	-L- 698+00 LT	2	W8x18	BA	N/A	N/A	N/A	32.00	8.79	10.00	7.81	4.5	2.86	20.67	25.17	0.00	0.00	0.00	-0.81	17.00	21.50	980.06	0	2.0	5.0	1.16	0.00	_____
920	A	180	x	120	-L- 738+00 LT	2	W10x22	BA	N/A	N/A	N/A	21.00	8.79	10.00	7.00	4.5	4.02	21.02	25.52	0.00	0.00	0.00	8.42	25.42	29.92	1457.68	0	2.5	5.0	1.82	0.00	_____
921	A	144	x	192	-L- 739+00	2	W10x26	BA	N/A	N/A	N/A	21.00	8.8 NON-STD. SPACING	16.00	7.00	4.5	3.27	26.27	30.77	0.00	0.00	0.00	5.88	28.88	33.38	1947.90	0	2.5	5.0	1.82	0.00	_____
922	A	180	x	138	-L- 746+00 LT	2	W10x26	BA	N/A	N/A	N/A	21.00	8.79	11.50	7.00	4.5	4.02	22.52	27.02	0.00	0.00	0.00	8.42	26.92	31.42	1799.44	0	2.5	5.0	1.82	0.00	_____
923	A	180	x	120	-L- 747+00	2	W10x22	BA	N/A	N/A	N/A	21.00	8.79	10.00	7.00	4.5	4.02	21.02	25.52	0.00	0.00	0.00	8.42	25.42	29.92	1457.68	0	2.5	5.0	1.82	0.00	_____
924	A	180	x	120	-L- 754+50	2	W10x26	BA	N/A	N/A	N/A	21.00	8.79	10.00	7.00	4.5	4.43	21.43	25.93	0.00	0.00	0.00	8.83	25.83	30.33	1742.76	0	2.5	5.0	1.82	0.00	_____
925	A	180	x	138	-L- 762+00	2	W10x26	BA	N/A	N/A	N/A	21.00	8.79	11.50	7.00	4.5	4.02	22.52	27.02	0.00	0.00	0.00	8.42	26.92	31.42	1799.44	0	2.5	5.0	1.82	0.00	_____

TOTAL 21845.16 TOTAL 4819.41 TOTAL 24.52 TOTAL 2.01  
 USE: 21846.00 4820.00 25.00 3.00

NOTES:


- DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF TRAVEL LANE.
- FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (\*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (\*) ARTICLE 1072-1. (\*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
- PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

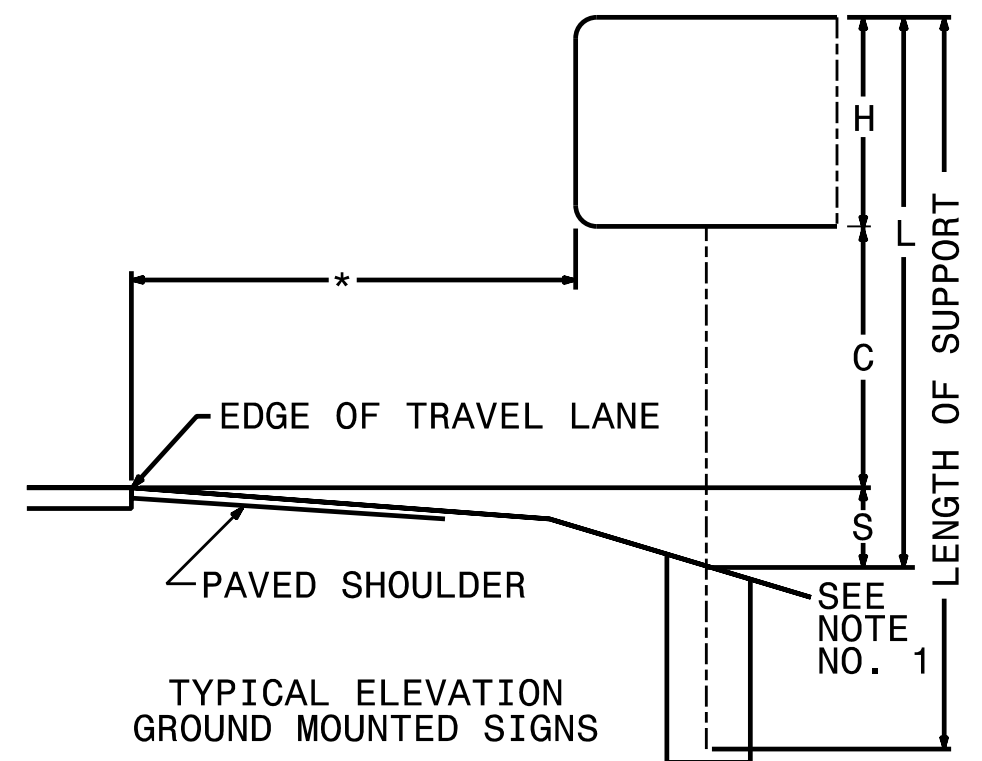


**HNTB** HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**TYPE A AND TYPE B  
 GROUND MOUNTED SIGNS**

TIP NO. I-4400C	SHEET NO. SIGN-2A
APPROVED: <i>Andrew D. Klinck</i> <small>DocuSigned by: Andrew D. Klinck          E3D79F84596E44B</small>	
DATE: 6/7/2019	
SEAL	
<b>DOCUMENT NOT CONSIDERED FINAL          UNLESS ALL SIGNATURES COMPLETED</b>	

TIP NO. I-4400C	SHEET NO. SIGN-3
APPROVED: <i>Andrew D. Klinkerick</i> E31078F8498E44B	
DATE: 6/7/2019	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

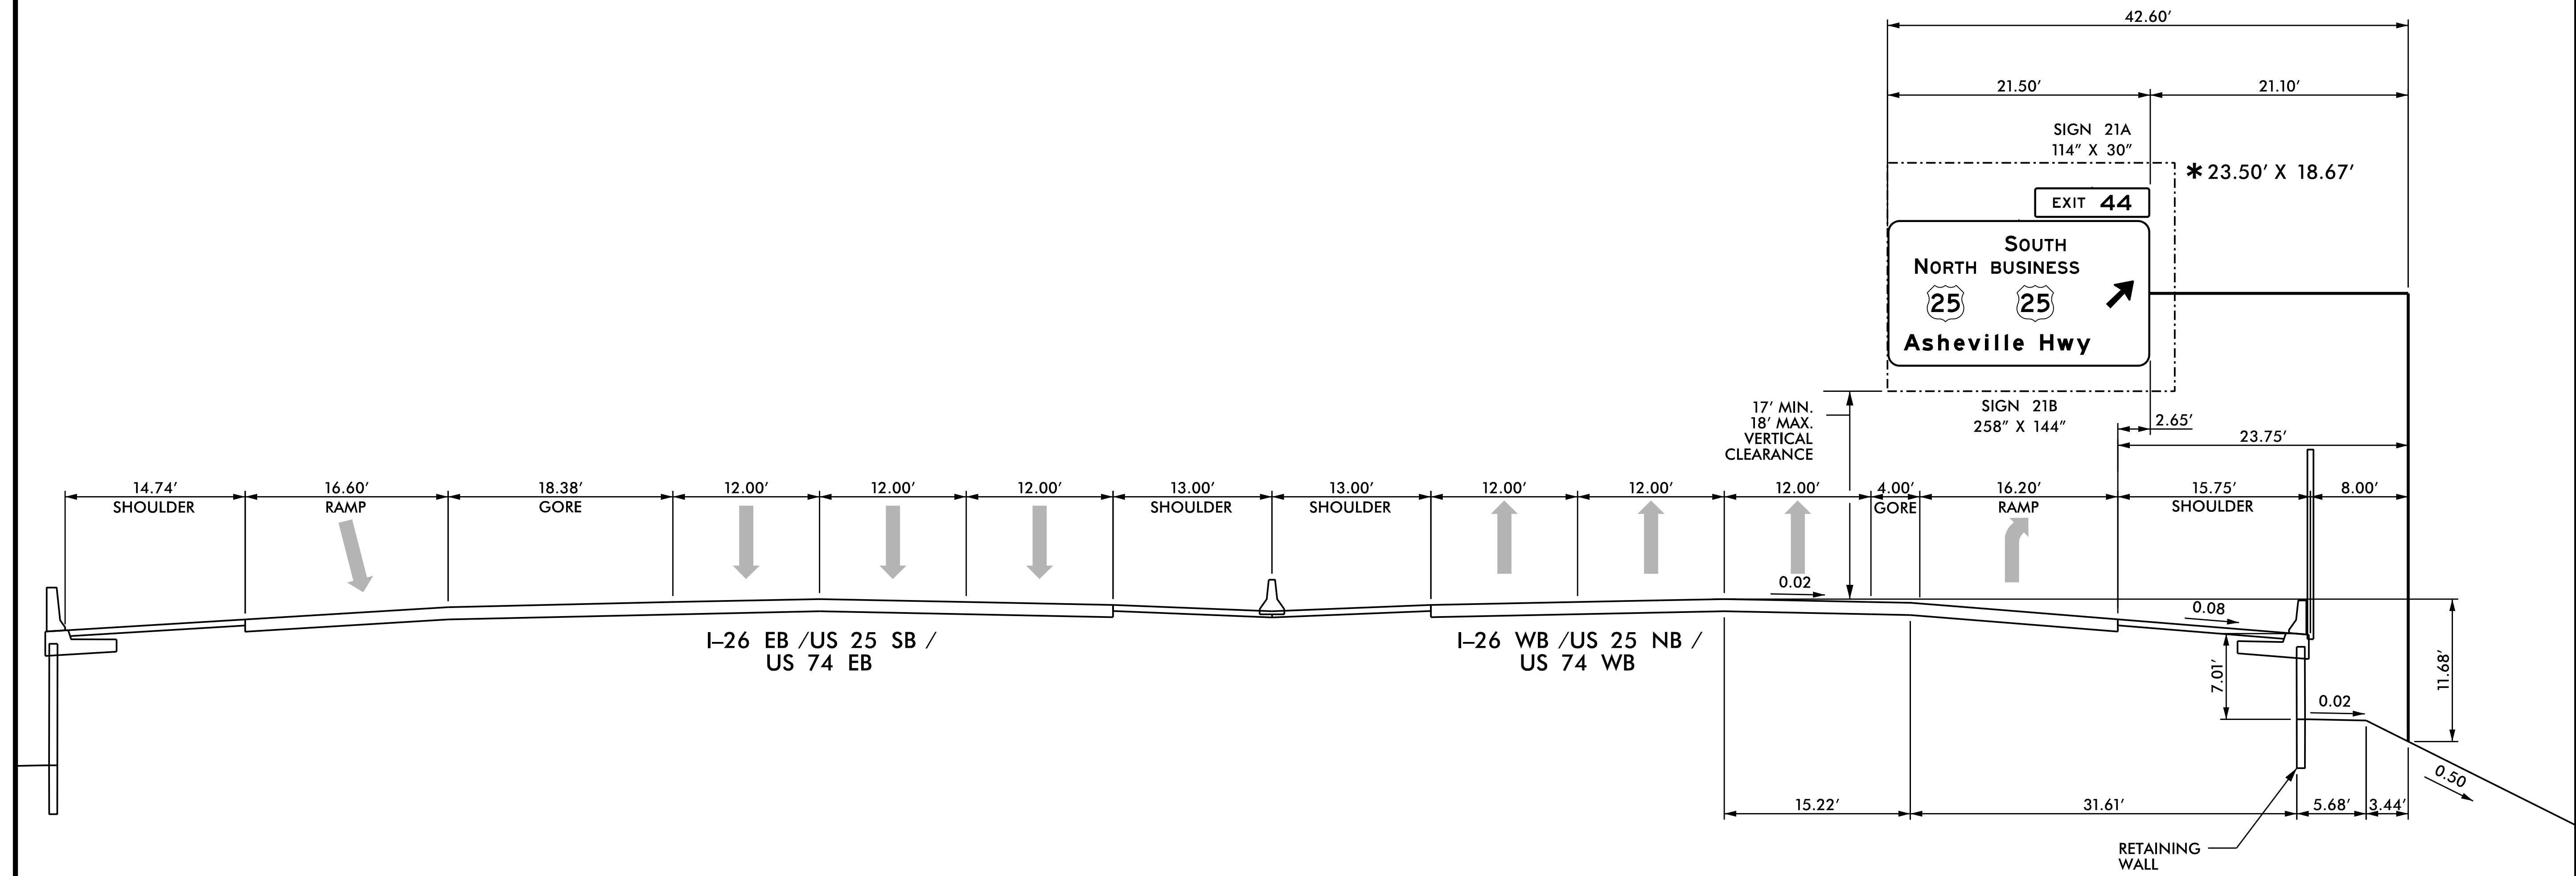

NOTES:


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.


\*THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**OVERHEAD SIGN STRUCTURE 'Q'**  
**-L- STA. 667+00**



TIP NO. I-4400C	SHEET NO. SIGN-3A
APPROVED: <i>Andrew D. Klinck</i> <small>DocuSigned by: E3D78F84596E44B</small>	
DATE: 6/7/2019	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

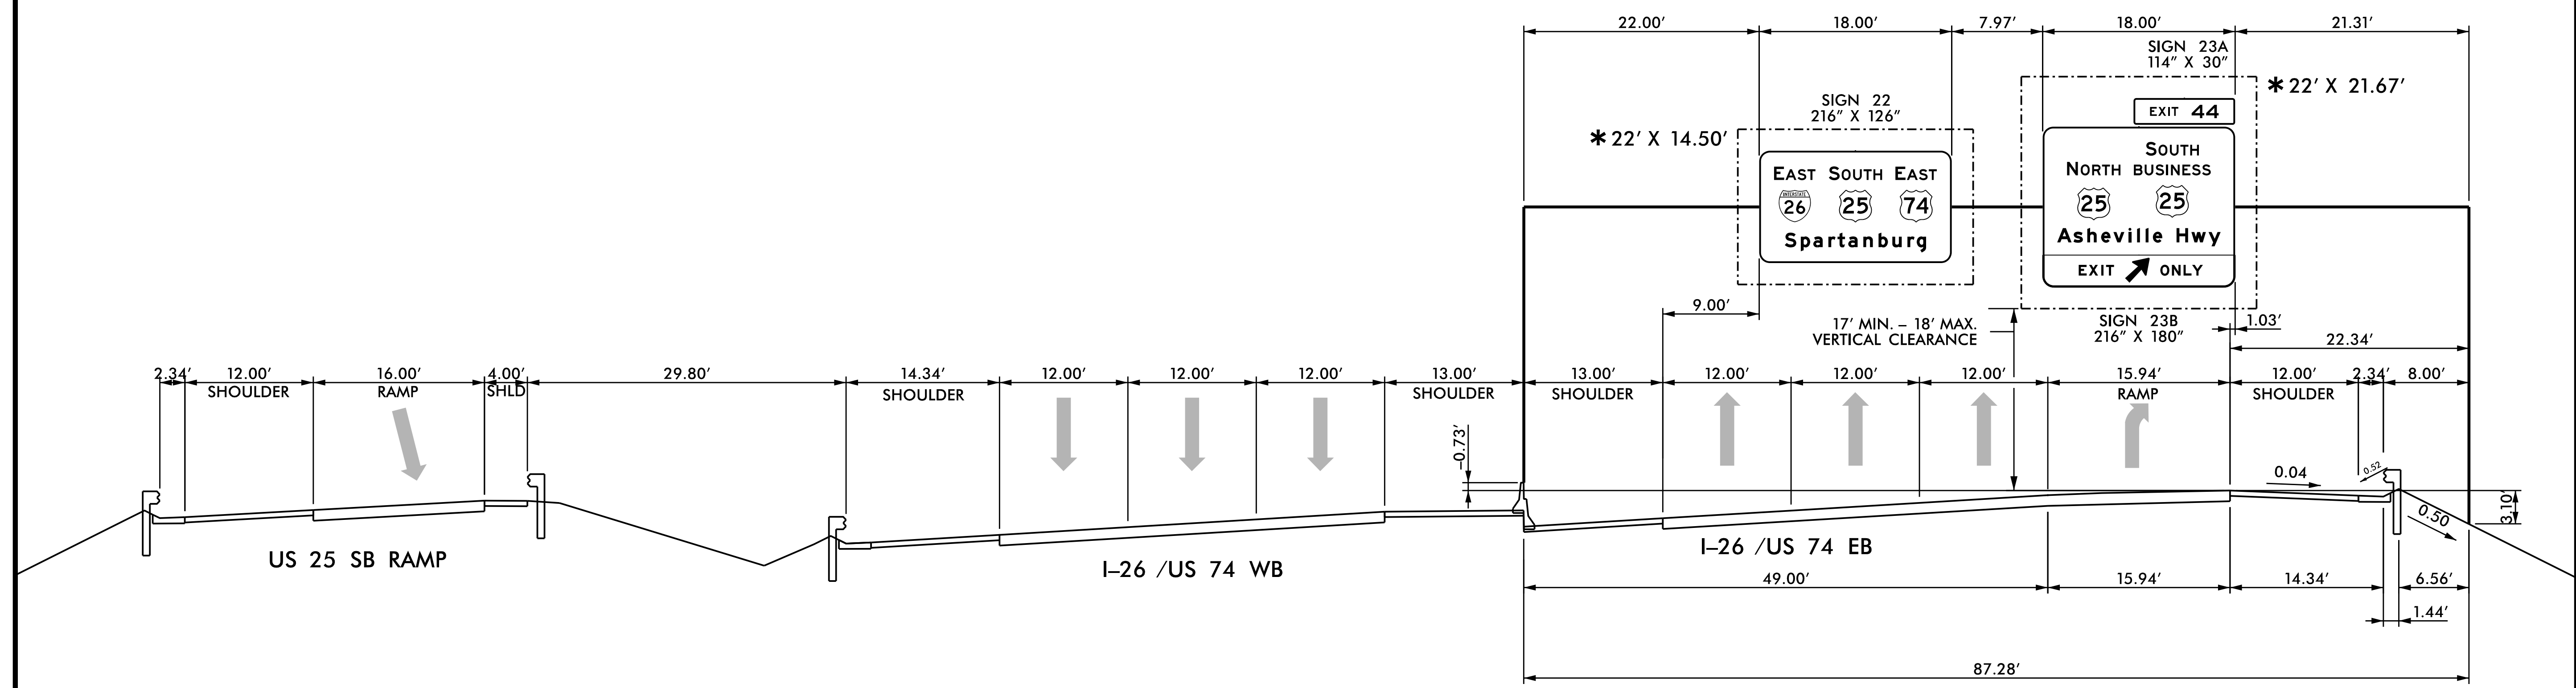


**NOTES:**


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\*THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**OVERHEAD SIGN STRUCTURE 'R'  
 -L- STA. 687+50 LT**

TIP NO. I-4400C	SHEET NO. SIGN-3B
APPROVED: <i>Andrew D. Klinkrick</i> <small>DocuSigned by: E3D78F84596E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

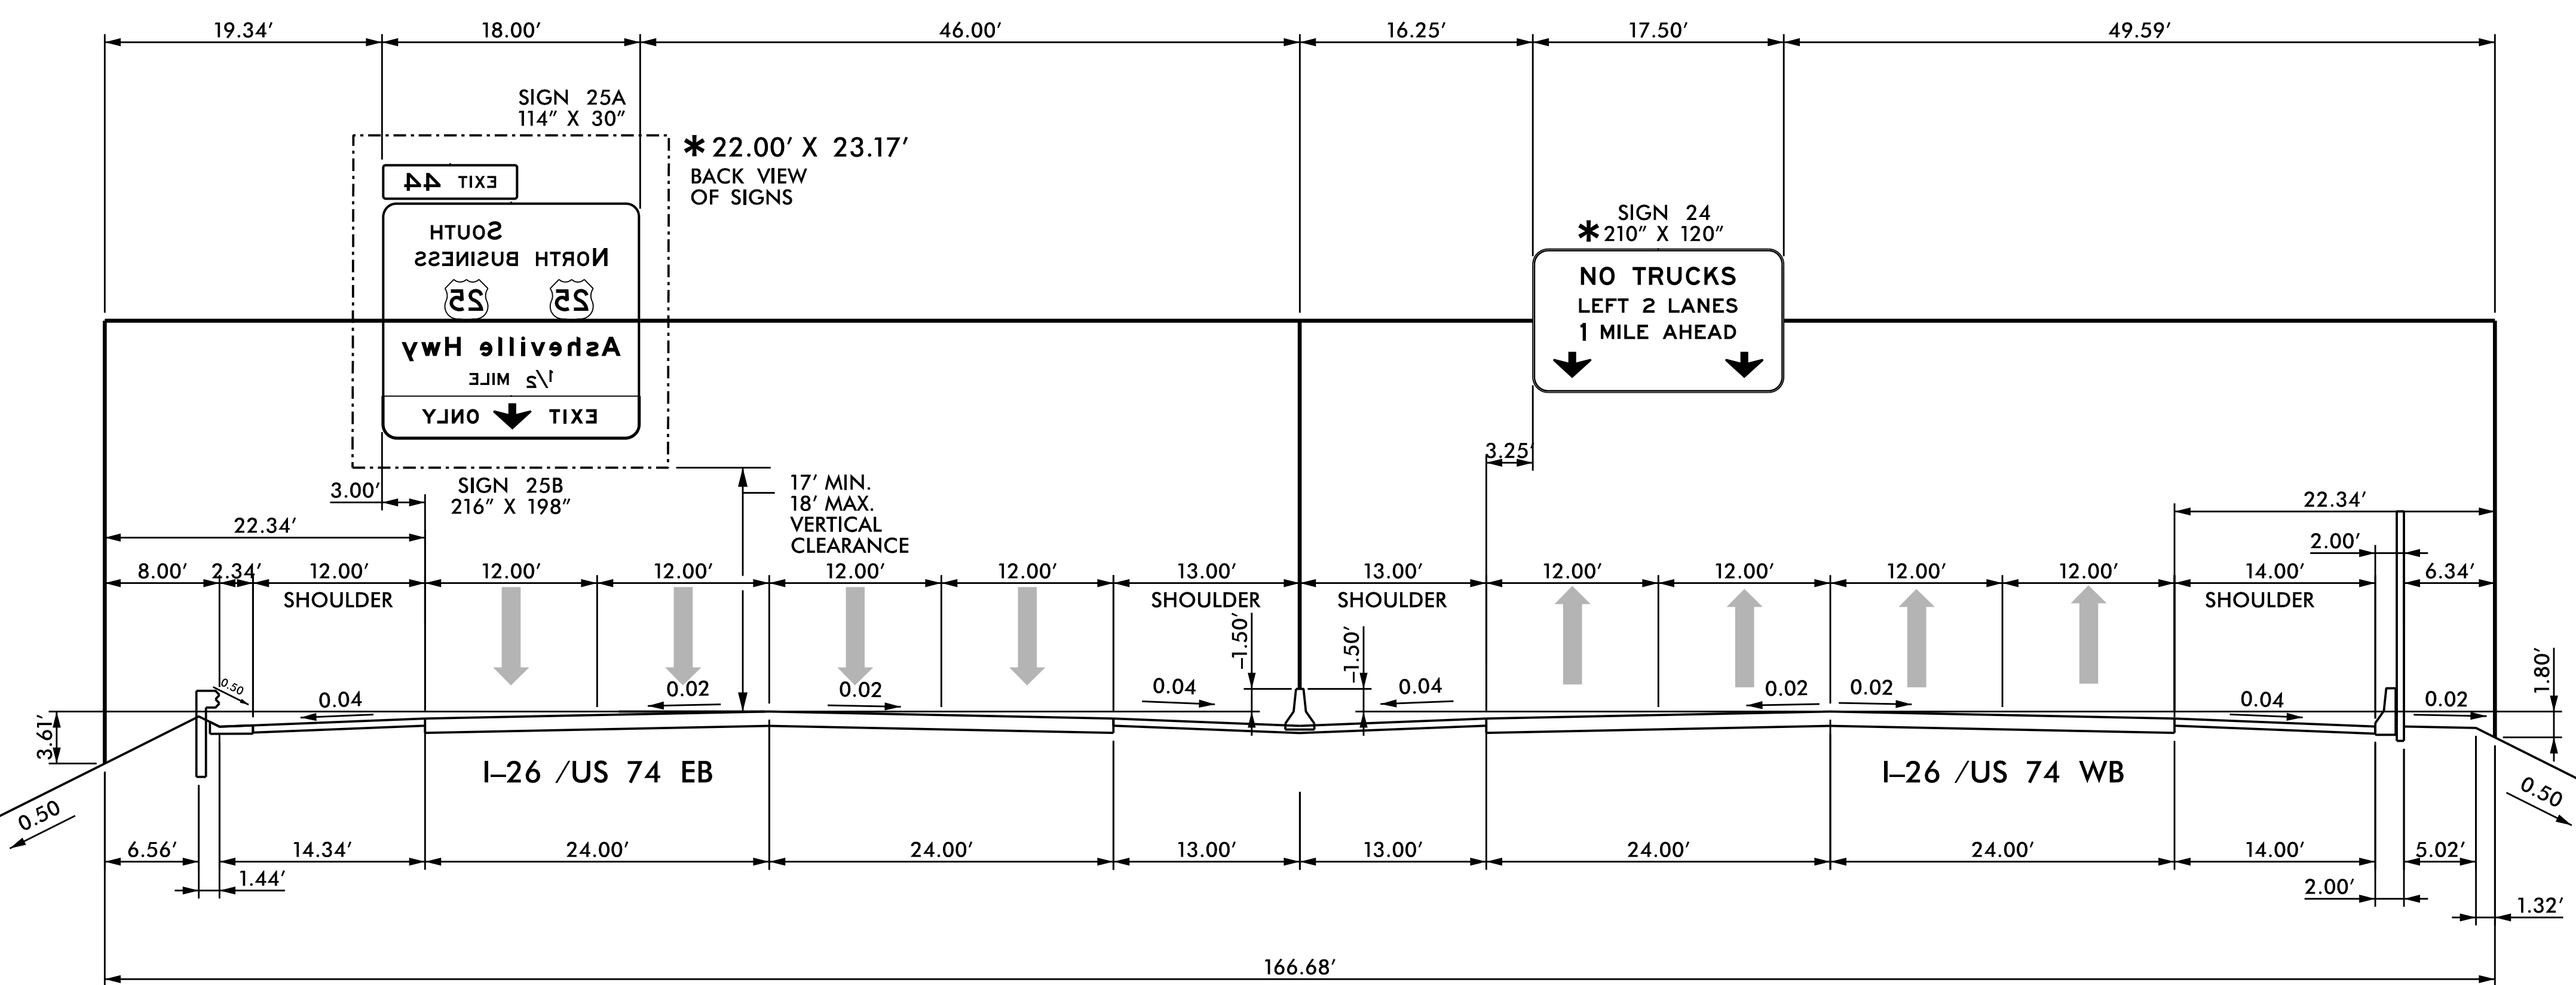

**NOTES:**


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.


\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**OVERHEAD SIGN STRUCTURE 'S'**  
**-L- STA. 714+00**



TIP NO. I-4400C	SHEET NO. SIGN-3C
APPROVED: <i>Andrew D. Klinkisch</i> <small>E31078F84596E44B</small>	
DATE: 6/7/2019	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

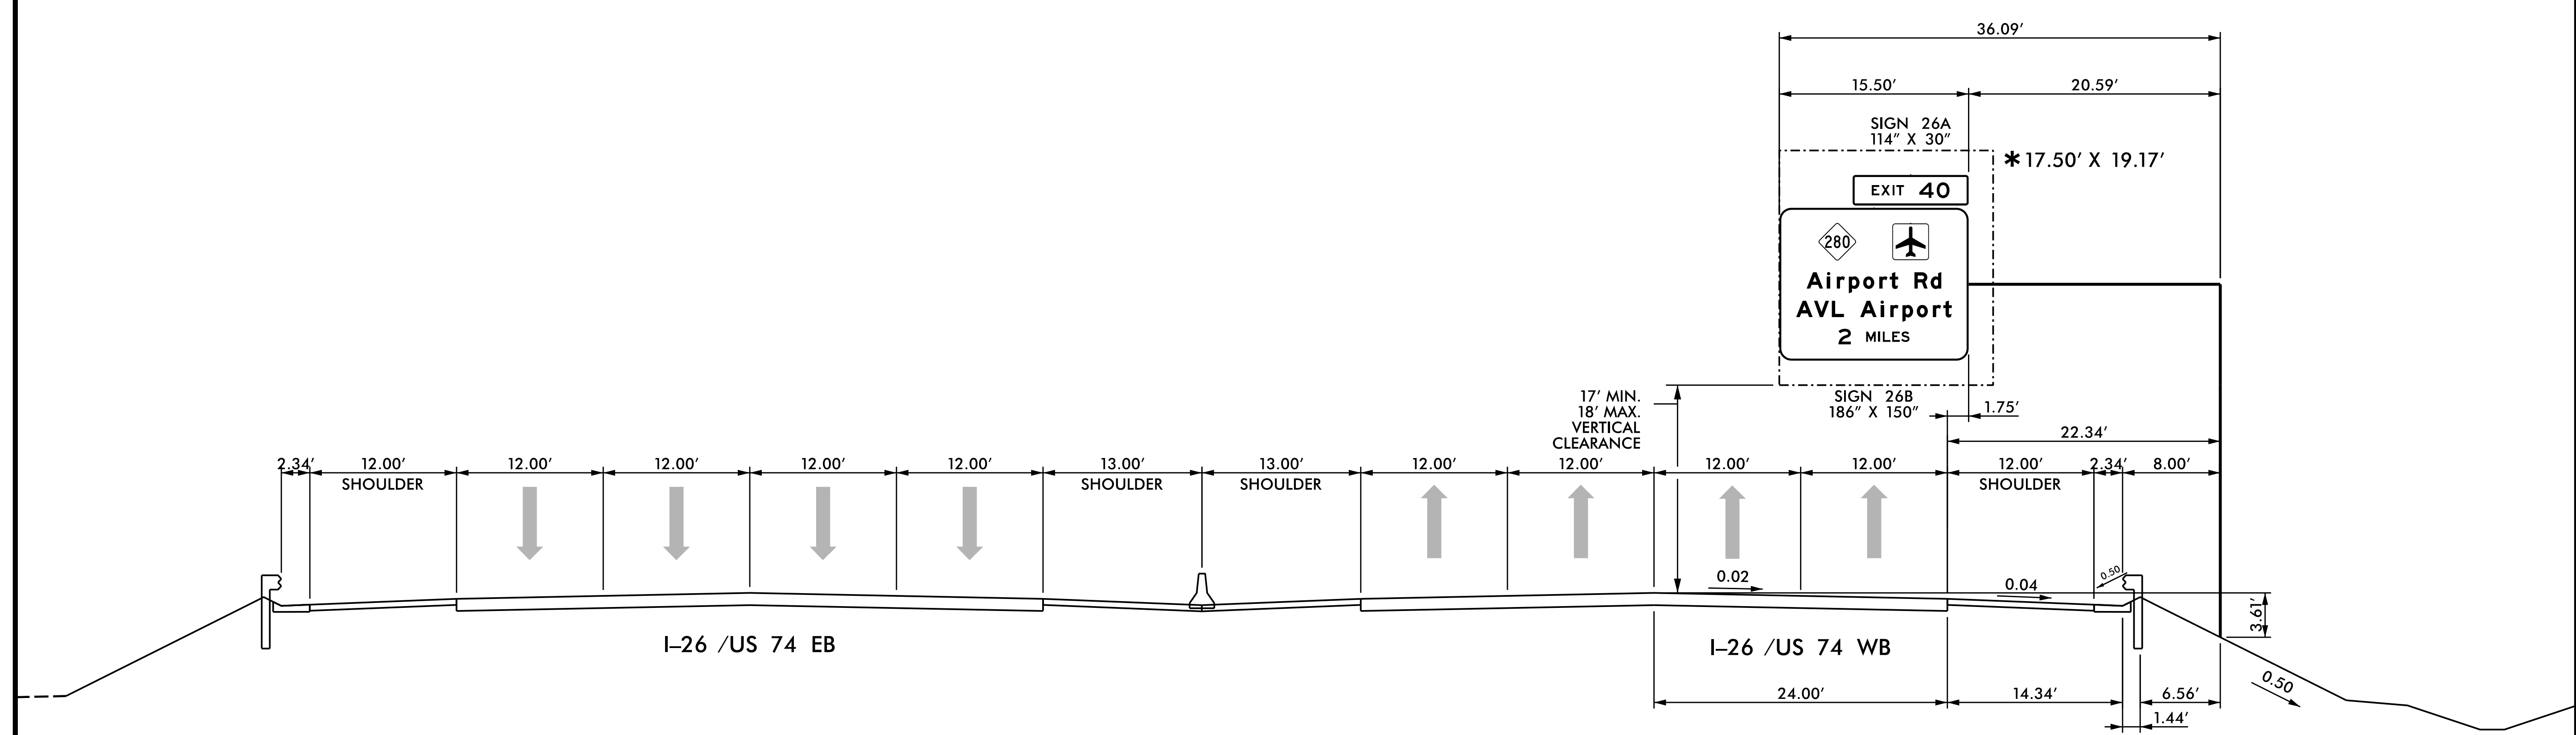


**NOTES:**


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**OVERHEAD SIGN STRUCTURE 'T'**  
**-L- STA. 731+00**

TIP NO.	SHEET NO.
I-4400C	SIGN-3D
APPROVED: <i>Andrew D. Klinkick</i> E3078F8498E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

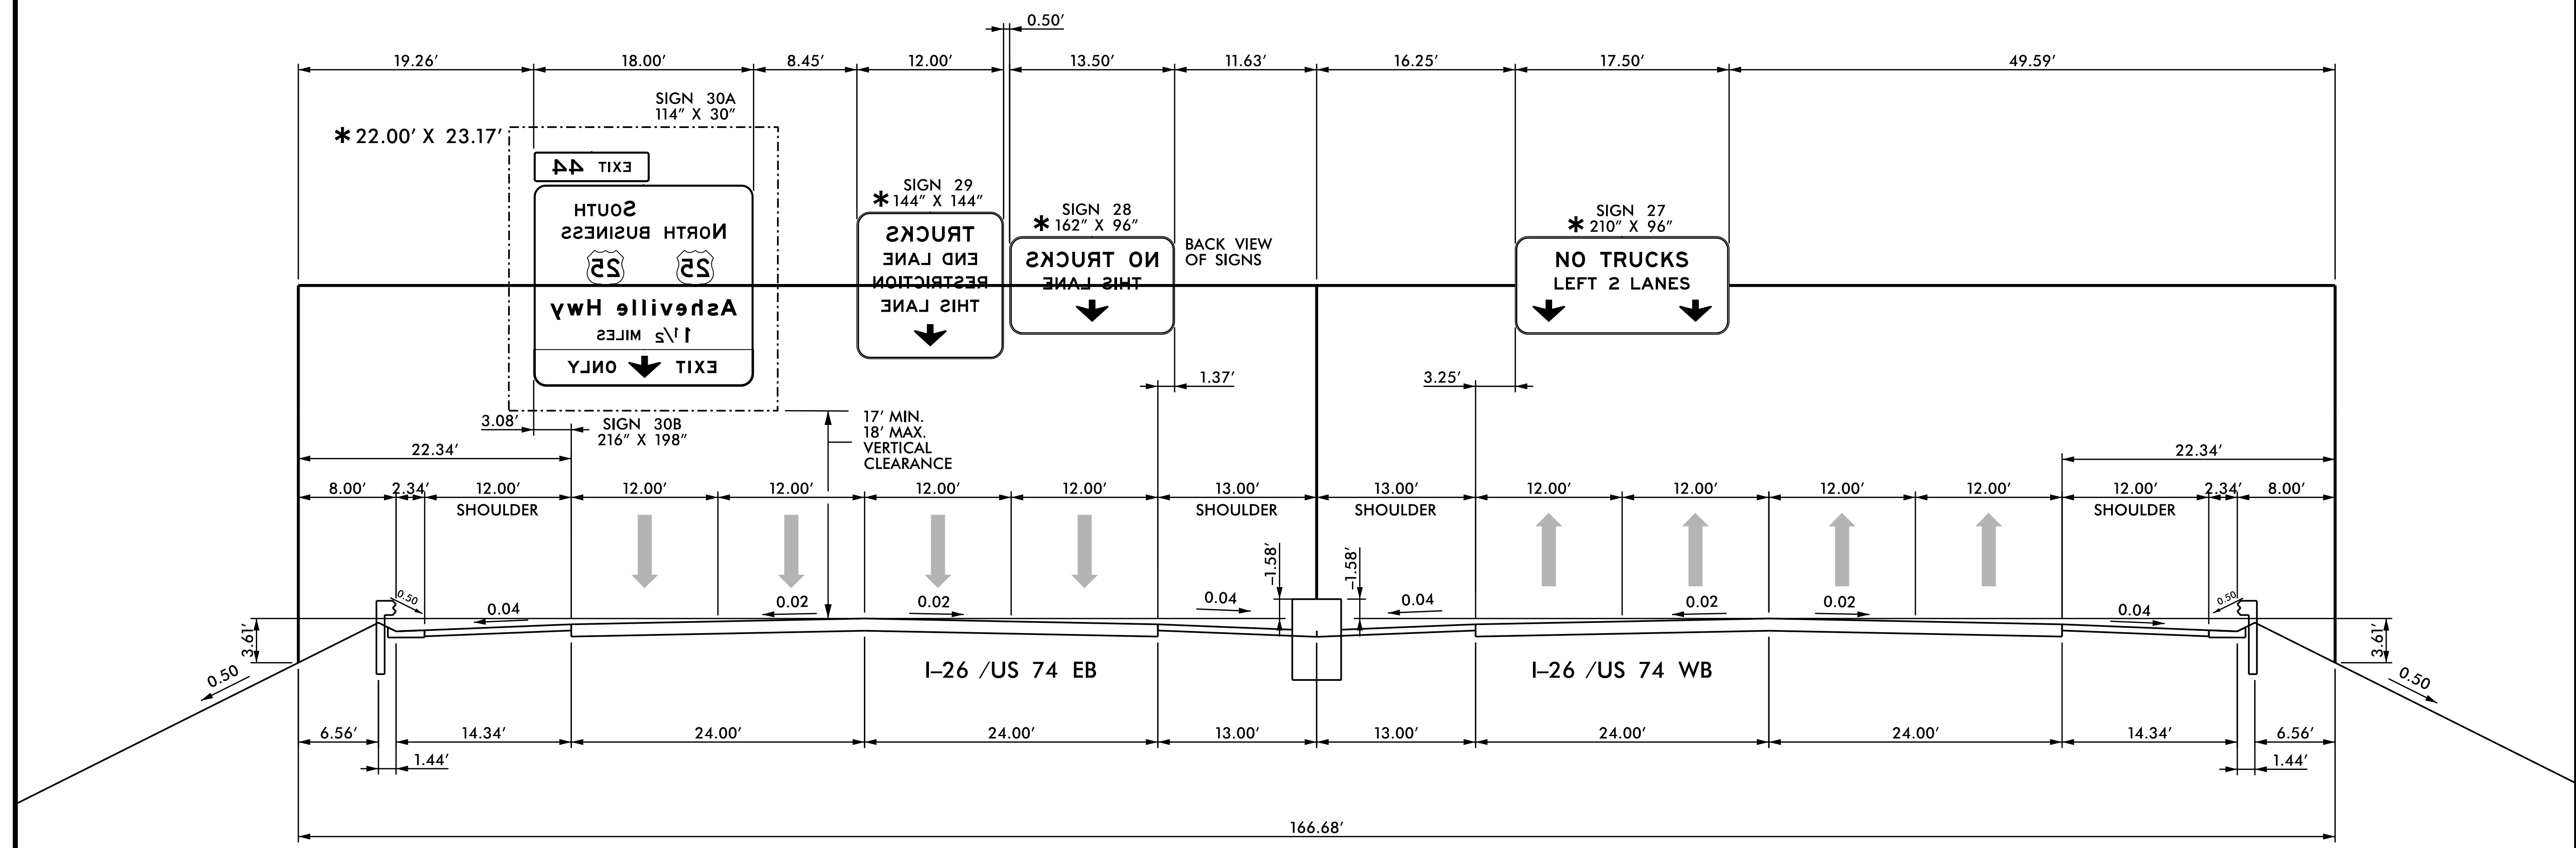


**NOTES:**


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\*THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**OVERHEAD SIGN STRUCTURE 'U'  
-L- STA. 767+00**



TIP NO. I-4400C	SHEET NO. SIGN-3E
APPROVED: <i>Andrew D. Klinkrick</i> <small>DocuSigned by: E3D78F84986E44B</small>	
DATE: 6/7/2019	
	
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	

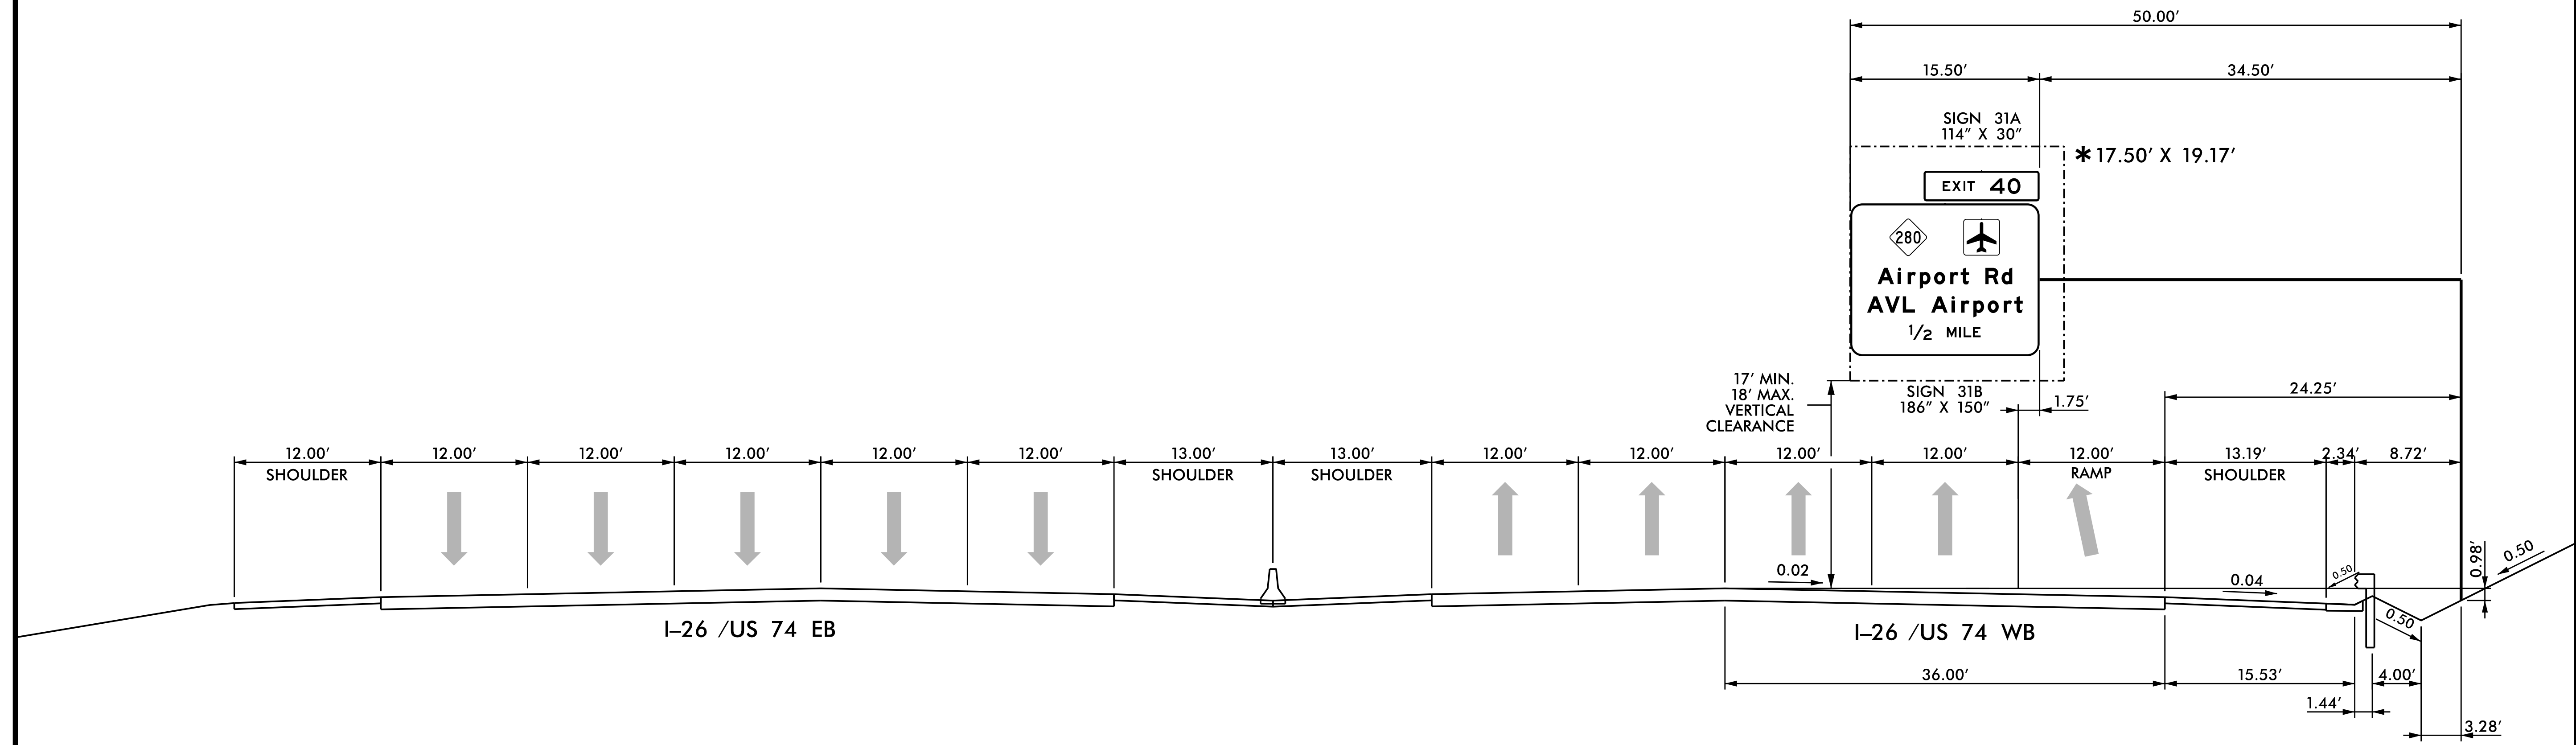


**NOTES:**


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.**

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**OVERHEAD SIGN STRUCTURE 'V'  
-L- STA. 811+00**

TIP NO. I-4400C	SHEET NO. SIGN-3F
APPROVED: <i>Andrew D. Klinkrick</i> E31078F84596E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

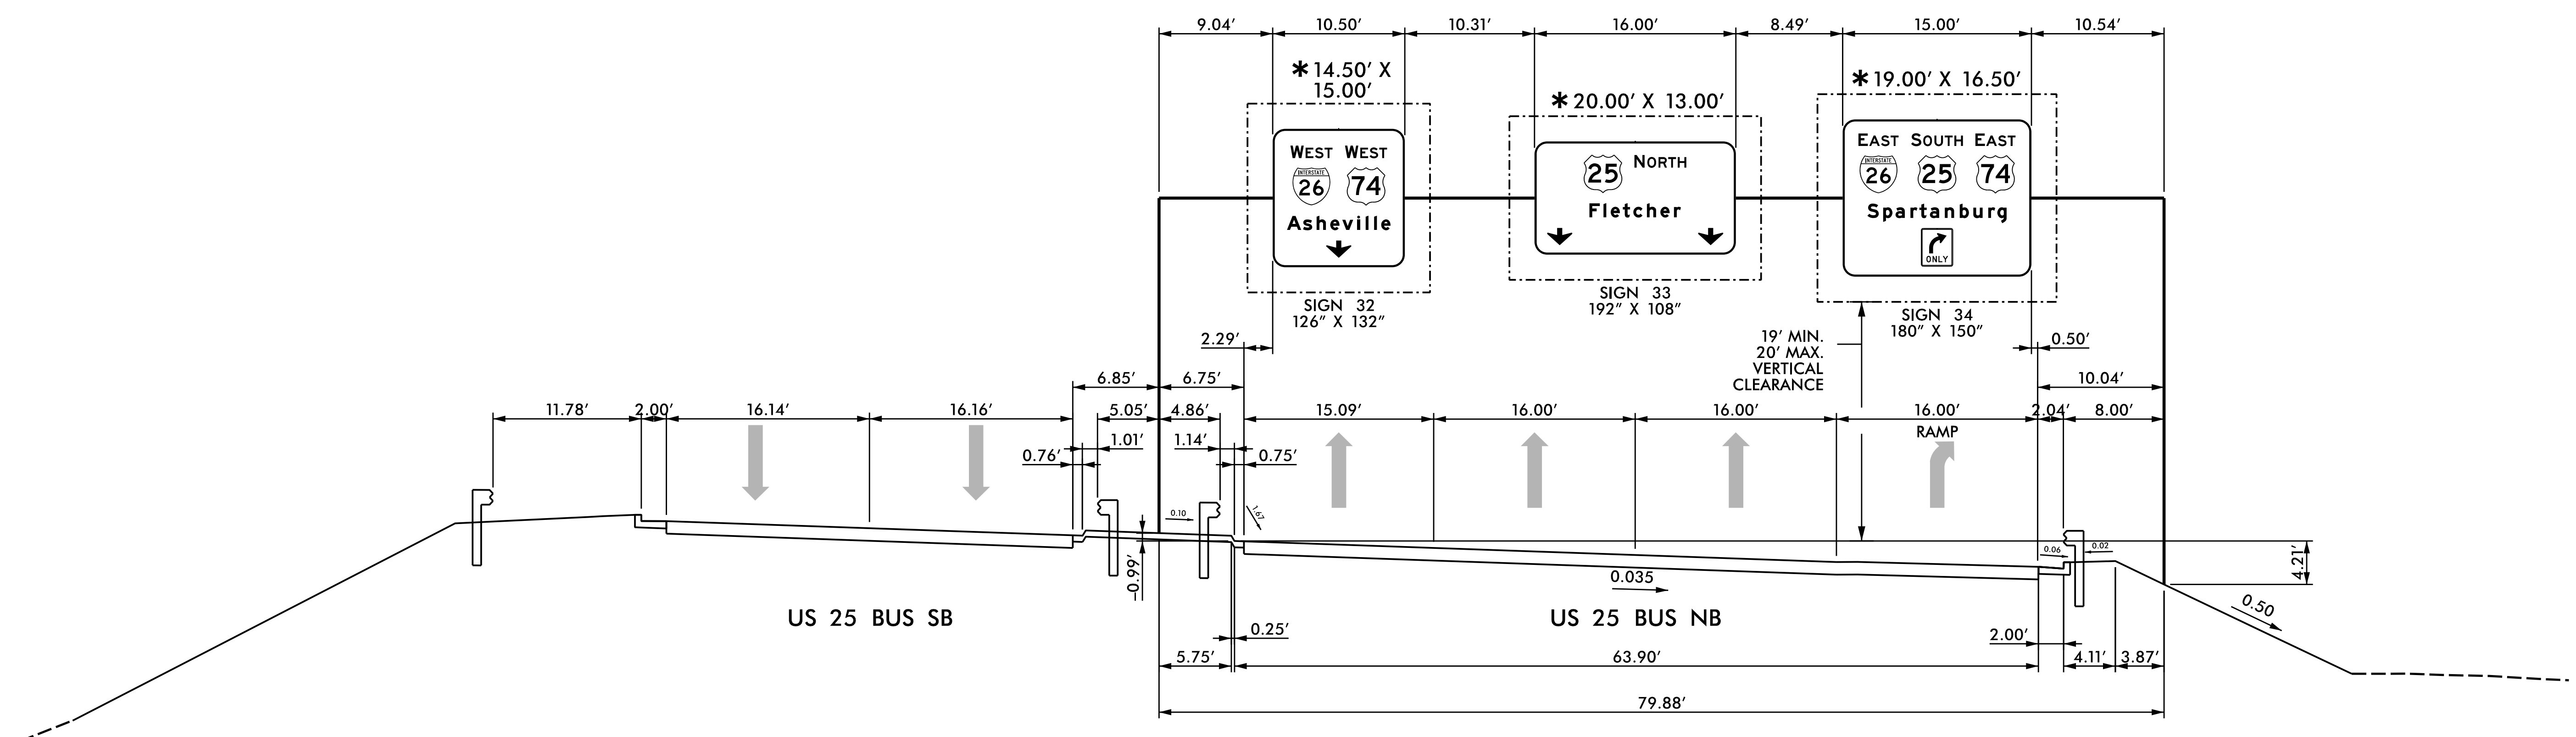

**NOTES:**


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.


\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**OVERHEAD SIGN STRUCTURE 'W'  
 -Y10- STA. 326+75**



TIP NO.	SHEET NO.
I-4400C	SIGN-3G
APPROVED: <i>Andrew D. Klinkerick</i> E31078F8498E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

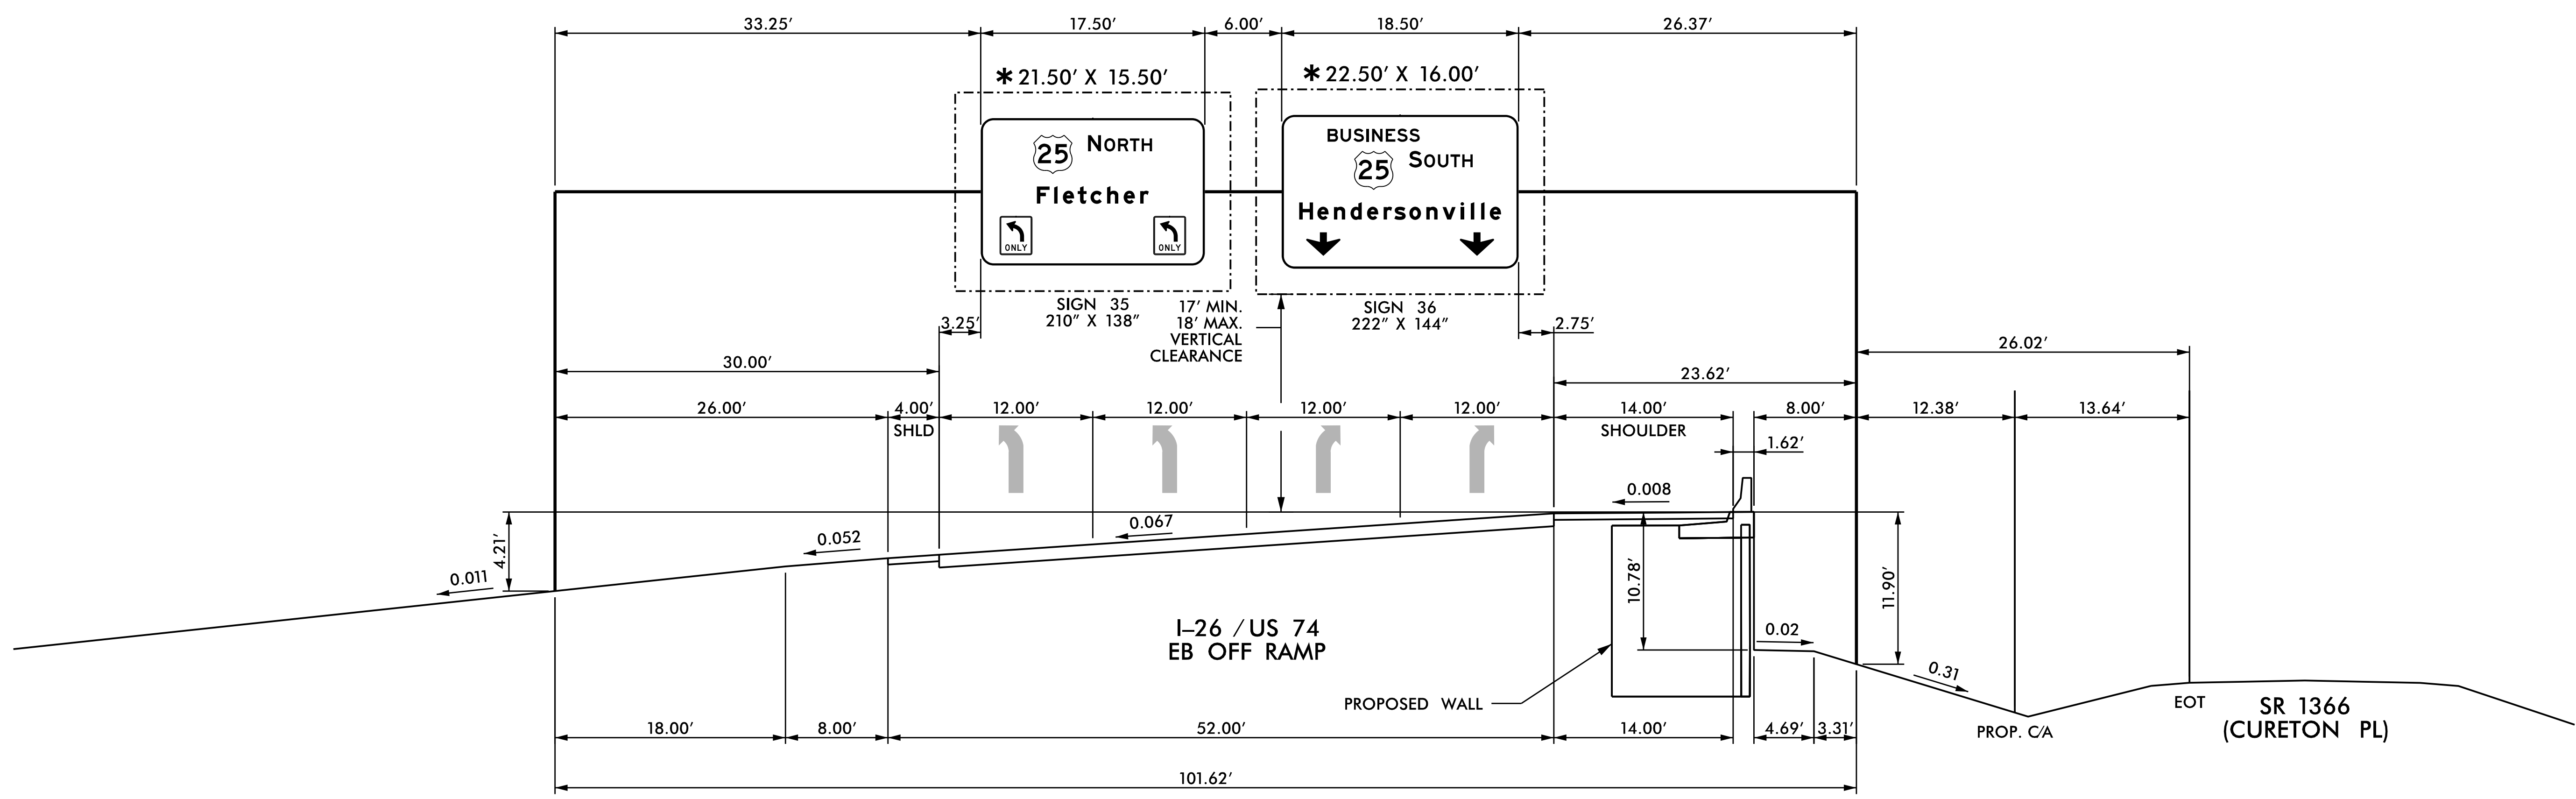


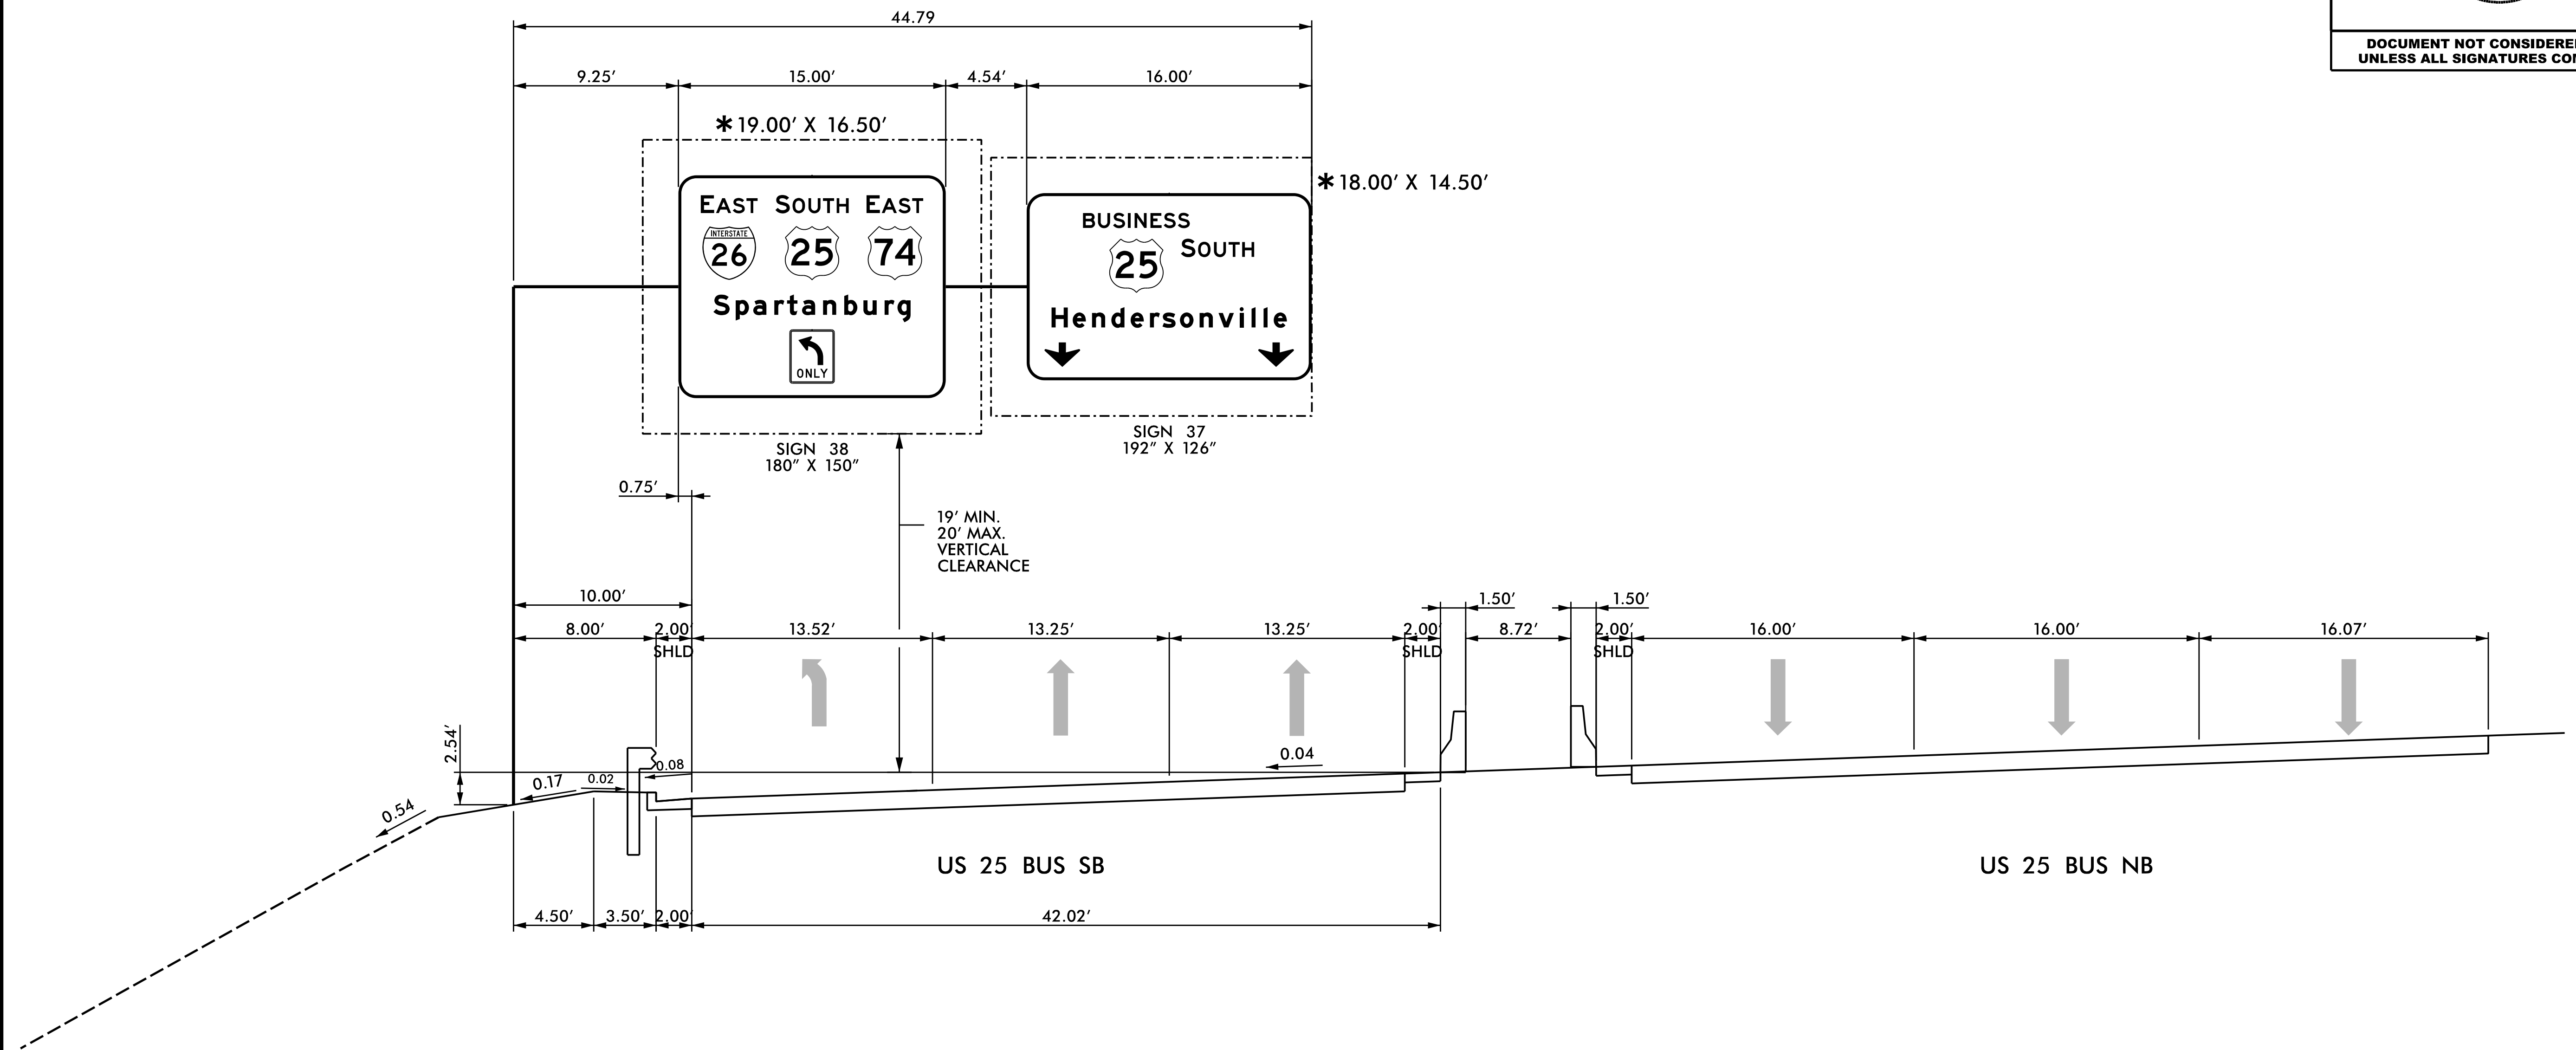
**NOTES:**

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**OVERHEAD SIGN STRUCTURE 'X'  
 -Y10RPA- STA. 23+90**

TIP NO. I-4400C	SHEET NO. SIGN-3H
APPROVED: <i>Andrew D. Klinkrick</i> E31078F84598E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




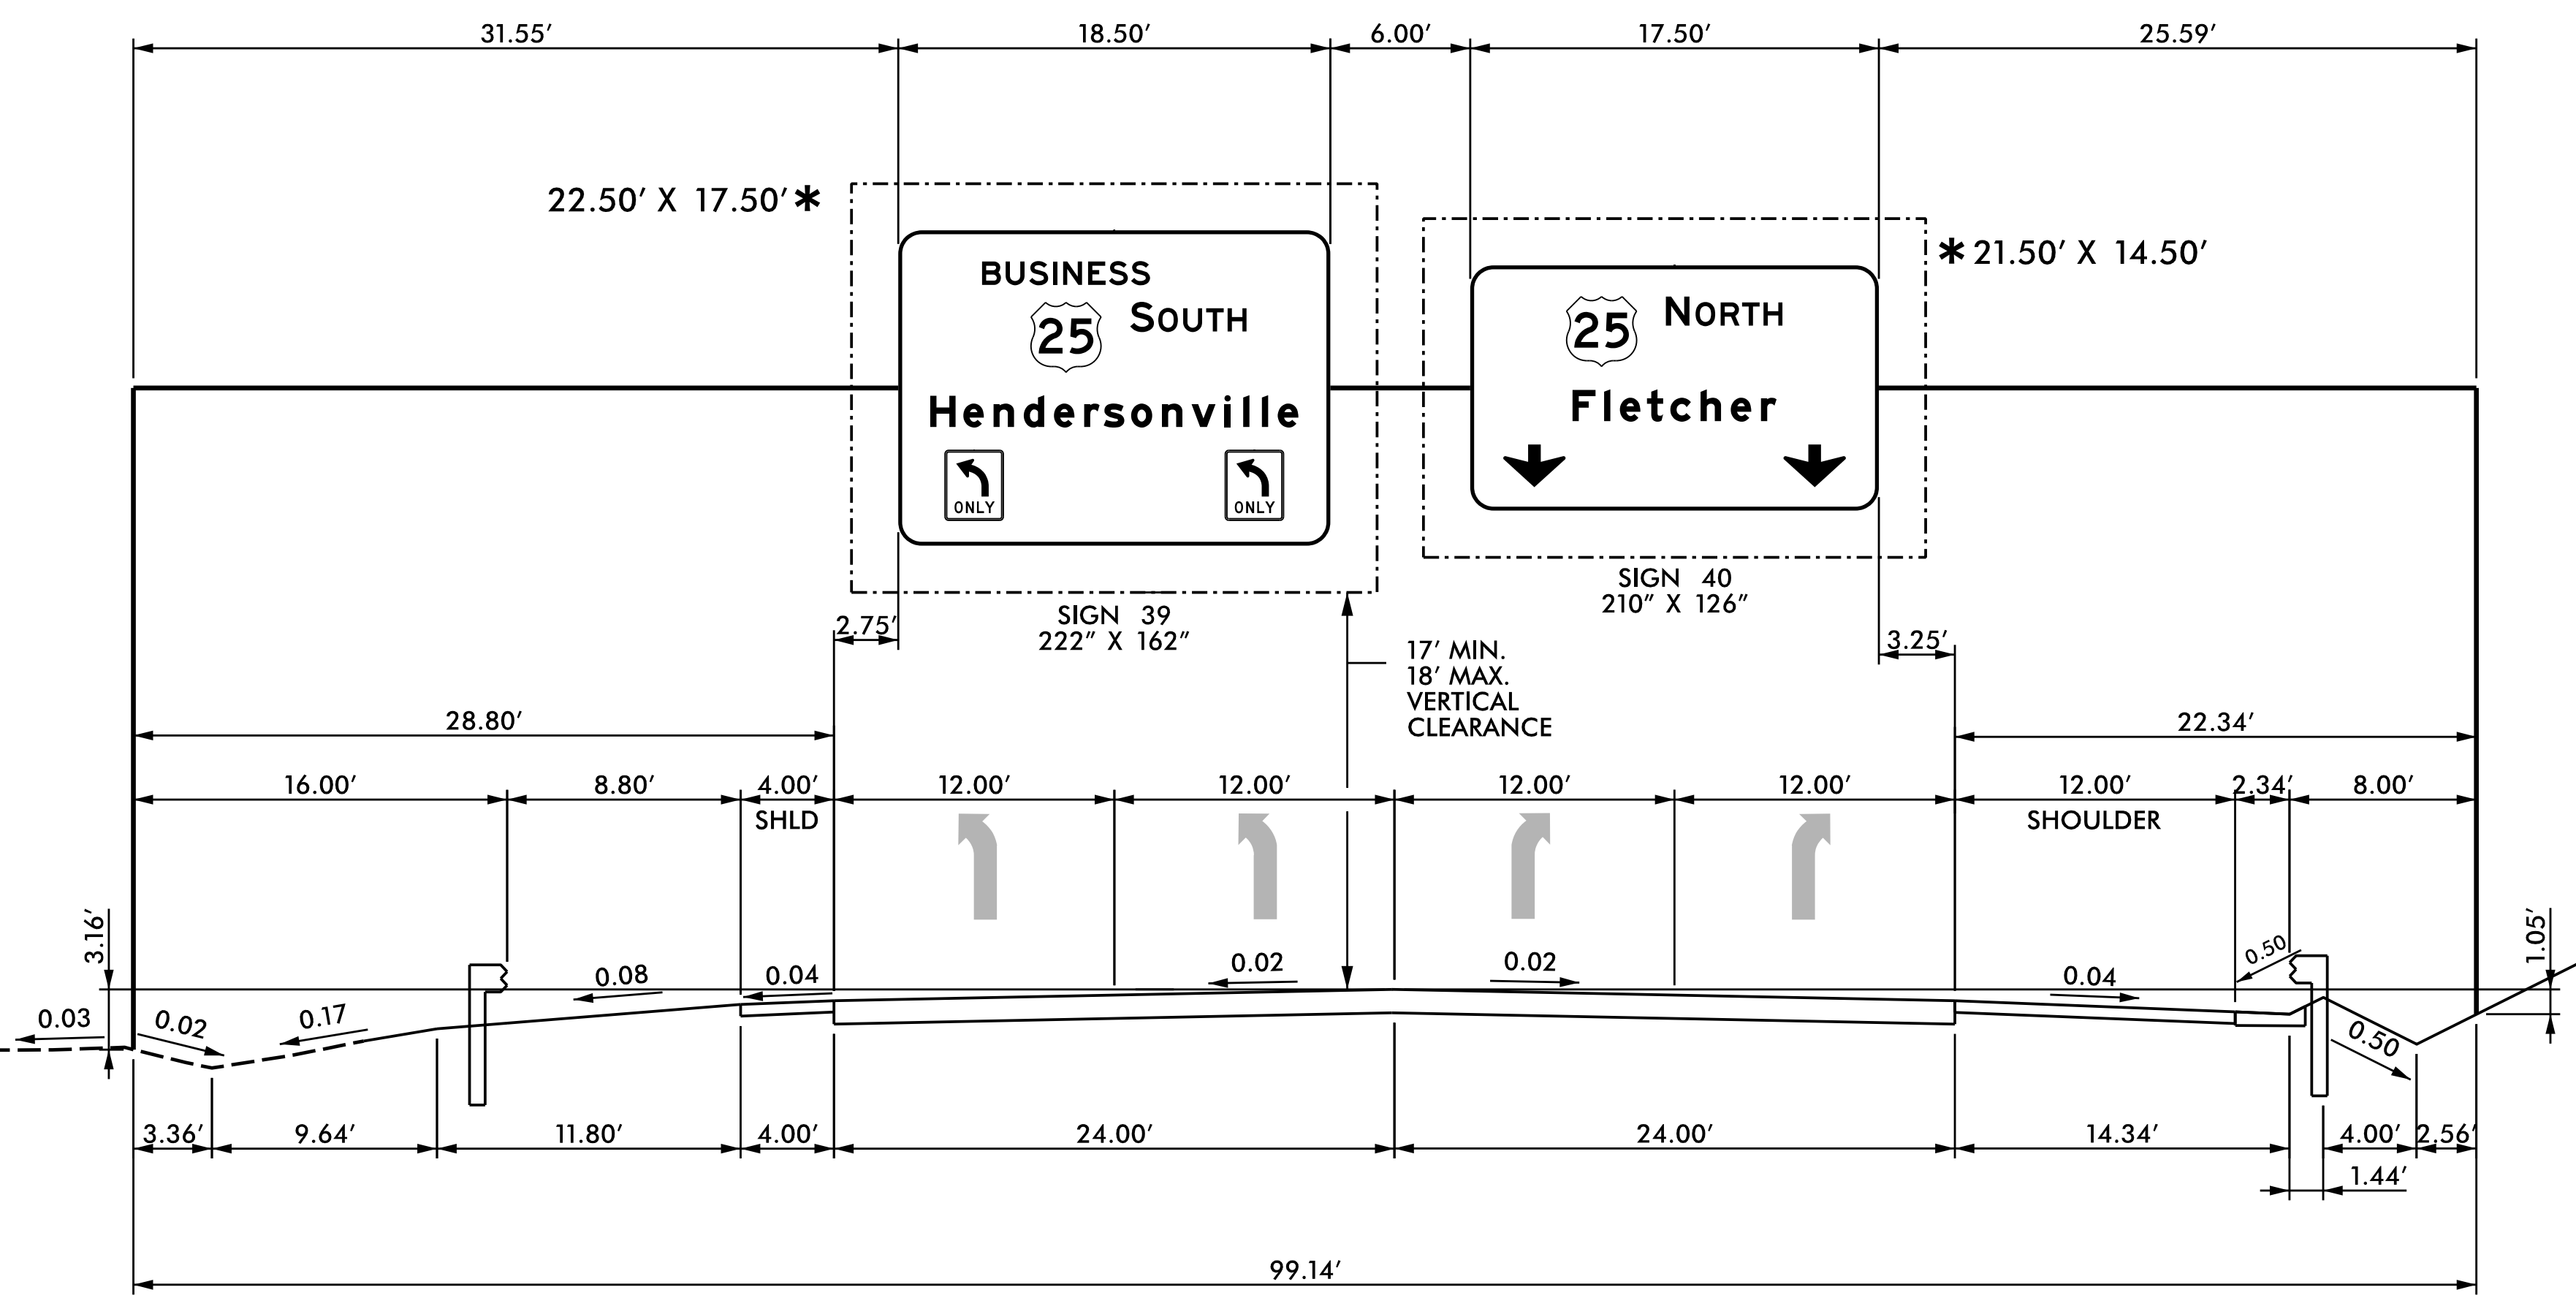
**NOTES:**

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\*THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.



TIP NO. I-4400C	SHEET NO. SIGN-3I
APPROVED: <i>Andrew D. Klinkisch</i> E31078F8498E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




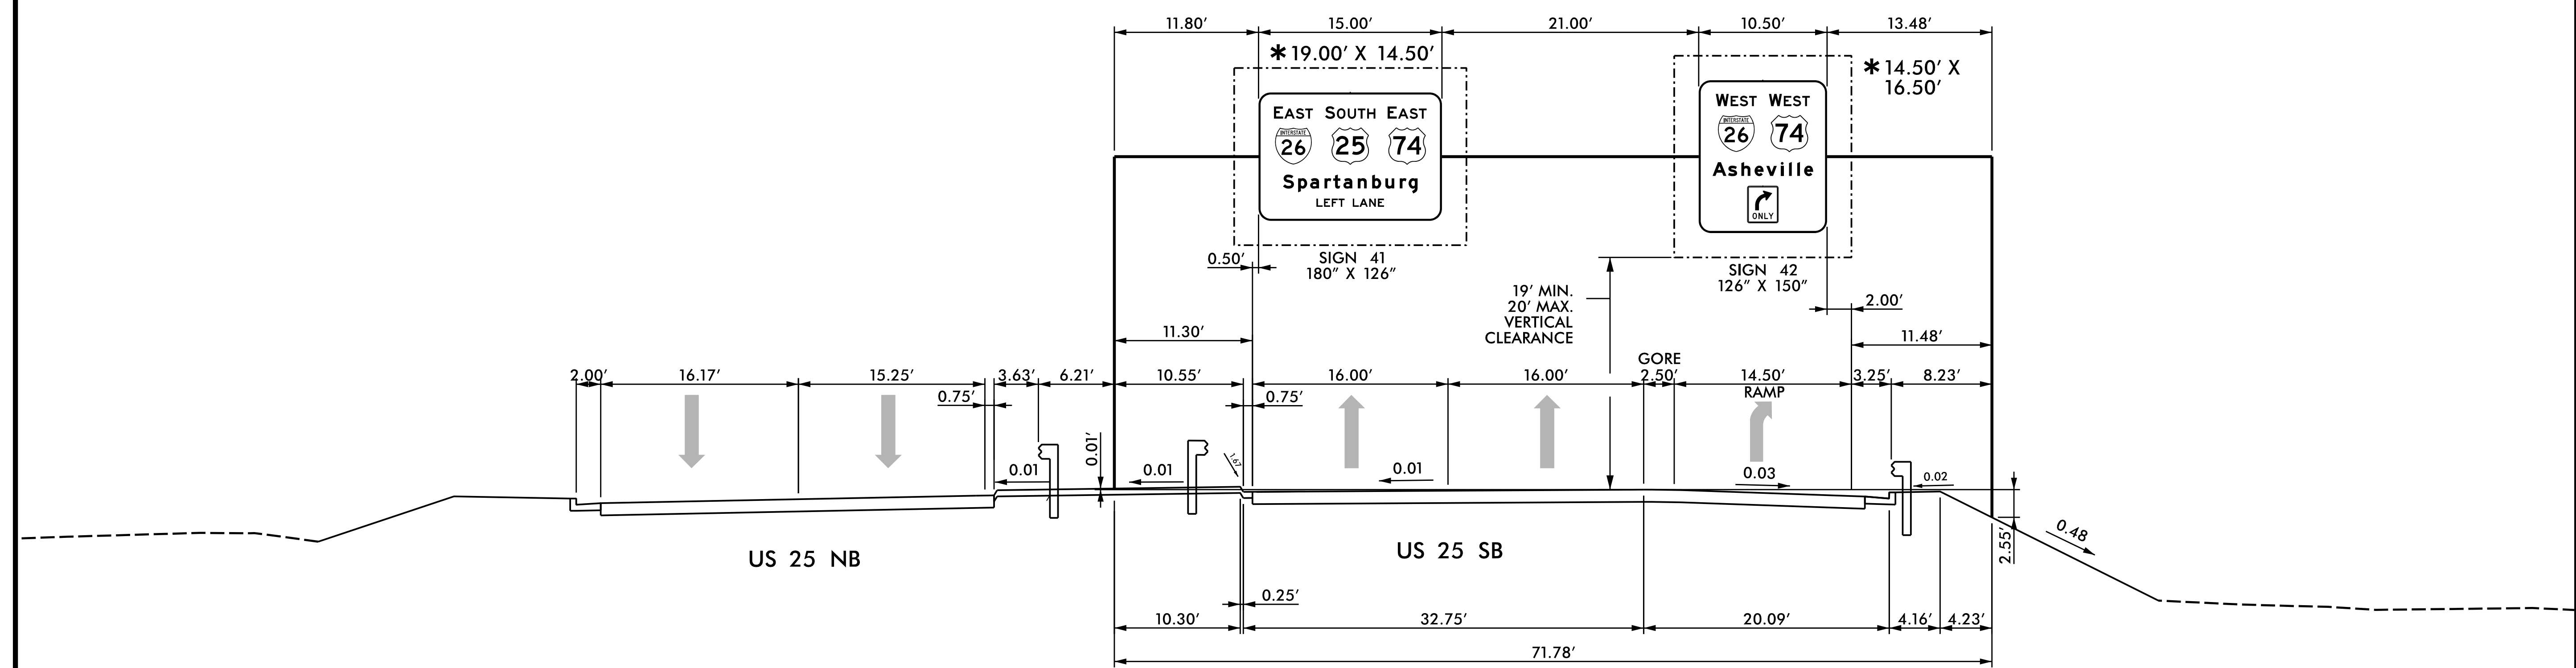
I-26 /US-74 WB  
OFF RAMP

NOTES:

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

TIP NO. I-4400C	SHEET NO. SIGN-3J
APPROVED: <i>Andrew D. Klinck</i> E3078F8498E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




NOTES:


- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

**HNTB**  
HNTB NORTH CAROLINA, P.C.  
343 E. Six Forks Road, Suite 200  
Raleigh, North Carolina 27609  
NC License No: C-1554  
(919) 546-8997

**OVERHEAD SIGN STRUCTURE 'AB'  
-Y10- STA. 337+25 LT**

TIP NO. I-4400C	SHEET NO. SIGN-3K
APPROVED: <i>Andrew D. Klinkrick</i> E3078F84596E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

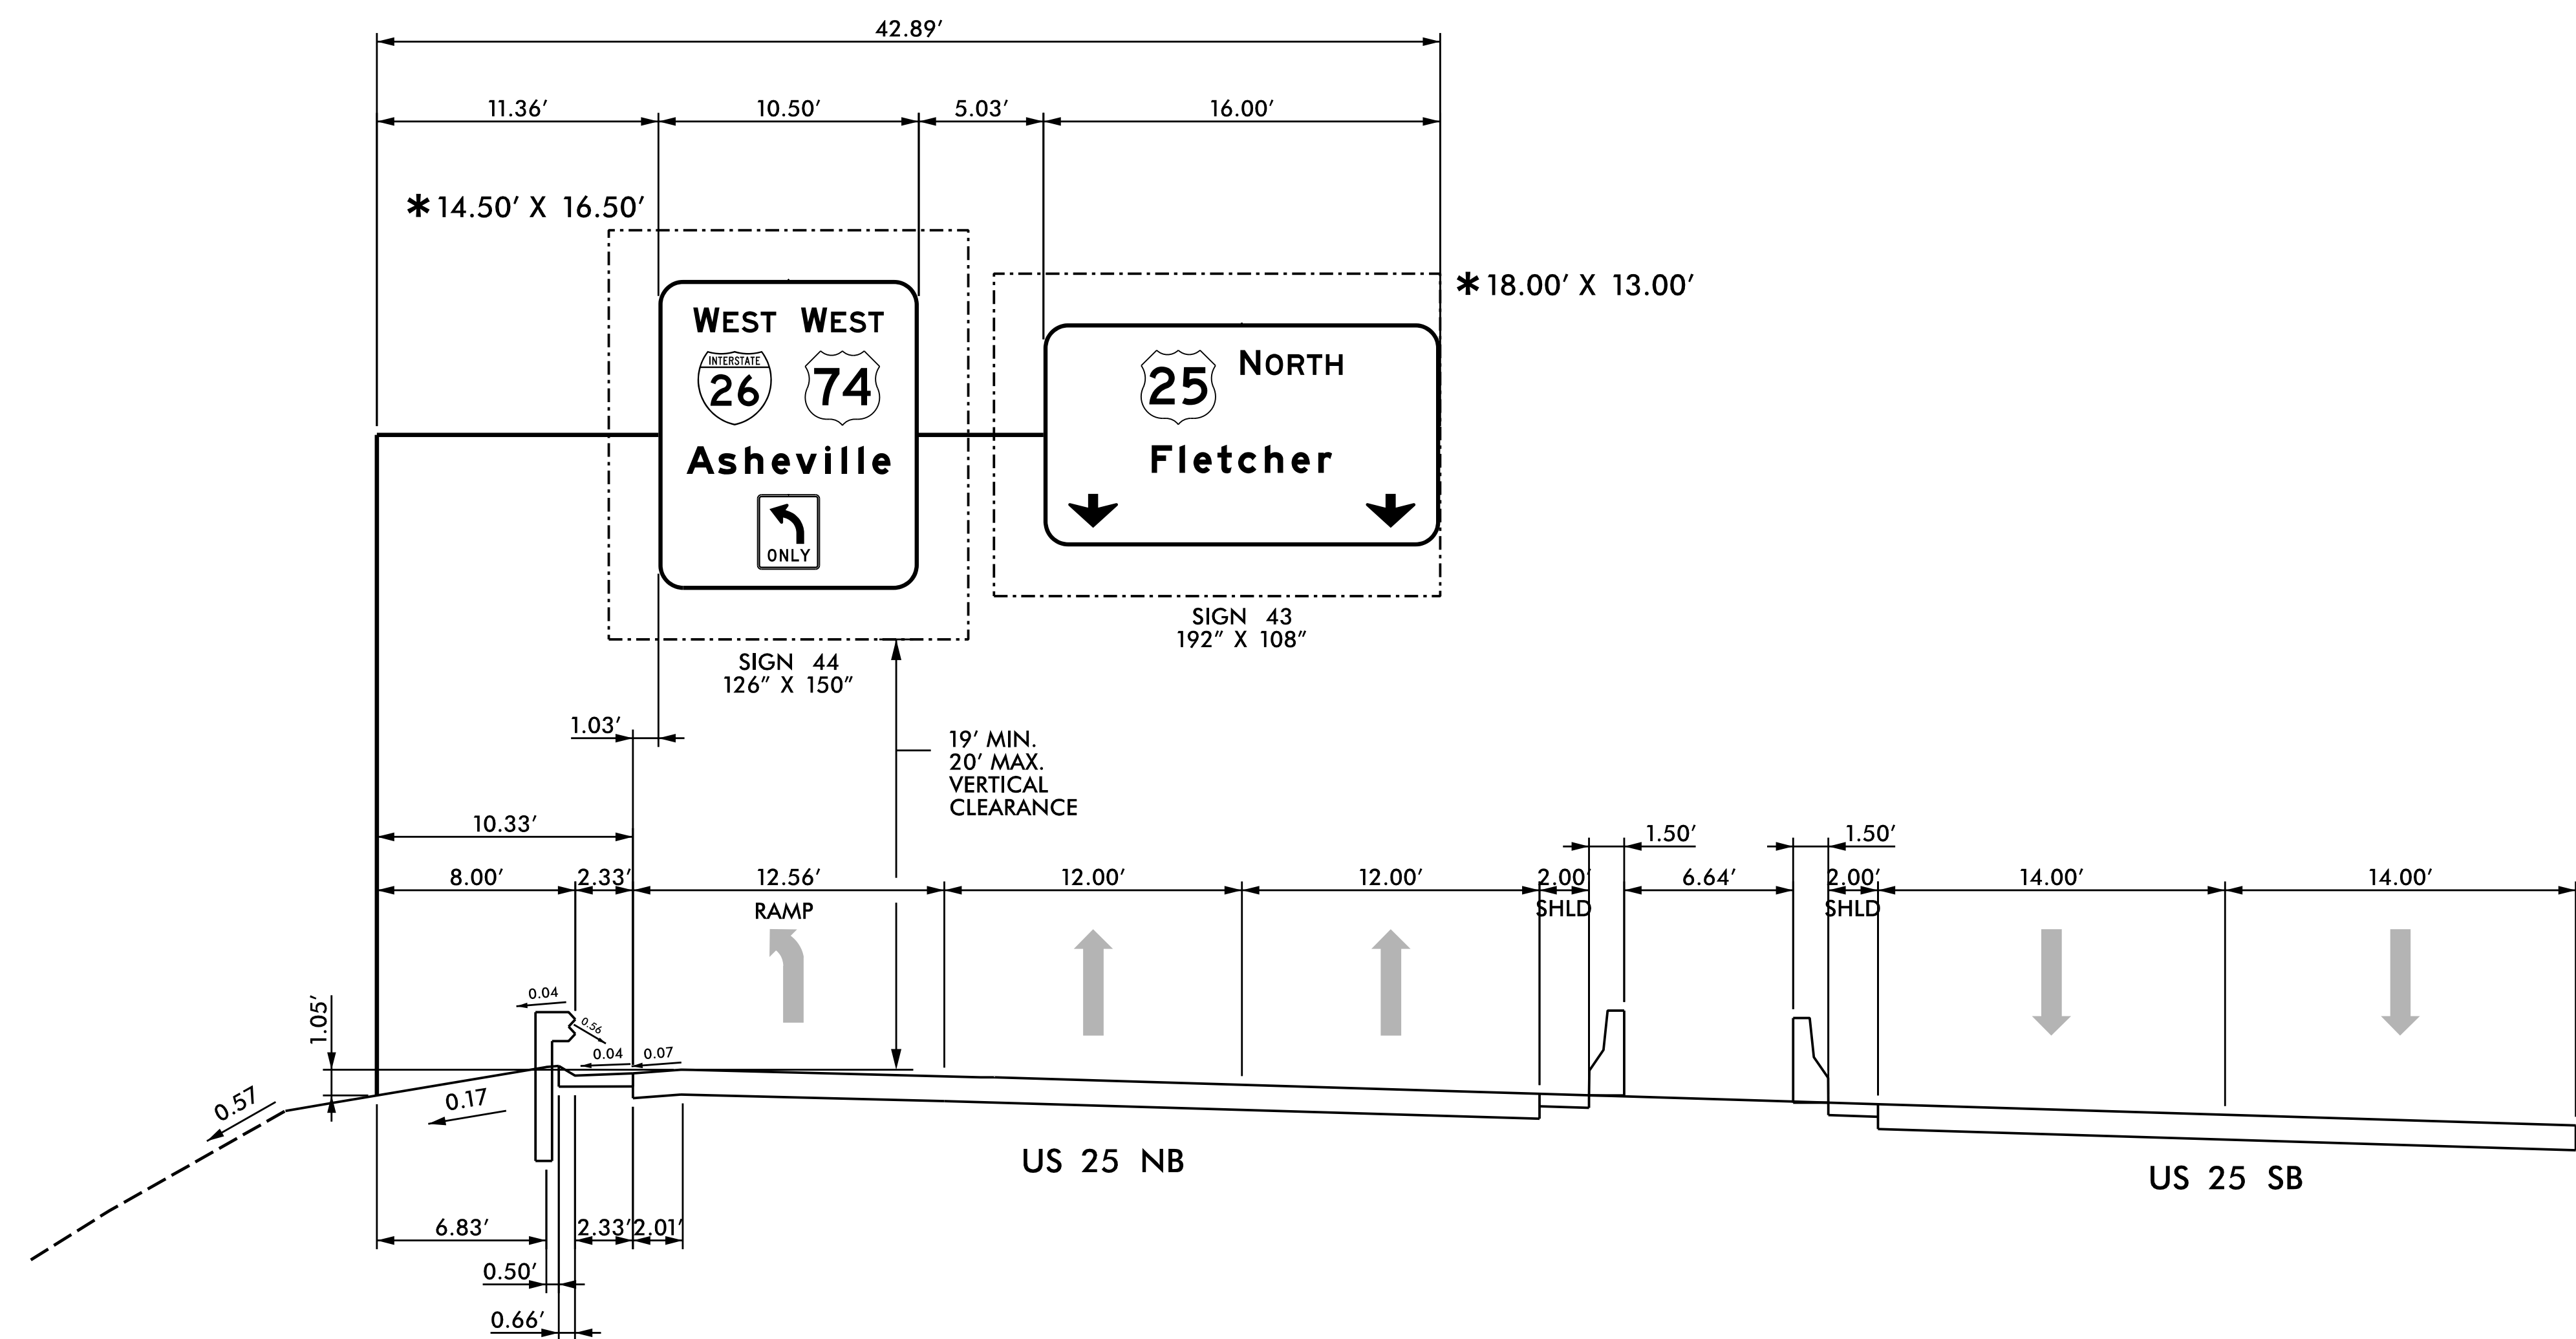


**NOTES:**

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

\* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTINGS. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.



APPROVED: *Andrew D. Klinck*  
E3D78F8498E448  
 DATE: 6/7/2019

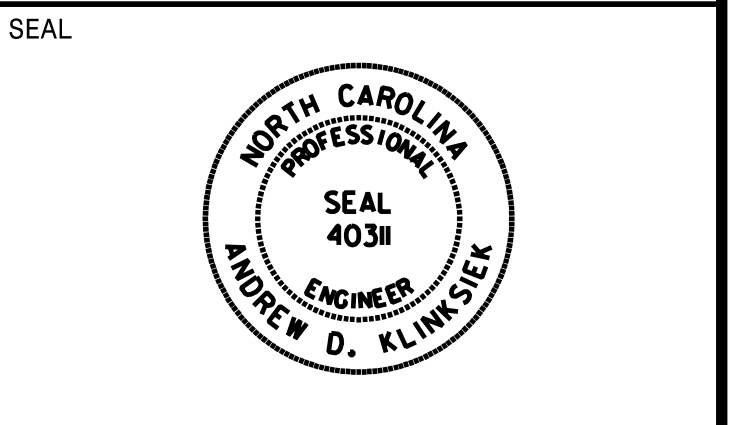


**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

SIGN NUMBER: 21A, 23A, 25A, 30A  
 TYPE: B (OVHD)  
 QUANTITY: 4  
 SIGN WIDTH: 9'-6"  
 HEIGHT: 2'-6"  
 TOTAL AREA: 23.8 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 3"  
 NO. Z BARS: 2  
 LENGTH: 106.0

BACKG COLOR: Green  
 COPY COLOR: White  
 MAT'L: 0.125" ALUMINUM

SYMBOL	X	Y	WID	HT

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

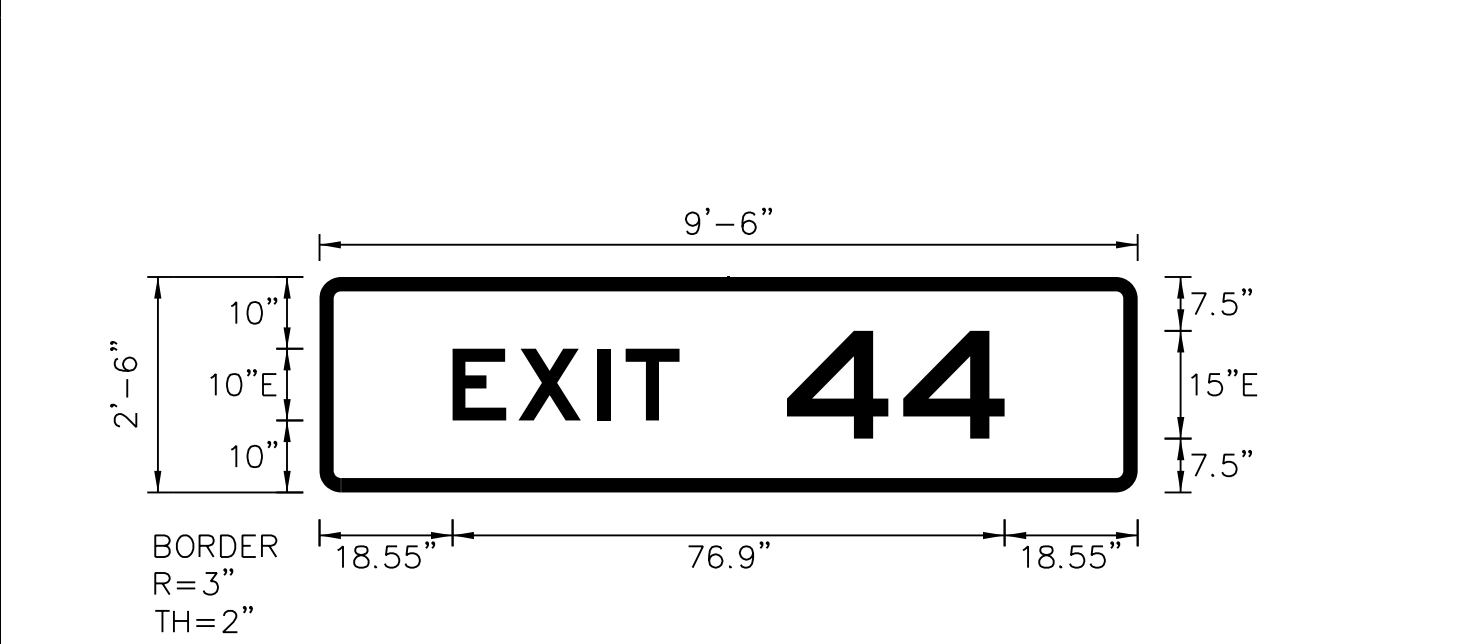

Spacing Factor is 1 unless specified otherwise  
 Spacing Factor for "EXIT" is 1.2

NOTES:  
 1. Legend and border shall be direct applied Grade A reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.  
 3. Use Attachment Method 1-R.

LETTER POSITIONS

Letter spacings are to start of next letter


Letter	E	X	I	T	Series/Size Text Length			
E	18.5	9.2	11.1	3.8	7.5	63.8	E 2000	31.6
X	4	4					E 2000	30.3
I	65.2	16.2	14.1	18.5				
T								

SIGN NUMBER: 21B  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 21'-6"  
 HEIGHT: 12'-0"  
 TOTAL AREA: 258.0 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 250.0

BACKG COLOR: Green  
 COPY COLOR: White  
 MAT'L: 0.125" ALUMINUM

SYMBOL	X	Y	WID	HT
Type A Arrow	214.5	57.3	22.3	35
M1_4	39	44	36	36
M1_4	127.1	44	36	36

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

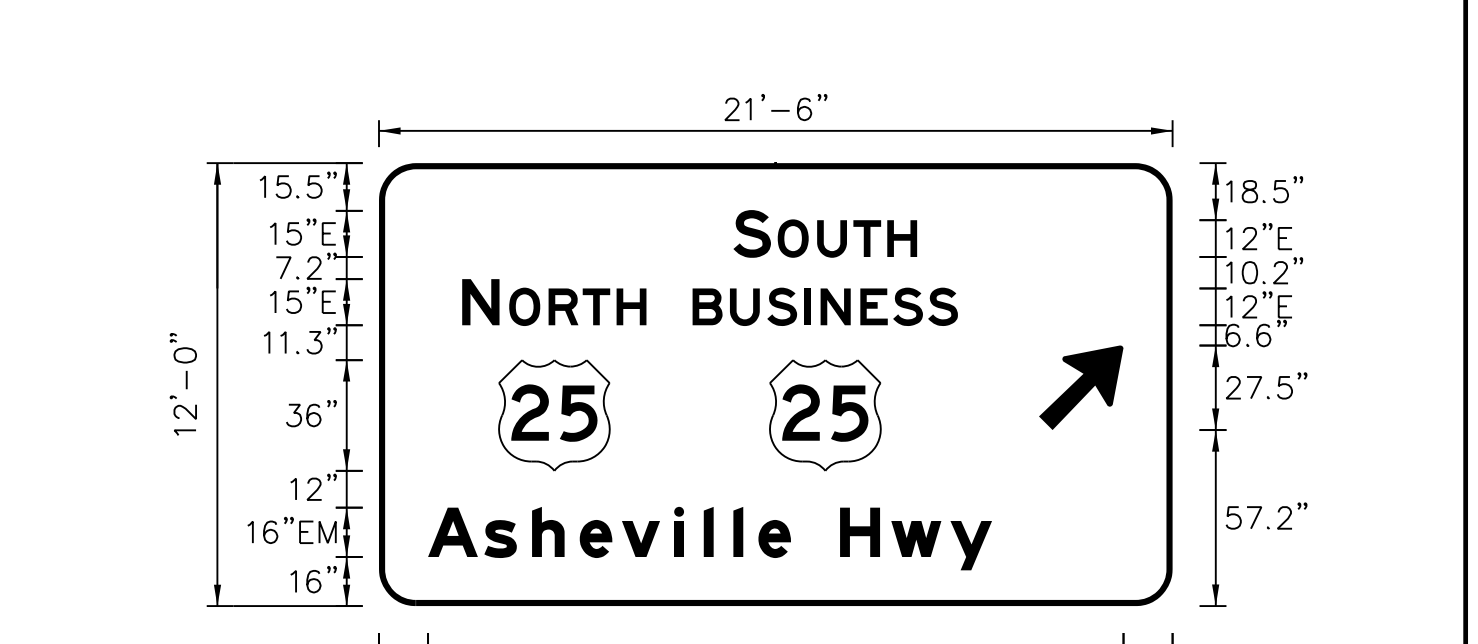

Spacing Factor is 1 unless specified otherwise

NOTES:  
 1. Legend and border shall be direct applied Grade A reflective sheeting.  
 2. Arrow and shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.  
 4. Center arrow vertically on panel.

LETTER POSITIONS

Letter spacings are to start of next letter


Letter	S	O	U	T	H	Series/Size Text Length											
S	115.3	12.2	2.2	12.8	11.8	11	9.7	83	E 2000	59.7							
O	27.1	12.2	3.1	12.8	11	11	9.7	171	E 2000	59.9							
U	102	12.1	12.1	12.1	5.3	12.8	10.7	11.4	9.7	69.8	E 2000	86.3					
T	16	18.2	15.5	15.5	13.8	17	9.6	9.6	8.2	10.6	16	16.6	19.2	13.6	58.7	EM 2000	183.4
H																	
w																	
y																	

SIGN NUMBER: 22  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 18'-0"  
 HEIGHT: 10'-6"  
 TOTAL AREA: 189.0 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 208.0

BACKG COLOR: Green  
 COPY COLOR: White  
 MAT'L: 0.125" ALUMINUM

SYMBOL	X	Y	WID	HT
M1_1	21.9	45.9	36	36
M1_4	90	45.9	36	36
M1_4	158.1	45.9	36	36

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

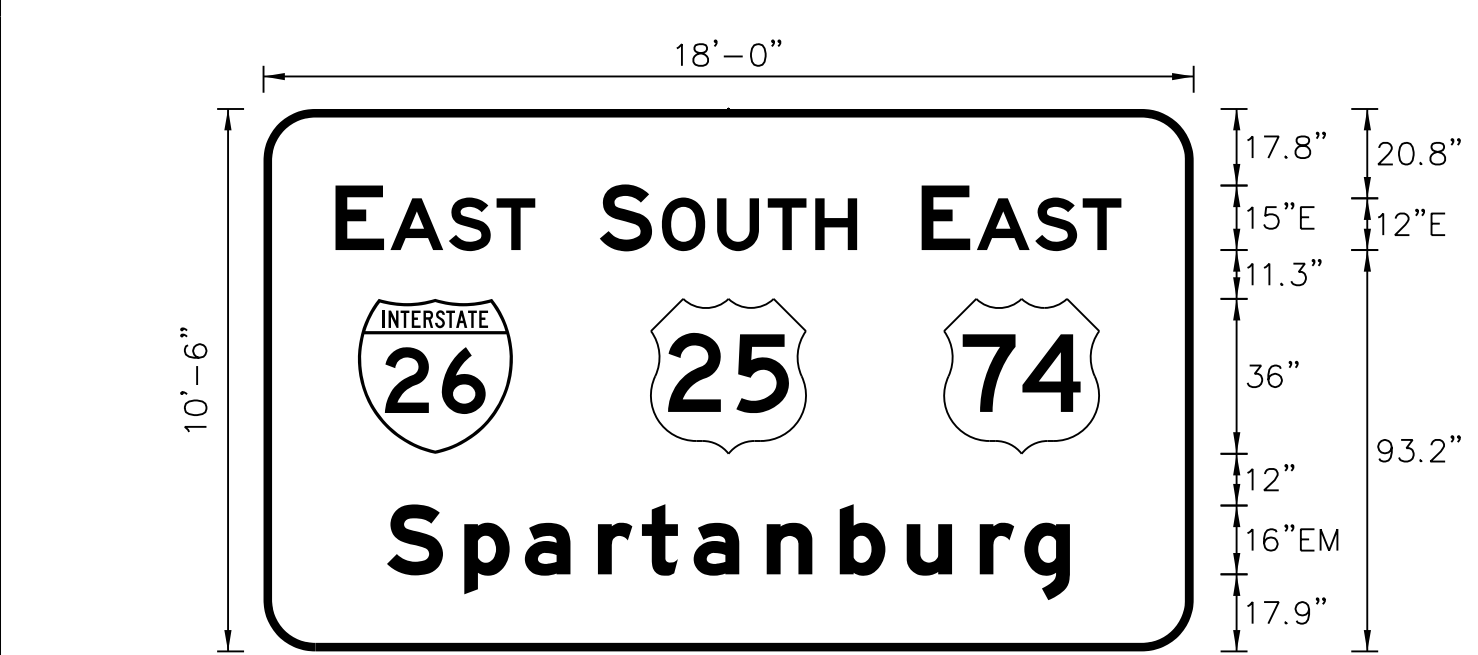

Spacing Factor is 1 unless specified otherwise

NOTES:  
 1. Legend and border shall be direct applied Grade A reflective sheeting.  
 2. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter


Letter	E	A	S	T	Series/Size Text Length										
E	16.7	11.3	1.5	13.6	11	9	52.9	E 2000	46.4						
A	78.1	12.2	2.2	12.8	11.8	11	9.7	78.1	E 2000	59.8					
S	152.9	11.3	1.5	13.6	11	9	16.7	E 2000	46.4						
T	28.7	17.9	14.1	17	10.2	12	17	17	15.5	17	10.4	10.6	28.7	EM 2000	158.6

SIGN NUMBER: 23B  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 18'-0"  
 HEIGHT: 15'-0"  
 TOTAL AREA: 463.6 Sq.Ft.  
 BORDER TYPE: VAR.  
 RECESS: VAR.  
 WIDTH: VAR.  
 RADII: VAR.  
 NO. Z BARS: 6  
 LENGTH: 208.0

BACKG COLOR: Green/Yellow  
 COPY COLOR: White/Black  
 MAT'L: 0.125" ALUMINUM

SYMBOL	X	Y	WID	HT
M1_4	127.4	78.2	36	36
M1_4	39.4	75.3	36	36
Type A Arrow	92	5	22.3	35

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

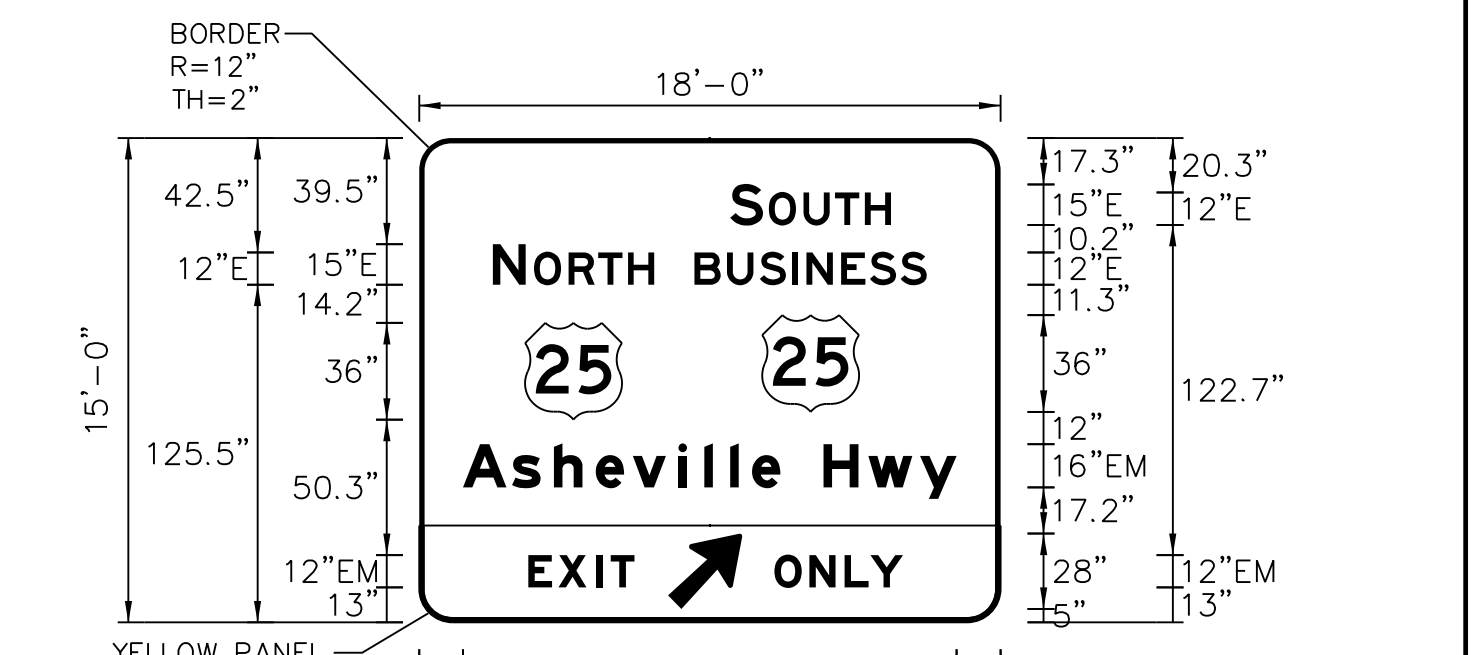

Spacing Factor is 1 unless specified otherwise  
 Spacing Factor for "EXIT" is 1.4

NOTES:  
 1. Legend and border shall be direct applied Grade A reflective sheeting.  
 2. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.  
 4. Bottom panel shall be yellow Grade C sheeting. Legend shall be direct applied black non-reflective sheeting. Arrow shall be black non-reflective sheeting on 0.032" aluminum and demountable. Yellow panel is 216" X 36", (Border Type = Recessed, Recess = 0.5", Width = 1.5", Radii = 12")

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	S	O	U	T	H	Series/Size Text Length											
S	115.6	12.2	2.2	12.8	11.8	11	9.7	40.7	E 2000	59.7							
O	27.4	12.2	3.1	12.8	11	11	9.7	28.7	E 2000	59.9							
U	102.3	12.1	12.1	12.1	5.3	12.8	10.7	11.4	9.7	27.4	E 2000	86.3					
T	16.3	18.2	15.5	15.5	13.8	17	9.6	9.6	8.2	10.6	16	16.6	19.2	13.6	16.3	EM 2000	183.4
H																	
w																	
y																	

APPROVED: *Andrew D. Klinck*  
DATE: 6/7/2019



DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED


SIGN NUMBER: 24  
TYPE: A (OVHD)  
QUANTITY: 1  
SIGN WIDTH: 17'-6"  
HEIGHT: 10'-0"  
TOTAL AREA: 175.0 Sq.Ft.  
BORDER TYPE: RECESSED  
RECESS: 0.75"  
WIDTH: 1.25"  
RADIUS: 12"  
NO. Z BARS: 3  
LENGTH: 202.0

BACKG COLOR: White  
COPY COLOR: Black

SYMBOL	X	Y	WID	HT
Type C Arrow	17	10	32	22
Type C Arrow	161	10	32	22

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

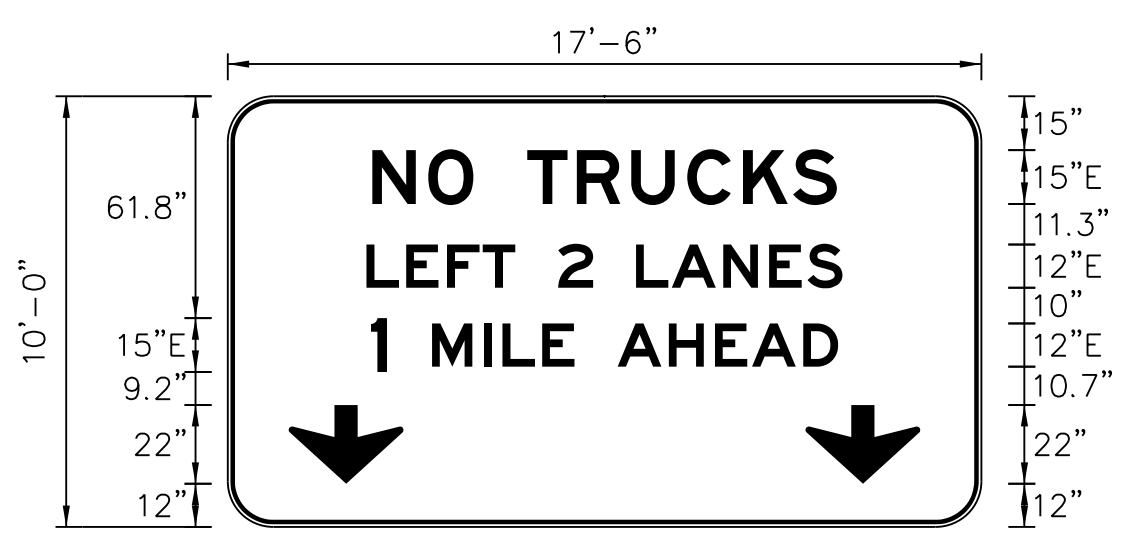

NOTES:  
1. Legend and border shall be direct applied black non-reflective sheeting.  
2. Arrows shall be non-reflective sheeting on 0.032" aluminum and demountable.  
3. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	N	O	T	R	U	C	K	S					E 2000
40.3	15.6	12.6	15	13.8	15.1	15.6	13.9	12.2	40.3				129.5
	L	E	F	T	2	L	A	N	E	S			E 2000
38.7	11	11.4	10	9	12	9.7	12	10	14.3	12.8	10.7	9.7	132.6
	1	M	I	L	E	A	H	E	A	D			E 2000
39.9	4.5	12.5	14.4	5.3	11	9	12	14.3	12.8	10.3	14.3	9.7	130.2


SIGN NUMBER: 26A,31A  
TYPE: B (OVHD)  
QUANTITY: 2  
SIGN WIDTH: 9'-6"  
HEIGHT: 2'-6"  
TOTAL AREA: 23.8 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 3"  
NO. Z BARS: 2  
LENGTH: 106.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

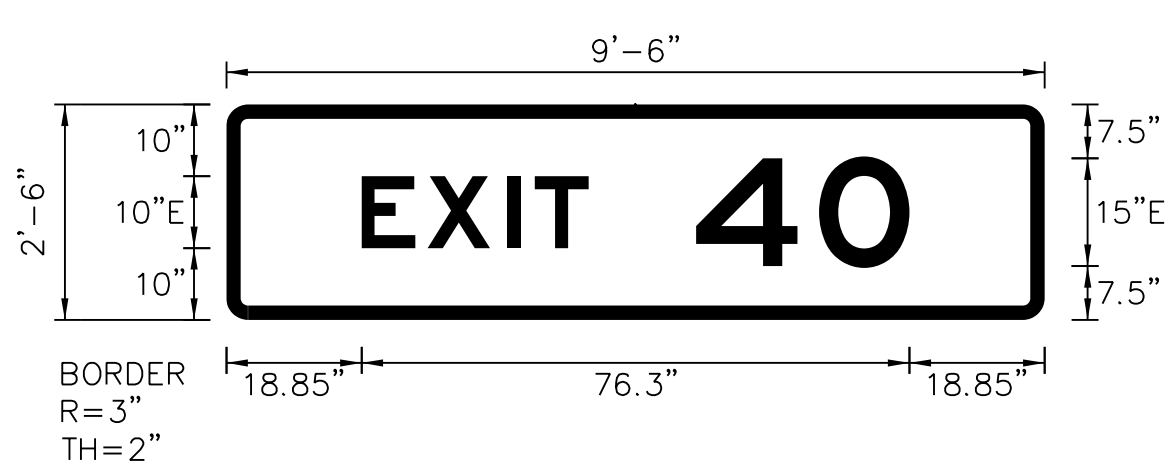

NOTES:  
1. Legend and border shall be direct applied Grade A reflective sheeting.  
2. Background shall be Grade C reflective sheeting.  
3. Use Attachment Method 1-R.

LETTER POSITIONS

Letter spacings are to start of next letter							Series/Size
							Text Length
	E	X	I	T			E 2000
18.8	9.2	11.1	3.8	7.5	63.5		31.6
	4	O					E 2000
65.5	17.1	12.6	18.8				29.7


SIGN NUMBER: 25B  
TYPE: A (OVHD)  
QUANTITY: 1  
SIGN WIDTH: 18'-0"  
HEIGHT: 16'-6"  
TOTAL AREA: 297.0 Sq.Ft.  
BORDER TYPE: VAR.  
RECESS: VAR.  
WIDTH: VAR.  
RADIUS: VAR.  
NO. Z BARS: 6  
LENGTH: 208.0

BACKG COLOR: Green/Yellow  
COPY COLOR: White/Black

SYMBOL	X	Y	WID	HT
M1_4	39.4	97.5	36	36
M1_4	127.4	97.5	36	36
Type C Arrow	91	8	32	22

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

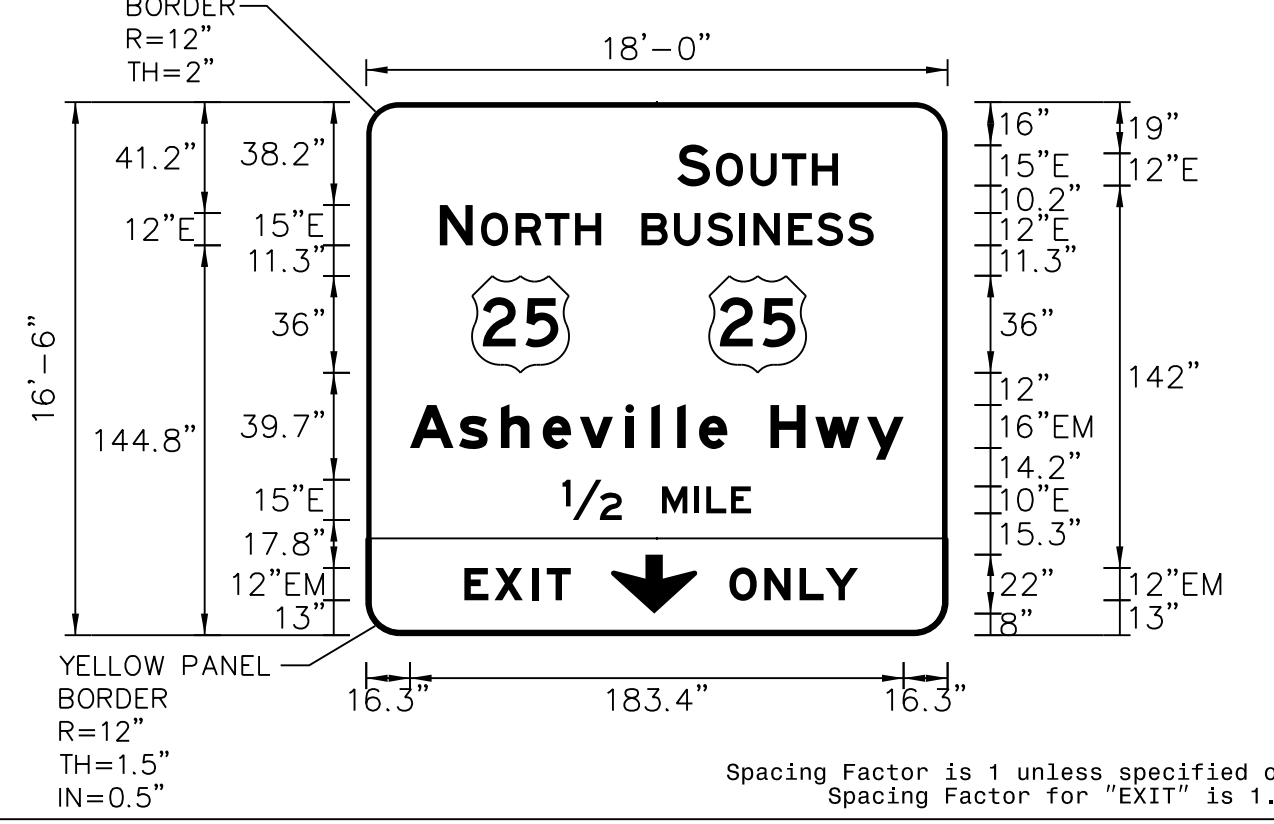

NOTES:  
1. Legend and border shall be direct applied Grade A reflective sheeting.  
2. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.  
3. Background shall be Grade C reflective sheeting.  
4. Bottom panel shall be yellow Grade C sheeting. Legend shall be direct applied black non-reflective sheeting. Arrow shall be black non-reflective sheeting on 0.032" aluminum and demountable. Yellow panel is 216" X 36", (Border Type = Recessed, Recess = 0.5", Width = 1.5", Radii = 12")

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	S	O	U	T	H								E 2000
115.6	12.2	2.2	12.8	11.8	11	9.7	40.7						59.7
	N	O	R	T	H								E 2000
27.4	12.2	3.1	12.8	11	11	9.7	28.7						59.9
	B	U	S	I	N	E	S	S					E 2000
102.3	12.1	12.1	12.1	5.3	12.8	10.7	11.4	9.7	27.4				86.3
	A	s	h	e	v	i	l	i	e	H	w	y	EM 2000
16.3	18.2	15.5	15.5	13.8	17	9.6	9.6	8.2	10.6	16	16.6	19.2	183.4
	1/2	M	I	L	E								E 2000
73	22	15	12	4.4	9.2	7.5	73						70.1
	E	X	I	T									EM 2000
36.5	11.2	14	5.4	8.9	140								39.5
	O	N	L	Y									EM 2000
135	13	13.1	9.6	12.1	33.2								47.8

SIGN NUMBER: 26B  
TYPE: A (OVHD)  
QUANTITY: 1  
SIGN WIDTH: 15'-6"  
HEIGHT: 12'-6"  
TOTAL AREA: 193.8 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 4  
LENGTH: 178.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
NC363A	39	98.7	36	36
AIRPORT I-5	111	98.7	36	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018




NOTES:  
1. Legend and border shall be direct applied Grade A reflective sheeting.  
2. Shield and Airport I-5 shall be Grade A reflective sheeting on 0.032" aluminum and demountable.  
3. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	A	i	r	p	o	r	t	R	d				EM 2000
26.8	20	9.6	11.8	14.1	15.8	10.2	8.3	16	15.8	10.6	26.8		132.3
	A	V	L	A	i	r	p	o	r	t			EM 2000
16.6	17.4	17.6	11.8	16	20	9.6	11.8	14.1	15.8	10.2	8.3	16.6	152.8
	2	M	I	L	E	S							E 2000
58.1	12.2	15	12	4.4	9.2	8.9	8.1	58.1					69.8



APPROVED: *Andrew D. Klinck*  
 DATE: 6/7/2019

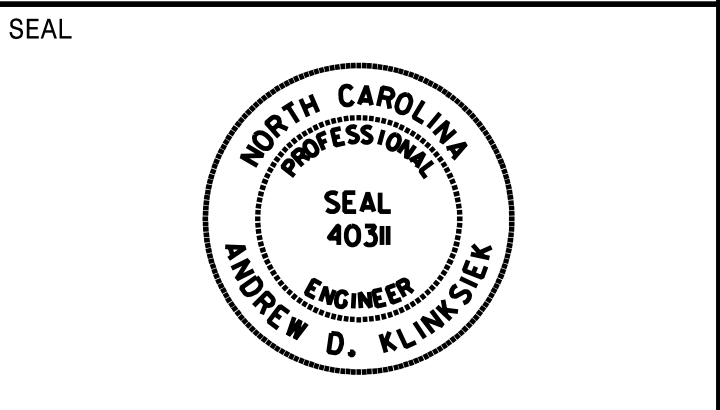


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SIGN NUMBER: 27  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 17'-6"  
 HEIGHT: 8'-0"  
 TOTAL AREA: 140.0 Sq.Ft.  
 BORDER TYPE: RECESSED  
 RECESS: 0.75"  
 WIDTH: 1.25"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 202.0

SYMBOL	X	Y	WID	HT
Type C Arrow	17	12.1	32	22
Type C Arrow	161	12.1	32	22

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

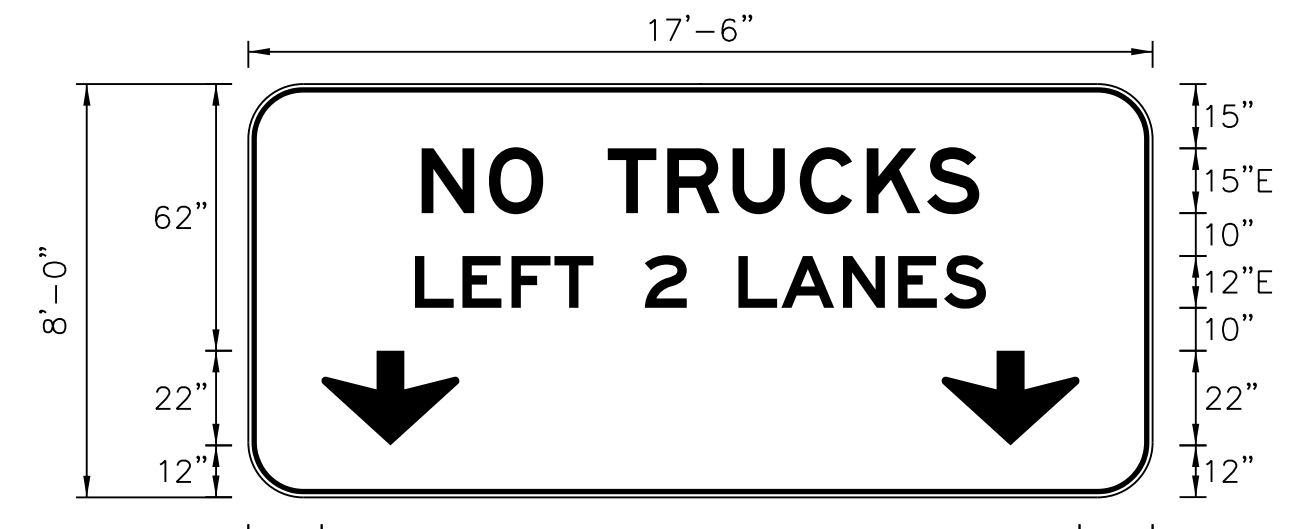

BORDER R=12"  
 TH=1.25"  
 IN=0.75"  
 Spacing Factor is 1 unless specified otherwise

NOTES:  
 1. Legend and border shall be direct applied black non-reflective sheeting.  
 2. Arrows shall be non-reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size		
													Text Length		
	N	O	T	R	U	C	K	S					E 2000		
	40.3	15.6	12.6	15	13.8	15.1	15.6	13.9	12.2	40.3			129.5		
	L	E	F	T			L	A	N	E	S		E 2000		
	38.7	11	11.4	10	9	12	9.7	12	10	14.3	12.8	10.7	9.7	38.7	132.6

SIGN NUMBER: 28  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 13'-6"  
 HEIGHT: 8'-0"  
 TOTAL AREA: 108.0 Sq.Ft.  
 BORDER TYPE: RECESSED  
 RECESS: 0.75"  
 WIDTH: 1.25"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 154.0

SYMBOL	X	Y	WID	HT
Type C Arrow	65	12.1	32	22

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

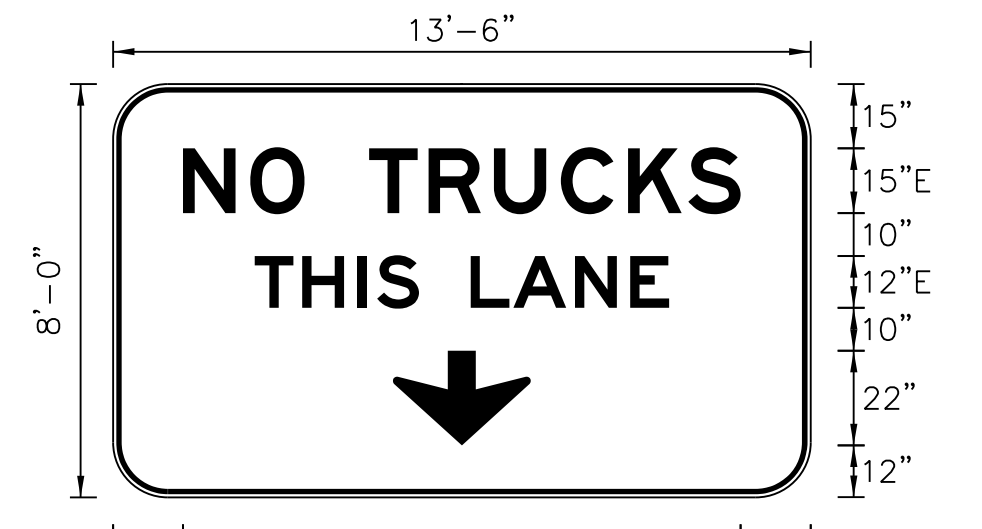

BORDER R=12"  
 TH=1.25"  
 IN=0.75"  
 Spacing Factor is 1 unless specified otherwise

NOTES:  
 1. Legend and border shall be direct applied black non-reflective sheeting.  
 2. Arrow shall be non-reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	N	O	T	R	U	C	K	S					E 2000
	16.3	15.6	12.6	15	13.8	15.1	15.6	13.9	12.2	16.3			129.5
	T	H	I	S			L	A	N	E			E 2000
	32.9	11	12.8	4.6	9.7	12	10	14.3	12.8	9	32.9		96.2

SIGN NUMBER: 29  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 12'-0"  
 HEIGHT: 12'-0"  
 TOTAL AREA: 144.0 Sq.Ft.  
 BORDER TYPE: RECESSED  
 RECESS: 0.75"  
 WIDTH: 1.25"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 136.0

SYMBOL	X	Y	WID	HT
Type C Arrow	56	12.1	32	22

DESIGN BY: JAW  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

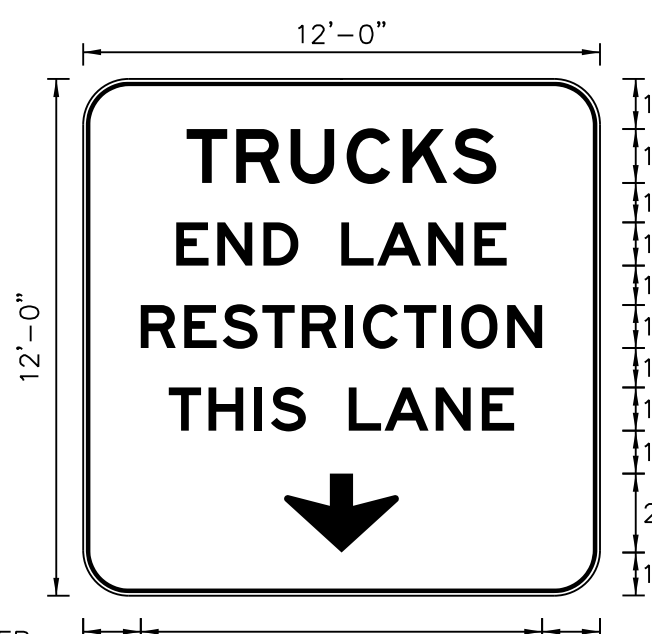

BORDER R=12"  
 TH=1.25"  
 IN=0.75"  
 Spacing Factor is 1 unless specified otherwise

NOTES:  
 1. Legend and border shall be direct applied black non-reflective sheeting.  
 2. Arrow shall be Grade A reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size	
													Text Length	
	T	R	U	C	K	S							E 2000	
	28.9	13.8	15.1	15.6	13.9	12.2	28.9						86.3	
	E	N	D		L	A	N	E					E 2000	
	26	11.4	12.8	9.7	12	10	14.3	12.8	9	26			92	
	R	E	S	T	R	I	C	T	I	O	N		E 2000	
	16.1	12.1	10.7	11	11	12.1	4.9	11.4	11	4.9	12.8	9.7	16.1	111.8
	T	H	I	S			L	A	N	E			E 2000	
	23.9	11	12.8	4.6	9.7	12	10	14.3	12.8	9	23.9		96.2	

SIGN NUMBER: 30B  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 18'-0"  
 HEIGHT: 16'-6"  
 TOTAL AREA: 297.0 Sq.Ft.  
 BORDER TYPE: VAR.  
 RECESS: VAR.  
 WIDTH: VAR.  
 RADII: VAR.  
 NO. Z BARS: 6  
 LENGTH: 208.0

SYMBOL	X	Y	WID	HT
M1_4	39.4	97.5	36	36
M1_4	127.4	97.5	36	36
Type C Arrow	91	8	32	22

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

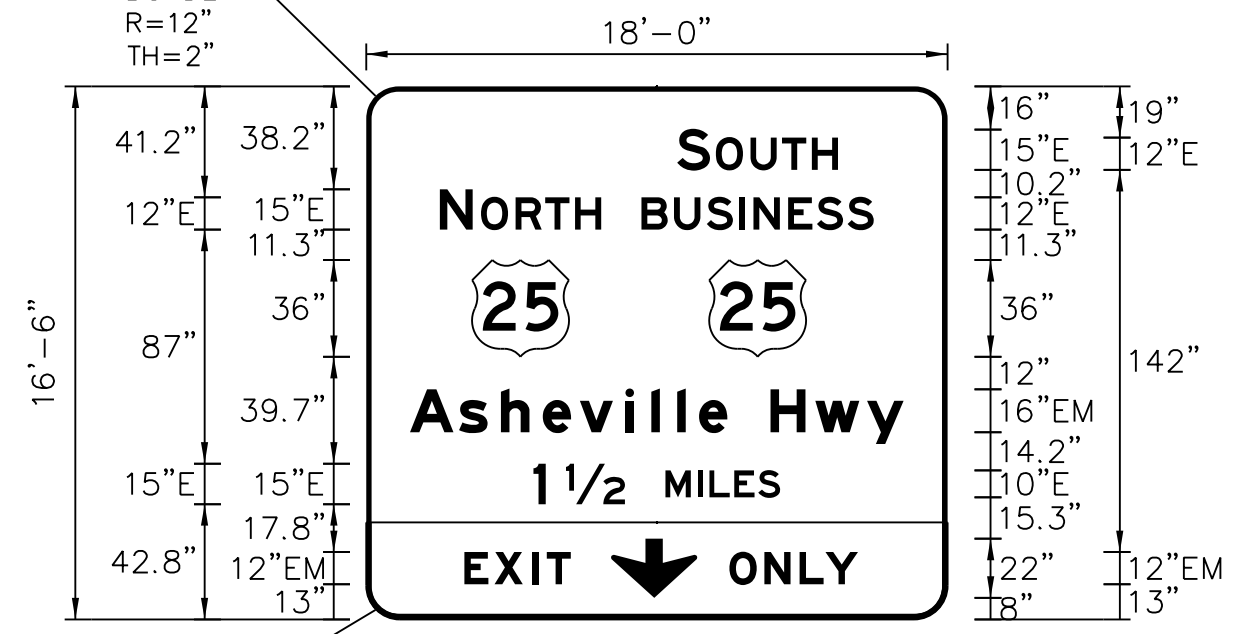


BORDER R=12"  
 TH=2"  
 YELLOW PANEL BORDER R=12"  
 TH=1.5"  
 IN=0.5"  
 Spacing Factor is 1 unless specified otherwise  
 Spacing Factor for "EXIT" is 1.4

NOTES:  
 1. Legend and border shall be direct applied Grade A reflective sheeting.  
 2. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.  
 3. Background shall be Grade C reflective sheeting.  
 4. Bottom panel shall be yellow Grade C sheeting. Legend shall be direct applied black non-reflective sheeting. Arrow shall be non-reflective sheeting on 0.032" aluminum and demountable. Yellow panel is 216" X 36". (Border Type = Recessed, Recess = 0.5", Width = 1.5", Radii = 12")

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size			
													Text Length			
	S	O	U	T	H								E 2000			
	115.6	12.2	2.2	12.8	11.8	11	9.7	40.7					59.7			
	N	O	R	T	H								E 2000			
	27.4	12.2	3.1	12.8	11	11	9.7	28.7					59.9			
	B	U	S	I	N	E	S	S					E 2000			
	102.3	12.1	12.1	12.1	5.3	12.8	10.7	11.4	9.7	27.4			86.3			
	A	s	h	e	v	i	i	i	e		H	w	y	EM 2000		
	16.3	18.2	15.5	15.5	13.8	17	9.6	9.6	8.2	10.6	16	16.6	19.2	13.6	16.3	183.4
	1		1/2		M	I	L	E	S							E 2000
	62.2	4.5	7.5	22	15	12	4.4	9.2	8.9	8.1	62.2					91.6
	E	X	I	T												EM 2000
	36.5	11.2	14	5.4	8.9	140										39.5
	O	N	L	Y												EM 2000
	135	13	13.1	9.6	12.1	33.2										47.8



TIP NO. I-4400C	SHEET NO. SIGN-4C
APPROVED: <i>Andrew D. Klinck</i> E310765496E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	


SIGN NUMBER: 318  
TYPE: A (OVHD)  
QUANTITY: 1  
SIGN WIDTH: 15'-6"  
HEIGHT: 12'-6"  
TOTAL AREA: 193.8 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 4  
LENGTH: 178.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
NC363A	39	98.7	36	36
AIRPORT I-5	111	98.7	36	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 13  
DATE: November 2018

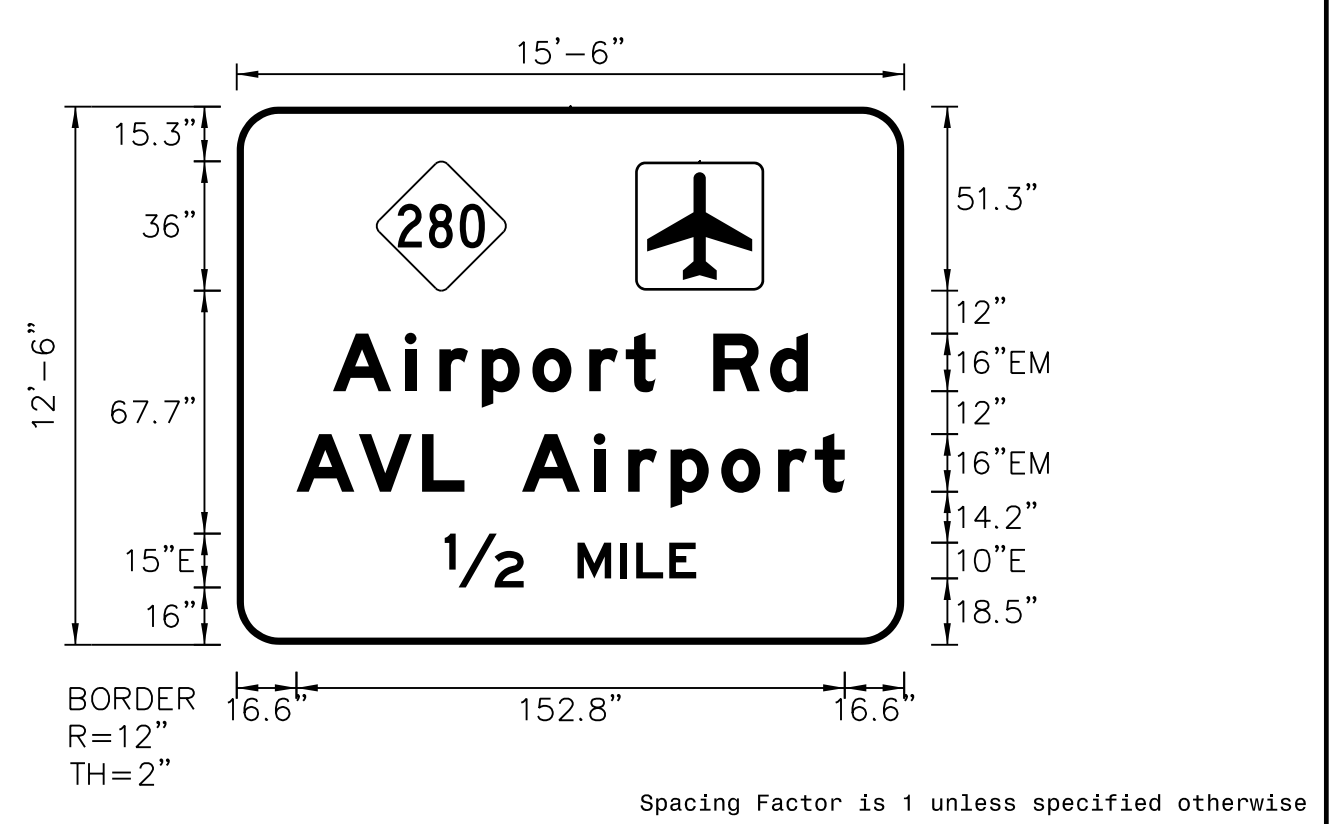

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Shield and Airport I-5 shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	A	i	r	p	o	r	t	R	d	Series/Size	Text Length				
	26.8	20	9.6	11.8	14.1	15.8	10.2	8.3	16	15.8	10.6	26.8	EM 2000	132.3	
	16.6	17.4	17.6	11.8	16	20	9.6	11.8	14.1	15.8	10.2	8.3	16.6	EM 2000	152.8
	58	22	15	12	4.4	9.2	7.5	58					E 2000	70.1	


SIGN NUMBER: 32  
TYPE: A (OVHD)  
QUANTITY: 1  
SIGN WIDTH: 10'-6"  
HEIGHT: 11'-0"  
TOTAL AREA: 115.5 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 3  
LENGTH: 118.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	18.9	59.1	36	36
M1_4	71.1	59.1	36	36
Type C Arrow	51	9	24	16.5

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

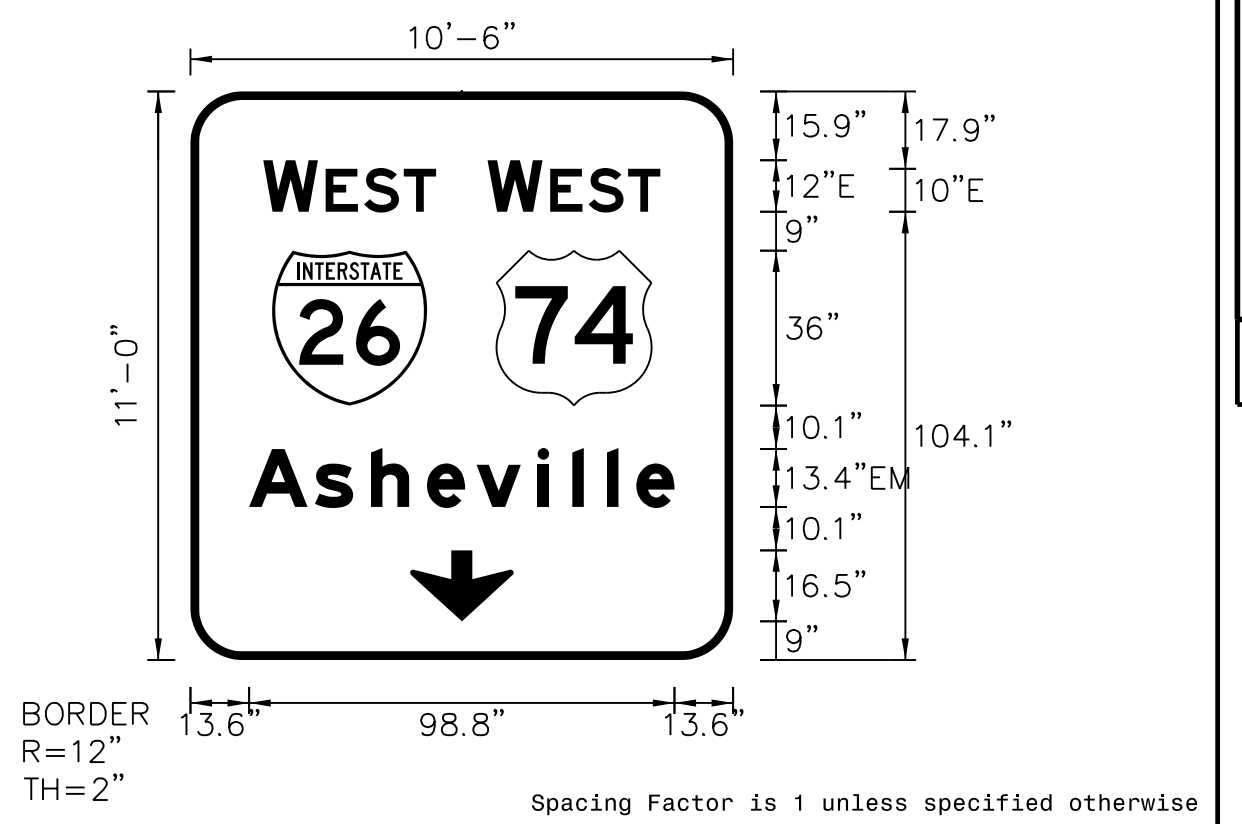

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Arrow and shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	W	E	S	T	Series/Size	Text Length							
	16.9	12.7	1.8	8.9	9.2	7.5	69	E 2000	40.1				
	69	12.7	1.8	8.9	9.2	7.5	16.9	E 2000	40.1				
	13.6	15.3	13	13	11.5	14.2	8	8	6.8	8.8	13.6	EM 2000	98.8


SIGN NUMBER: 33,43  
TYPE: A (OVHD)  
QUANTITY: 2  
SIGN WIDTH: 16'-0"  
HEIGHT: 9'-0"  
TOTAL AREA: 144.0 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 3  
LENGTH: 184.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	47.3	59	36	36
Type C Arrow	12	9	24	16.5
Type C Arrow	156	9	24	16.5

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

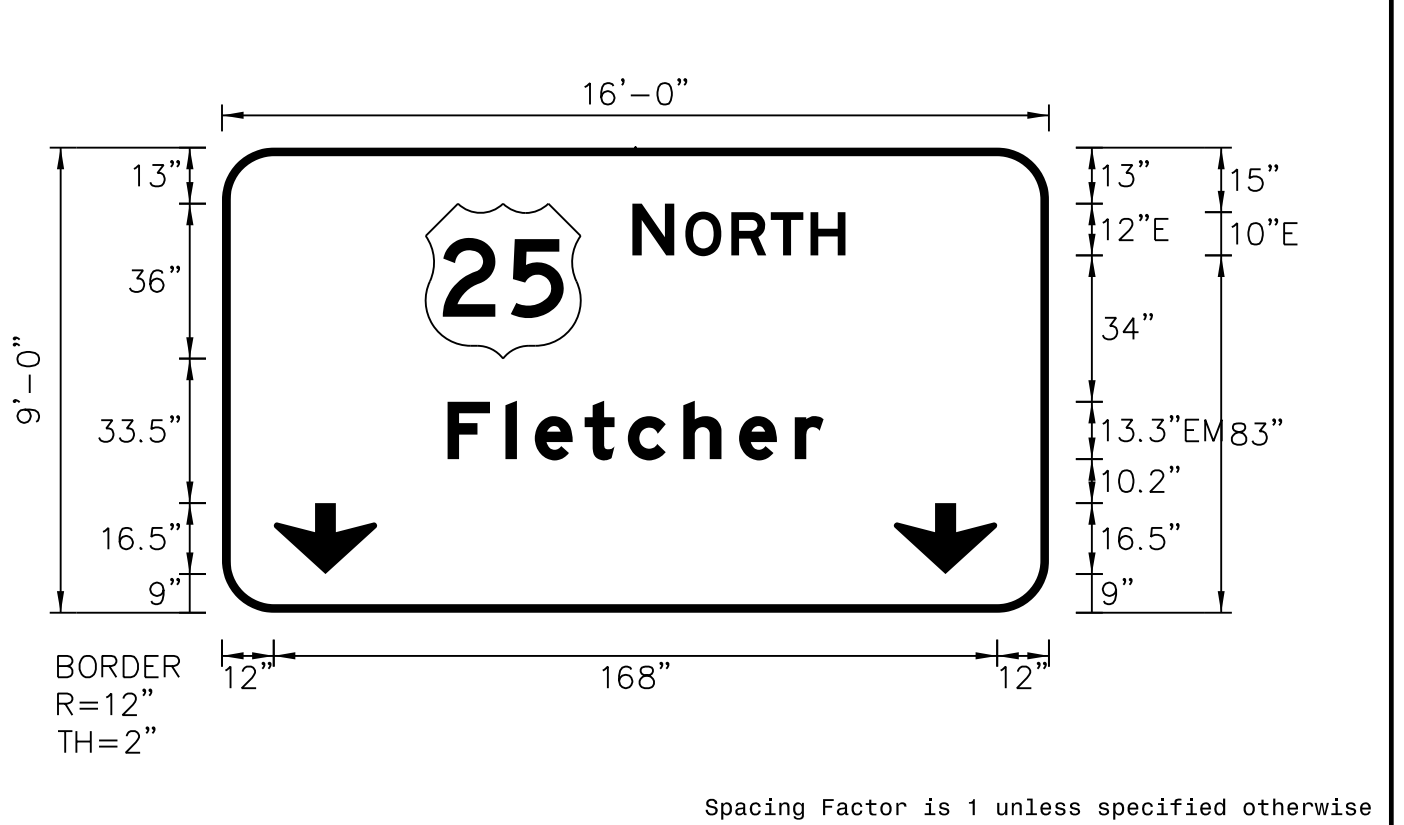

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Arrows and shield shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	N	O	R	T	H	Series/Size	Text Length					
	95.3	9.7	2.6	10.7	9.2	9.2	8.1	47.3	E 2000	49.5		
	52.3	13.5	6.8	11.6	10	12.9	12.9	12.9	6.7	52.3	EM 2000	87.3


SIGN NUMBER: 34  
TYPE: A (OVHD)  
QUANTITY: 1  
SIGN WIDTH: 15'-0"  
HEIGHT: 12'-6"  
TOTAL AREA: 187.5 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 4  
LENGTH: 172.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	16.2	79.6	36	36
M1_4	72	79.6	36	36
M1_4	127.8	79.6	36	36
R3-5 (R)	75	10	30	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

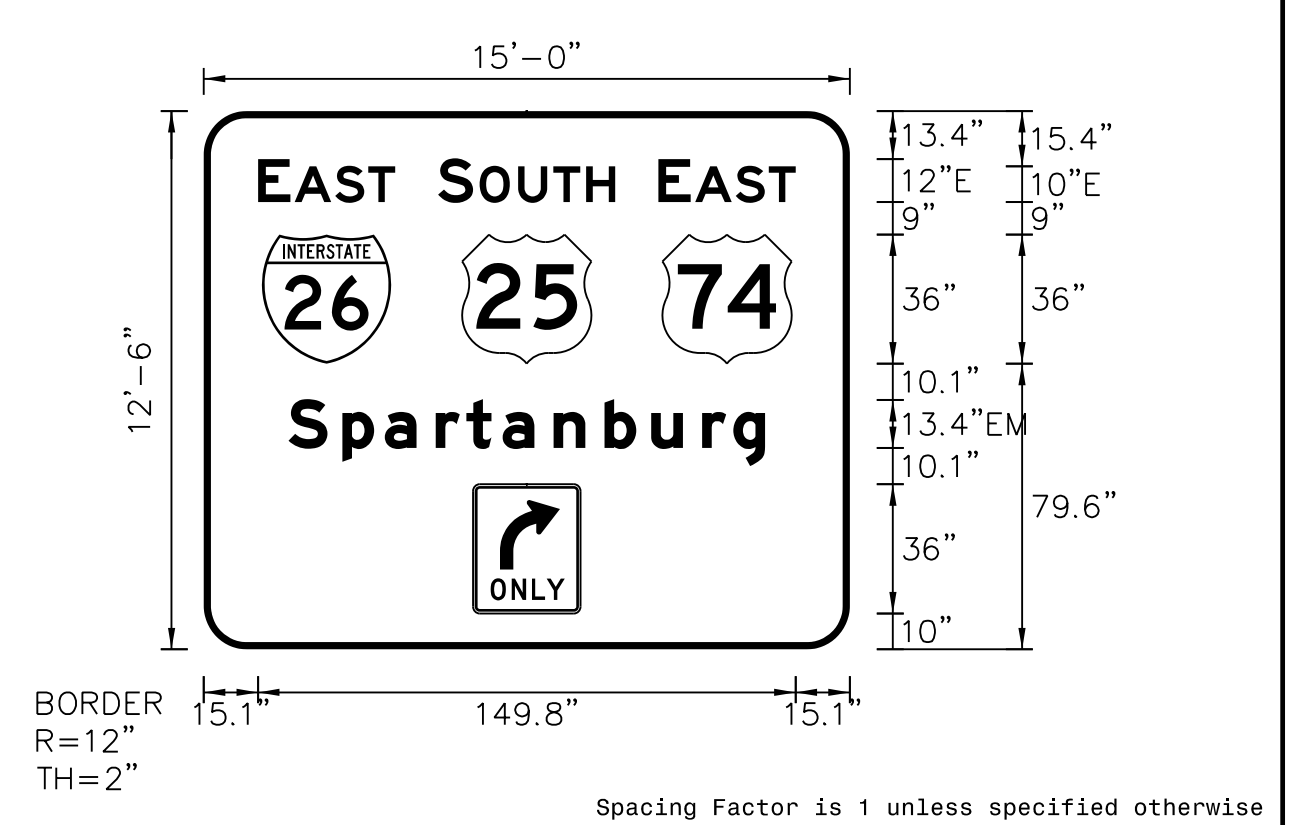

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.
  - R3-5(L or R) shall be Grade A white reflective sheeting on 0.032" aluminum and demountable. Legend and arrow shall be direct applied non-reflective sheeting.

LETTER POSITIONS


Letter spacings are to start of next letter

	E	A	S	T	Series/Size	Text Length									
	15.1	9	1.2	11.3	9.2	7.5	126.7	E 2000	38.2						
	65.3	9.7	1.8	10.7	9.8	9.2	8.1	65.3	E 2000	49.4					
	126.7	9	1.2	11.3	9.2	7.5	15.1	E 2000	38.2						
	23.6	15	11.8	14.2	8.6	10.1	14.2	14.2	13	14.2	8.7	8.8	23.6	EM 2000	132.8





APPROVED: *Andrew D. Klinck*  
 DATE: 6/7/2019

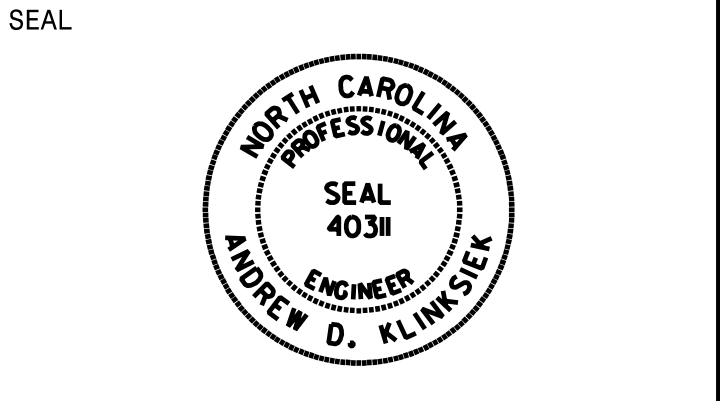

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED


SIGN NUMBER: 39  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 18'-6"  
 HEIGHT: 13'-6"  
 TOTAL AREA: 249.8 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 4  
 LENGTH: 214.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	68.2	89	36	36
R3-5 (L)	24	13	30	36
R3-5 (L)	168	13	30	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

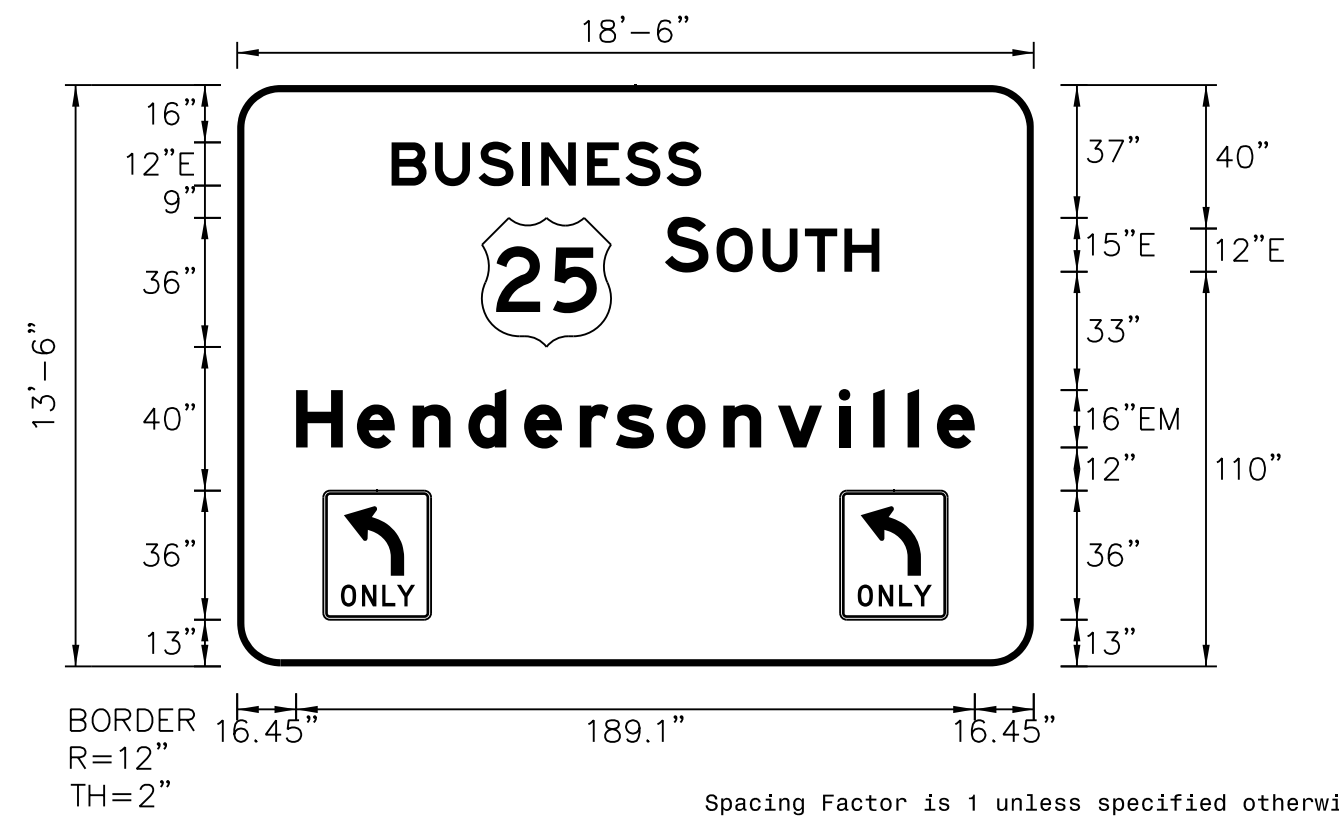

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Shield shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.
  - R3-5(L or R) shall be Grade A white reflective sheeting on 0.032" aluminum and demountable. Legend and arrow shall be direct applied non-reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	B	U	S	I	N	E	S	S													Series/Size Text Length
	43.1	12.1	12.1	12.1	5.3	12.8	10.7	11.4	9.7	92.7											E 2000
																					86.3
																					E 2000
	119.2	12.2	2.2	12.8	11.8	11	9.7	4.3													59.8
																					EM 2000
																					104.8
																					EM 2000
	16.4	17	15.5	15.5	15.5	10.1	14.1	15.8	15.2	17	9.6	9.6	8.2	10.6	16.4						189.1


SIGN NUMBER: 41  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 15'-0"  
 HEIGHT: 10'-6"  
 TOTAL AREA: 157.5 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 172.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	16.2	55.3	36	36
M1_4	72	55.3	36	36
M1_4	127.8	55.3	36	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

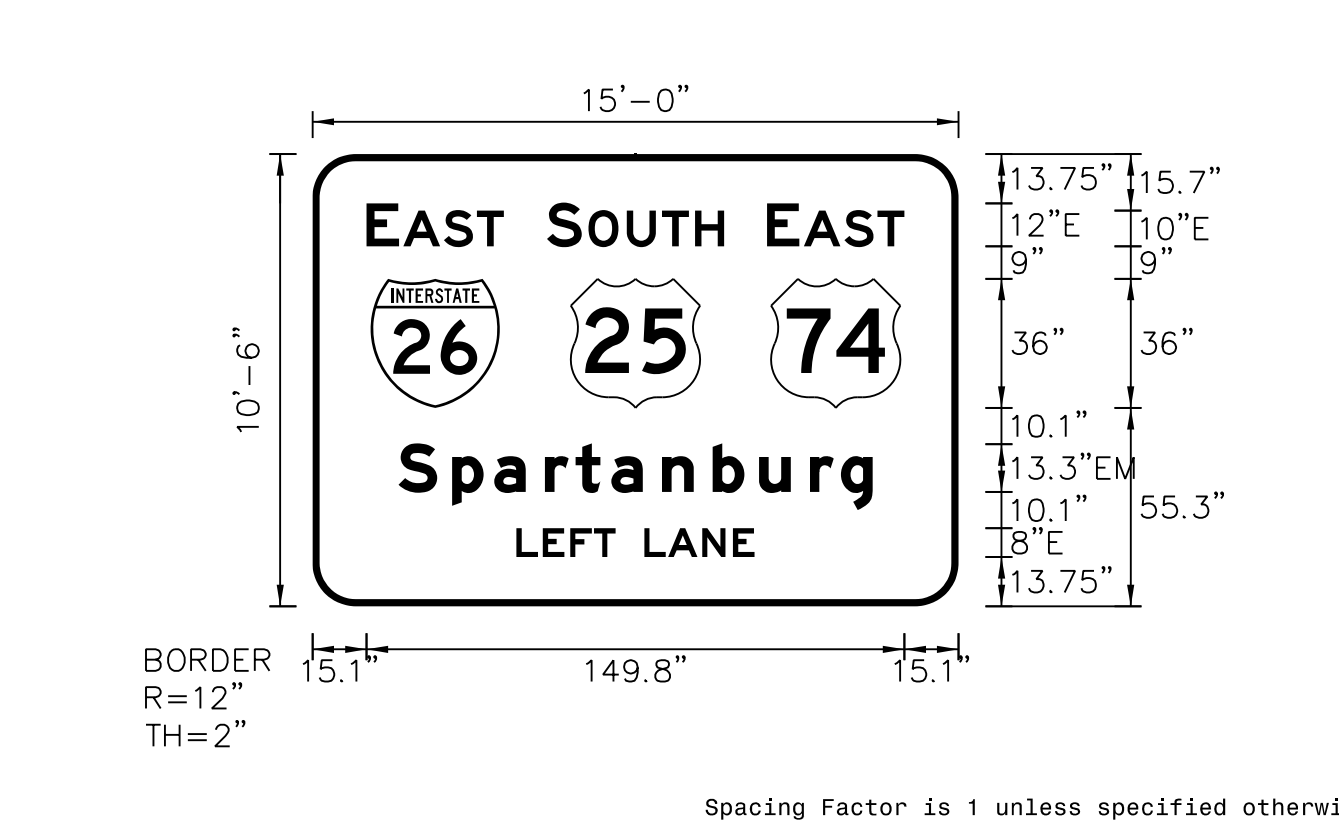

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	E	A	S	T																		Series/Size Text Length
	15.1	9	1.2	11.3	9.2	7.5	26.7															E 2000
																						36.2
																						E 2000
	65.3	9.7	1.8	10.7	9.8	9.2	8.1	65.3														49.4
																						E 2000
	126.7	9	1.2	11.3	9.2	7.5	15.1															38.2
																						EM 2000
	24	14.9	11.7	14.1	8.5	10	14.1	14.1	12.9	14.1	8.7	8.8	23.9									132.1
																						E 2000
	56.8	7.4	7.6	6.6	6	8	6.6	9.5	8.6	6	56.8											66.3


SIGN NUMBER: 40  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 17'-6"  
 HEIGHT: 10'-6"  
 TOTAL AREA: 183.8 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 202.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	49.5	74	36	36
Type C Arrow	17	12	32	22
Type C Arrow	161	12	32	22

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

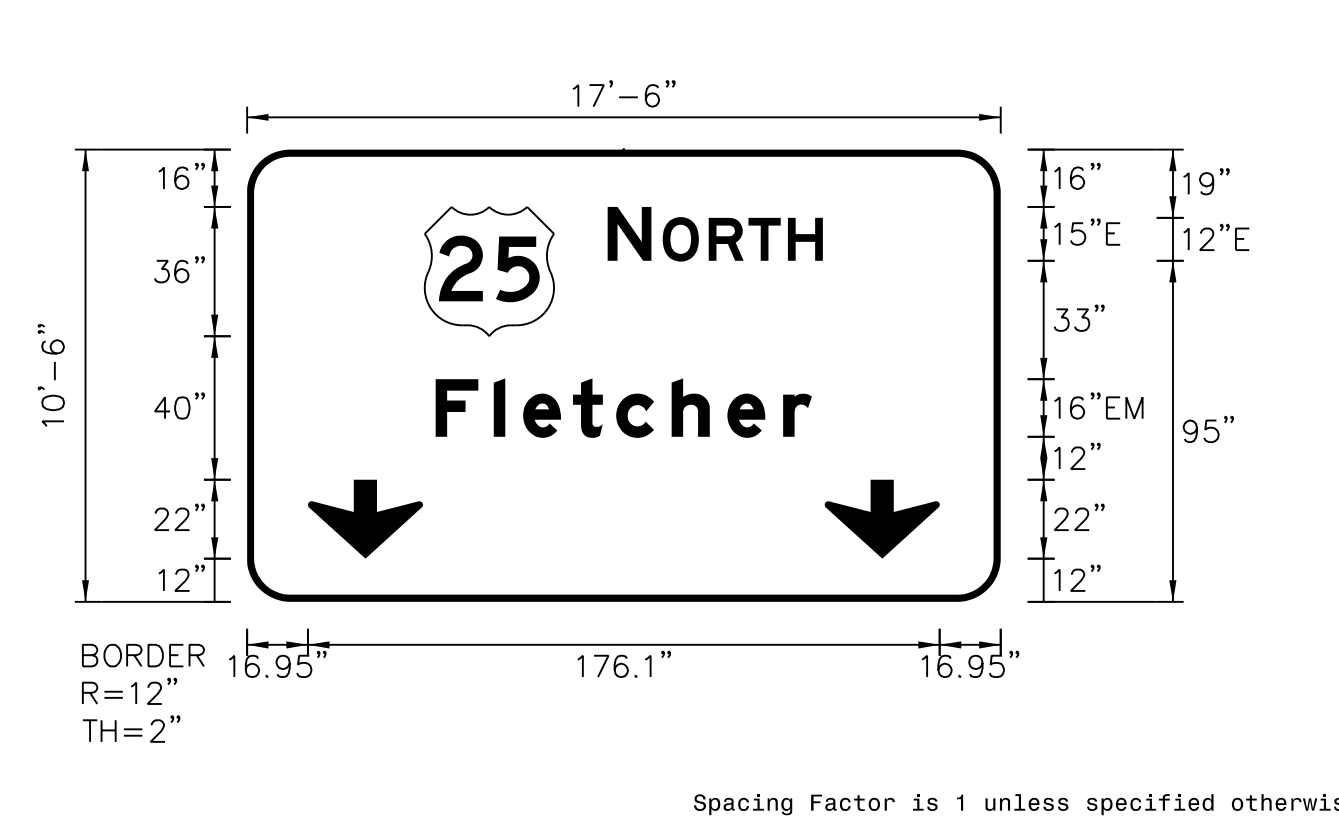

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Arrows and shield shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	N	O	R	T	H																	Series/Size Text Length
	100.5	12.2	3.1	12.8	11	11	9.7	49.5														E 2000
																						59.9
																						EM 2000
	52.6	16.2	8.2	13.9	12	15.5	15.5	8	52.6													104.8


SIGN NUMBER: 42  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 10'-6"  
 HEIGHT: 12'-6"  
 TOTAL AREA: 131.3 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 4  
 LENGTH: 118.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	18.9	79.6	36	36
M1_4	71.1	79.6	36	36
R3-5 (R)	48	10	30	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

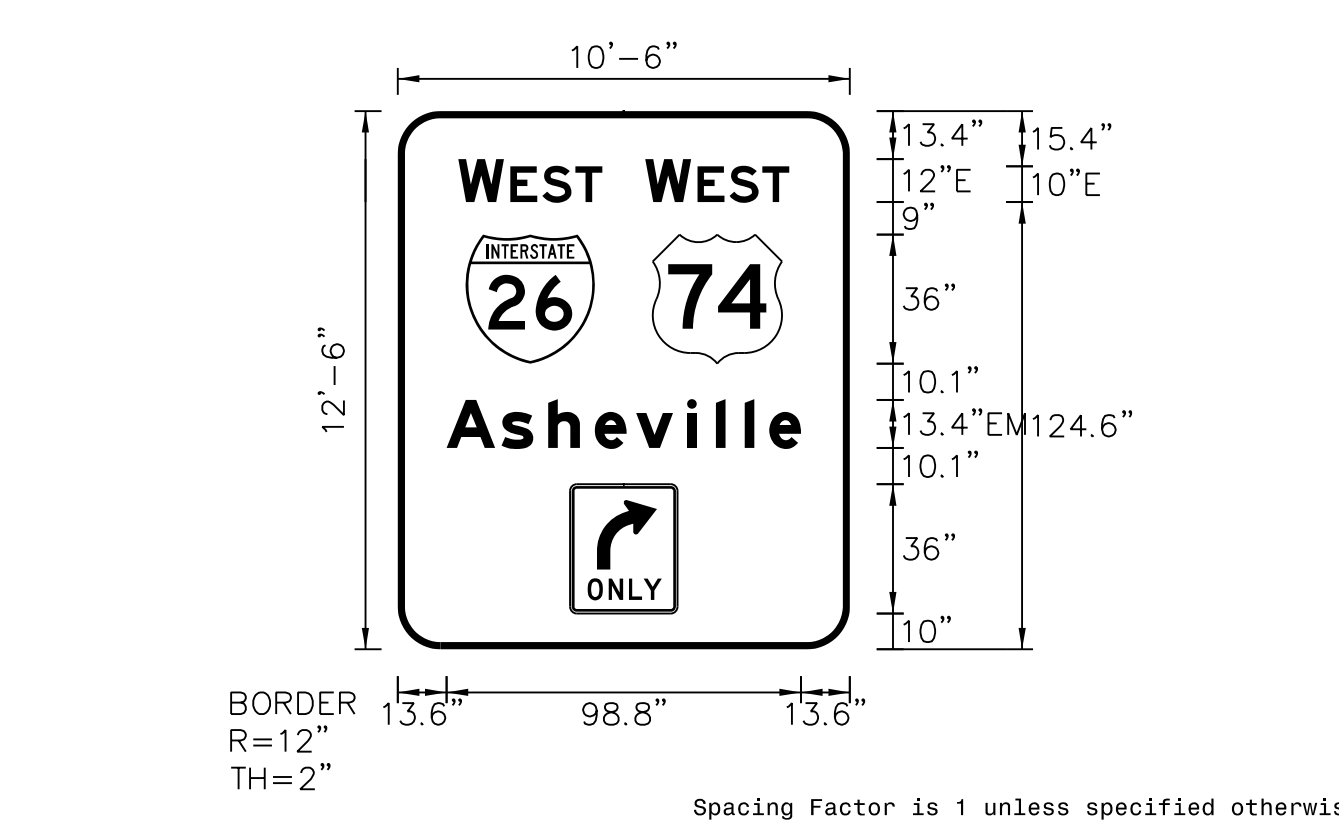

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.
  - R3-5(L or R) shall be Grade A white reflective sheeting on 0.032" aluminum and demountable. Legend and arrow shall be direct applied non-reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter

	W	E	S	T																		Series/Size Text Length
	16.9	12.7	1.8	8.9	9.2	7.5	69															E 2000
																						40.1
																						E 2000
	69	12.7	1.8	8.9	9.2	7.5	16.9															40.1
																						EM 2000
	13.6	15.3	13	13	11.5	14.2	8	8	6.8	8.8	13.6											98.8



APPROVED: *Andrew D. Klinck*  
DocuSigned by:  
 Andrew D. Klinck  
 E3D7F64596E44B  
 DATE: 6/7/2019

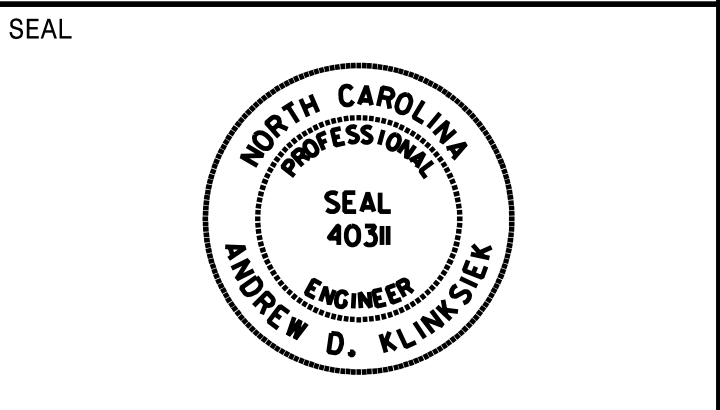


**DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED**

SIGN NUMBER: 44  
 TYPE: A (OVHD)  
 QUANTITY: 1  
 SIGN WIDTH: 10'-6"  
 HEIGHT: 12'-6"  
 TOTAL AREA: 131.3 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 4  
 LENGTH: 118.0

SYMBOL	X	Y	WID	HT
M1_1	18.9	79.6	36	36
M1_4	71.1	79.6	36	36
R3-5 (L)	48	10	30	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

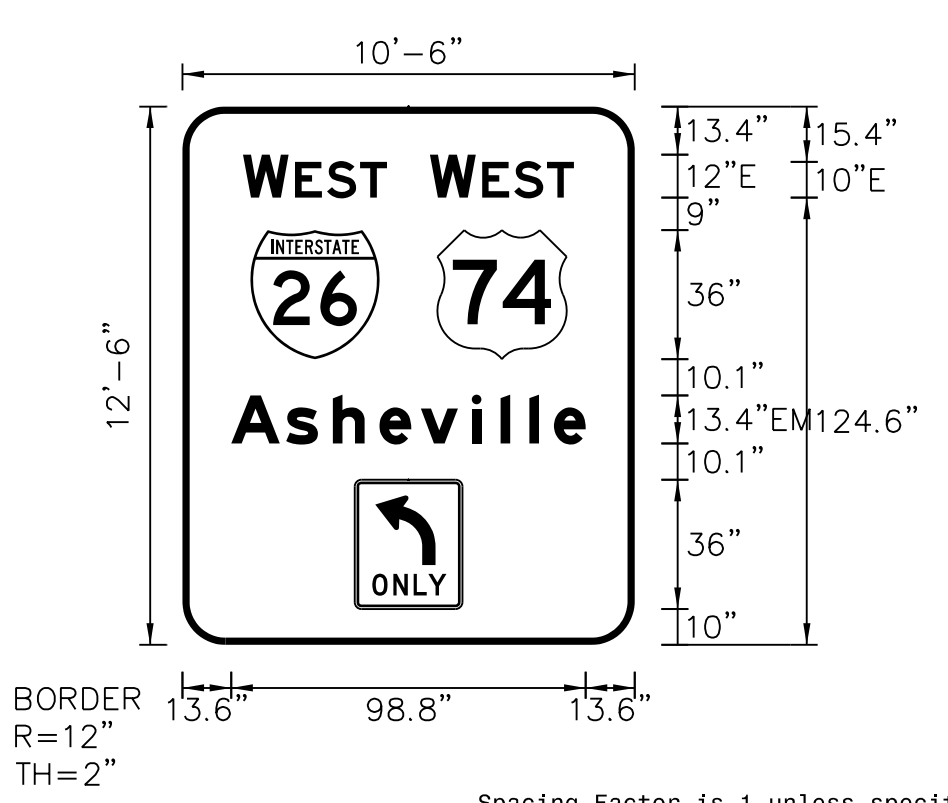

- NOTES:
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.
  - R3-5(L or R) shall be Grade A white reflective sheeting on 0.032" aluminum and demountable. Legend and arrow shall be direct applied non-reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter


Series/Size	Text Length
E 2000	40.1
E 2000	40.1
EM 2000	98.8

SIGN NUMBER: 119,120  
 TYPE: A  
 QUANTITY: 2  
 SIGN WIDTH: 9'-0"  
 HEIGHT: 6'-0"  
 TOTAL AREA: 54.0 Sq.Ft.  
 BORDER TYPE: RECESSED  
 RECESS: 0.75"  
 WIDTH: 1.25"  
 RADII: 3"  
 NO. Z BARS: 2  
 LENGTH: 100.0

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: NKV  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

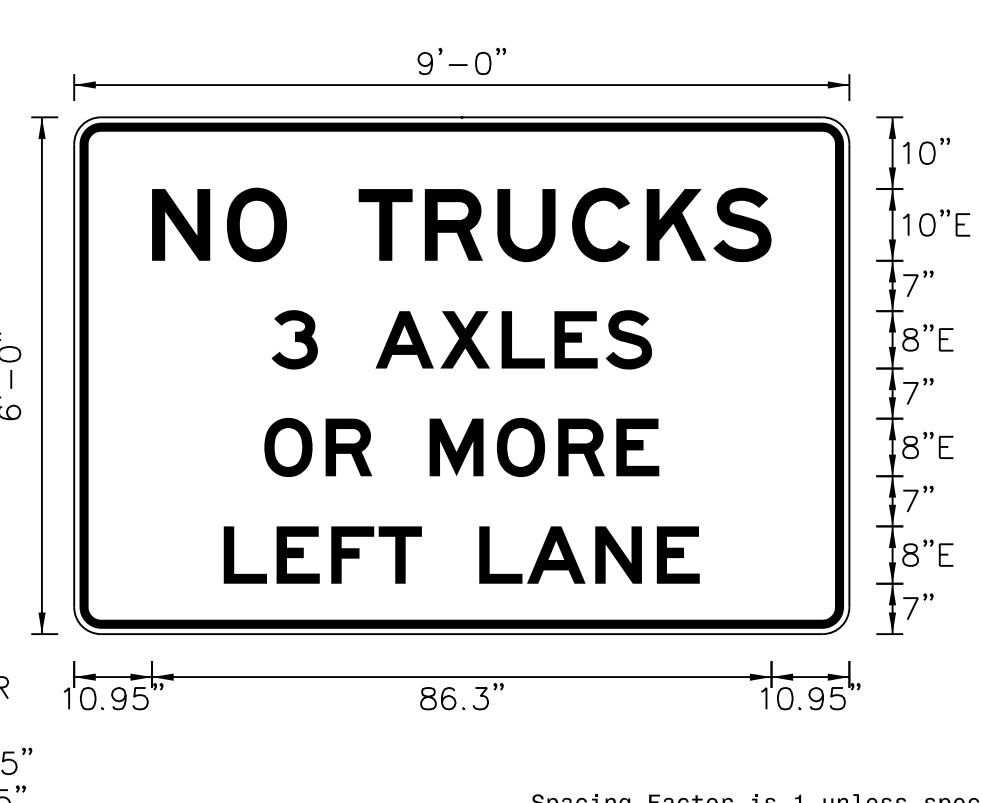

- NOTES:
- Legend and border shall be direct applied black non-reflective sheeting.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
E 2000	86.3
E 2000	53
E 2000	55
E 2000	66.3

SIGN NUMBER: 121  
 TYPE: A  
 QUANTITY: 1  
 SIGN WIDTH: 11'-0"  
 HEIGHT: 5'-0"  
 TOTAL AREA: 55.0 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 9"  
 NO. Z BARS: 2  
 LENGTH: 124.0

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018



- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter


Series/Size	Text Length
E 2000	103.8
E 2000	91.6

SIGN NUMBER: 122  
 TYPE: A  
 QUANTITY: 1  
 SIGN WIDTH: 9'-6"  
 HEIGHT: 8'-6"  
 TOTAL AREA: 80.8 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 106.0

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

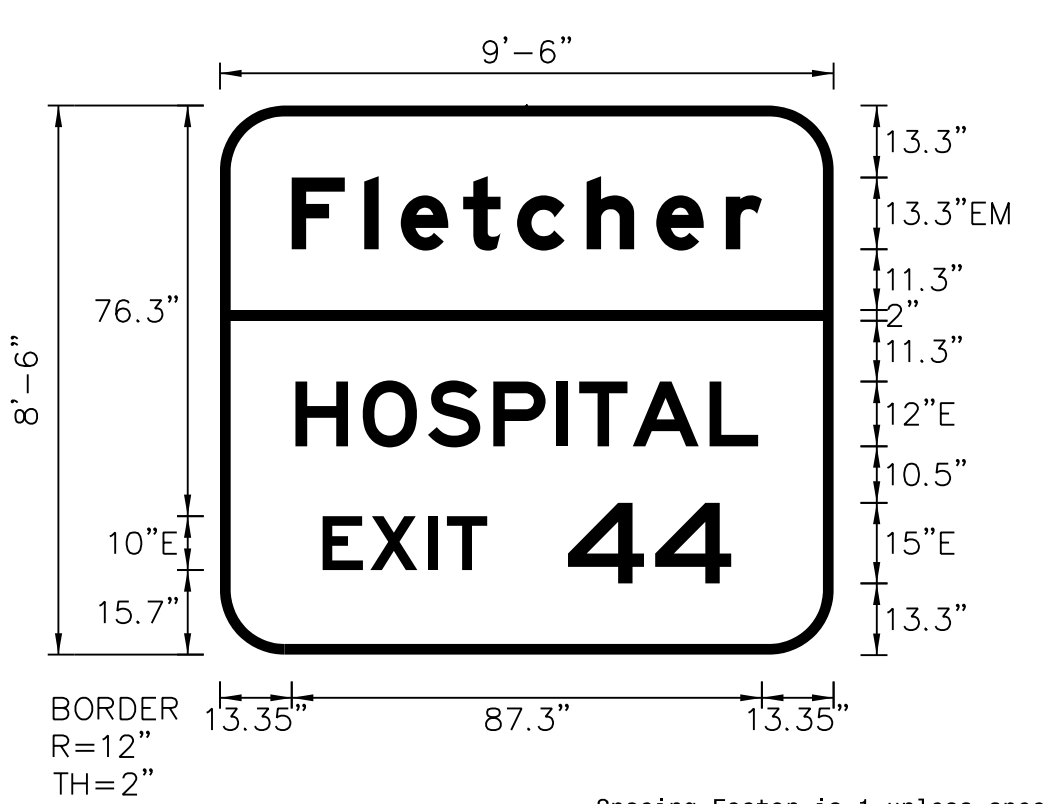


- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
EM 2000	87.3
E 2000	85.9
E 2000	75.9

APPROVED: Andrew D. Klinkisch  
DocuSigned by:  
 Andrew D. Klinkisch  
 E3D78F8496E44B  
 DATE: 6/7/2019

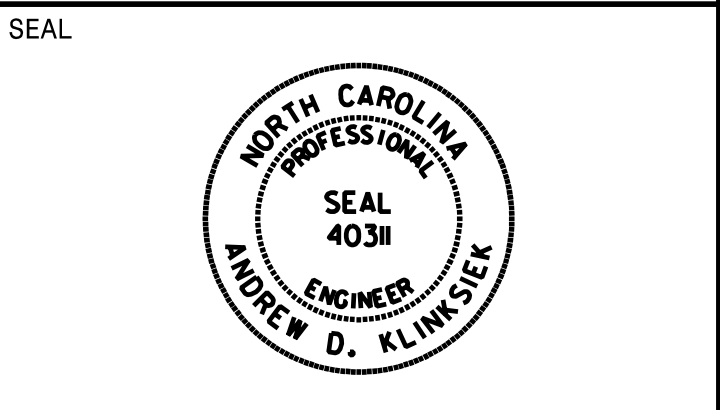

**DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED**

SIGN NUMBER: 123,127      BACKG COLOR: Blue  
 TYPE: A                      COPY COLOR: White  
 QUANTITY: 2

SYMBOL	X	Y	WID	HT


SIGN WIDTH: 11'-0"  
 HEIGHT: 5'-0"  
 TOTAL AREA: 55.0 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 9"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: 2  
 LENGTH: 124.0

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 14                      DATE: November 2018

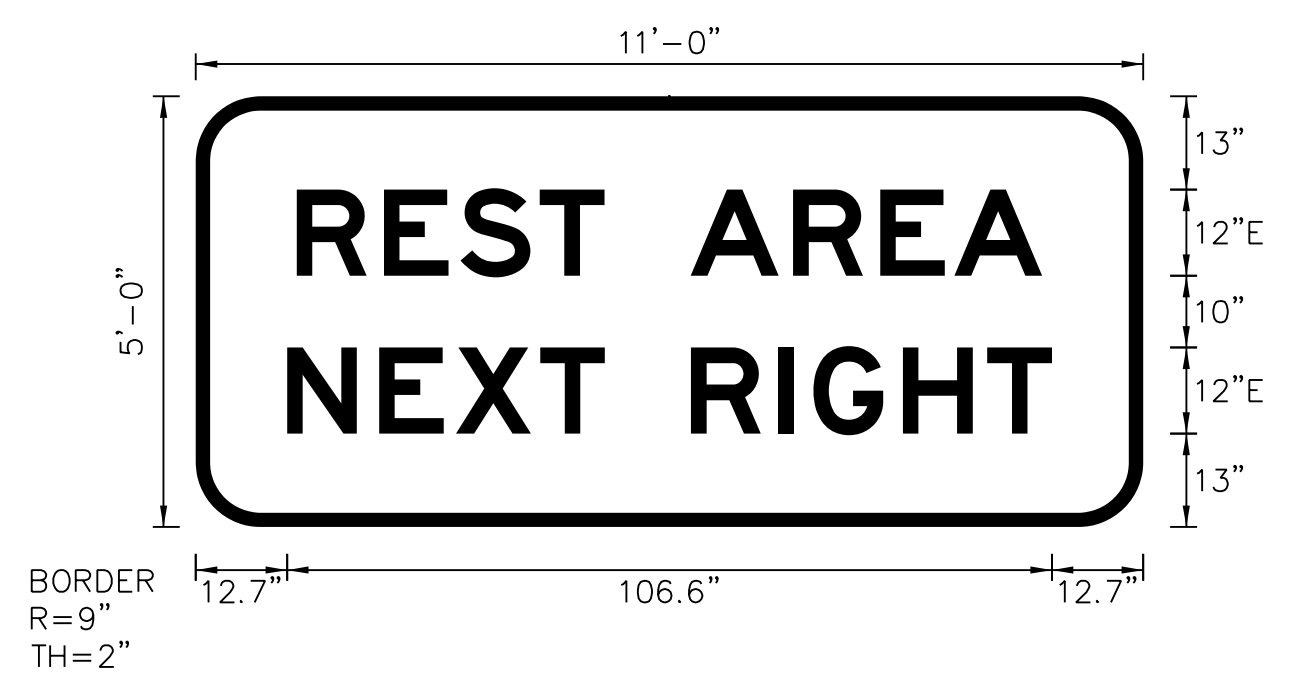

NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter															Series/Size
	R	E	S	T	A	R	E	A							Text Length
	14.1	12.1	10.7	11	9	12	14.3	12.1	10.3	12.2	14.1				E 2000
															103.8
	N	E	X	T	R	I	G	H	T						E 2000
	12.7	12.8	10.7	11.8	9	12	12.1	4.9	12.5	11.8	9	12.7			106.6

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: 124                      BACKG COLOR: Green  
 TYPE: A                      COPY COLOR: White  
 QUANTITY: 1

SYMBOL	X	Y	WID	HT


SIGN WIDTH: 15'-6"  
 HEIGHT: 5'-6"  
 TOTAL AREA: 85.3 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 9"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: 2  
 LENGTH: 178.0

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 14                      DATE: November 2018

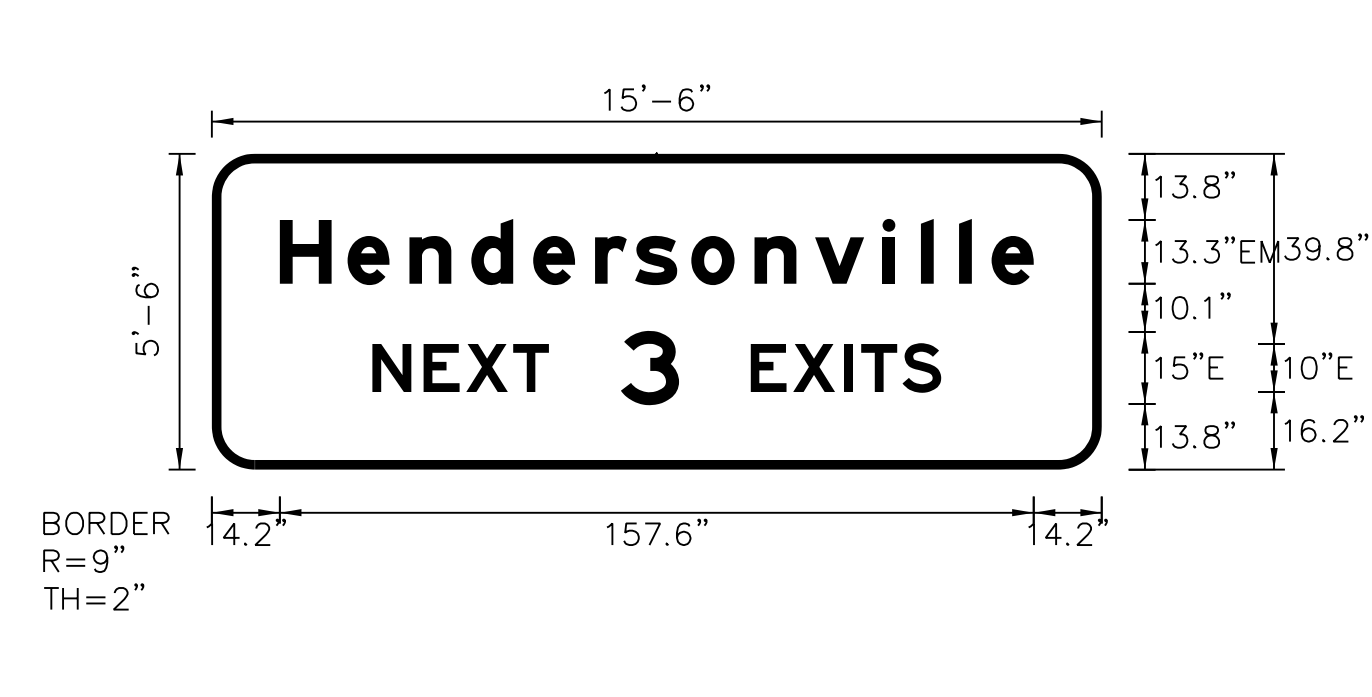

NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter															Series/Size
	H	e	n	d	e	r	s	o	n	v	i	l	i	e	Text Length
	14.2	14.1	12.9	12.9	12.9	8.4	11.7	13.2	12.7	14.1	8	8	6.8	8.8	EM 2000
															157.6
	N	E	X	T	3	E	X	I	T	S					E 2000
	33.6	10.7	8.9	9.8	7.5	15	12.2	15	8.9	10.7	3.5	8.6	8.1	33.6	118.9

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: 125                      BACKG COLOR: Green/Brown  
 TYPE: A                      COPY COLOR: White/White  
 QUANTITY: 1

SYMBOL	X	Y	WID	HT

SIGN WIDTH: 18'-0"  
 HEIGHT: 14'-0"  
 TOTAL AREA: 252.0 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 9"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: 4  
 LENGTH: 208.0

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 13                      DATE: November 2018



NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.  
 3. Proposed support spacing is 7.50'.

LETTER POSITIONS

Letter spacings are to start of next letter															Series/Size
	W	N	C	A	g	r	i	c	u	i	t	u	r	a	Text Length
	14.8	16.6	14.1	10.9	13.4	15.5	14.2	9.9	6.8	13	14.2	6.7	11.3	14.2	EM 2000
															186.4
	C	e	n	t	e	r									EM 2000
	73.4	13.4	13	12.9	10	13	6.7	73.6							69
	S	i	e	r	r	a									EM 2000
	33.8	14.9	6.8	12.9	9.9	8.7	8.8	13.3	14.1	11.5	12.9	12.9	8.8	33.8	148.5
	B	r	e	w	i	n	g								EM 2000
	49.2	14.5	8.7	11.5	17.5	8	12.9	8.8	13.3	13.3	9.1	49.2			117.6
	T	O	U	R	S										E 2000
	84.1	8.9	10.7	10.7	9.5	8.1	84								47.9
	E	X	I	T	4	0									E 2000
	70.4	8.9	10.7	3.5	7.5	15	17.1	12.6	70.3						75.3

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: 126                      BACKG COLOR: Green  
 TYPE: A                      COPY COLOR: White  
 QUANTITY: 1

SYMBOL	X	Y	WID	HT


SIGN WIDTH: 12'-0"  
 HEIGHT: 5'-6"  
 TOTAL AREA: 66.0 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 9"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: 2  
 LENGTH: 136.0

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 14                      DATE: November 2018

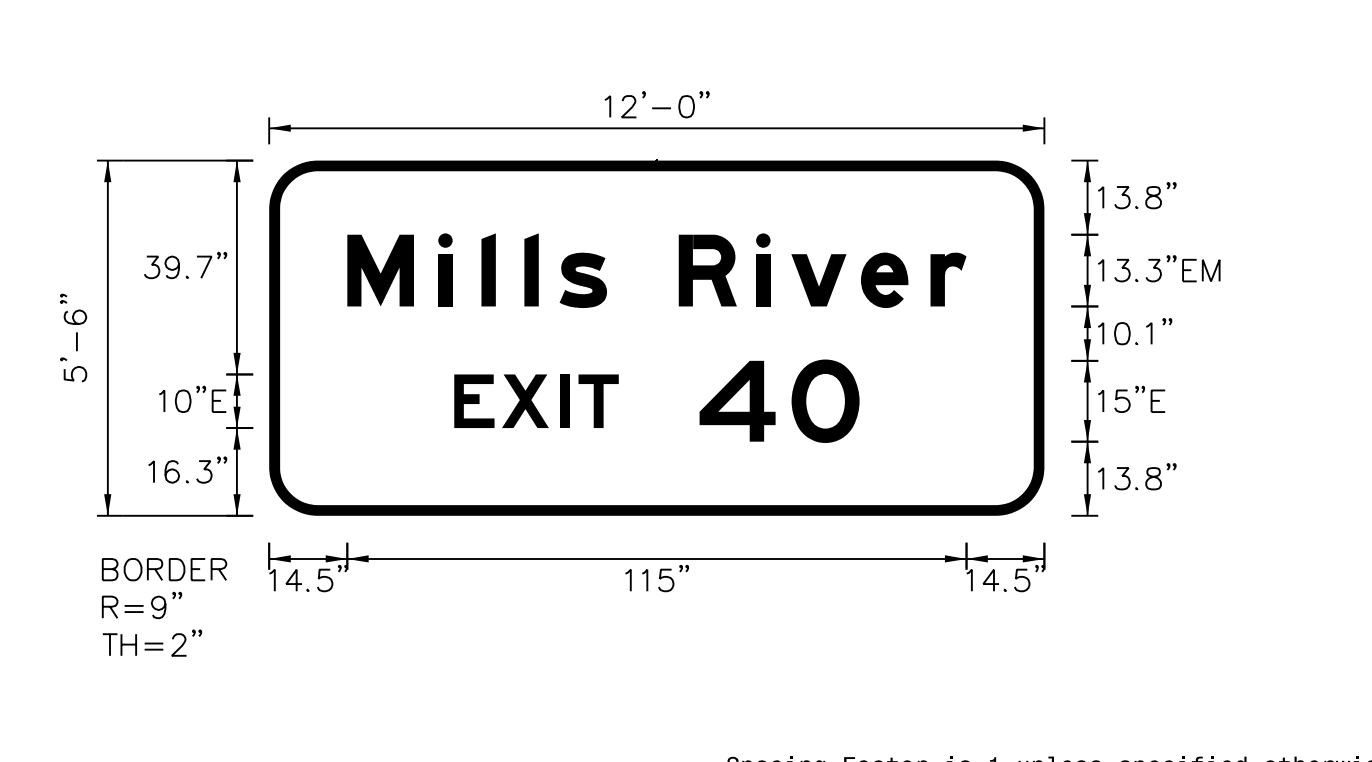

NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter															Series/Size
	M	i	l	l	s	R	i	v	e	r					Text Length
	14.5	16.9	8	8	6.5	8.8	13.3	14.4	6.5	12.9	12.9	6.7	14.5		EM 2000
															115
	E	X	I	T	4	0									E 2000
	34.4	8.9	10.7	3.5	7.5	15	17.1	12.6	34.4						75.3

Spacing Factor is 1 unless specified otherwise

APPROVED: *Andrew D. Klinck*  
E310765496E44B  
DATE: 6/7/2019



DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED


SIGN NUMBER: 128  
TYPE: A  
QUANTITY: 1  
SIGN WIDTH: 6'-6"  
HEIGHT: 7'-0"  
TOTAL AREA: 45.5 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 1.5"  
RADIUS: 9"  
NO. Z BARS: 2  
LENGTH: 70.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	27	38	24	24
M1_4	9.7	8	24	24
M1_4	44.3	8	24	24

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

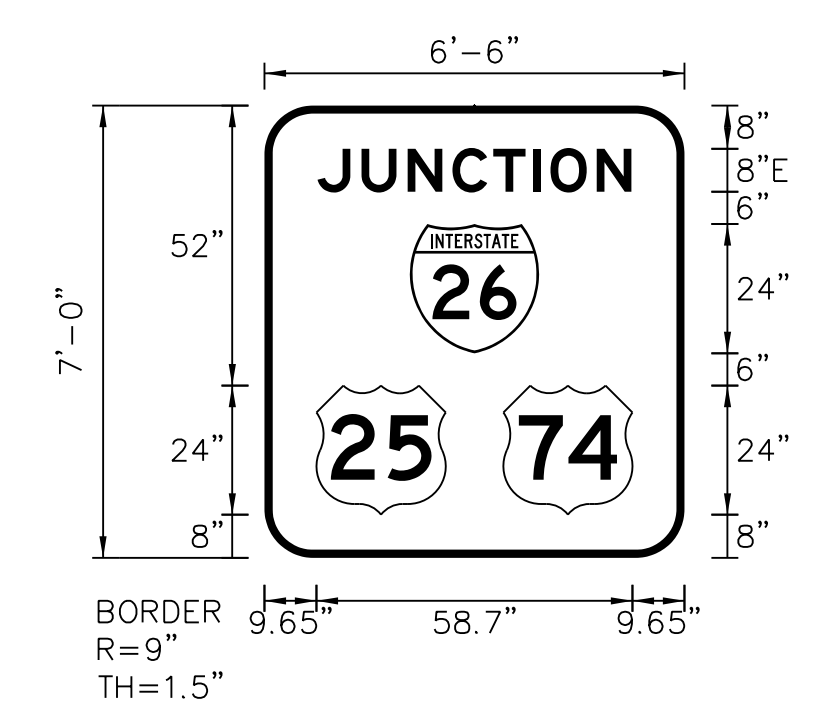

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Shields shall be Grade C reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
E 2000	58.3
E 2000	57.5


SIGN NUMBER: 129  
TYPE: A  
QUANTITY: 1  
SIGN WIDTH: 9'-6"  
HEIGHT: 8'-6"  
TOTAL AREA: 80.8 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 3  
LENGTH: 106.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	45	54	24	24
M1_4	29	10	24	24
M1_4	77.8	10	24	24

MAT'L: 0.125" ALUMINUM

DESIGN BY: NKV  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 14  
DATE: November 2018

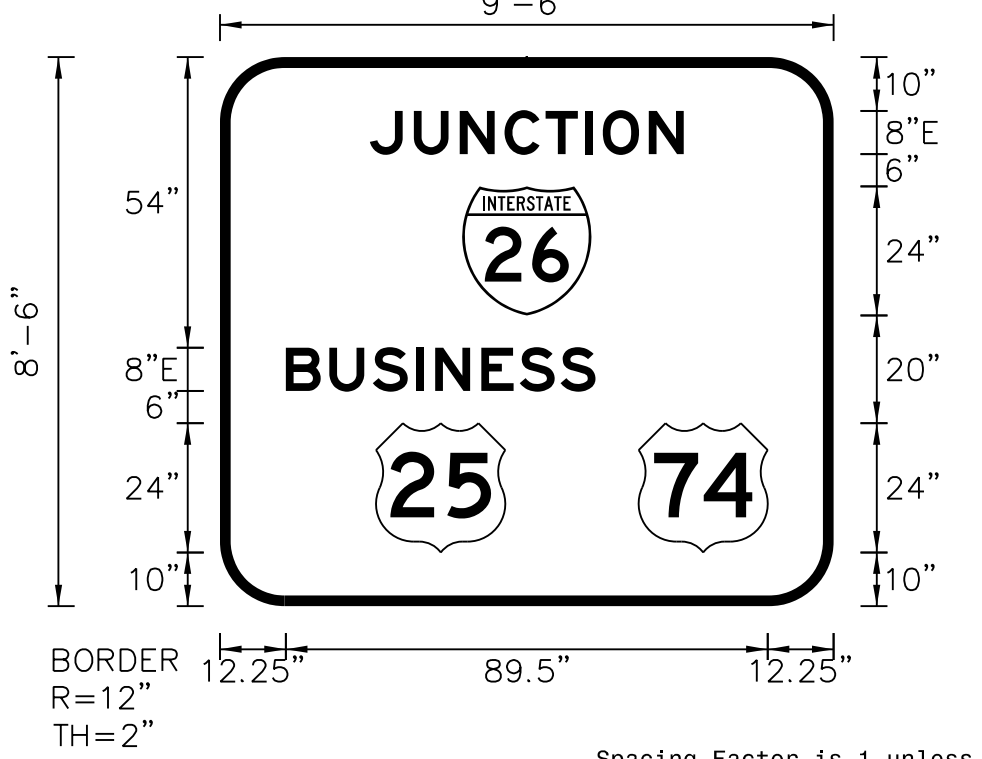

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Shields shall be Grade C reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
E 2000	58.3
E 2000	57.5


SIGN NUMBER: 132  
TYPE: A  
QUANTITY: 1  
SIGN WIDTH: 12'-0"  
HEIGHT: 8'-0"  
TOTAL AREA: 96.0 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 3  
LENGTH: 136.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	21.6	16.9	36	36
M1_4	86.4	16.9	36	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 13  
DATE: November 2018

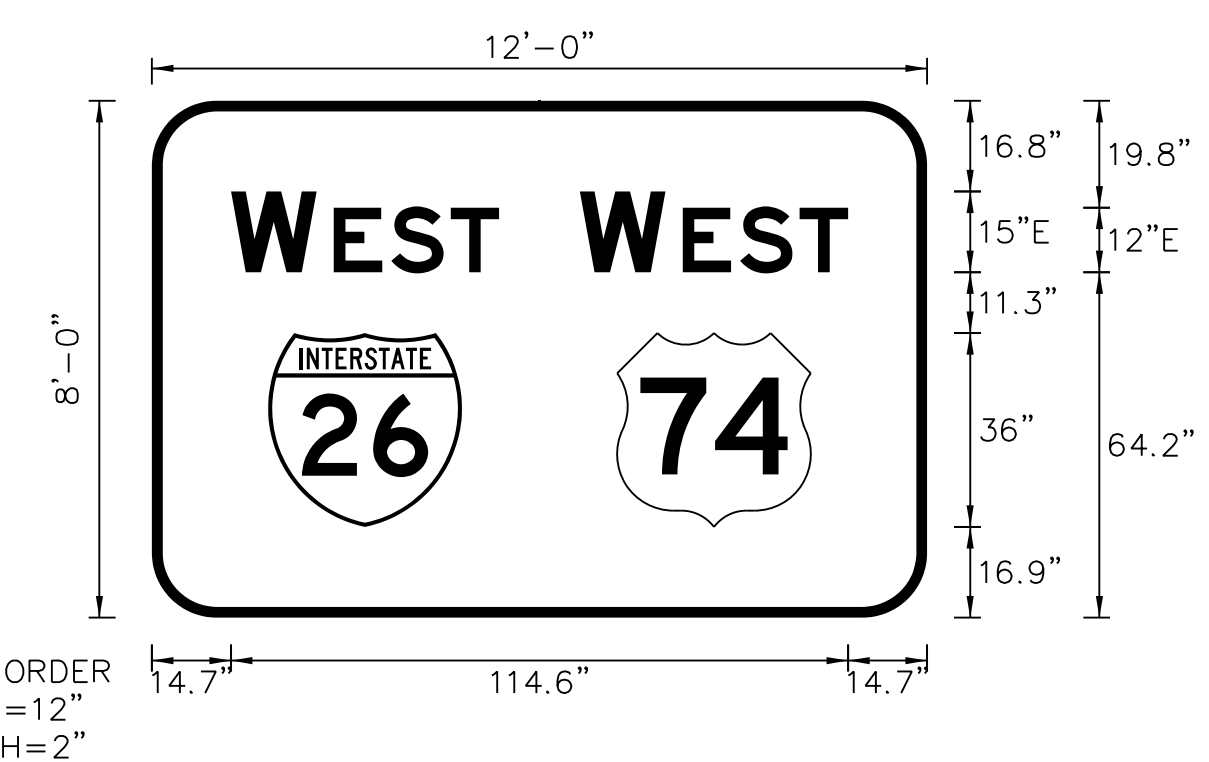

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Shields shall be Grade C reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
E 2000	49.8
E 2000	49.8


SIGN NUMBER: 133  
TYPE: A  
QUANTITY: 1  
SIGN WIDTH: 12'-0"  
HEIGHT: 8'-0"  
TOTAL AREA: 96.0 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 2"  
RADIUS: 12"  
NO. Z BARS: 3  
LENGTH: 136.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	21.9	16.9	36	36
M1_4	86.1	16.9	36	36

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
PROJECT ID: I-4400C  
CHECKED BY: TRT/ADK  
DIV: 13  
DATE: November 2018

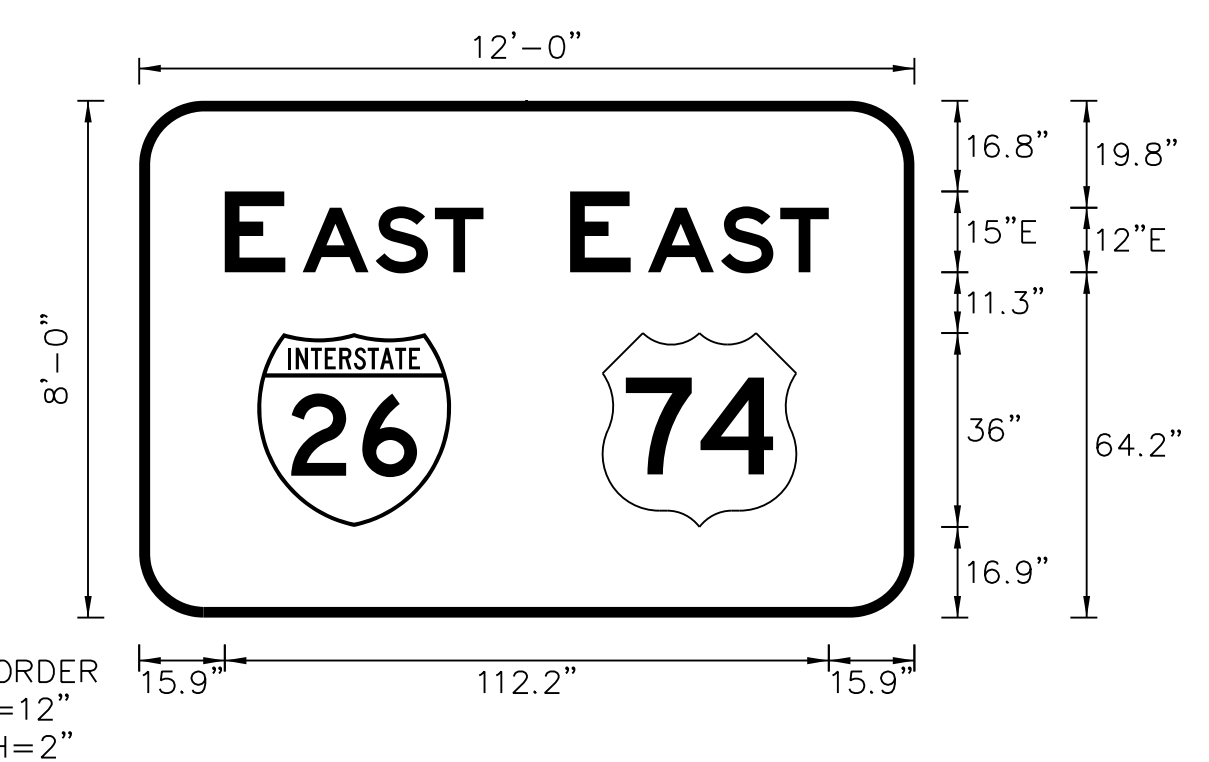

Spacing Factor is 1 unless specified otherwise

- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Shields shall be Grade C reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.


LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
E 2000	48.1
E 2000	48.1



APPROVED: Andrew D. Klinck  
E3078F8496E44B  
 DATE: 6/7/2019

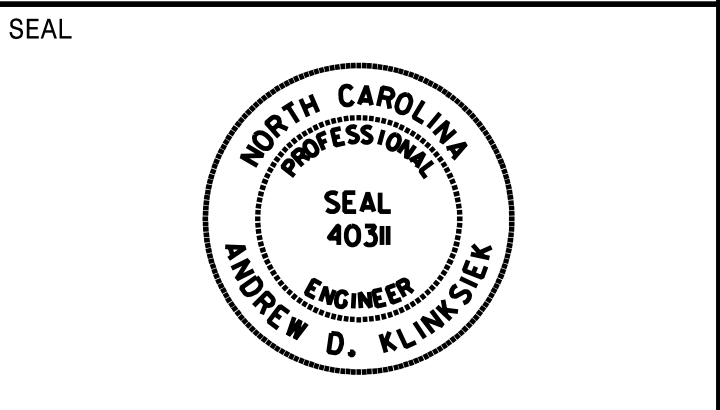

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

SIGN NUMBER: 204,205      BACKG COLOR: Green  
 TYPE: A                      COPY COLOR: White  
 QUANTITY: 2

SYMBOL	X	Y	WID	HT
Type A Arrow	49	6	18.3	29.3


SIGN WIDTH: 6'-6"  
 HEIGHT: 5'-0"  
 TOTAL AREA: 32.5 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 1.5"  
 RADII: 6"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: 2  
 LENGTH: 70.0

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 14                      DATE: November 2018

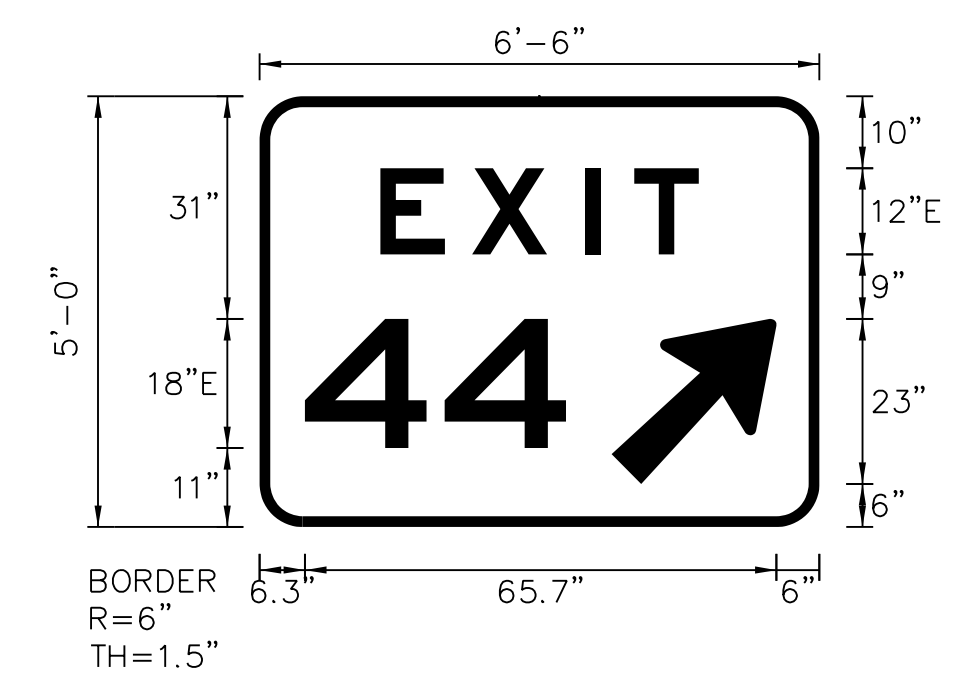

- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Arrow shall be Grade C reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	E	X	I	T		Series/Size	
	16.8	12.8	15.8	6.8	9	16.8	E 2000
		4	4				44.4
	6.3	19.4	16.9	35.3			E 2000
							36.4

SIGN NUMBER: 206,207      BACKG COLOR: Blue  
 TYPE: A                      COPY COLOR: White  
 QUANTITY: 2

SYMBOL	X	Y	WID	HT
Type A Arrow	24.4	7.7	18.3	29.3


SIGN WIDTH: 6'-6"  
 HEIGHT: 6'-6"  
 TOTAL AREA: 42.3 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 9"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: 2  
 LENGTH: 70.0

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 14                      DATE: November 2018

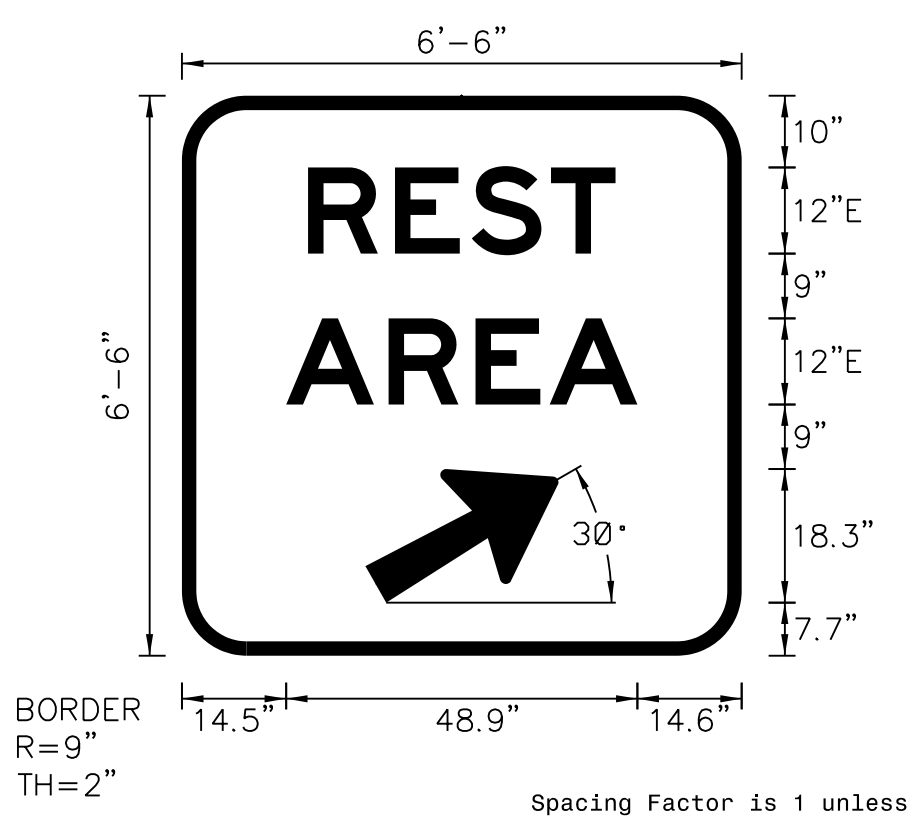

- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Arrow shall be Grade C reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	R	E	S	T		Series/Size	
	17.6	12.1	10.7	11	9	17.6	E 2000
		A	R	E	A		42.8
	14.5	14.3	12.1	10.3	12.2	14.6	E 2000
							48.9

SIGN NUMBER: 308,309      BACKG COLOR: Green  
 TYPE: D                      COPY COLOR: White  
 QUANTITY: 2

SYMBOL	X	Y	WID	HT
--------	---	---	-----	----


SIGN WIDTH: 2'-6"  
 HEIGHT: 1'-0"  
 TOTAL AREA: 2.5 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 0.75"  
 RADII: 1.5"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: N/A  
 LENGTH: N/A

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 14                      DATE: November 2018

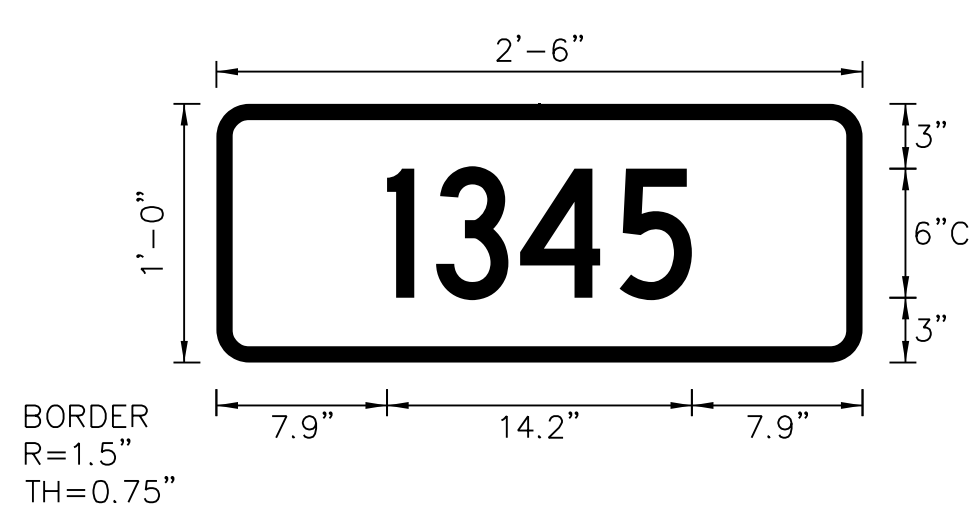

- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Background shall be Grade C reflective sheeting.
  - One "U" post per sign.

LETTER POSITIONS

Letter spacings are to start of next letter

	1	3	4	5		Series/Size	
	7.9	2.3	3.9	4.6	3.4	7.9	C 2000
							14.2

SIGN NUMBER: 310,311      BACKG COLOR: Green  
 TYPE: D                      COPY COLOR: White  
 QUANTITY: 2

SYMBOL	X	Y	WID	HT
--------	---	---	-----	----


SIGN WIDTH: 5'-6"  
 HEIGHT: 1'-6"  
 TOTAL AREA: 8.3 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 1"  
 RADII: 1.5"

MAT'L: 0.125" ALUMINUM

NO. Z BARS: N/A  
 LENGTH: N/A

DESIGN BY: JTT                      CHECKED BY: TRT/ADK  
 PROJECT ID: I-4400C              DIV: 14                      DATE: November 2018

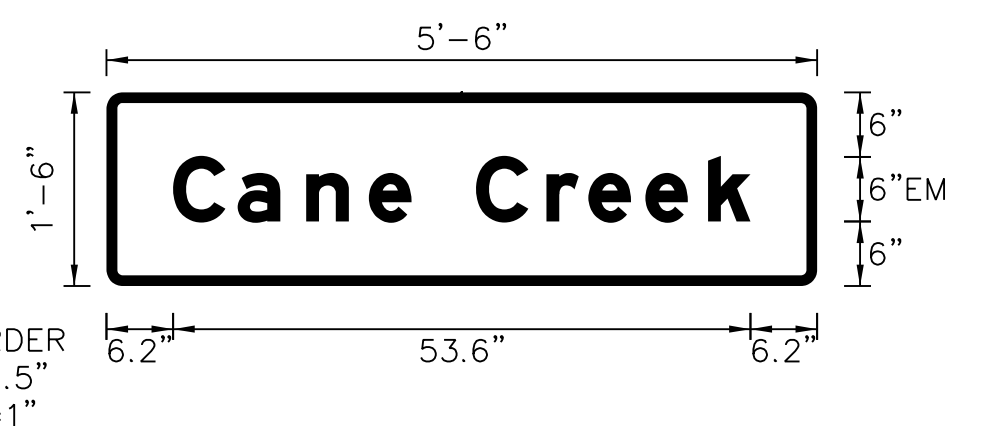


- NOTES:
- Legend and border shall be direct applied Grade C reflective sheeting.
  - Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

	C	a	n	e	C	r	e	e	k		Series/Size		
	6.2	6	6.4	5.8	4	6	6.5	3.9	5.3	5.8	4	6.2	EM 2000
													53.6

APPROVED: Andrew D. Klinck  
E3078F8496E44B  
 DATE: 6/7/2019

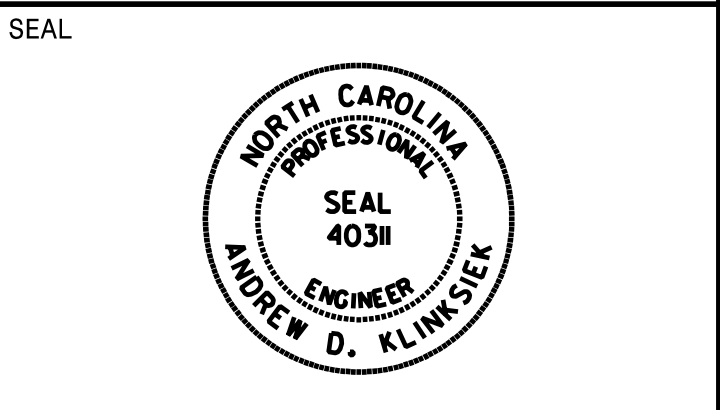

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**


SIGN NUMBER: 312  
 TYPE: D  
 QUANTITY: 1  
 SIGN WIDTH: 7'-0"  
 HEIGHT: 3'-0"  
 TOTAL AREA: 21.0 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 1"  
 RADII: 3"  
 NO. Z BARS: N/A  
 LENGTH: N/A

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 13  
 DATE: November 2018

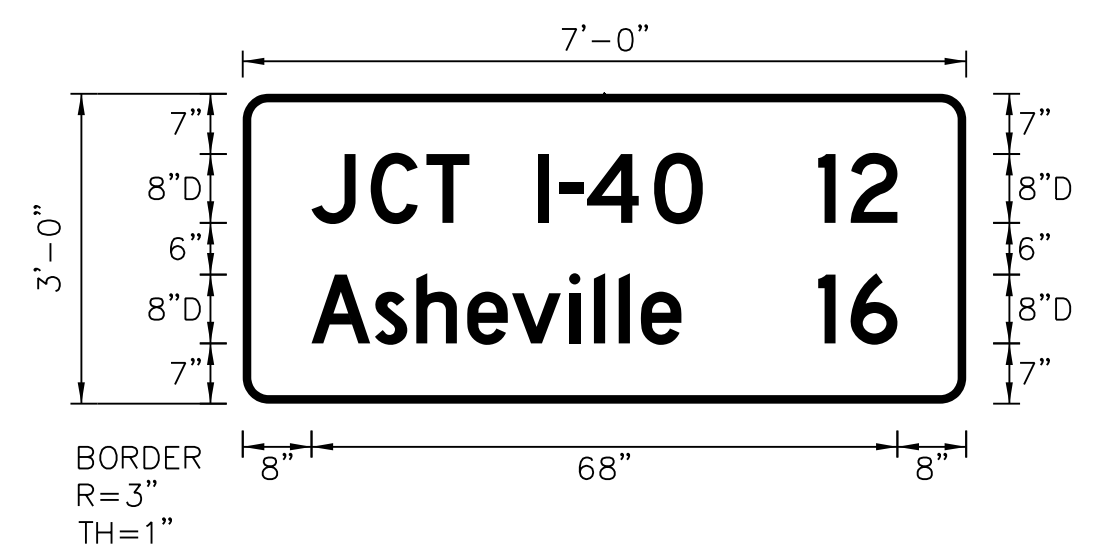

NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
D 2000	45.6
D 2000	9.2
D 2000	43
D 2000	8.9


SIGN NUMBER: 313,314  
 TYPE: D  
 QUANTITY: 2  
 SIGN WIDTH: 2'-6"  
 HEIGHT: 1'-0"  
 TOTAL AREA: 2.5 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 0.75"  
 RADII: 1.5"  
 NO. Z BARS: N/A  
 LENGTH: N/A

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: JTT  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 13  
 DATE: November 2018

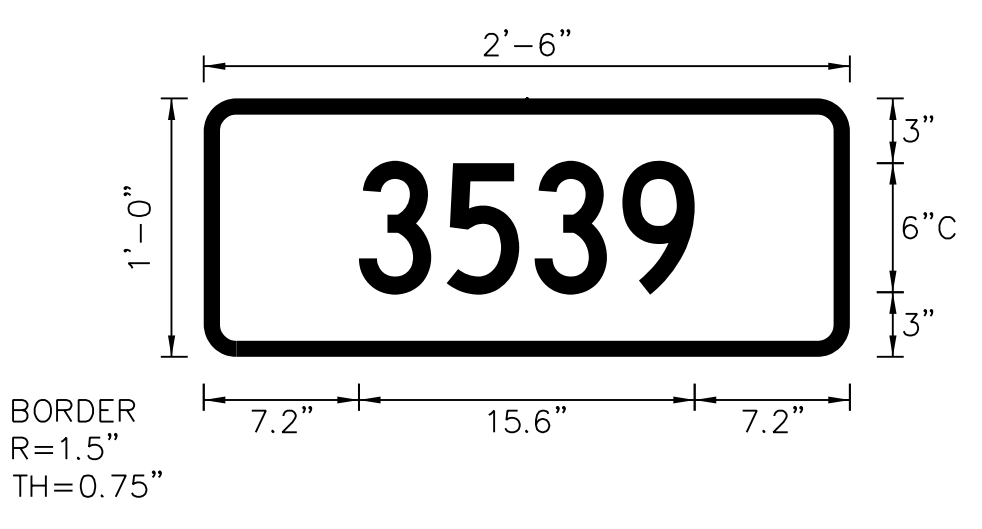

NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.  
 3. One "U" post per sign.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
C 2000	15.6


SIGN NUMBER: 315  
 TYPE: D  
 QUANTITY: 1  
 SIGN WIDTH: 4'-0"  
 HEIGHT: 2'-0"  
 TOTAL AREA: 8.0 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 0.5"  
 RADII: 3"  
 NO. Z BARS: N/A  
 LENGTH: N/A

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: NKV  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 13  
 DATE: November 2018

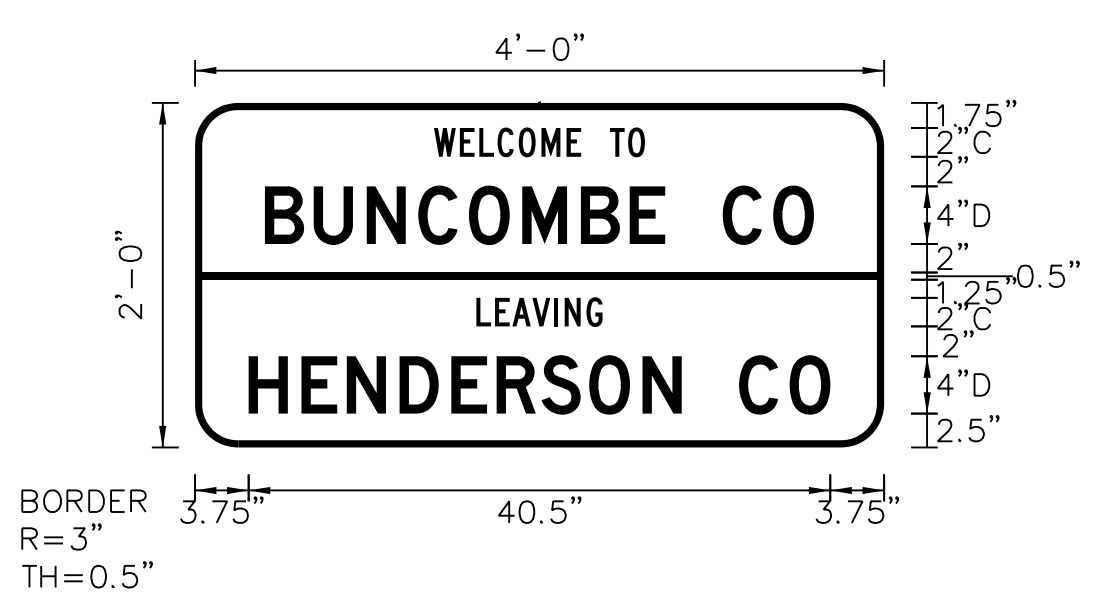

NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size	Text Length
C 2000	14.7
D 2000	38.2
C 2000	8.8
D 2000	40.5


SIGN NUMBER: 316  
 TYPE: D  
 QUANTITY: 1  
 SIGN WIDTH: 4'-0"  
 HEIGHT: 2'-0"  
 TOTAL AREA: 8.0 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 0.5"  
 RADII: 3"  
 NO. Z BARS: N/A  
 LENGTH: N/A

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM

DESIGN BY: NKV  
 PROJECT ID: I-4400C  
 CHECKED BY: TRT/ADK  
 DIV: 14  
 DATE: November 2018

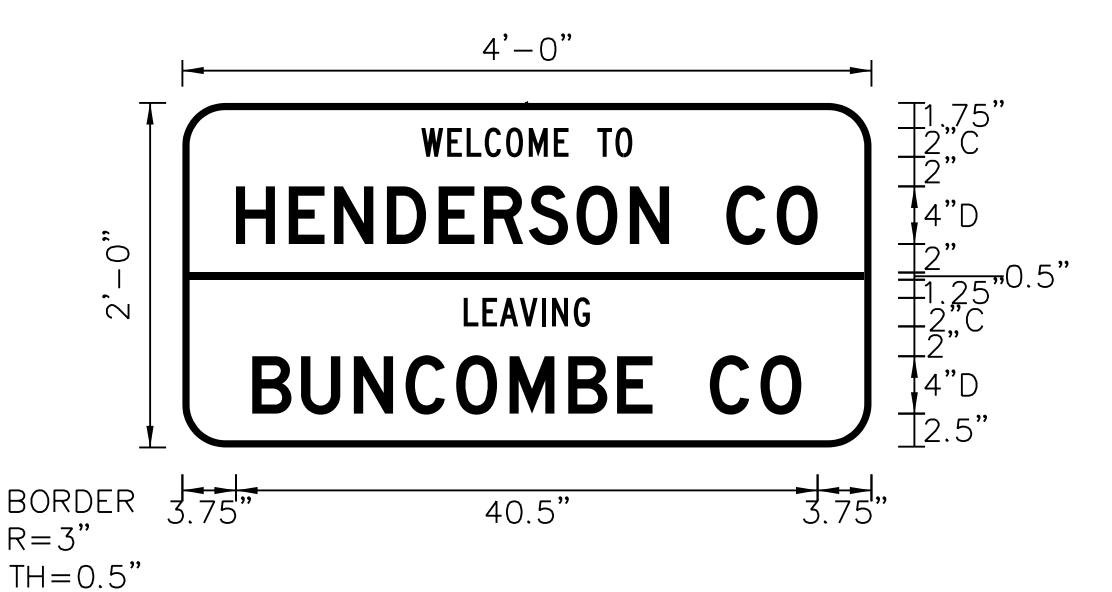

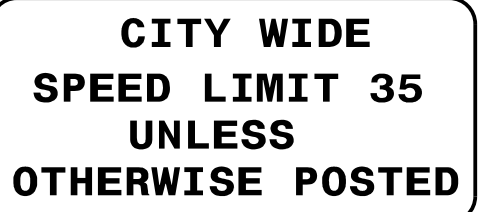

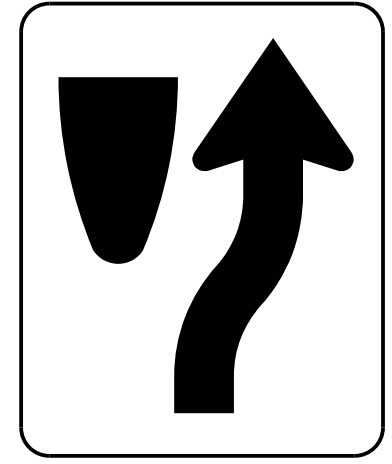











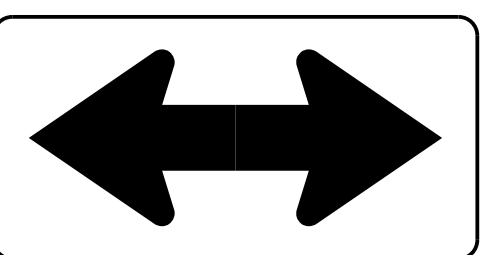
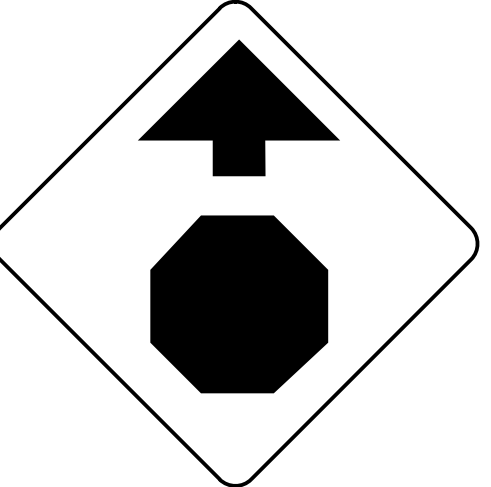
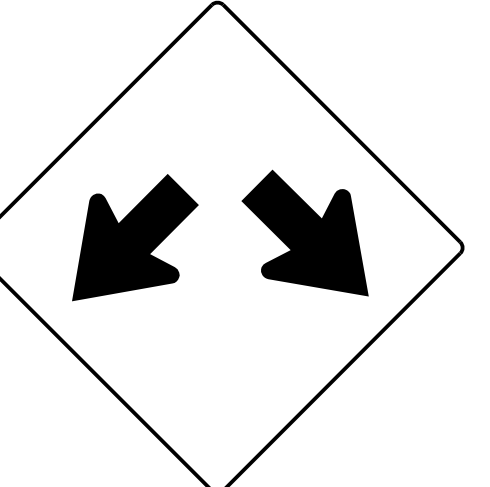
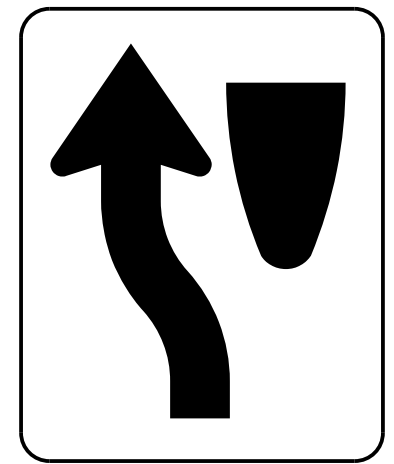
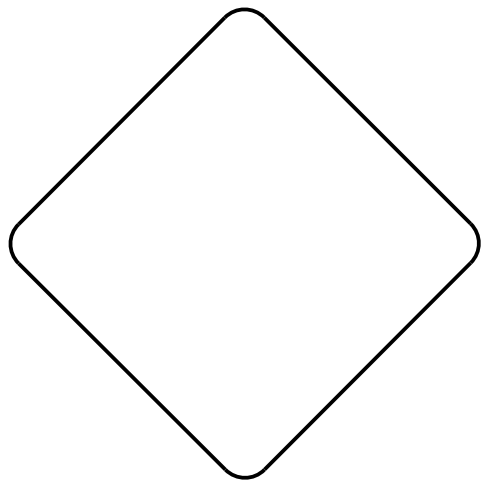




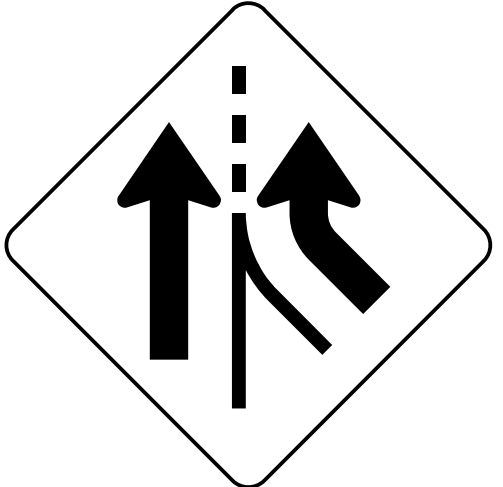







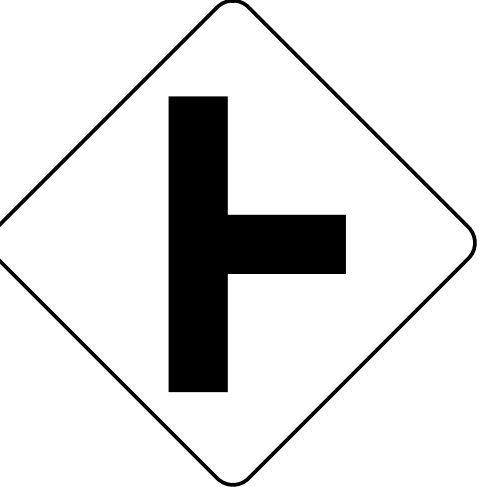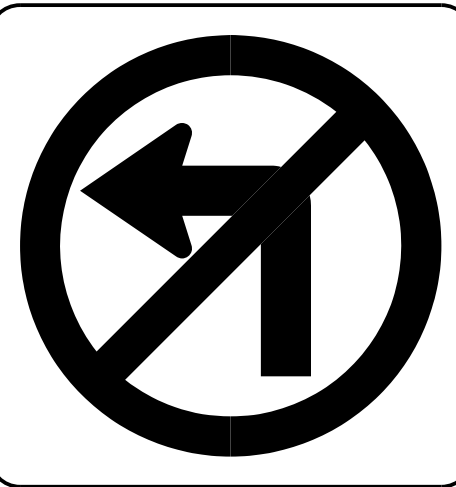


NOTES:  
 1. Legend and border shall be direct applied Grade C reflective sheeting.  
 2. Background shall be Grade C reflective sheeting.






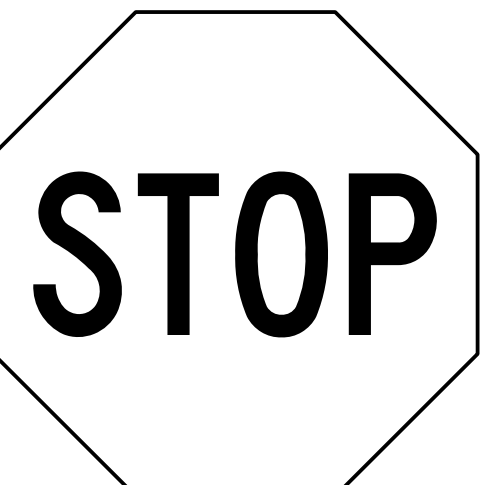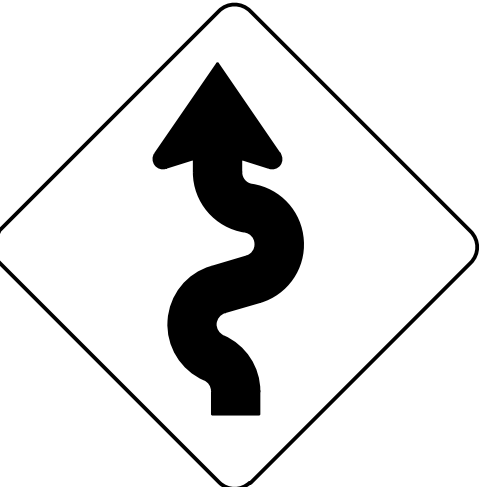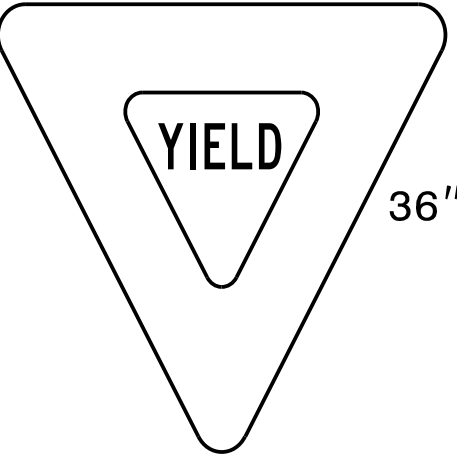

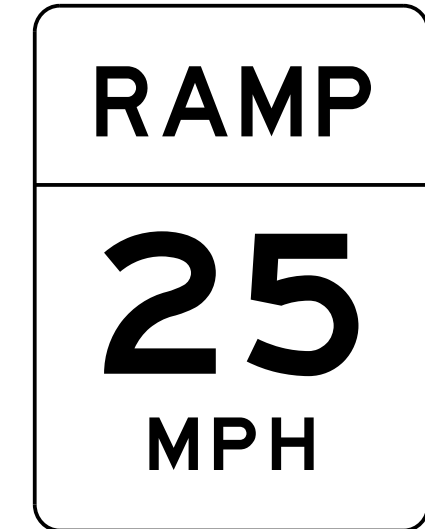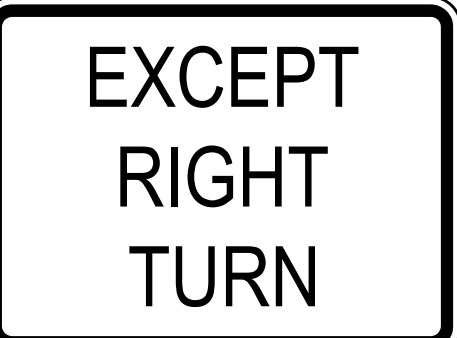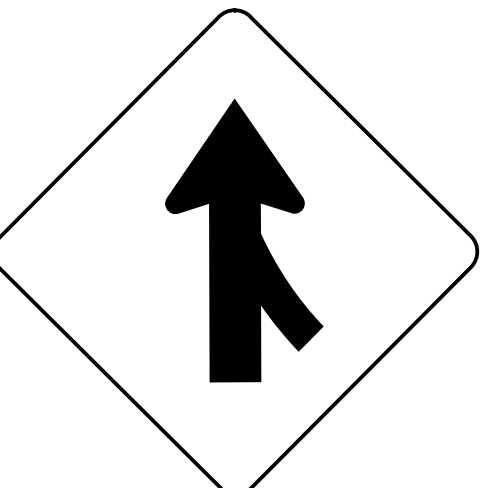






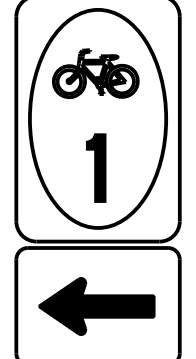
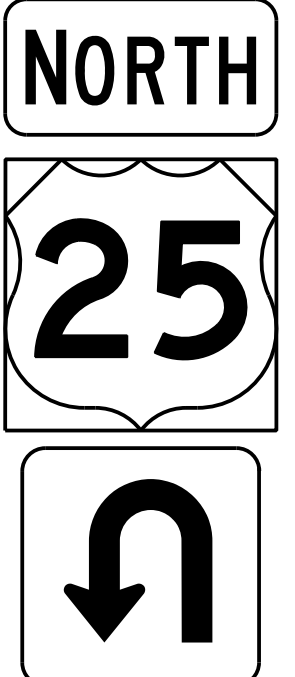
LETTER POSITIONS

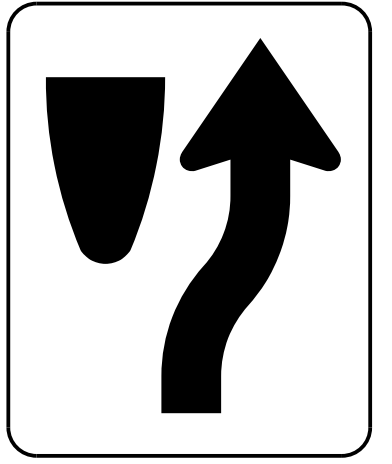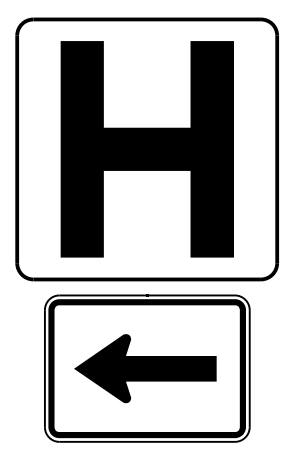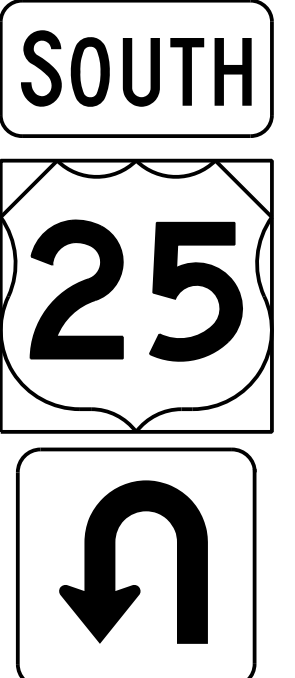



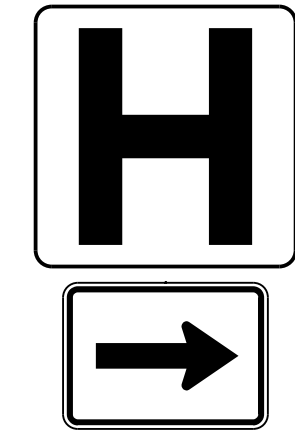



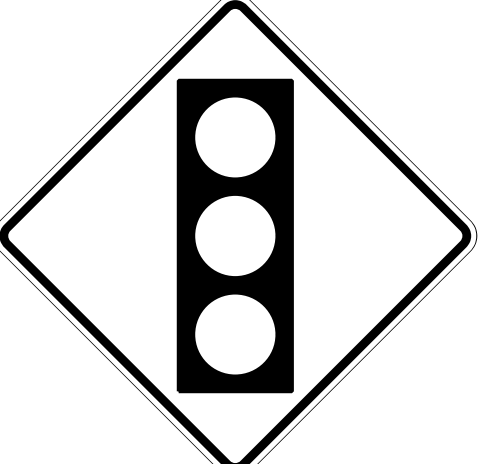






Letter spacings are to start of next letter


Series/Size	Text Length
C 2000	14.7
D 2000	40.5
C 2000	8.8
D 2000	38.2



<p>401 QUANTITY REQ'D 1</p>  <p>48" X 48" W4-3</p> <p>TWO "U" POSTS PER SIGN</p>	<p>408 QUANTITY REQ'D 3</p>  <p>24" X 30" R2-1</p> <p>ONE "U" POST PER SIGN</p>	<p>416 QUANTITY REQ'D 1</p>  <p>42" X 30" R2-27</p> <p>TWO "U" POSTS PER SIGN</p>	<p>423 QUANTITY REQ'D 17</p>  <p>36" X 36" R5-1</p> <p>ONE "U" POST PER SIGN</p>	<p>428 QUANTITY REQ'D 5</p>  <p>18" X 30" R4-7C</p> <p>ONE "U" POST PER SIGN</p>	<p>432 QUANTITY REQ'D 2</p>  <p>48" X 48" W9-1 (R)</p> <p>TWO "U" POSTS PER SIGN</p>	<table border="1"> <tr> <td>TIP NO. I-4400C</td> <td>SHEET NO. SIGN-4K</td> </tr> <tr> <td colspan="2">APPROVED: <i>Andrew D. Klinski</i> E3379F849E44B</td> </tr> <tr> <td colspan="2">DATE: 6/7/2019</td> </tr> <tr> <td colspan="2">SEAL</td> </tr> <tr> <td colspan="2" style="text-align: center;">  </td> </tr> <tr> <td colspan="2" style="text-align: center;">DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</td> </tr> </table>	TIP NO. I-4400C	SHEET NO. SIGN-4K	APPROVED: <i>Andrew D. Klinski</i> E3379F849E44B		DATE: 6/7/2019		SEAL				DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
TIP NO. I-4400C	SHEET NO. SIGN-4K																	
APPROVED: <i>Andrew D. Klinski</i> E3379F849E44B																		
DATE: 6/7/2019																		
SEAL																		
																		
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED																		
<p>404 QUANTITY REQ'D 4</p>  <p>24" X 30" R2-1</p> <p>ONE "U" POST PER SIGN</p>	<p>409 QUANTITY REQ'D 1</p>  <p>36" X 36" W14-2</p> <p>ONE "U" POST PER SIGN</p>	<p>417 QUANTITY REQ'D 1</p>  <p>30" X 30" W2-2</p> <p>ONE "U" POST PER SIGN</p>	<p>424 QUANTITY REQ'D 4</p>  <p>36" X 36" R3-1(L)</p> <p>ONE "U" POST PER SIGN MOUNTED BACK TO BACK WITH SIGN 423 IN 2 INSTALLATIONS</p>	<p>429 QUANTITY REQ'D 2</p>  <p>36" X 36" R3-7 (R)</p> <p>ONE "U" POST PER SIGN</p>	<p>434 QUANTITY REQ'D 2</p>  <p>36" X 48" W13-2</p> <p>TWO "U" POSTS PER SIGN</p>	<p>441 QUANTITY REQ'D 2</p>  <p>36" X 36" W3-5</p> <p>ONE "U" POST PER SIGN</p>												
<p>405 QUANTITY REQ'D 3</p>  <p>48" X 24" W1-7</p> <p>TWO "U" POSTS PER SIGN</p>	<p>410 QUANTITY REQ'D 1</p>  <p>30" X 30" W3-1</p> <p>ONE "U" POST PER SIGN</p>	<p>420 QUANTITY REQ'D 6</p>  <p>36" X 36" W12-1</p> <p>ONE "U" POST PER SIGN</p>	<p>425 QUANTITY REQ'D 2</p>  <p>24" X 30" R4-8</p> <p>ONE "U" POST PER SIGN</p>	<p>430 QUANTITY REQ'D 5</p>  <p>18" X 18" OM1-3</p> <p>MOUNT BELOW SIGN 428 IN 5 INSTALLATIONS</p>	<p>436 QUANTITY REQ'D 2</p>  <p>36" X 36" M1-10</p> <p>ONE "U" POST PER SIGN</p>	<p>442 QUANTITY REQ'D 4</p>  <p>24" X 30" R2-1</p> <p>ONE "U" POST PER SIGN</p>												
<p>406 QUANTITY REQ'D 6</p>  <p>36" X 36" R1-1</p> <p>ONE "U" POST PER SIGN MOUNTED BELOW SIGN 431 IN 1 INSTALLATION</p>	<p>414 QUANTITY REQ'D 1</p>  <p>30" X 30" W1-5</p> <p>ONE "U" POST PER SIGN</p>	<p>421 QUANTITY REQ'D 1</p>  <p>36" X 36" X 36" R1-2</p> <p>ONE "U" POST PER SIGN</p>	<p>426 QUANTITY REQ'D 4</p>  <p>54" X 18" R6-1(L)</p> <p>TWO "U" POSTS PER SIGN BARRIER MOUNTED IN 2 INSTALLATIONS</p>	<p>431 QUANTITY REQ'D 1</p>  <p>54" X 18" R6-1 (R)</p> <p>TWO "U" POSTS PER SIGN</p>	<p>440 QUANTITY REQ'D 2</p>  <p>36" X 48" W13-3</p> <p>TWO "U" POSTS PER SIGN</p>	<p>443 QUANTITY REQ'D 1</p>  <p>24" X 18" R1-10P</p> <p>MOUNTED BELOW SIGN 406 IN 1 INSTALLATION</p>												
<p>407 QUANTITY REQ'D 3</p>  <p>48" X 48" W4-1</p> <p>TWO "U" POSTS PER SIGN</p>	<p>415 QUANTITY REQ'D 2</p>  <p>48" X 60" R2-1</p> <p>TWO "U" POSTS PER SIGN</p>	<p>422 QUANTITY REQ'D 4</p>  <p>36" X 36" R3-1 (R)</p> <p>MOUNTED BACK TO BACK WITH SIGN 423 IN 2 INSTALLATIONS MOUNTED BACK TO BACK WITH SIGN 424 IN 2 INSTALLATIONS</p>	<p>427 QUANTITY REQ'D 12</p>  <p>36" X 24" R5-1a</p> <p>ONE "U" POST PER SIGN</p>															



<p>(444) QUANTITY REQ'D 2</p>  <p>24" X 30" R4-7</p> <p>ONE "U" POST PER SIGN</p>		<p>(504) (508)</p>  <p>1 - 24" X 24" 1 - 21" X 15"</p> <p>ONE "U" POST PER ASSEMBLY</p>	<p>(510)</p>  <p>1 - 24" X 12" 1 - 24" X 24" 1 - 21" X 21"</p> <p>ONE "U" POST PER ASSEMBLY</p>			<table border="1"> <tr> <td>TIP NO. I-4400C</td> <td>SHEET NO. SIGN-4L</td> </tr> <tr> <td colspan="2">APPROVED: <i>Andrew D. Klinckisch</i> <small>E31078F8496E44B</small></td> </tr> <tr> <td colspan="2">DATE: 6/7/2019</td> </tr> <tr> <td colspan="2" style="text-align: center;">  </td> </tr> <tr> <td colspan="2" style="text-align: center;">DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</td> </tr> </table>	TIP NO. I-4400C	SHEET NO. SIGN-4L	APPROVED: <i>Andrew D. Klinckisch</i> <small>E31078F8496E44B</small>		DATE: 6/7/2019				DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
TIP NO. I-4400C	SHEET NO. SIGN-4L															
APPROVED: <i>Andrew D. Klinckisch</i> <small>E31078F8496E44B</small>																
DATE: 6/7/2019																
																
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED																
<p>(446) QUANTITY REQ'D 2</p>  <p>36" X 36" W3-5</p> <p>ONE "U" POST PER SIGN BARRIER MOUNTED IN 1 INSTALLATION</p>		<p>(505)</p>  <p>1 - 24" X 24" 1 - 21" X 15"</p> <p>ONE "U" POST PER ASSEMBLY</p>	<p>(511)</p>  <p>1 - 24" X 12" 1 - 24" X 24"</p> <p>ONE "U" POST PER ASSEMBLY</p>													
<p>(447) QUANTITY REQ'D 18</p>  <p>12" X 18" R7-301</p> <p>ONE "U" POST PER SIGN</p>		<p>(506)</p>  <p>1 - 24" X 12" 1 - 24" X 12" 1 - 24" X 24"</p> <p>ONE "U" POST PER ASSEMBLY</p>	<p>(512)</p>  <p>1 - 24" X 12" 1 - 24" X 12" 1 - 24" X 24"</p> <p>ONE "U" POST PER ASSEMBLY</p>													
<p>(448) QUANTITY REQ'D 1</p>  <p>30" X 30" W3-3</p> <p>ONE "U" POST PER SIGN</p>		<p>(507)</p>  <p>1 - 24" X 12" 1 - 24" X 12" 1 - 24" X 24"</p> <p>ONE "U" POST PER ASSEMBLY</p>	<p>(513)</p>  <p>1 - 12" X 18" 1 - 12" X 9"</p> <p>ONE "U" POST PER ASSEMBLY</p>													
		<p>(509)</p>  <p>1 - 24" X 12" 1 - 24" X 24" 1 - 21" X 21"</p> <p>ONE "U" POST PER ASSEMBLY</p>														


QUANTITY REQ'D 1		QUANTITY REQ'D 1		QUANTITY REQ'D 1								TIP NO. I-4400C		SHEET NO. SIGN-4M	
 <p>18" X 60" D10-5</p> <p>BARRIER MOUNTED BACK TO BACK WITH EAST MM 41.5</p>		 <p>18" X 60" D10-5</p> <p>ONE "U" POST PER SIGN</p>		 <p>18" X 54" D10-4</p> <p>ONE "U" POST PER SIGN</p>								<p>DocuSigned by: <i>Andrew D. Klinckisch</i> E3D78F8496E44B...</p> <p>DATE: 6/7/2019</p> <p>SEAL</p>  <p>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</p>			
 <p>18" X 60" D10-5</p> <p>BARRIER MOUNTED BACK TO BACK WITH WEST MM 41.5</p>		 <p>18" X 54" D10-4</p> <p>ONE "U" POST PER SIGN</p>		 <p>18" X 54" D10-4</p> <p>ONE "U" POST PER SIGN</p>											
 <p>18" X 54" D10-4</p> <p>ONE "U" POST PER SIGN</p>		 <p>18" X 54" D10-4</p> <p>ONE "U" POST PER SIGN</p>		 <p>18" X 60" D10-5</p> <p>ONE "U" POST PER SIGN</p>											
 <p>18" X 54" D10-4</p> <p>ONE "U" POST PER SIGN</p>		 <p>18" X 60" D10-5</p> <p>BARRIER MOUNTED BACK TO BACK WITH EAST MM 43.5</p>		 <p>18" X 60" D10-5</p> <p>ONE "U" POST PER SIGN</p>											
 <p>18" X 60" D10-5</p> <p>ONE "U" POST PER SIGN</p>		 <p>18" X 60" D10-5</p> <p>BARRIER MOUNTED BACK TO BACK WITH WEST MM 43.5</p>													


TIP NO. I-4400C	SHEET NO. SIGN-5
APPROVED: <u>Andrew D. Klinckisch</u> <small>DocuSigned by: E3D79F8496E44B...</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

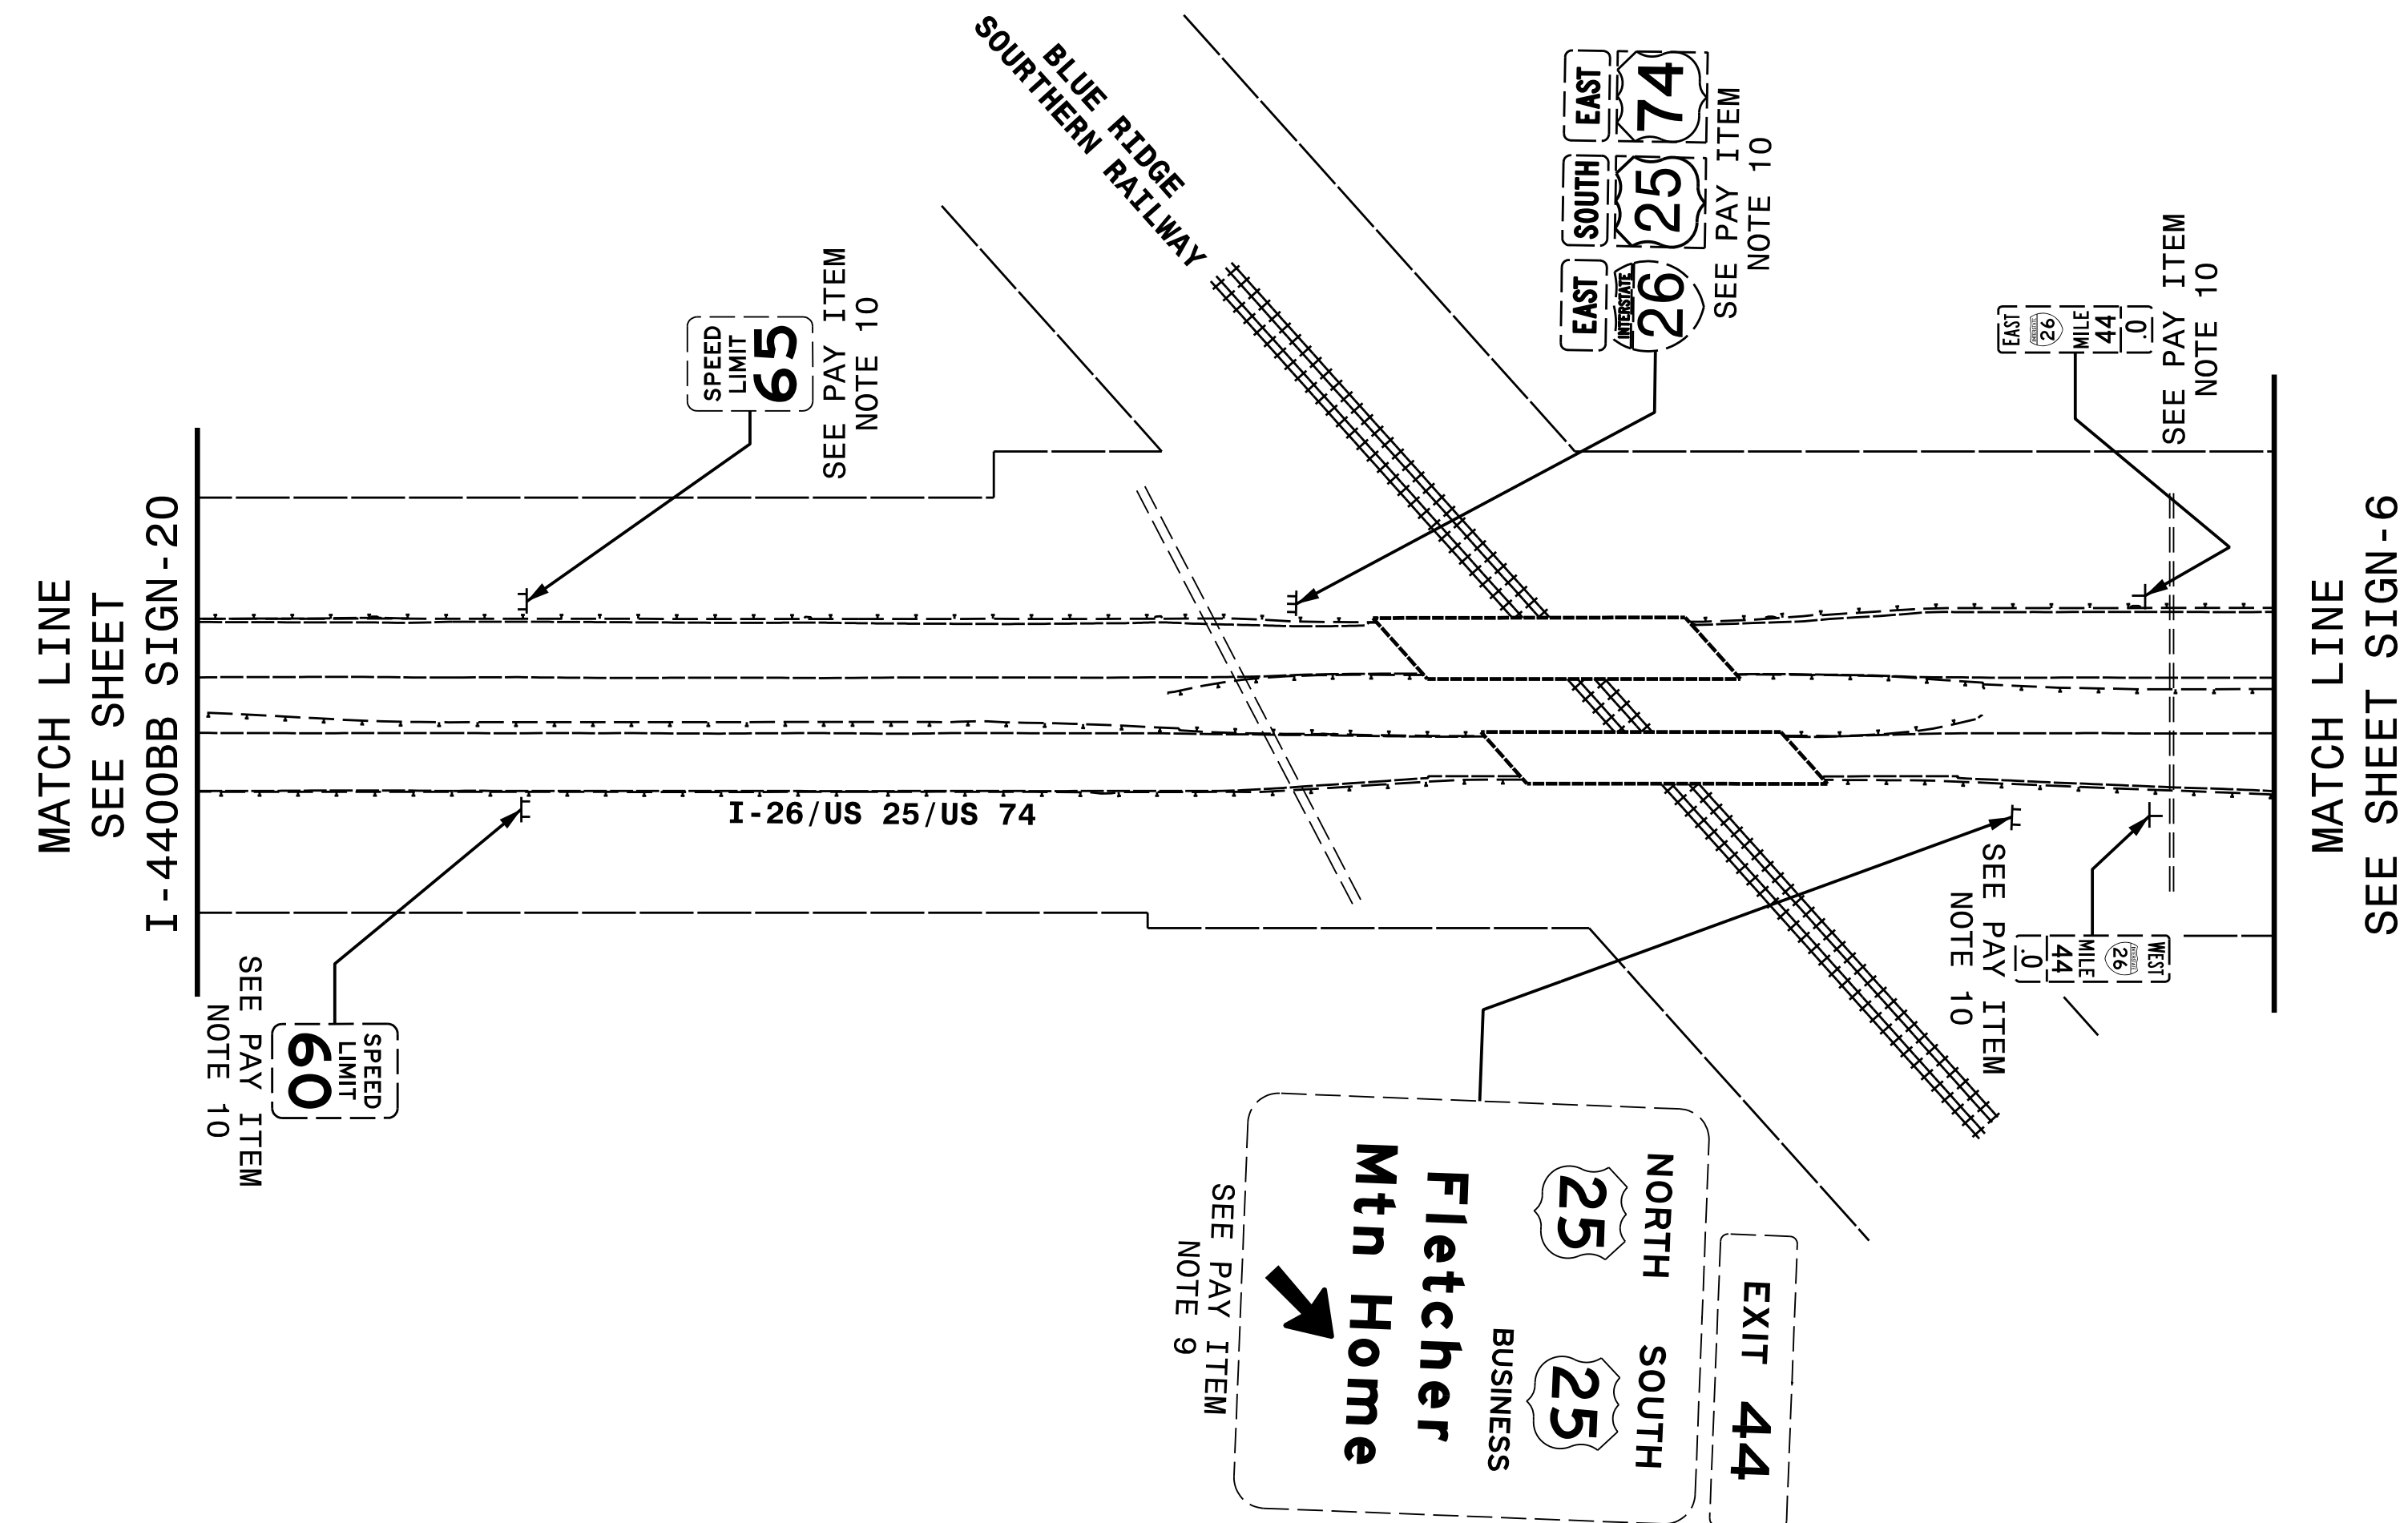

**EXISTING SIGNING  
I-26/US 25/US 74**




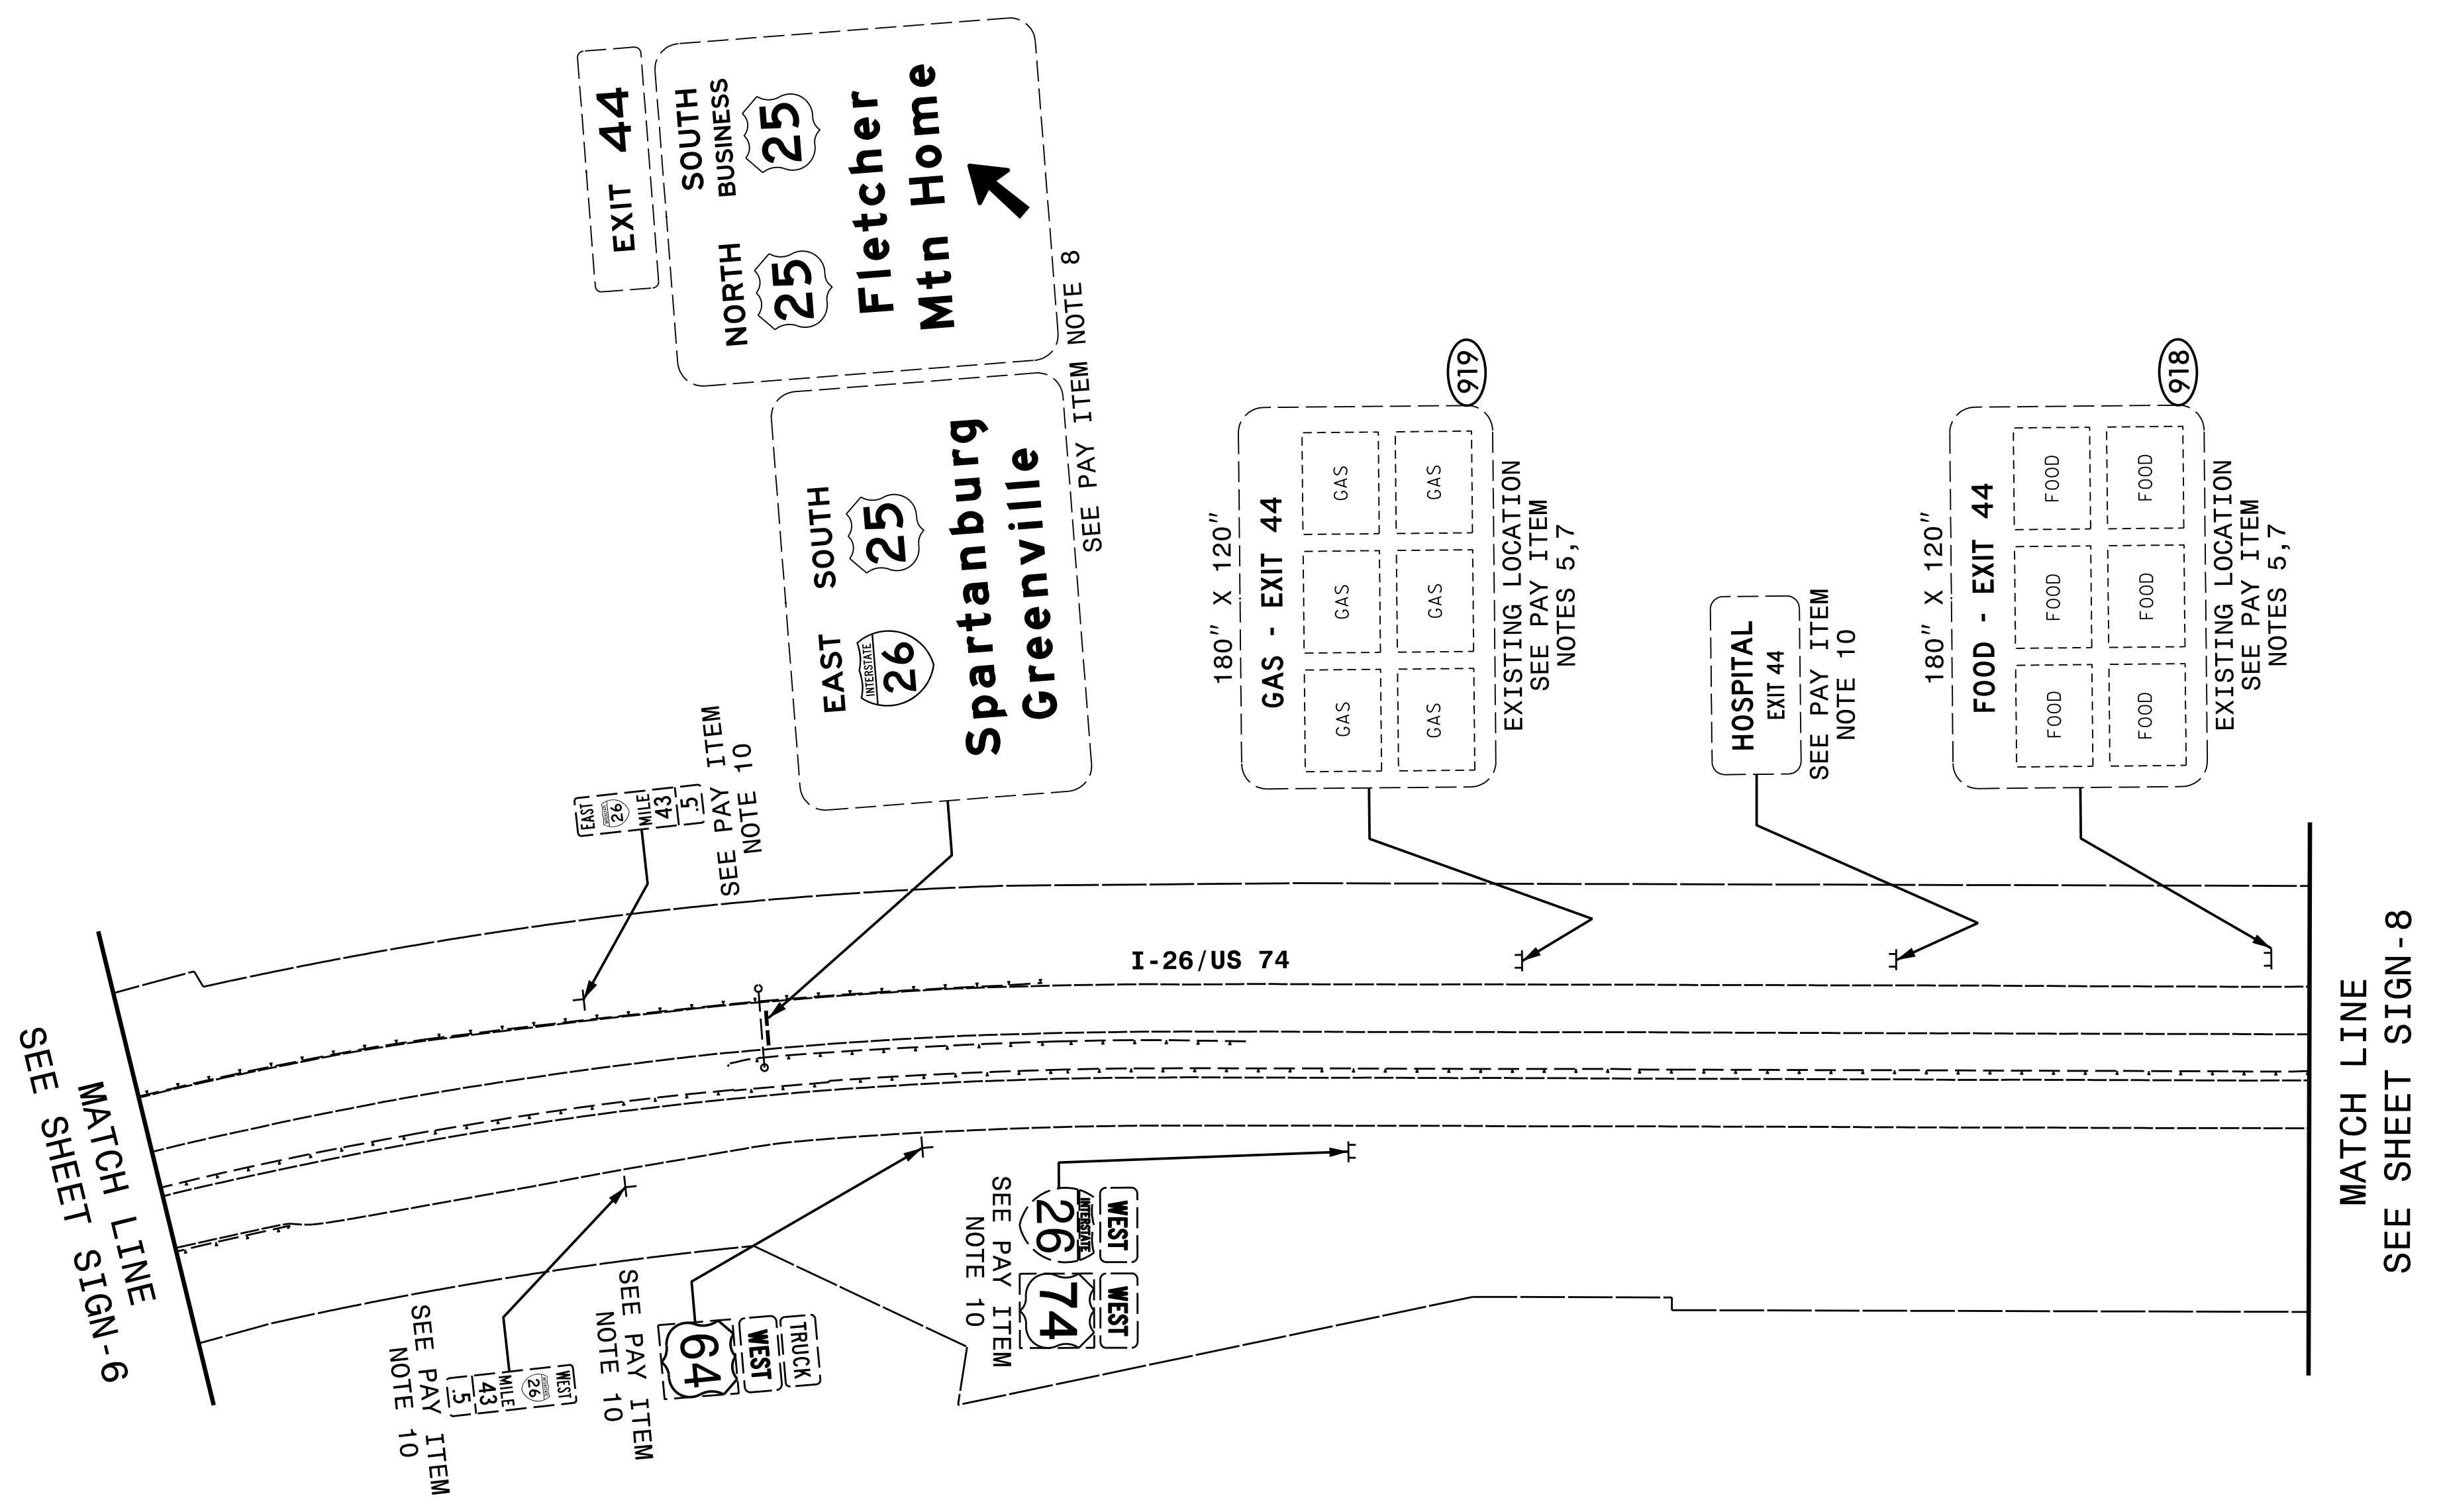
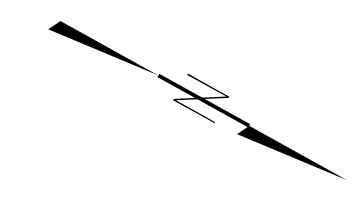
TIP NO. I-4400C	SHEET NO. SIGN-6
APPROVED: <u>Andrew D. Klinck</u> <small>DocuSigned by: E3D78F84964E44D</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

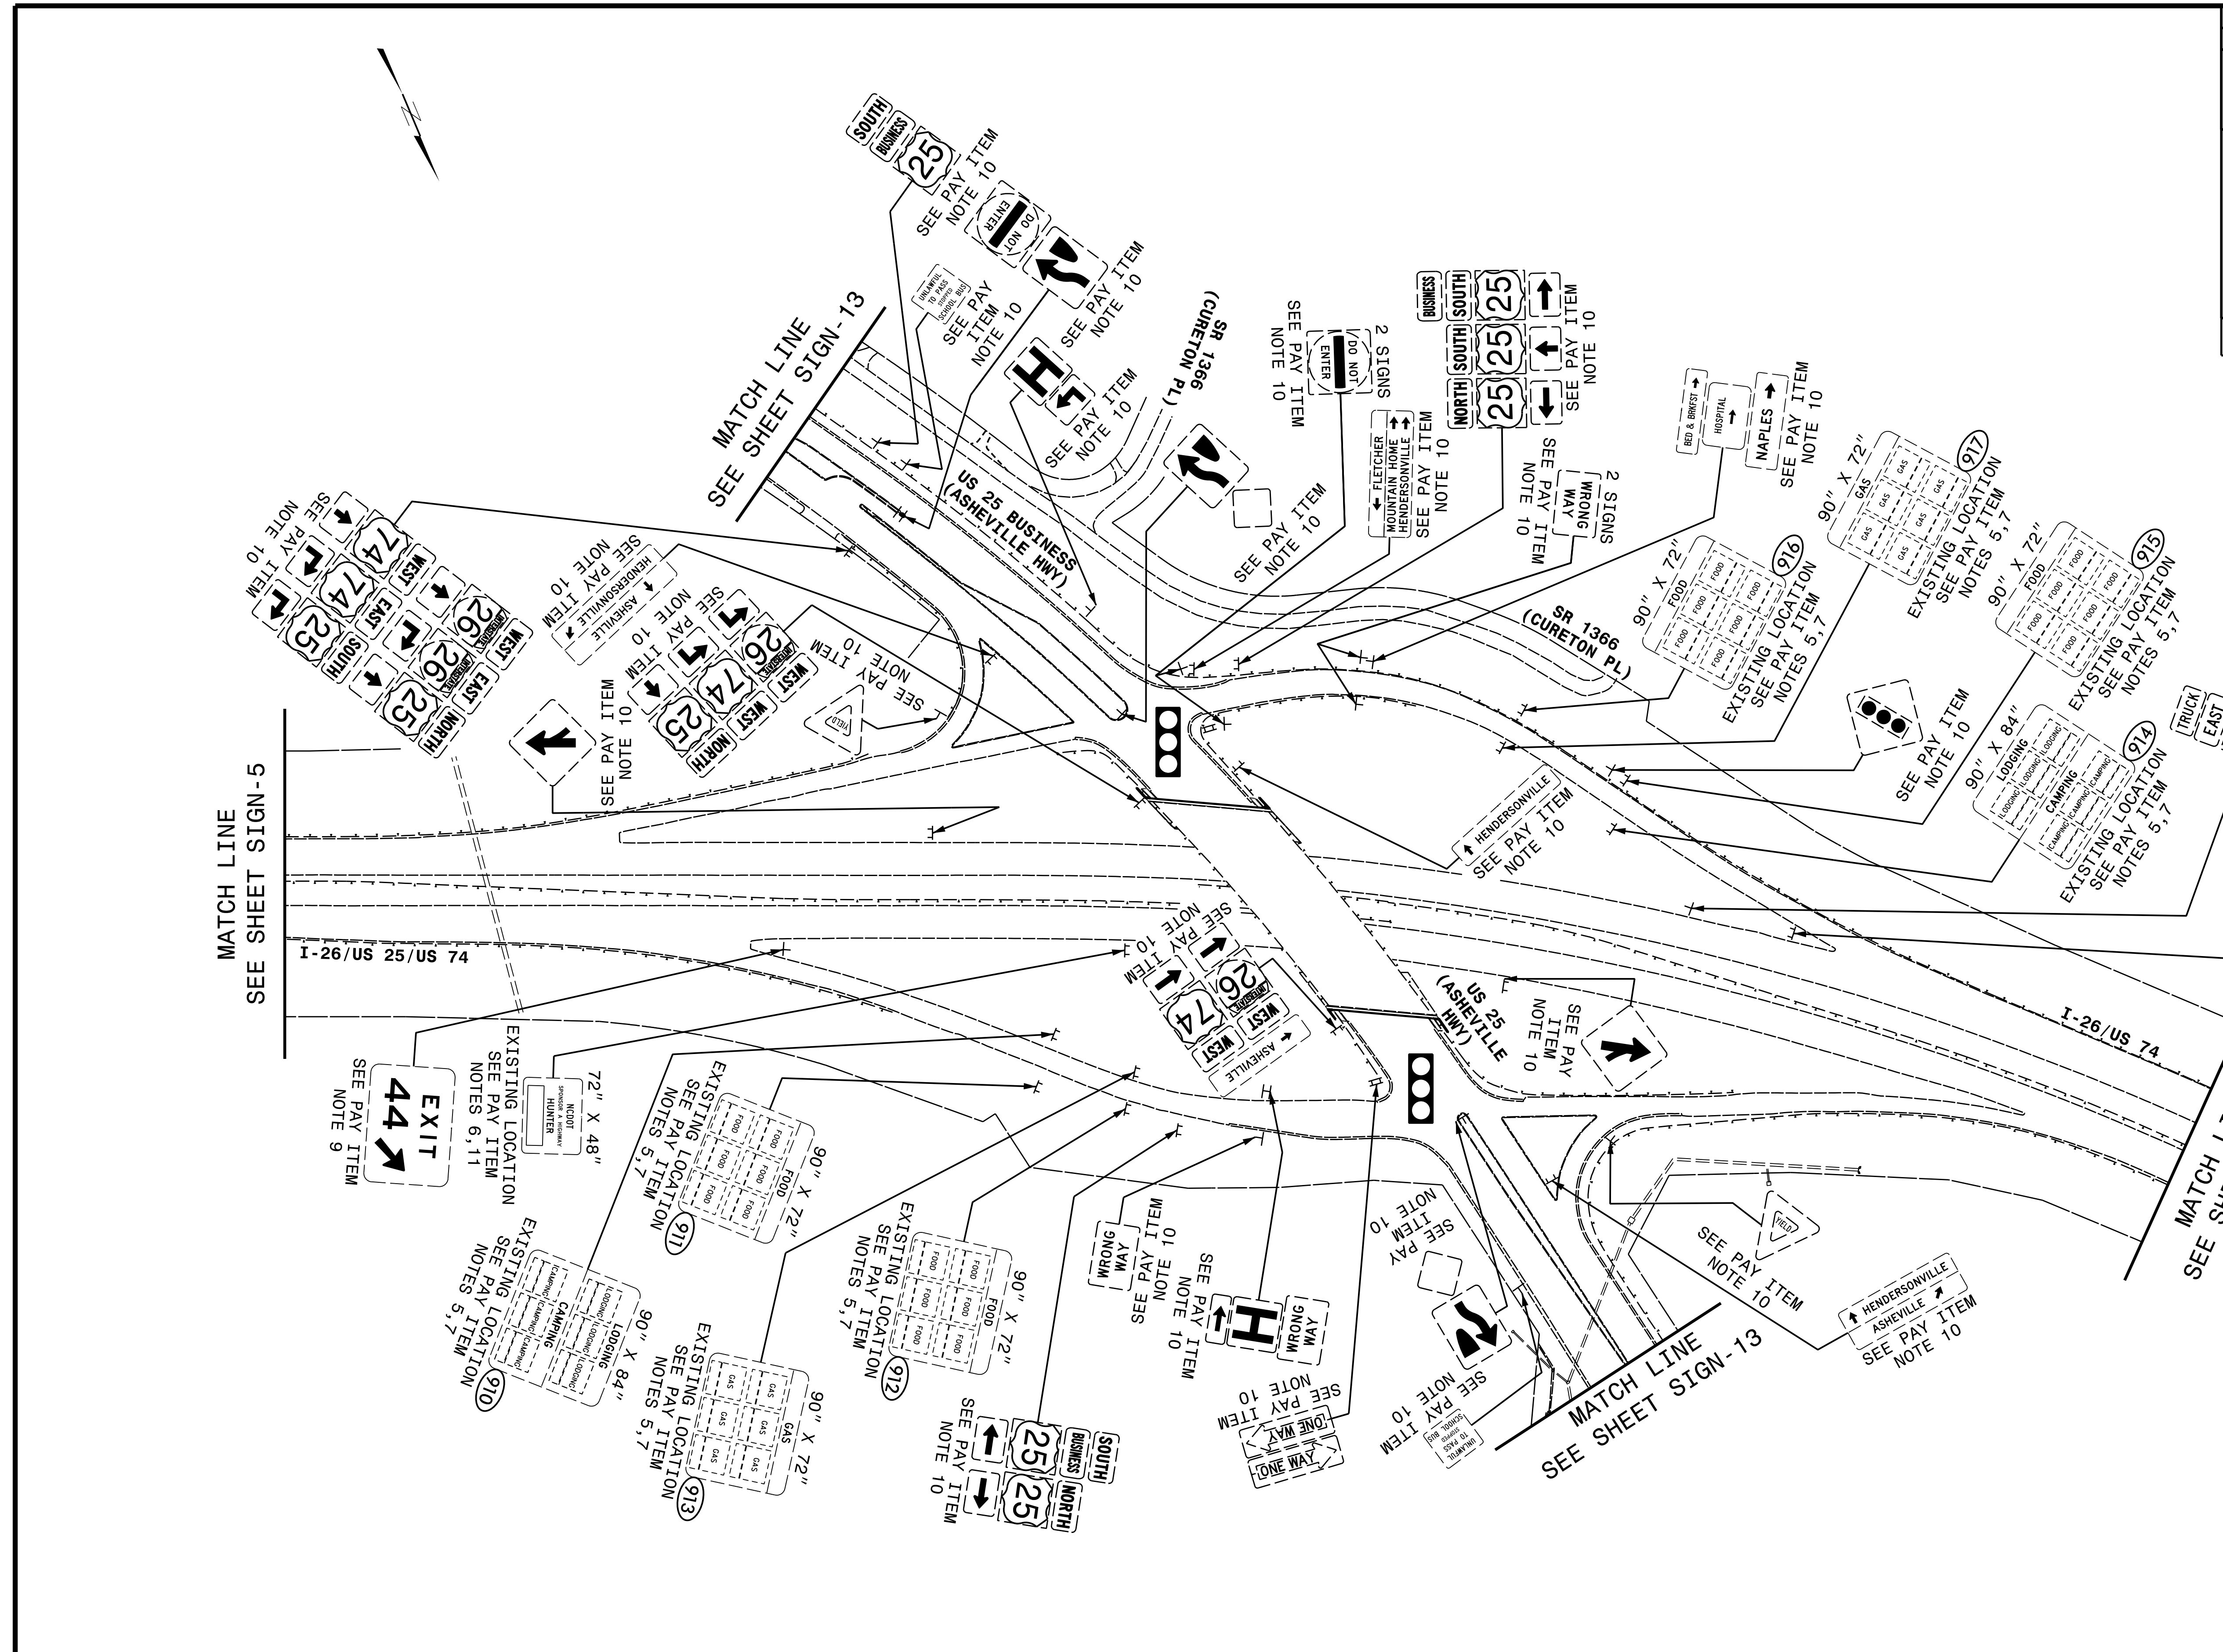


**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997


**EXISTING SIGNING**  
**I-26/US 25/US 74**

TIP NO. I-4400C	SHEET NO. SIGN-7
APPROVED: <u>Andrew D. Klinckisch</u> <small>DocuSigned by: E3D79F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




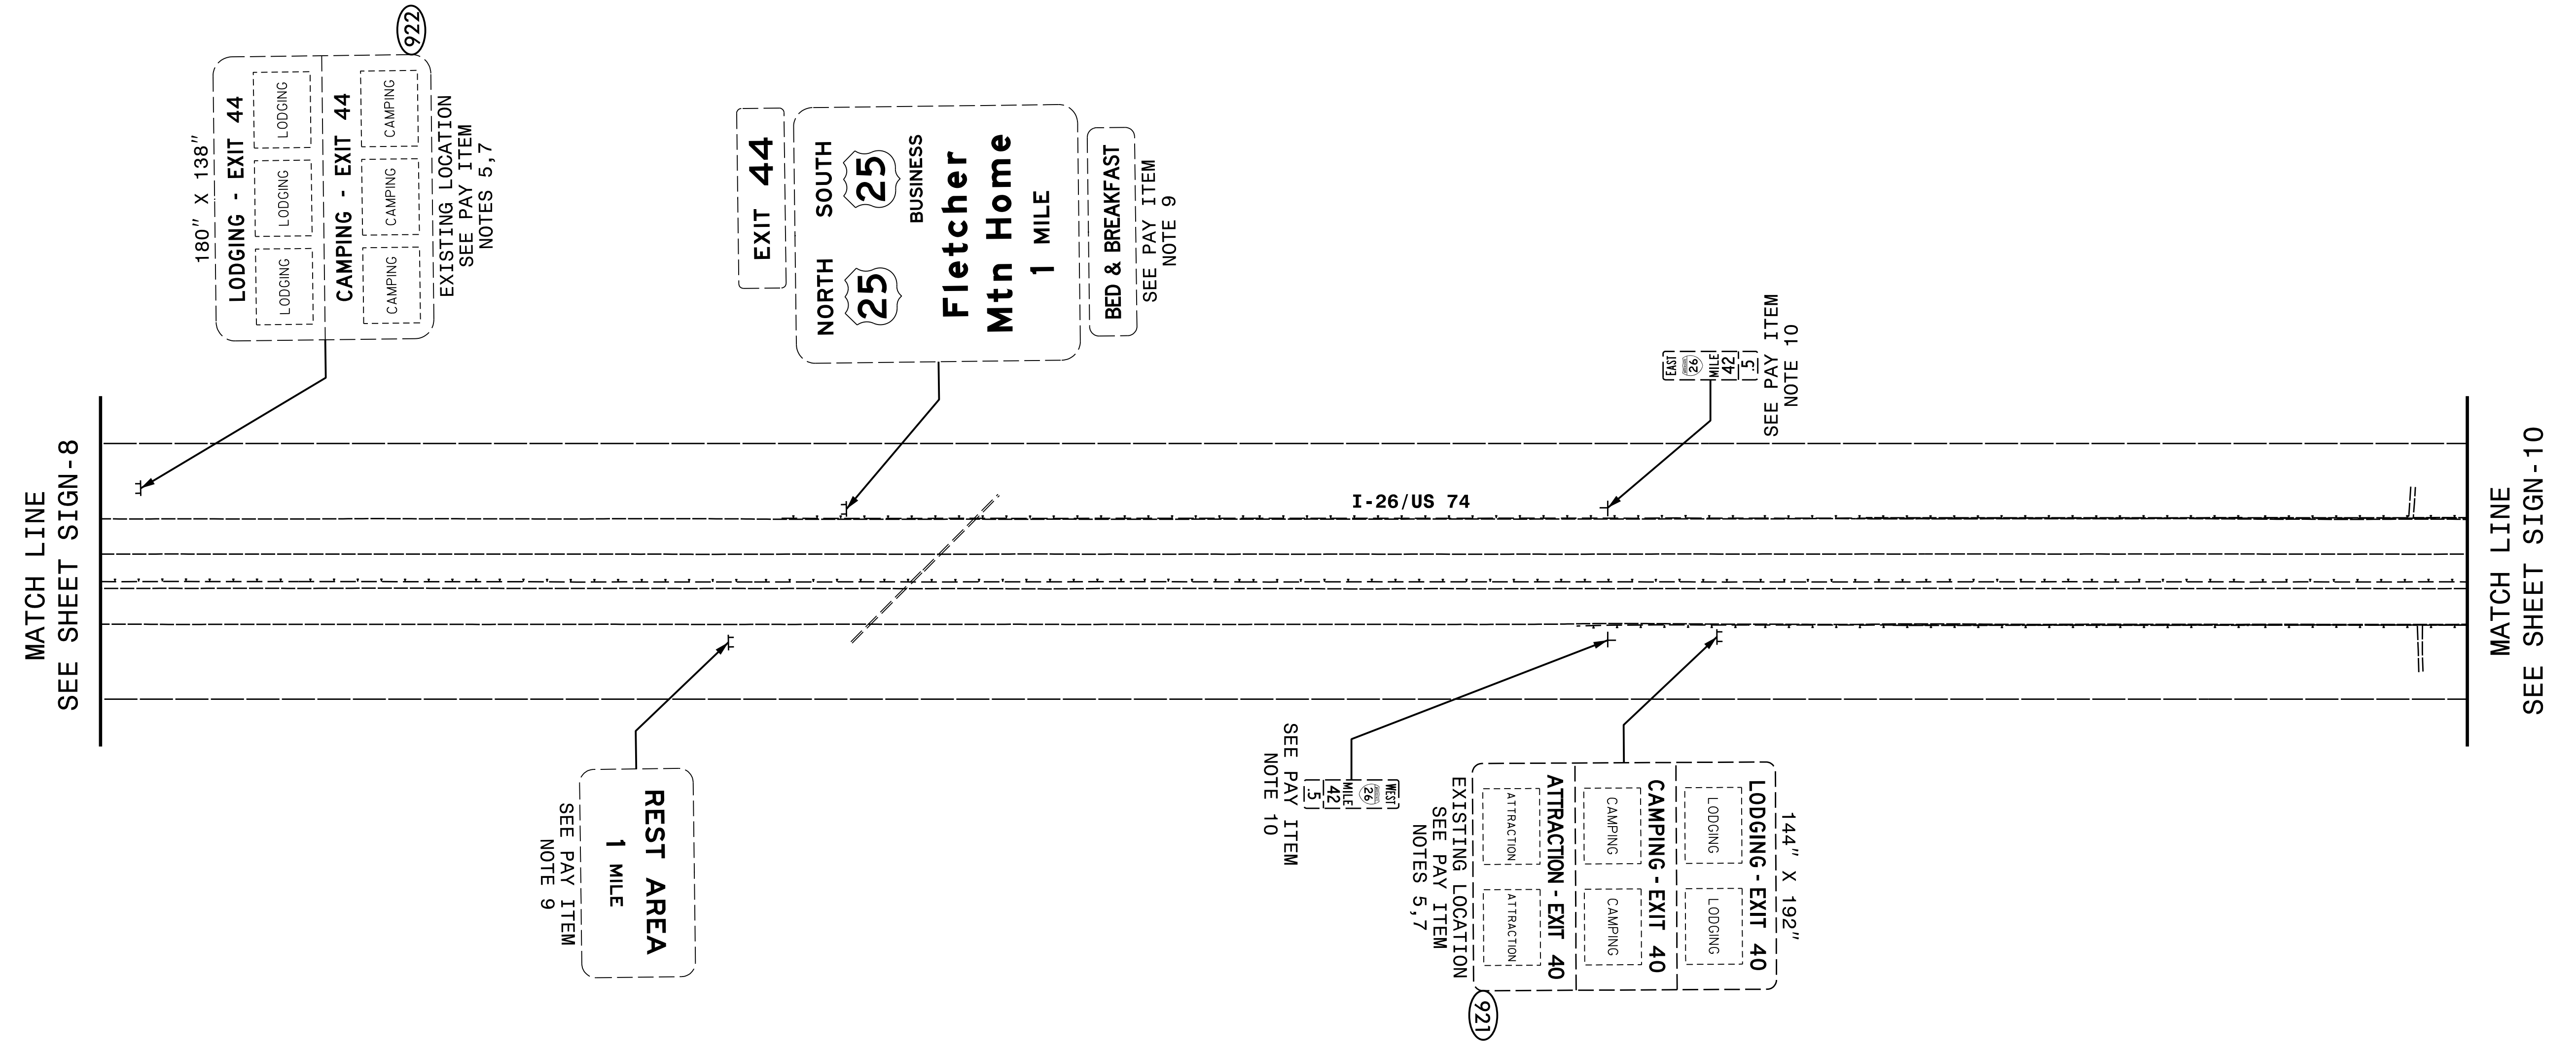



TIP NO. I-4400C	SHEET NO. SIGN-8
APPROVED: <u>Andrew D. Klinckisch</u> <small>DocuSigned by: E3D79F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

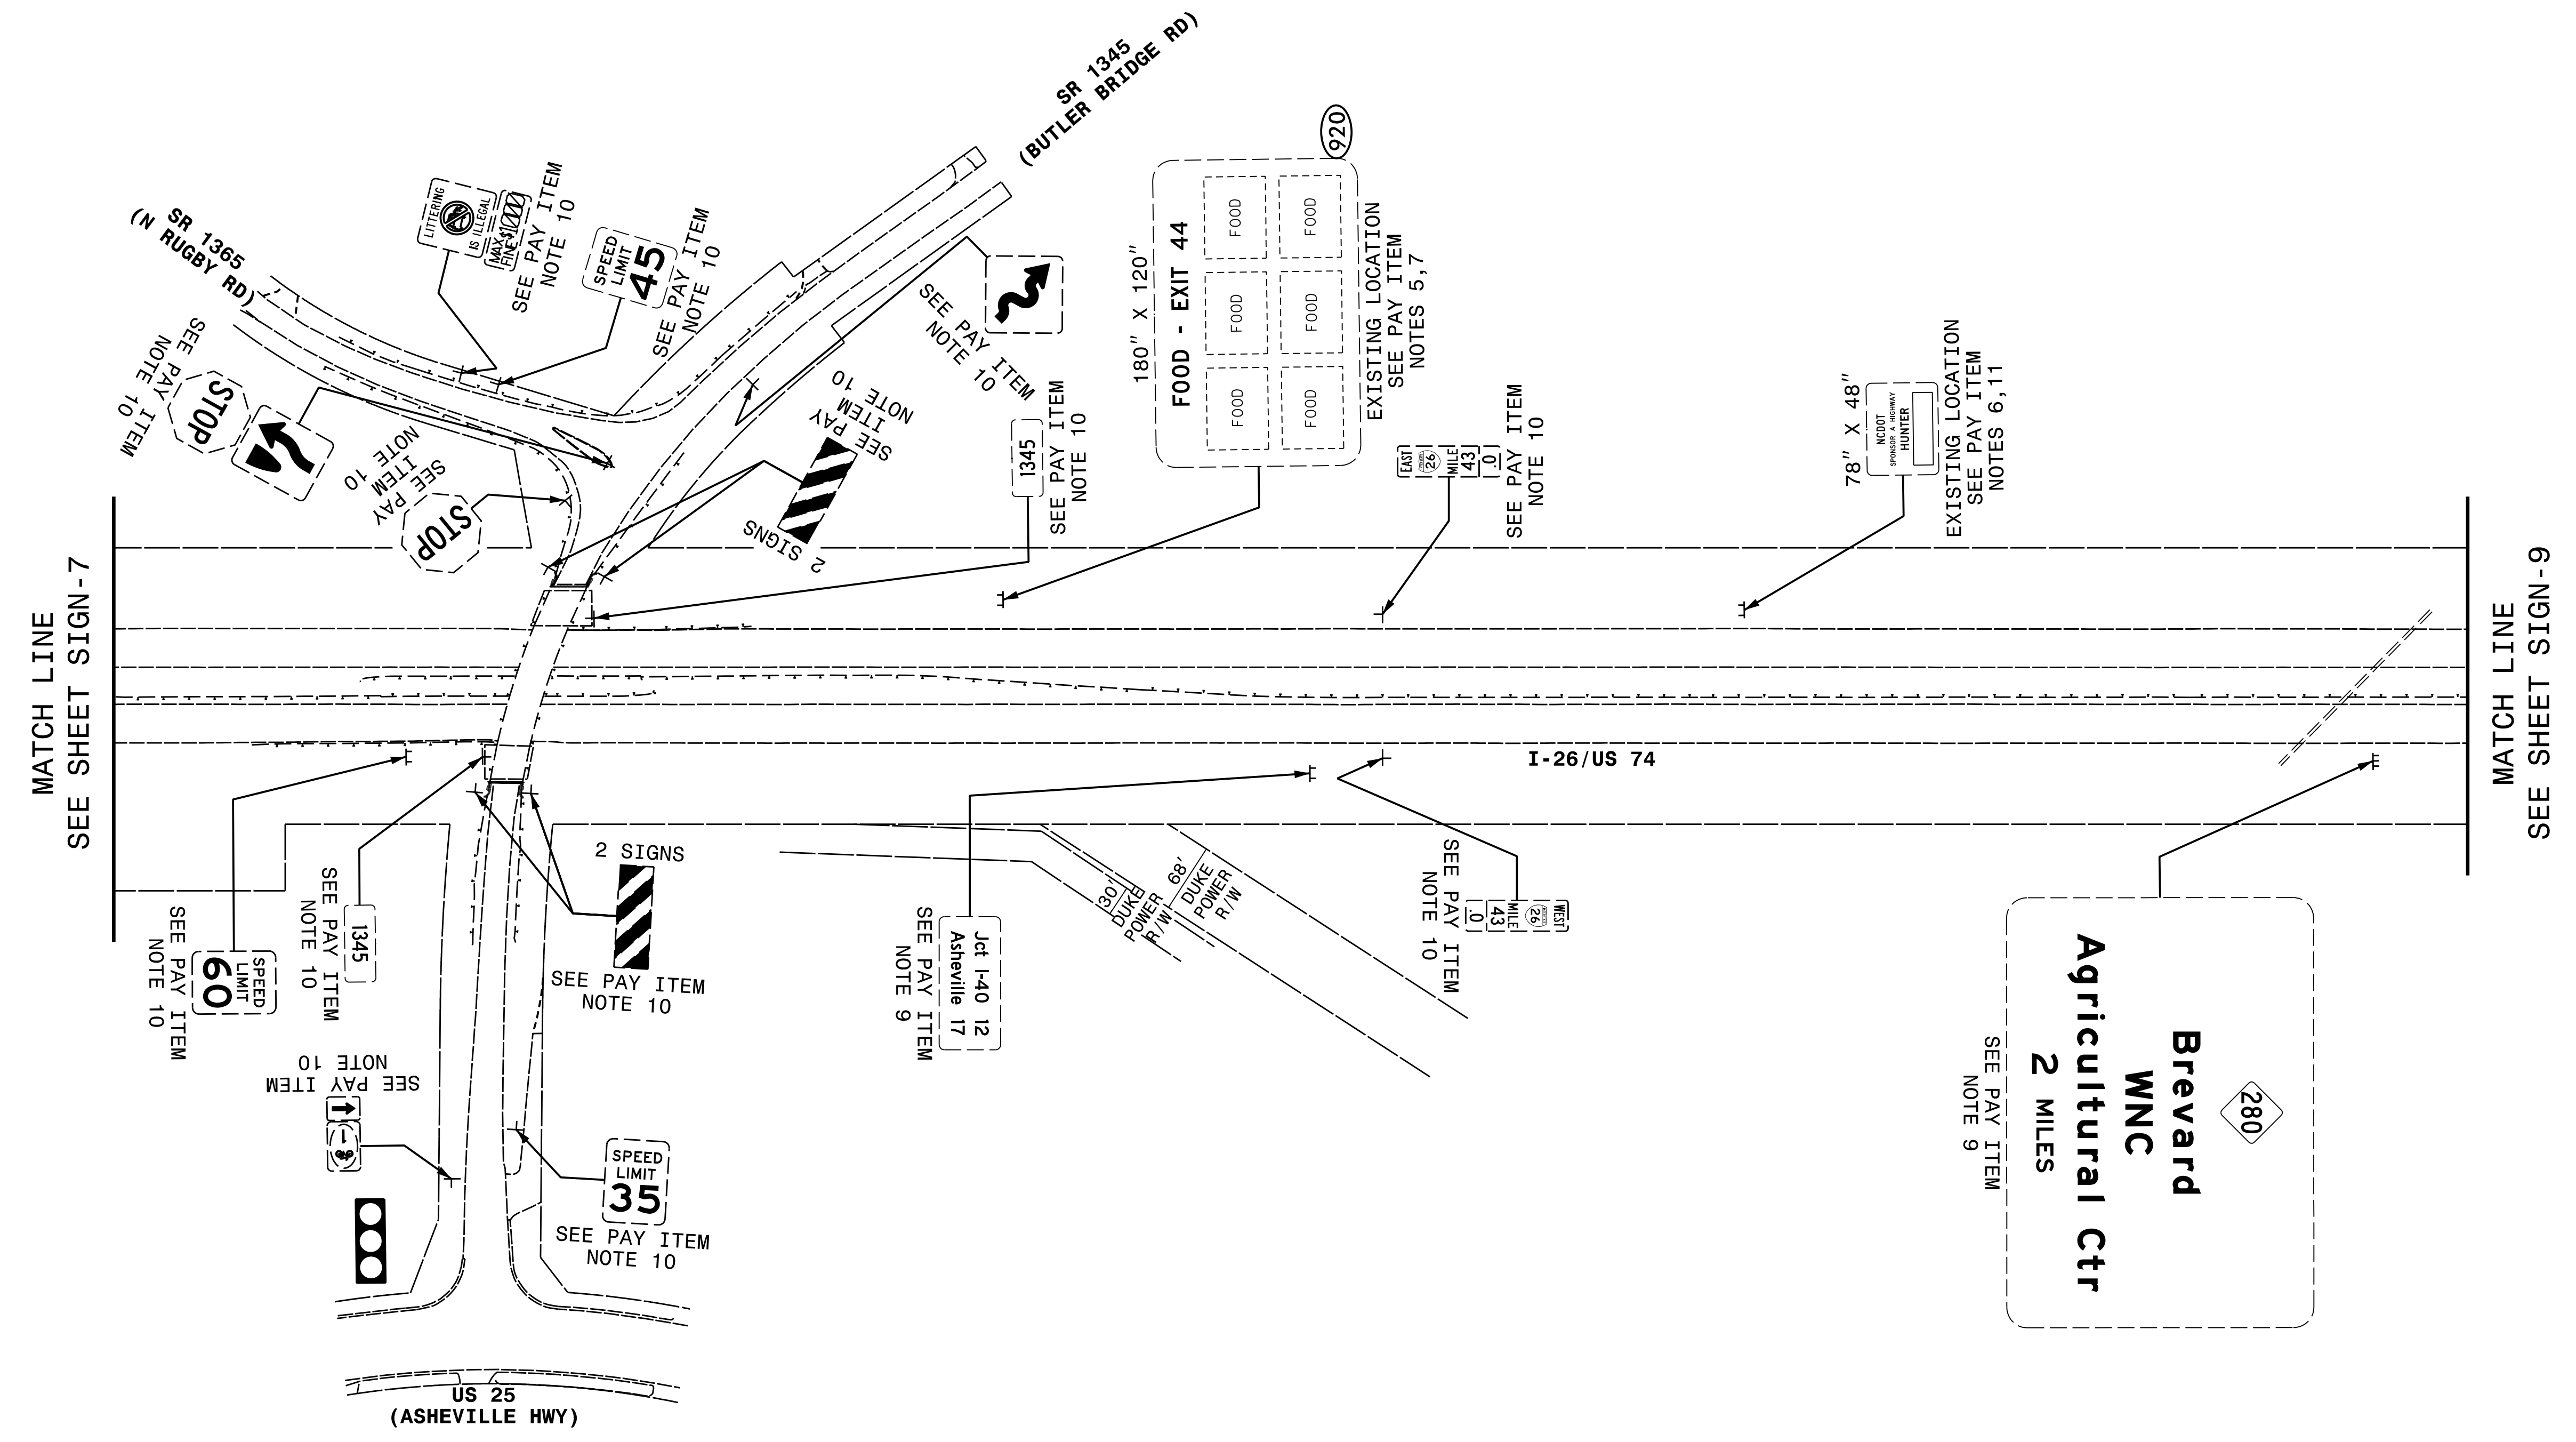





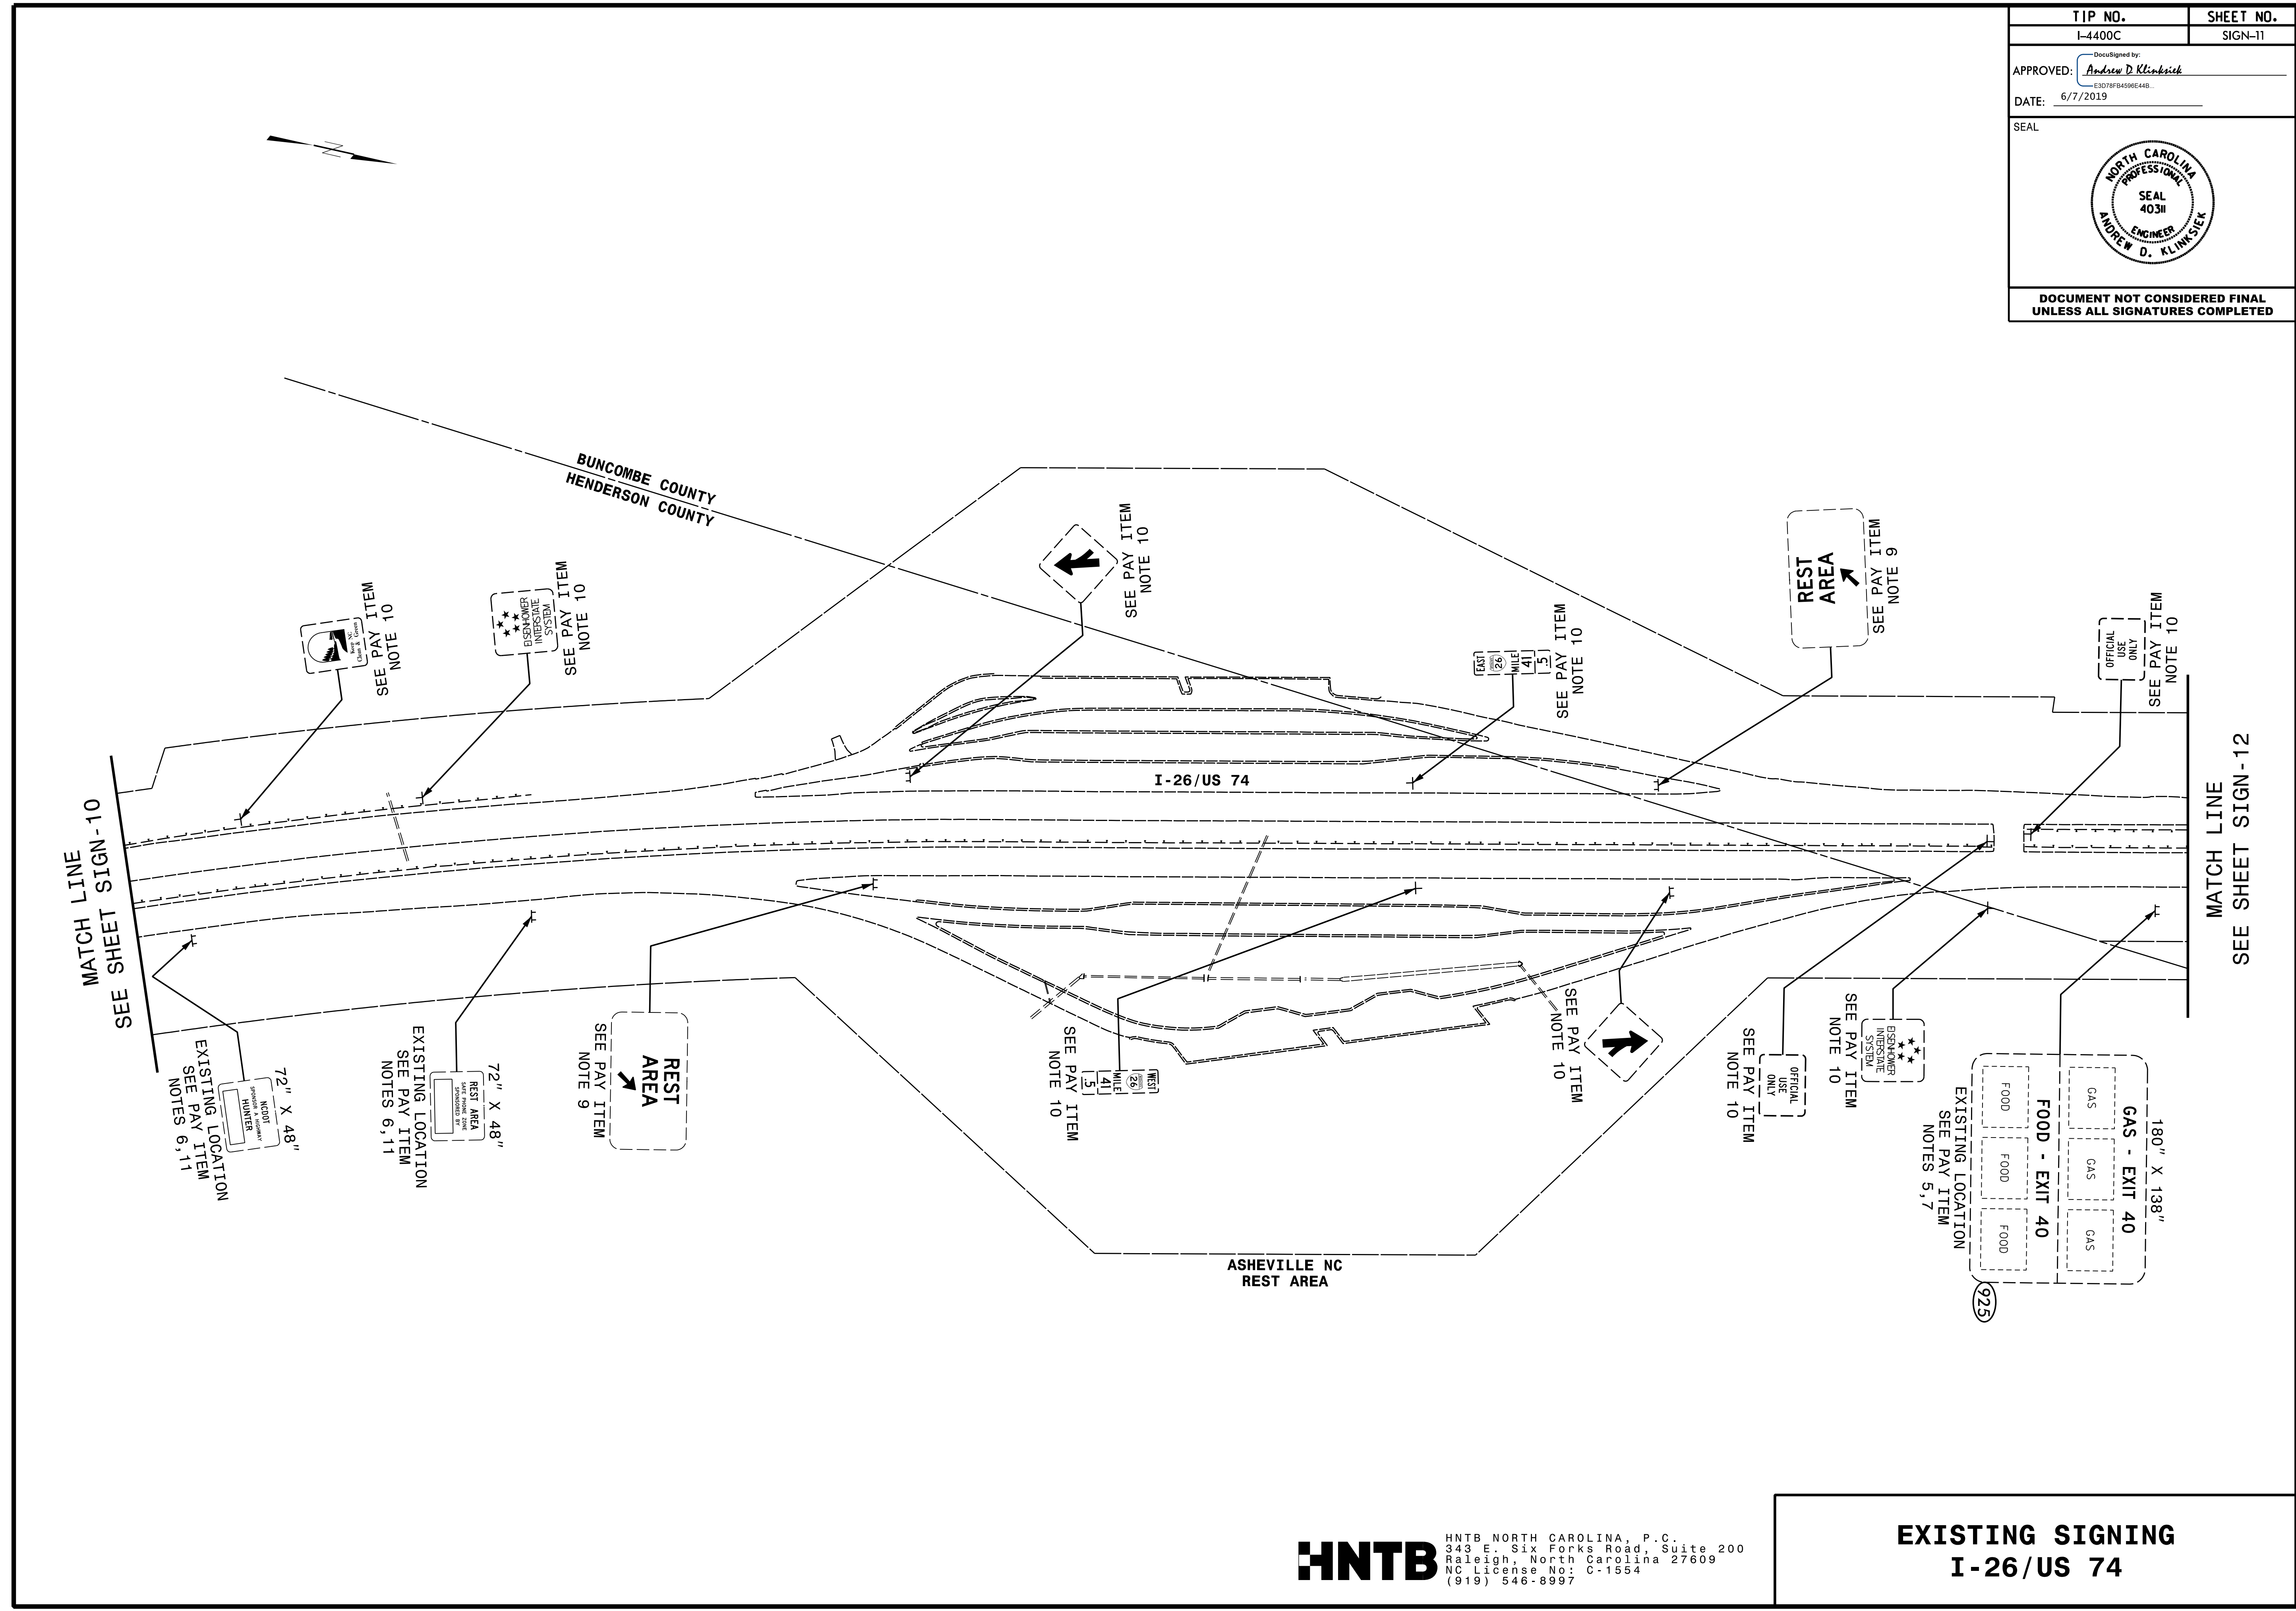
TIP NO. I-4400C	SHEET NO. SIGN-9
APPROVED: <i>Andrew D. Klinck</i> <small>DocuSigned by: E3D79F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	



TIP NO. I-4400C	SHEET NO. SIGN-10
APPROVED: <u>Andrew D. Klinck</u> <small>DocuSigned by: E3D79F849644B...</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

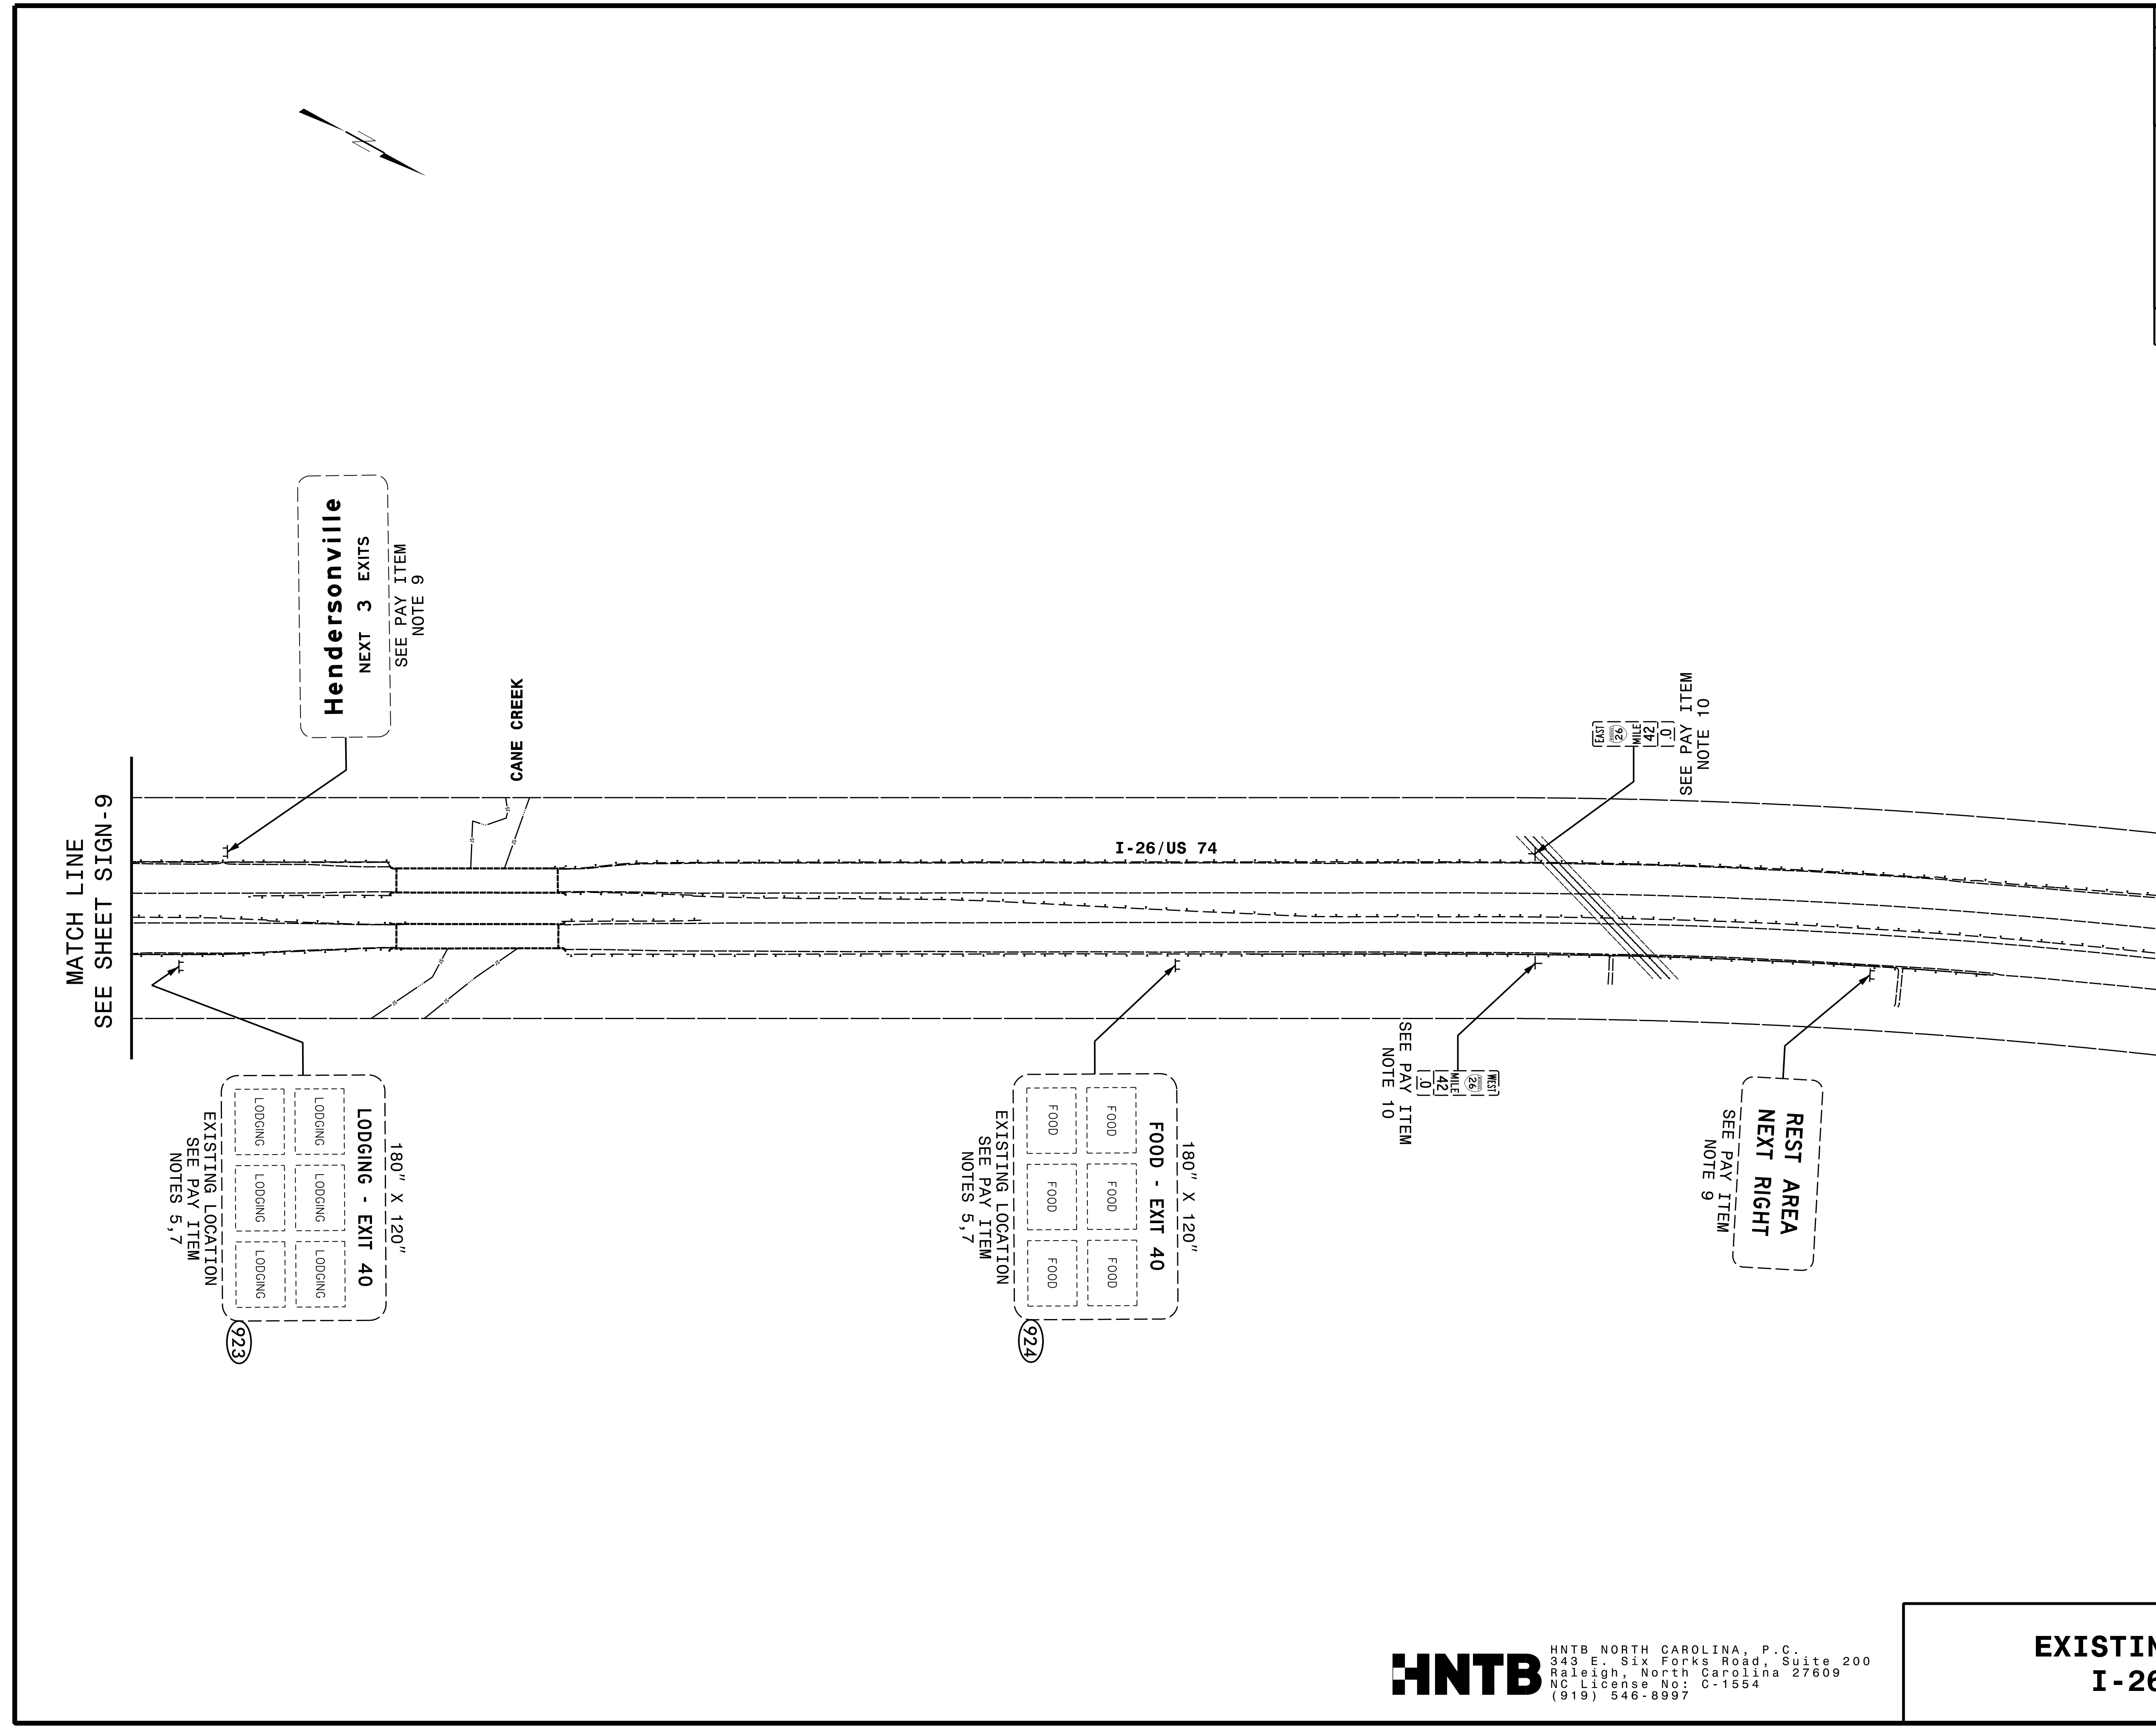


TIP NO. I-4400C	SHEET NO. SIGN-11
APPROVED: <i>Andrew D. Klinck</i> E31078F8496E44B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**EXISTING SIGNING**  
**I-26/US 74**




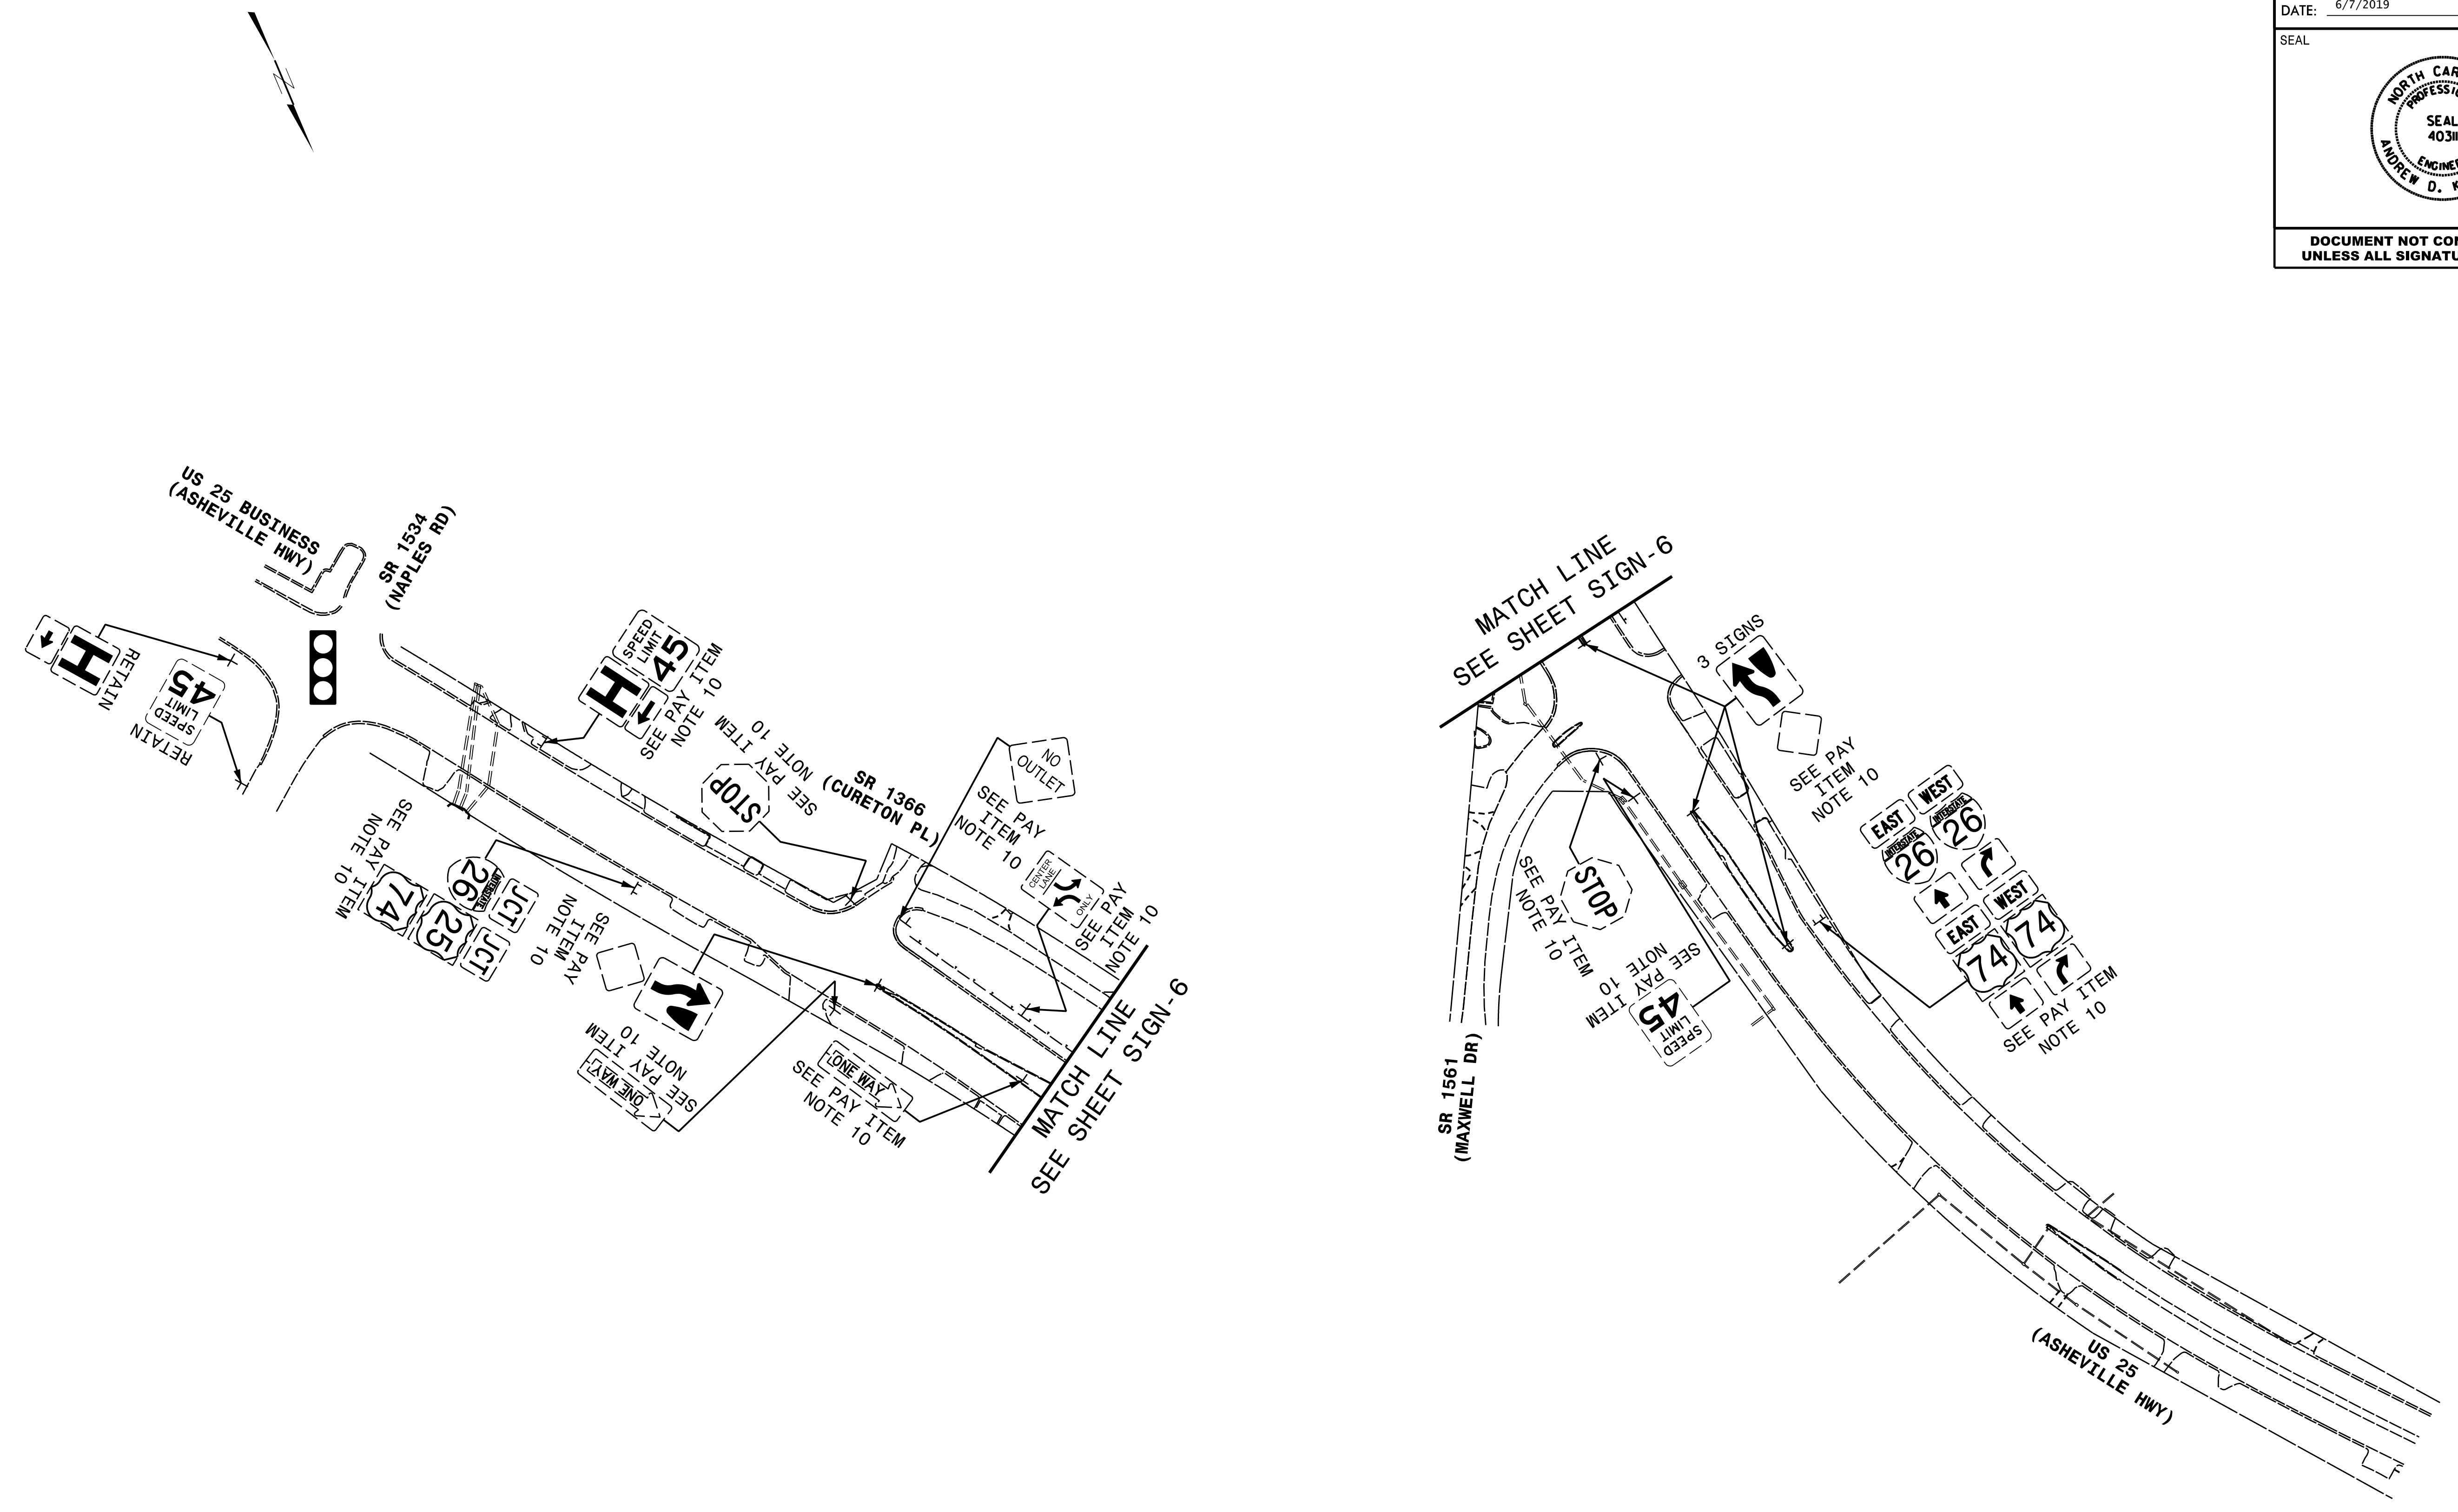
TIP NO. I-4400C	SHEET NO. SIGN-12
APPROVED: <u>Andrew D. Klinck</u> <small>DocuSigned by: E3D78F84964E44D</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

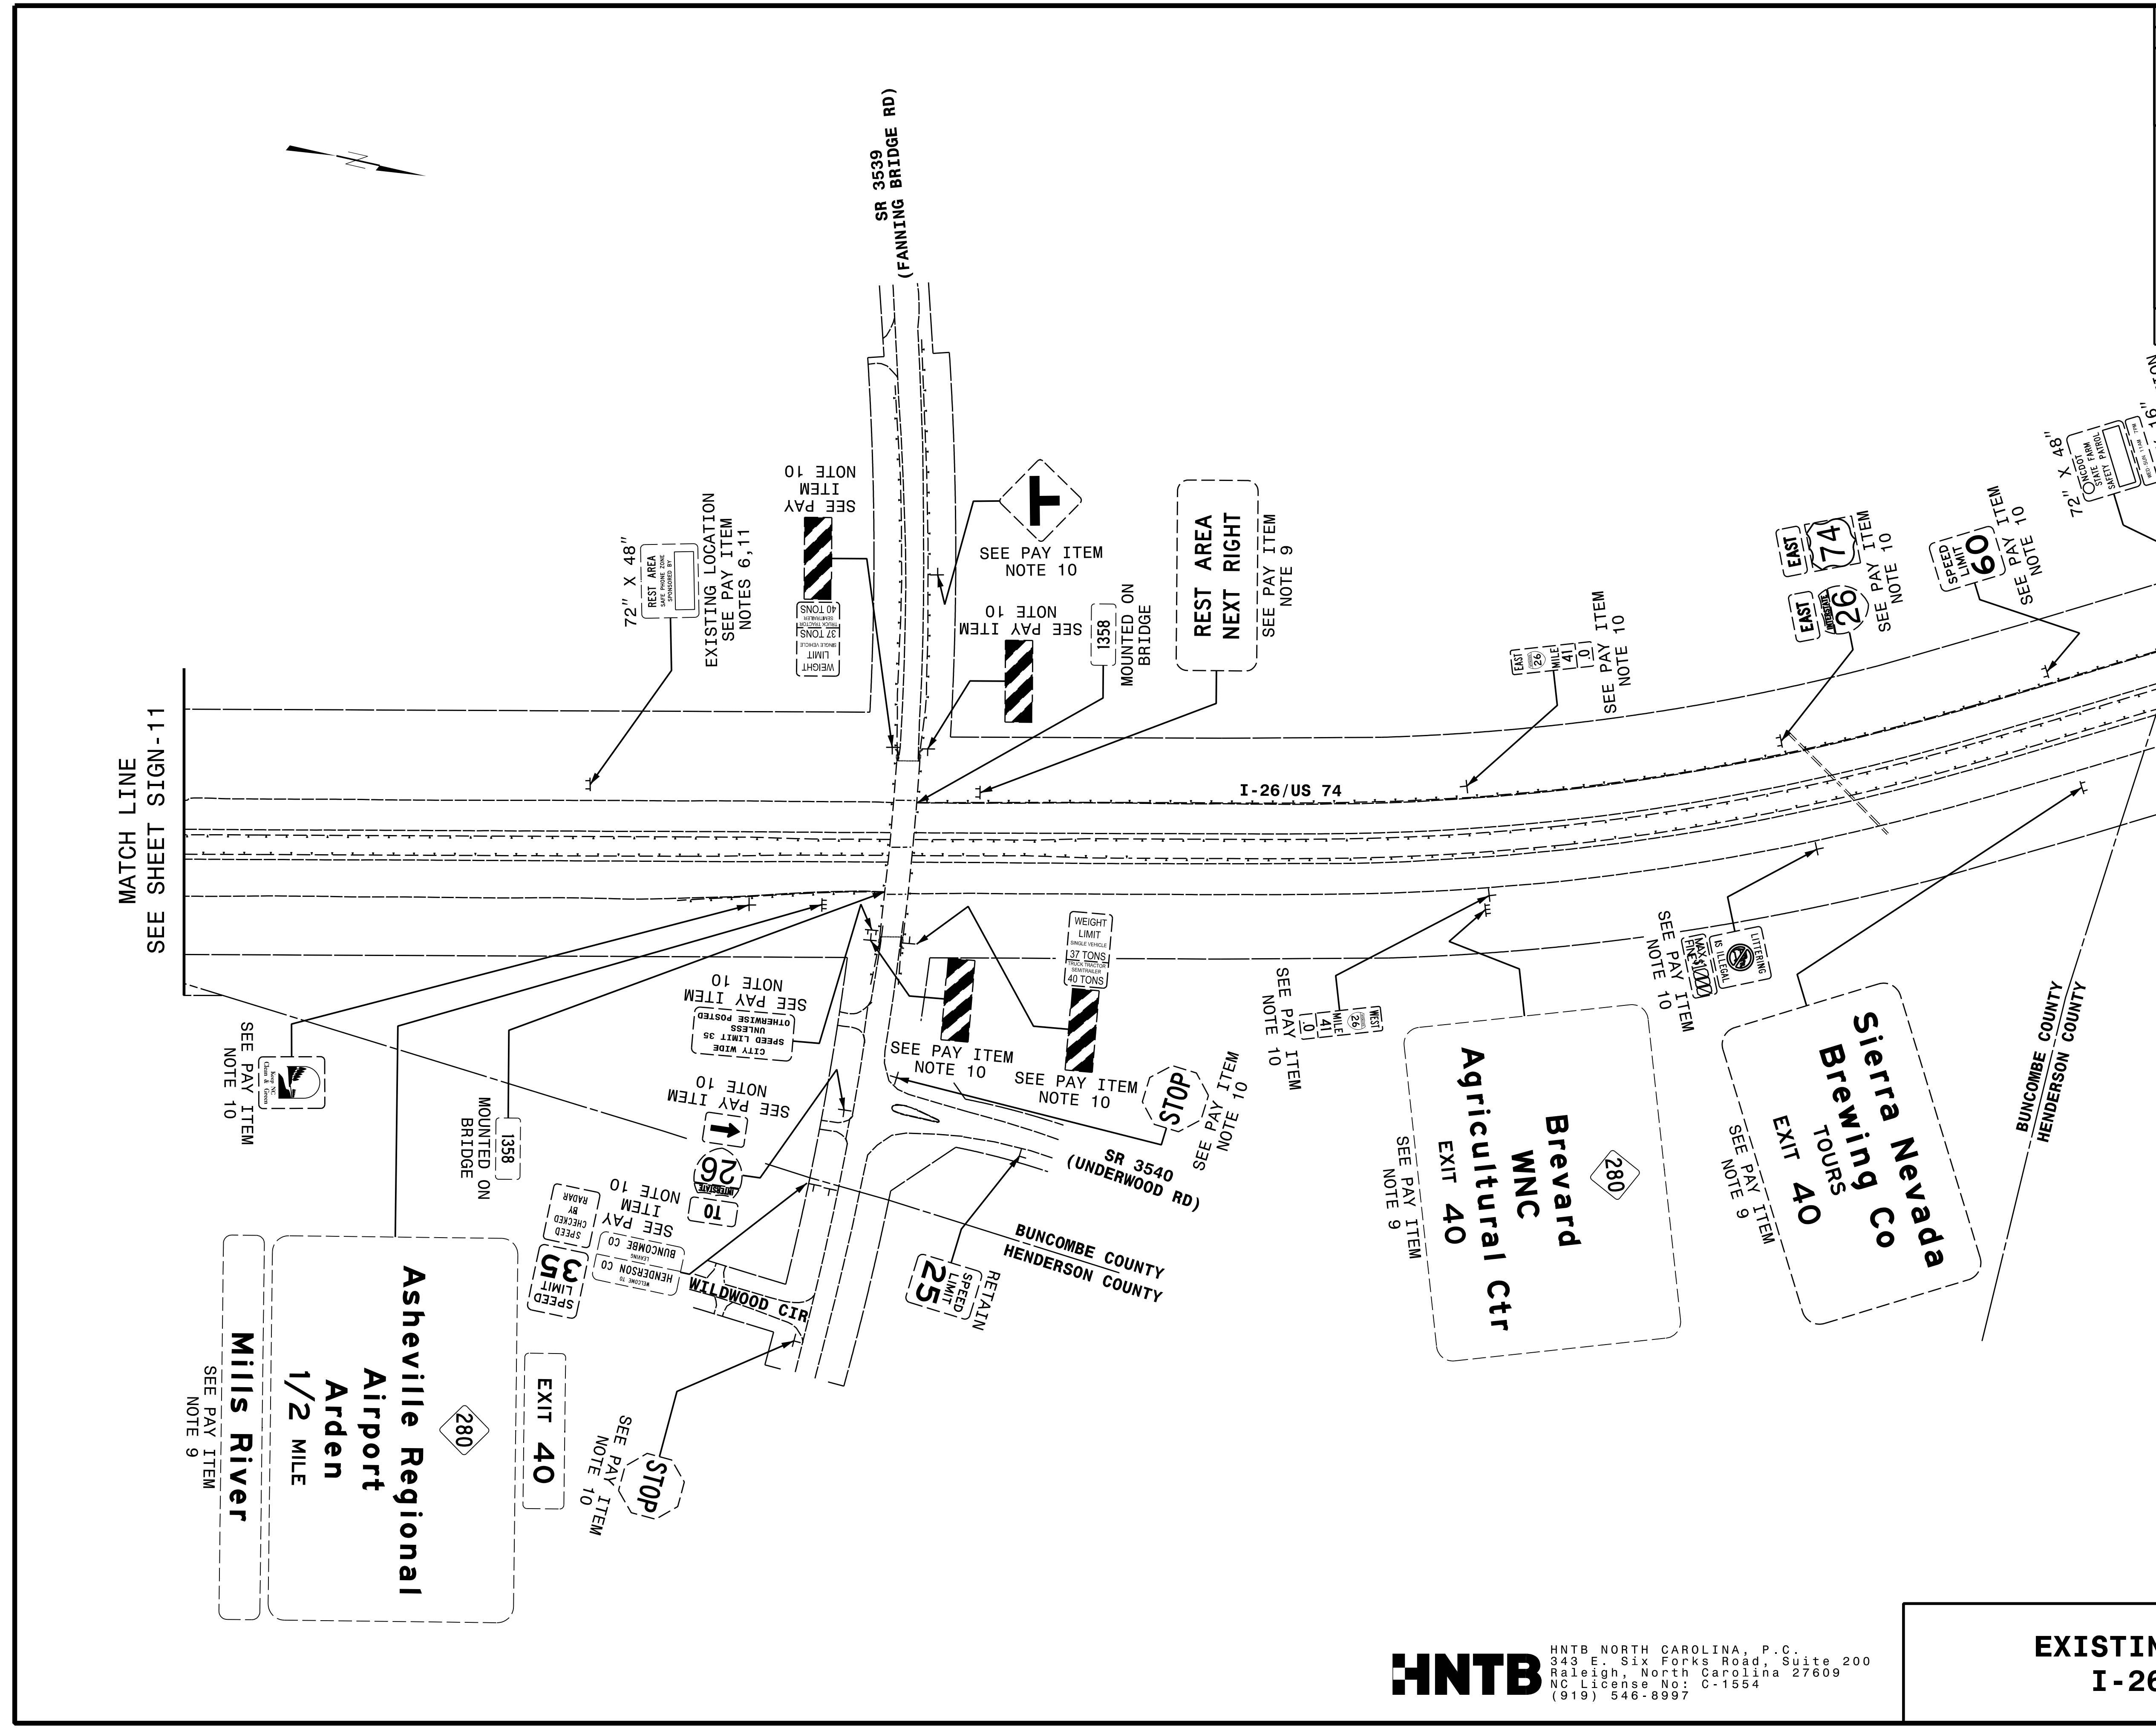


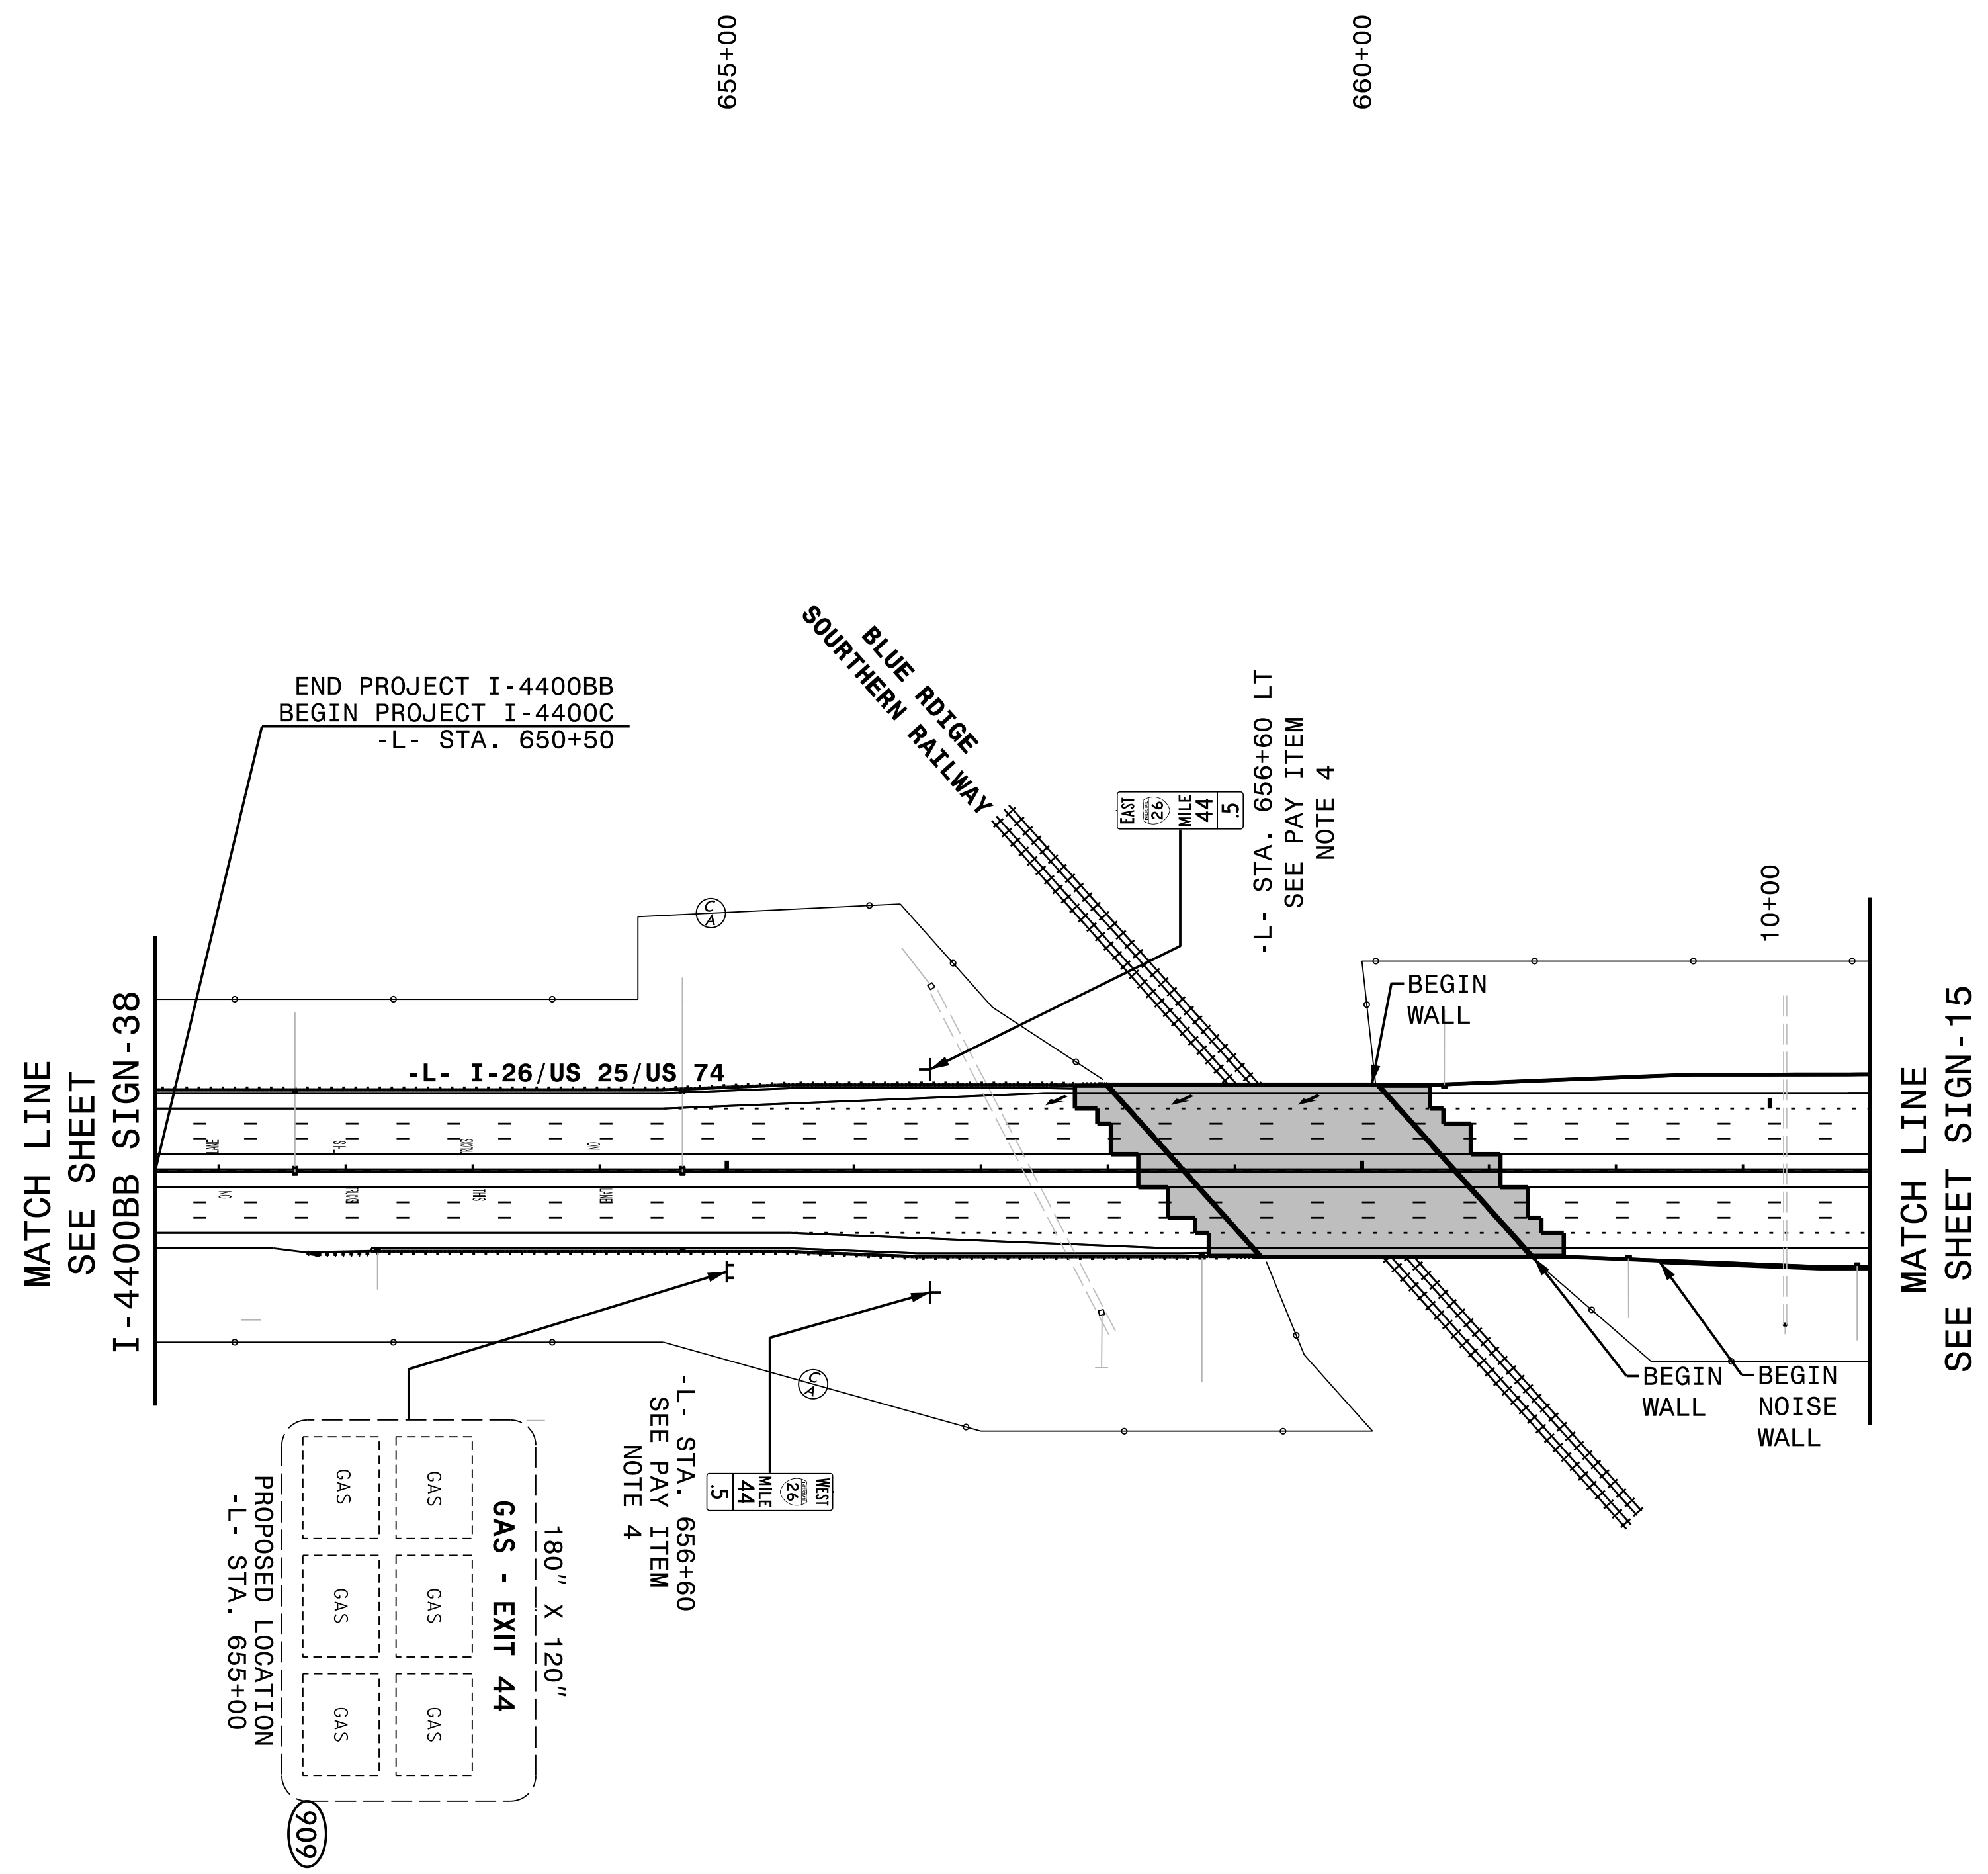

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**EXISTING SIGNING**  
**I-26/US 74**

TIP NO. I-4400C	SHEET NO. SIGN-13
APPROVED: <u>Andrew D. Klinkisch</u> <small>E3378F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




TIP NO. I-4400C	SHEET NO. SIGN-14
APPROVED: <u>Andrew D. Klinck</u> <small>DocuSigned by: E3D78F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




**HNTB**  
HNTB NORTH CAROLINA, P.C.  
343 E. Six Forks Road, Suite 200  
Raleigh, North Carolina 27609  
NC License No: C-1554  
(919) 546-8997

**PROPOSED SIGNING**  
**-L- STA. 650+50 TO 664+00**



TIP NO. I-4400C	SHEET NO. SIGN-15
APPROVED: <u>Andrew D. Klinck</u> <small>E31078F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

**SEE SHEETS SIGN-22 TO  
SIGN-25 FOR US 25 SIGNING**

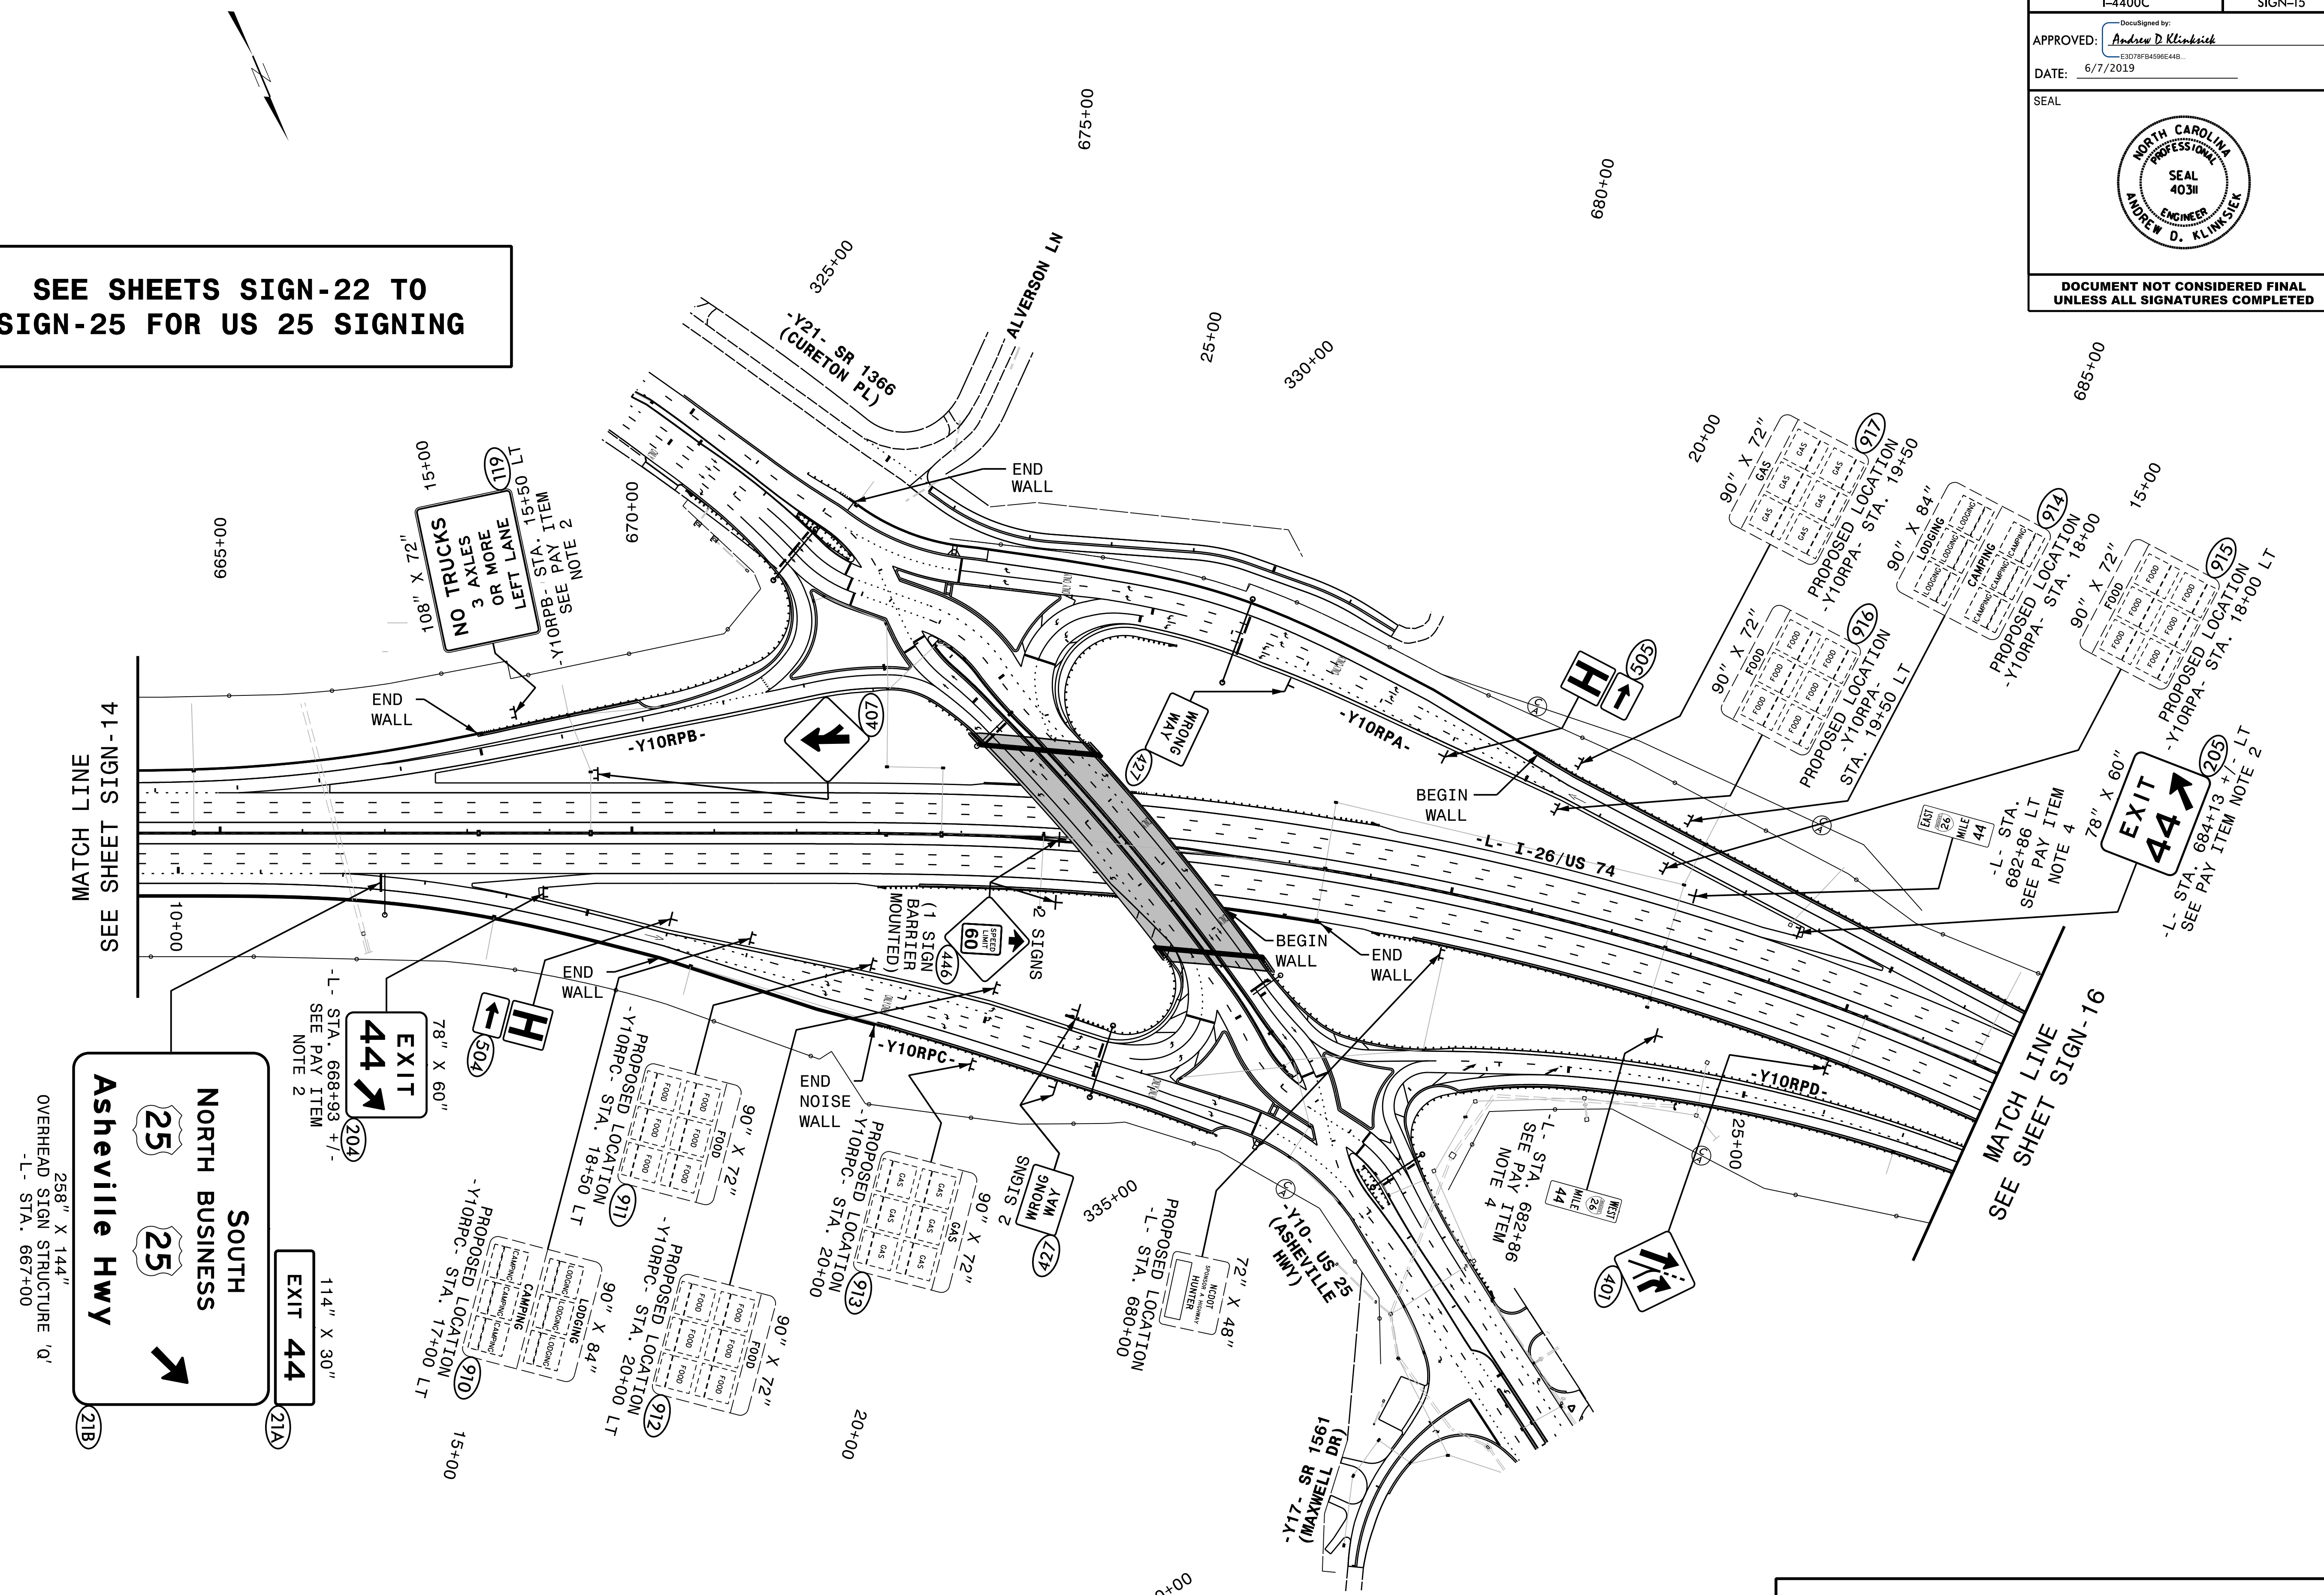

**Asheville Hwy**  
 SOUTH NORTH BUSINESS  
 25 25  
 258" X 144"  
 OVERHEAD SIGN STRUCTURE '0'  
 -L- STA. 667+00

**EXIT 44**  
 114" X 30"  
 21A


**EXIT 44**  
 78" X 60"  
 20A  
 -L- STA. 668+93 +/-  
 SEE PAY ITEM NOTE 2



**EXIT 44**  
 78" X 60"  
 205  
 -L- STA. 684+13 +/-  
 SEE PAY ITEM NOTE 2

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**PROPOSED SIGNING  
 -L- STA. 664+00 TO 687+00**




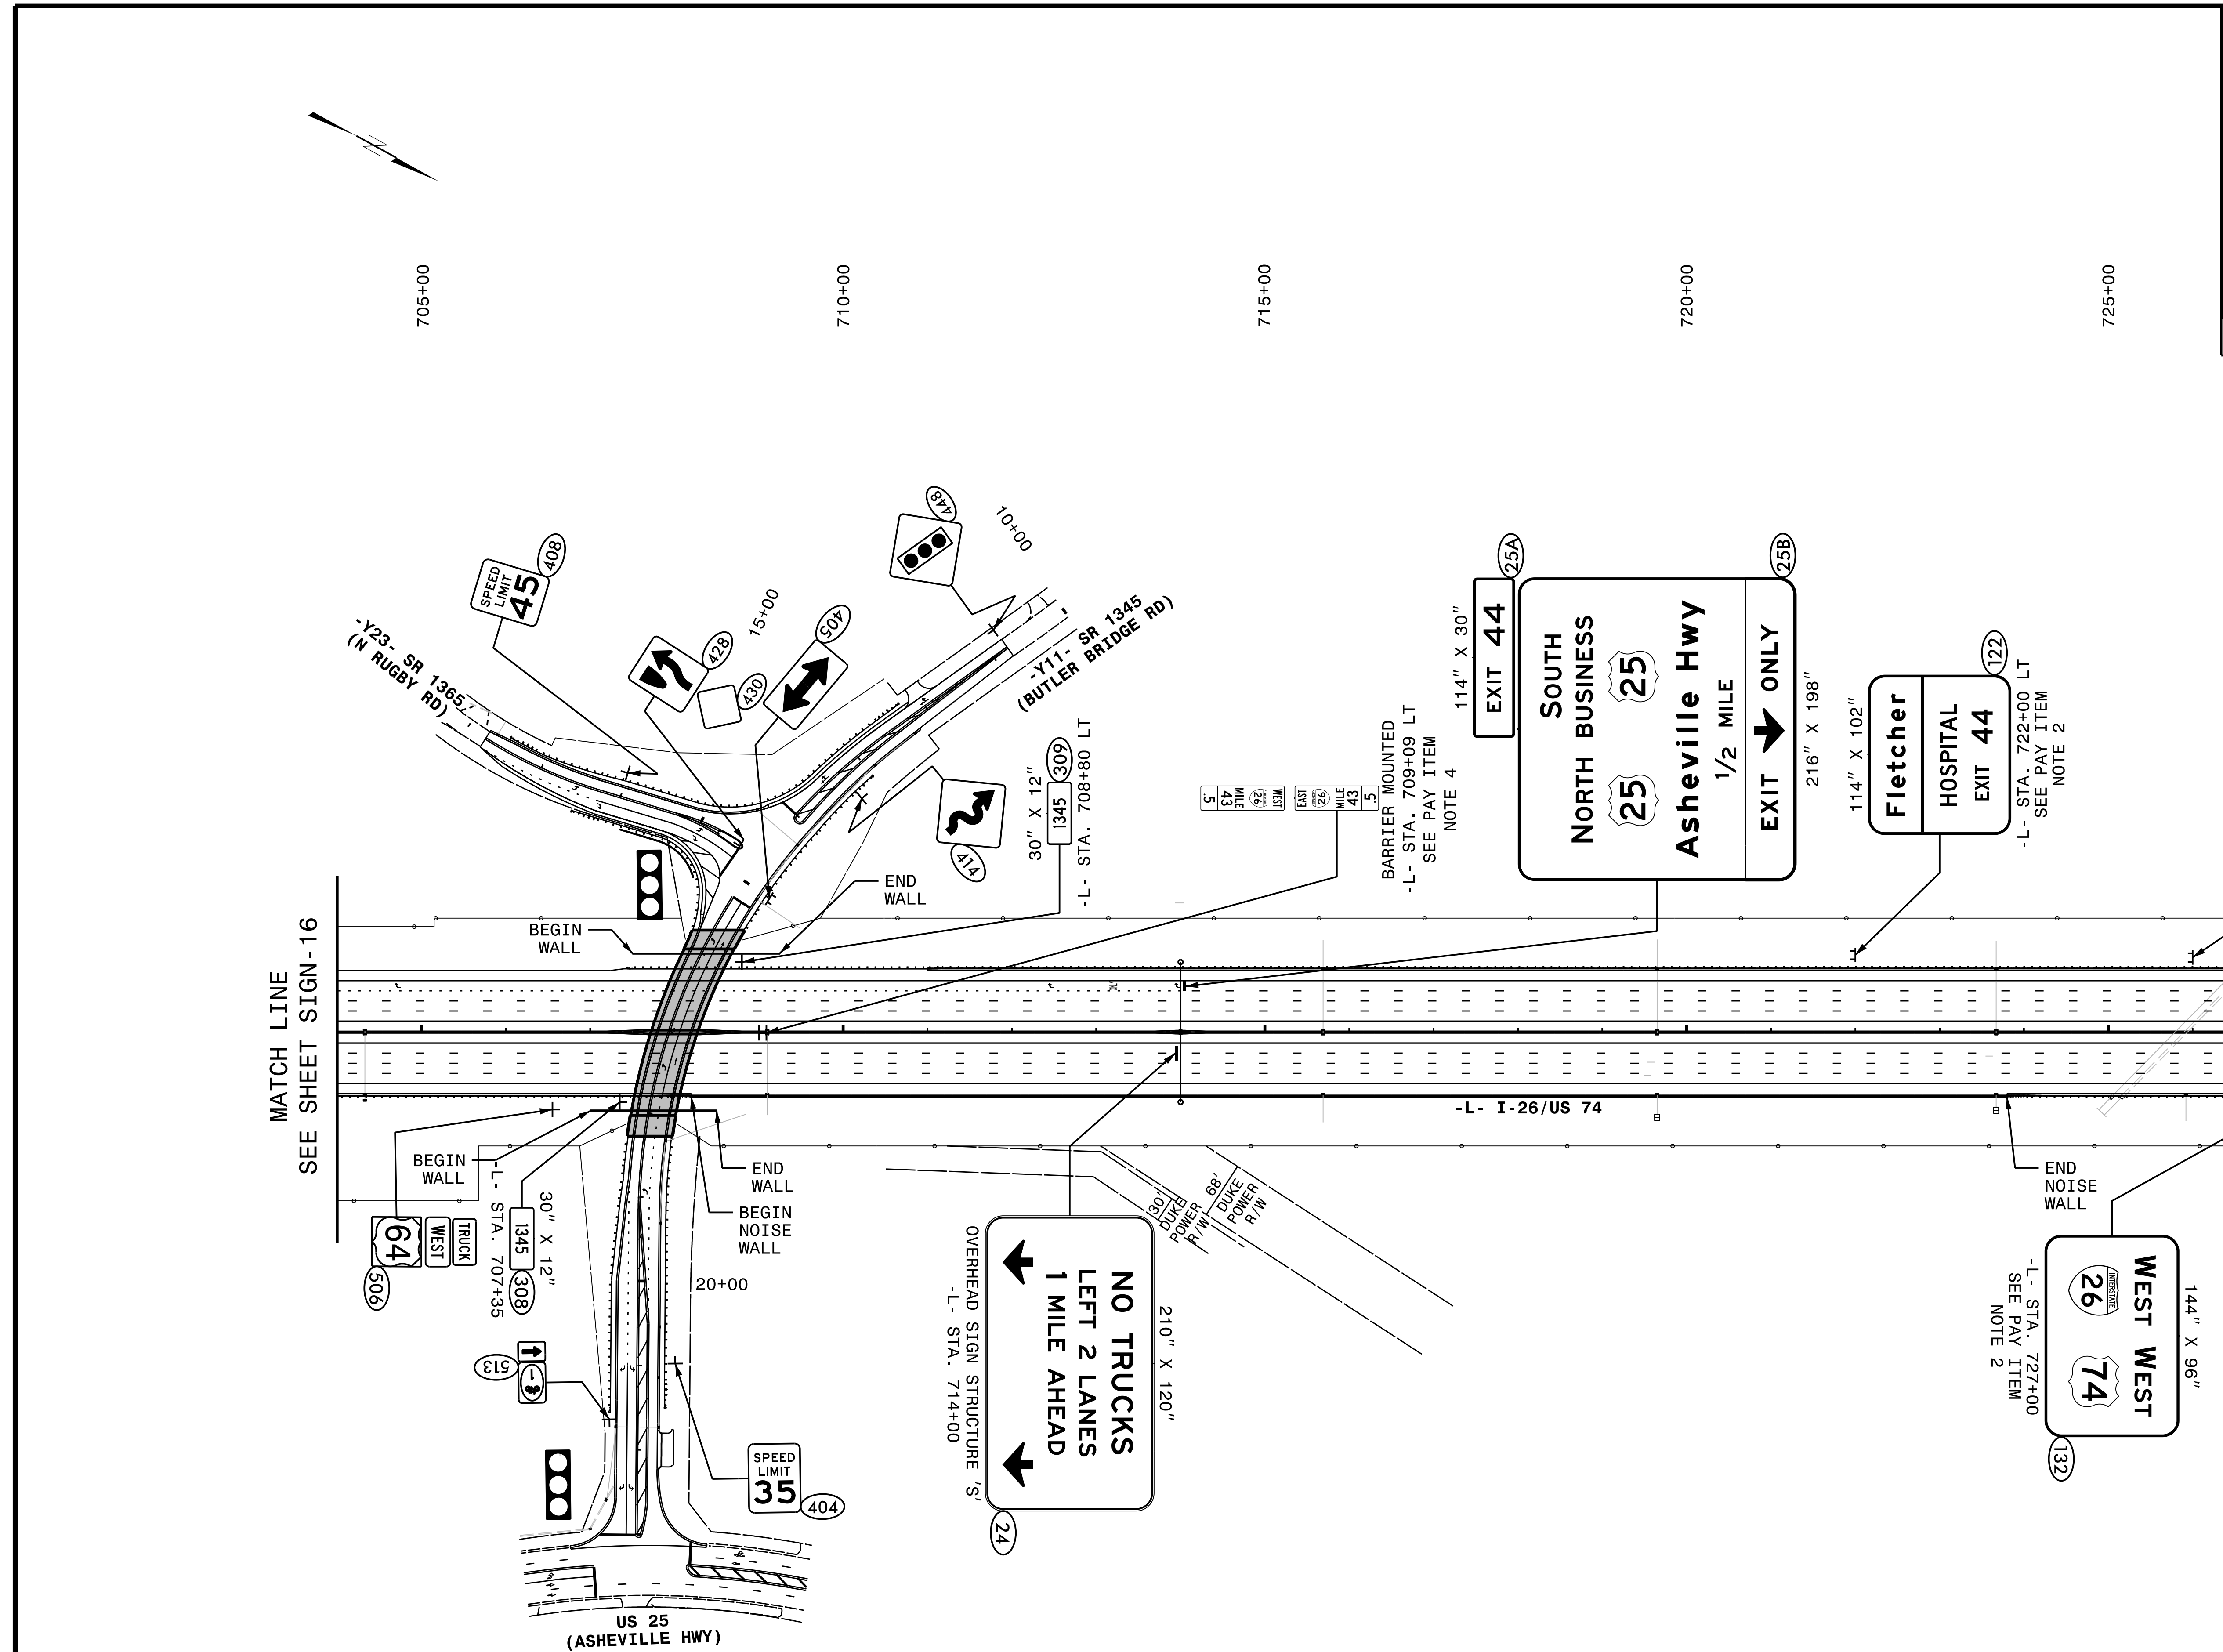
TIP NO. I-4400C	SHEET NO. SIGN-16
APPROVED: <u>Andrew D. Klinckisch</u> <small>DocuSigned by: E3D79F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

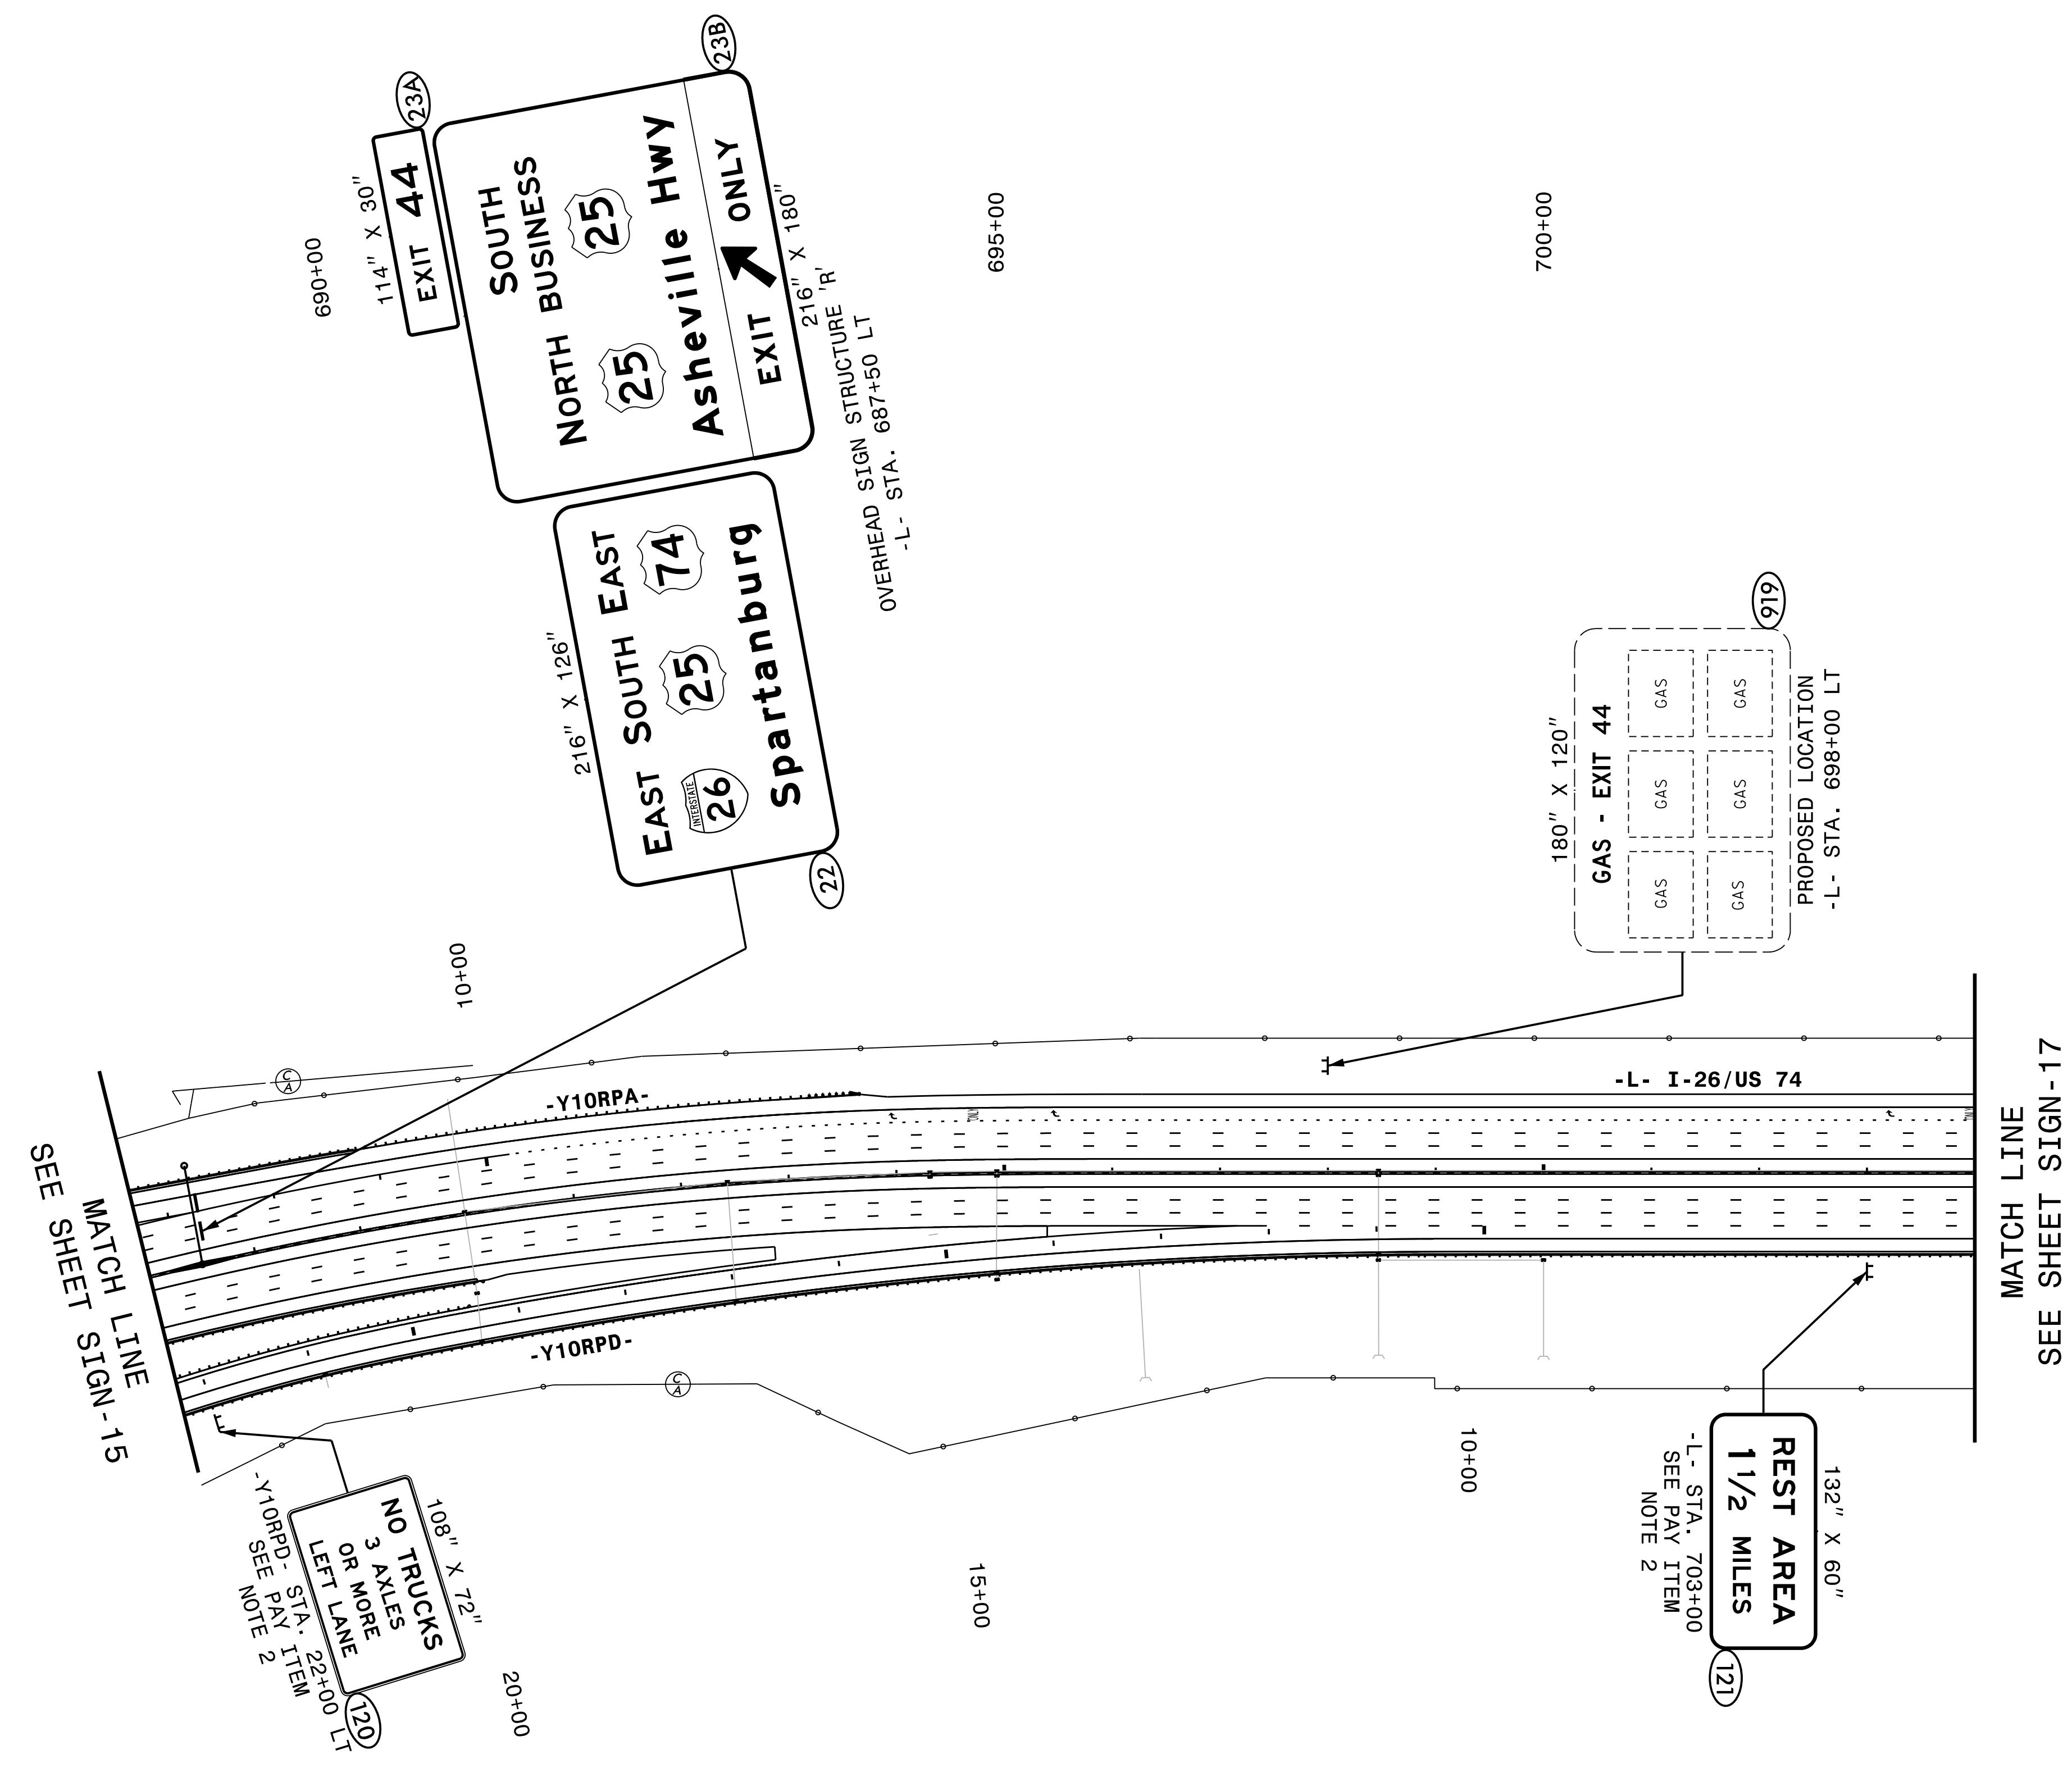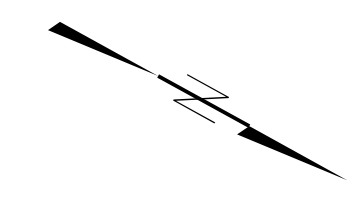

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**PROPOSED SIGNING**  
**-L- STA. 687+00 TO 704+00**

TIP NO. I-4400C	SHEET NO. SIGN-17
APPROVED: <u>Andrew D. Klinck</u> <small>DocuSigned by: E3D79F84964E44D</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




MATCH LINE  
SEE SHEET SIGN-16


MATCH LINE  
SEE SHEET SIGN-18

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**PROPOSED SIGNING**  
 -L- STA. 704+00 TO 728+00  
 -Y11- STA. 10+00 TO 23+00




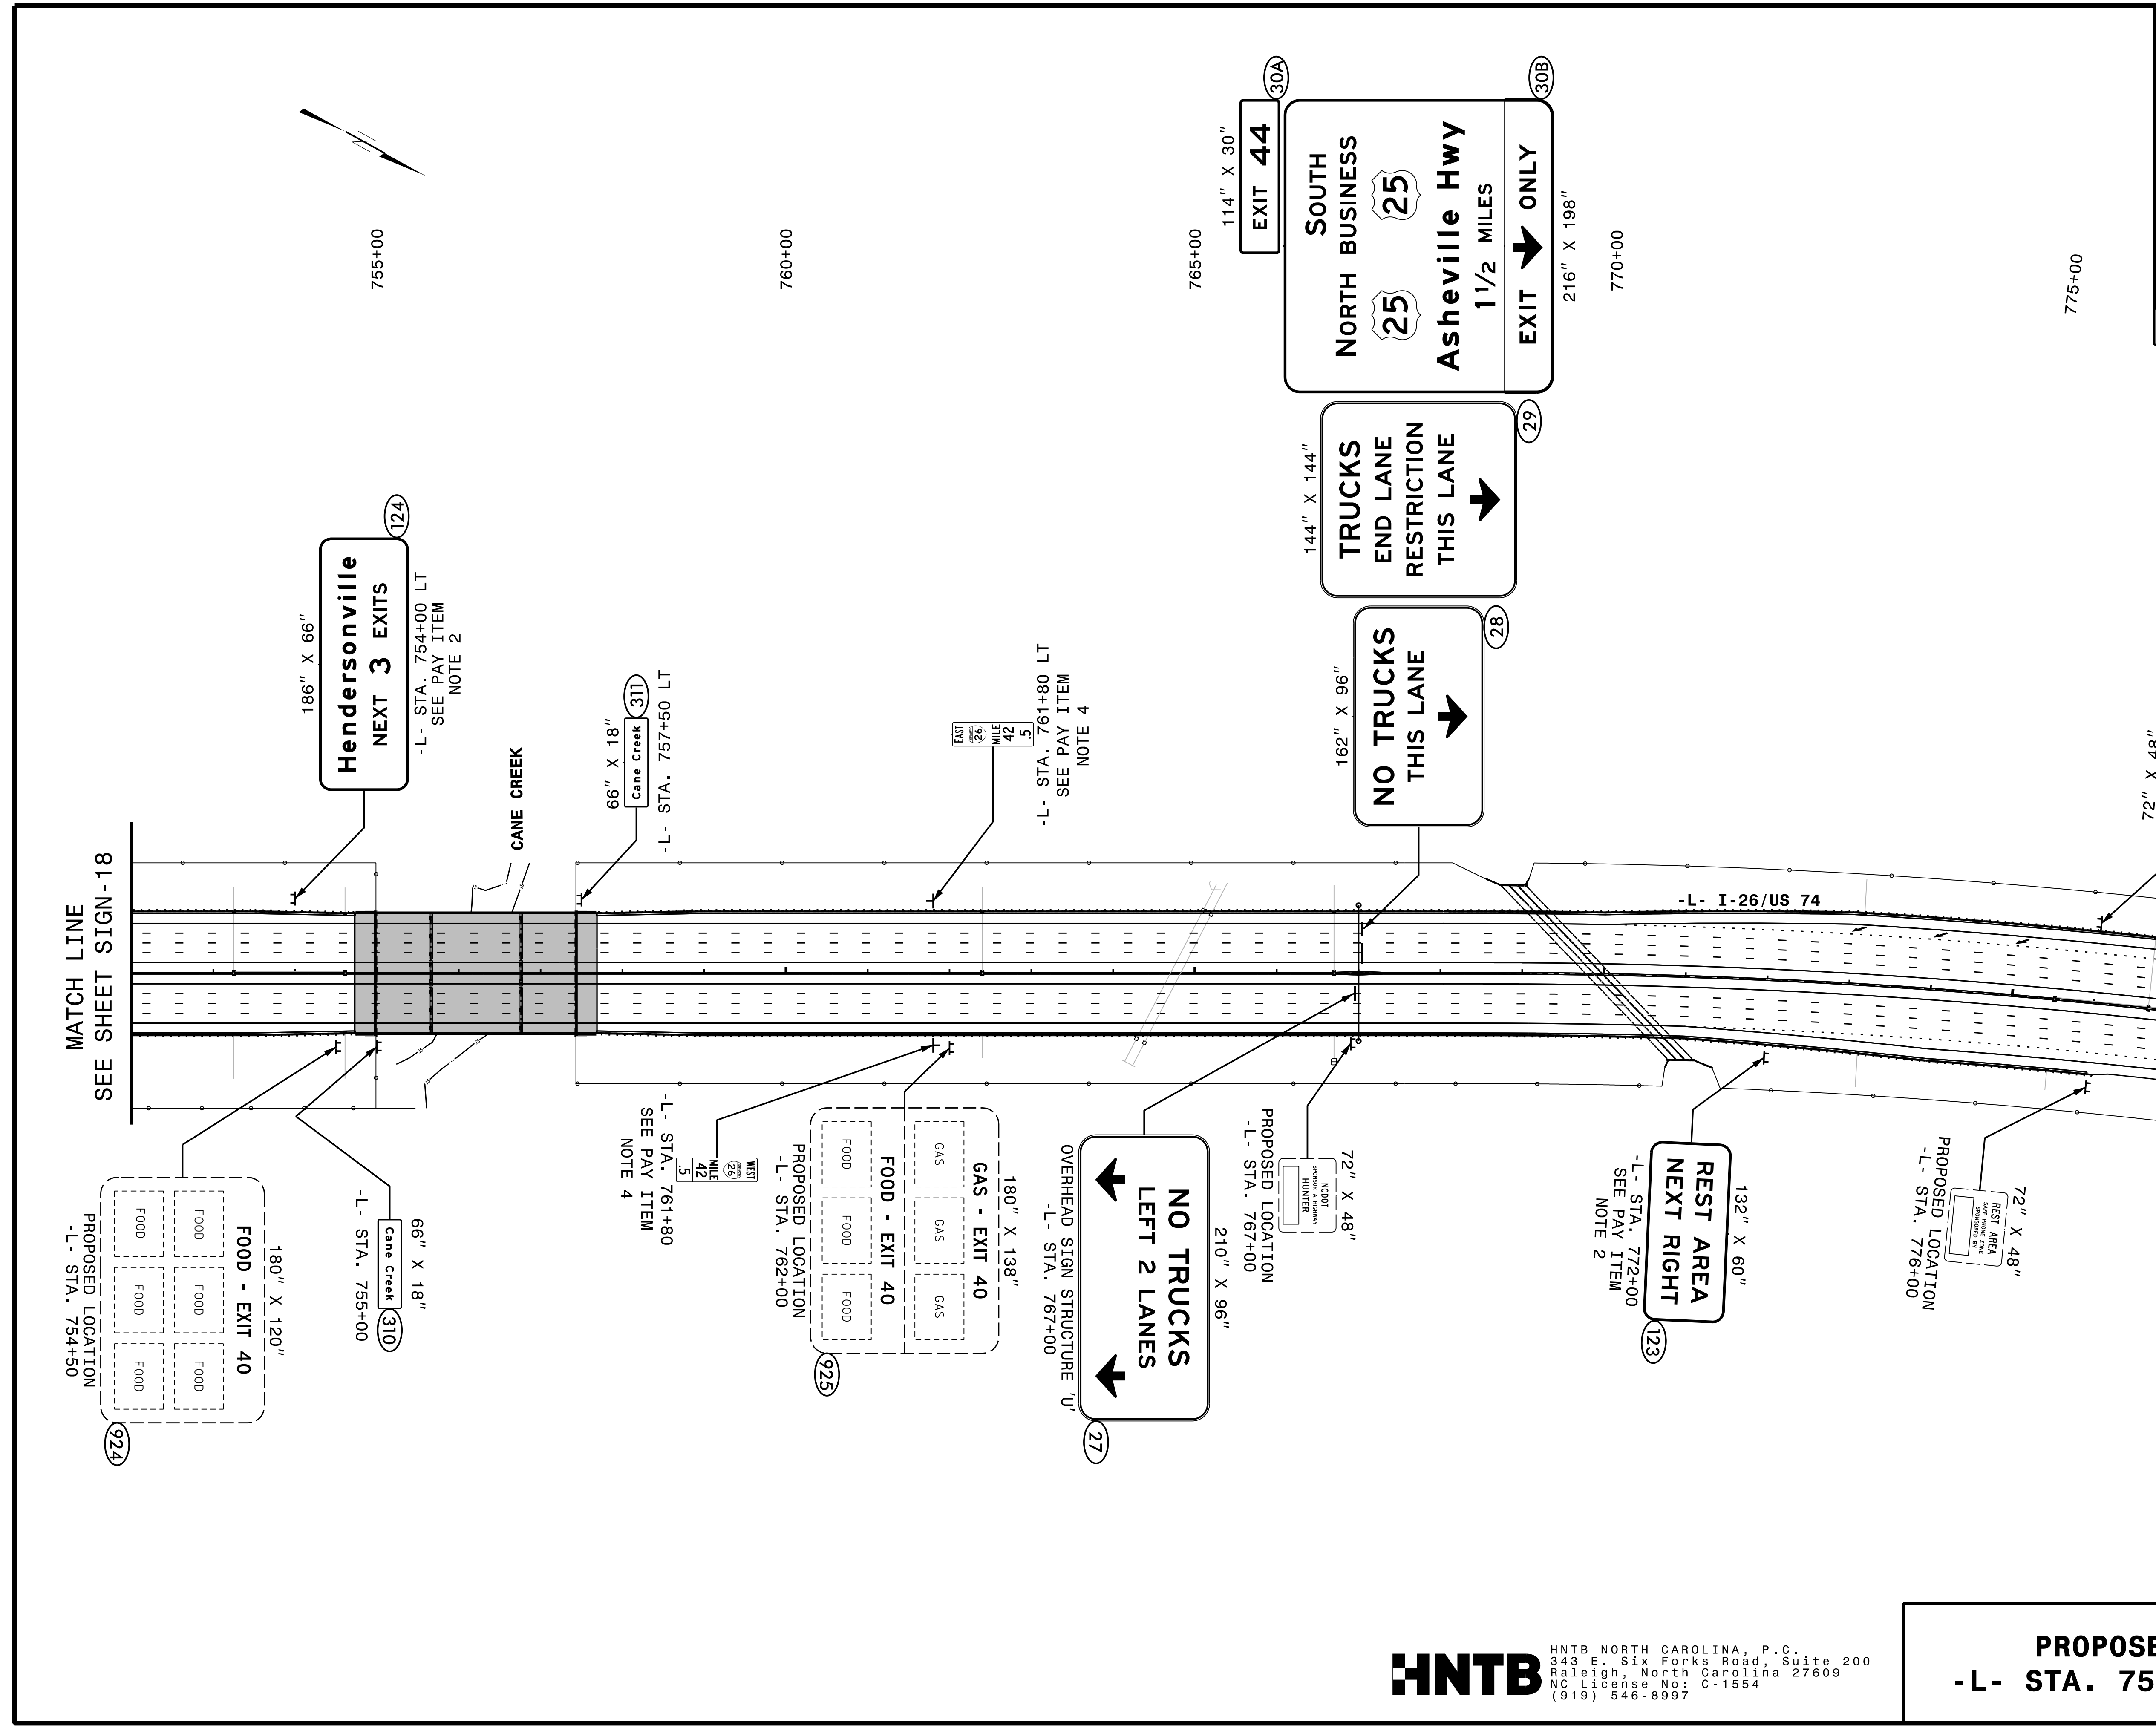
TIP NO. I-4400C	SHEET NO. SIGN-18
APPROVED: <i>Andrew D. Klinckisch</i> <small>DocuSigned by: E3D79F8496E44B...</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

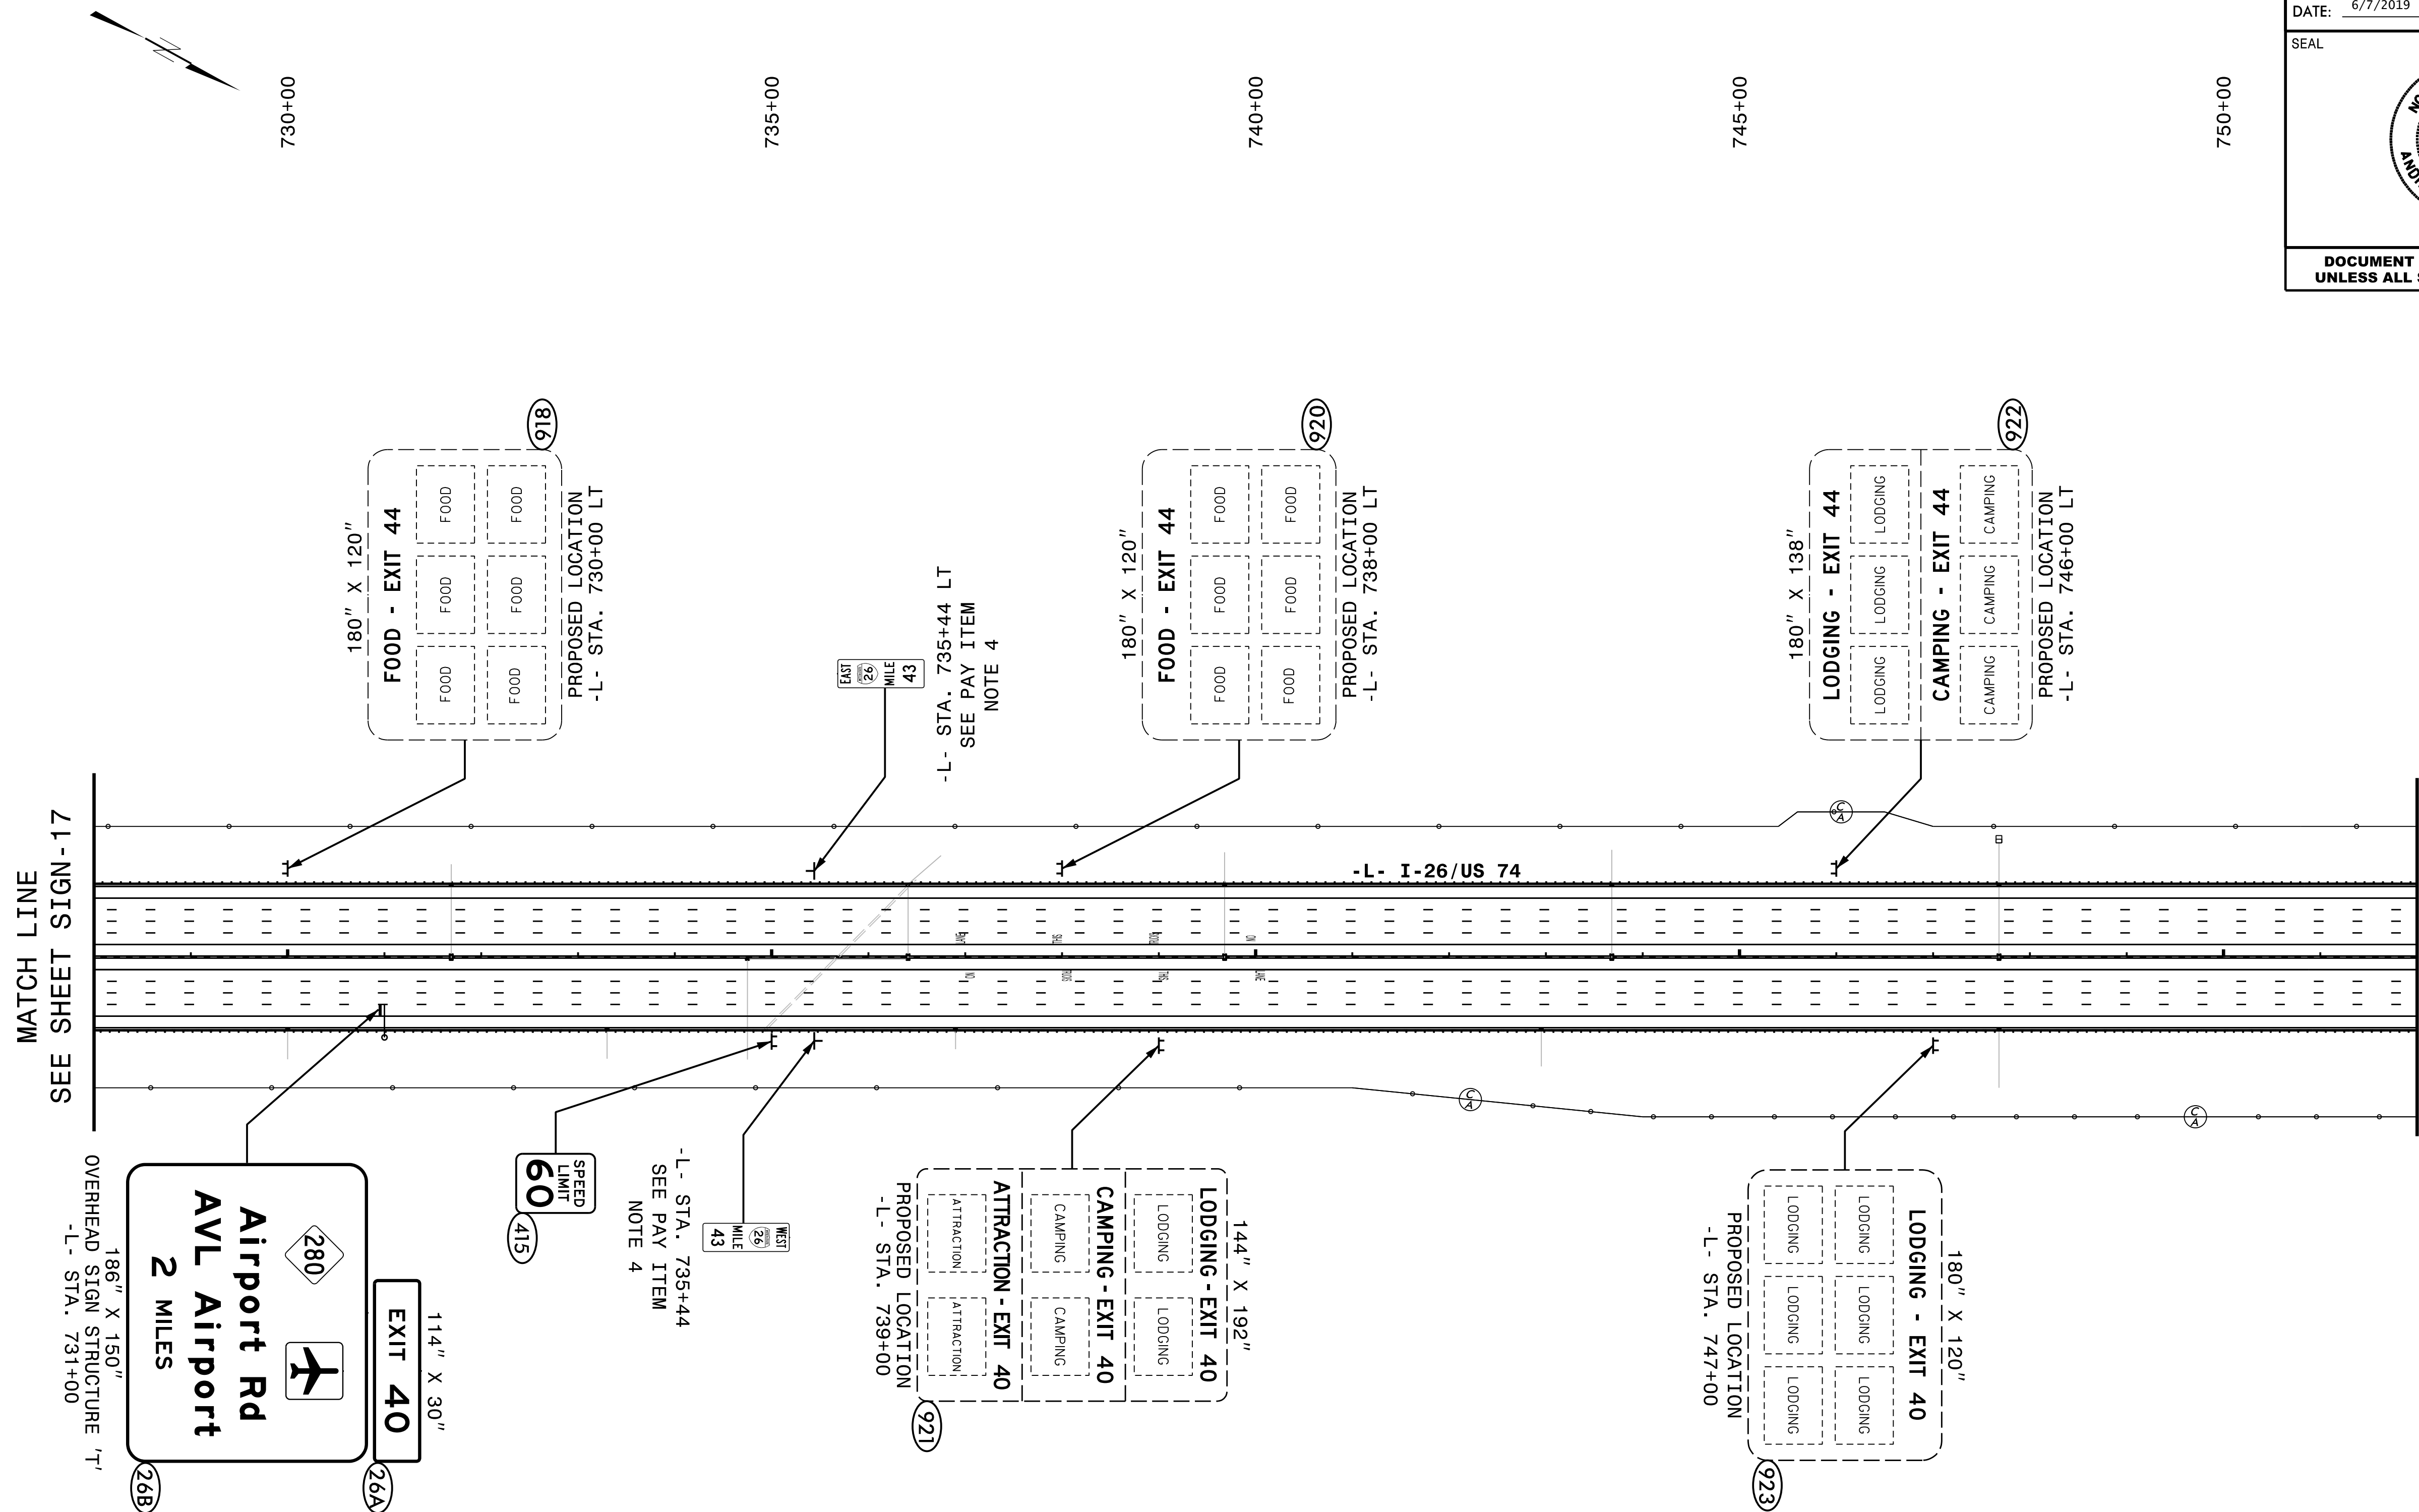

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997


**PROPOSED SIGNING**  
**-L- STA. 728+00 TO 752+00**


TIP NO. I-4400C	SHEET NO. SIGN-19
APPROVED: <u>Andrew D. Klinck</u> <small>E3379F849644B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	



**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**PROPOSED SIGNING**  
**-L- STA. 752+00 TO 779+00**

TIP NO. I-4400C	SHEET NO. SIGN-20
APPROVED: <i>Andrew D. Klinckisch</i> E31078F849644B	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

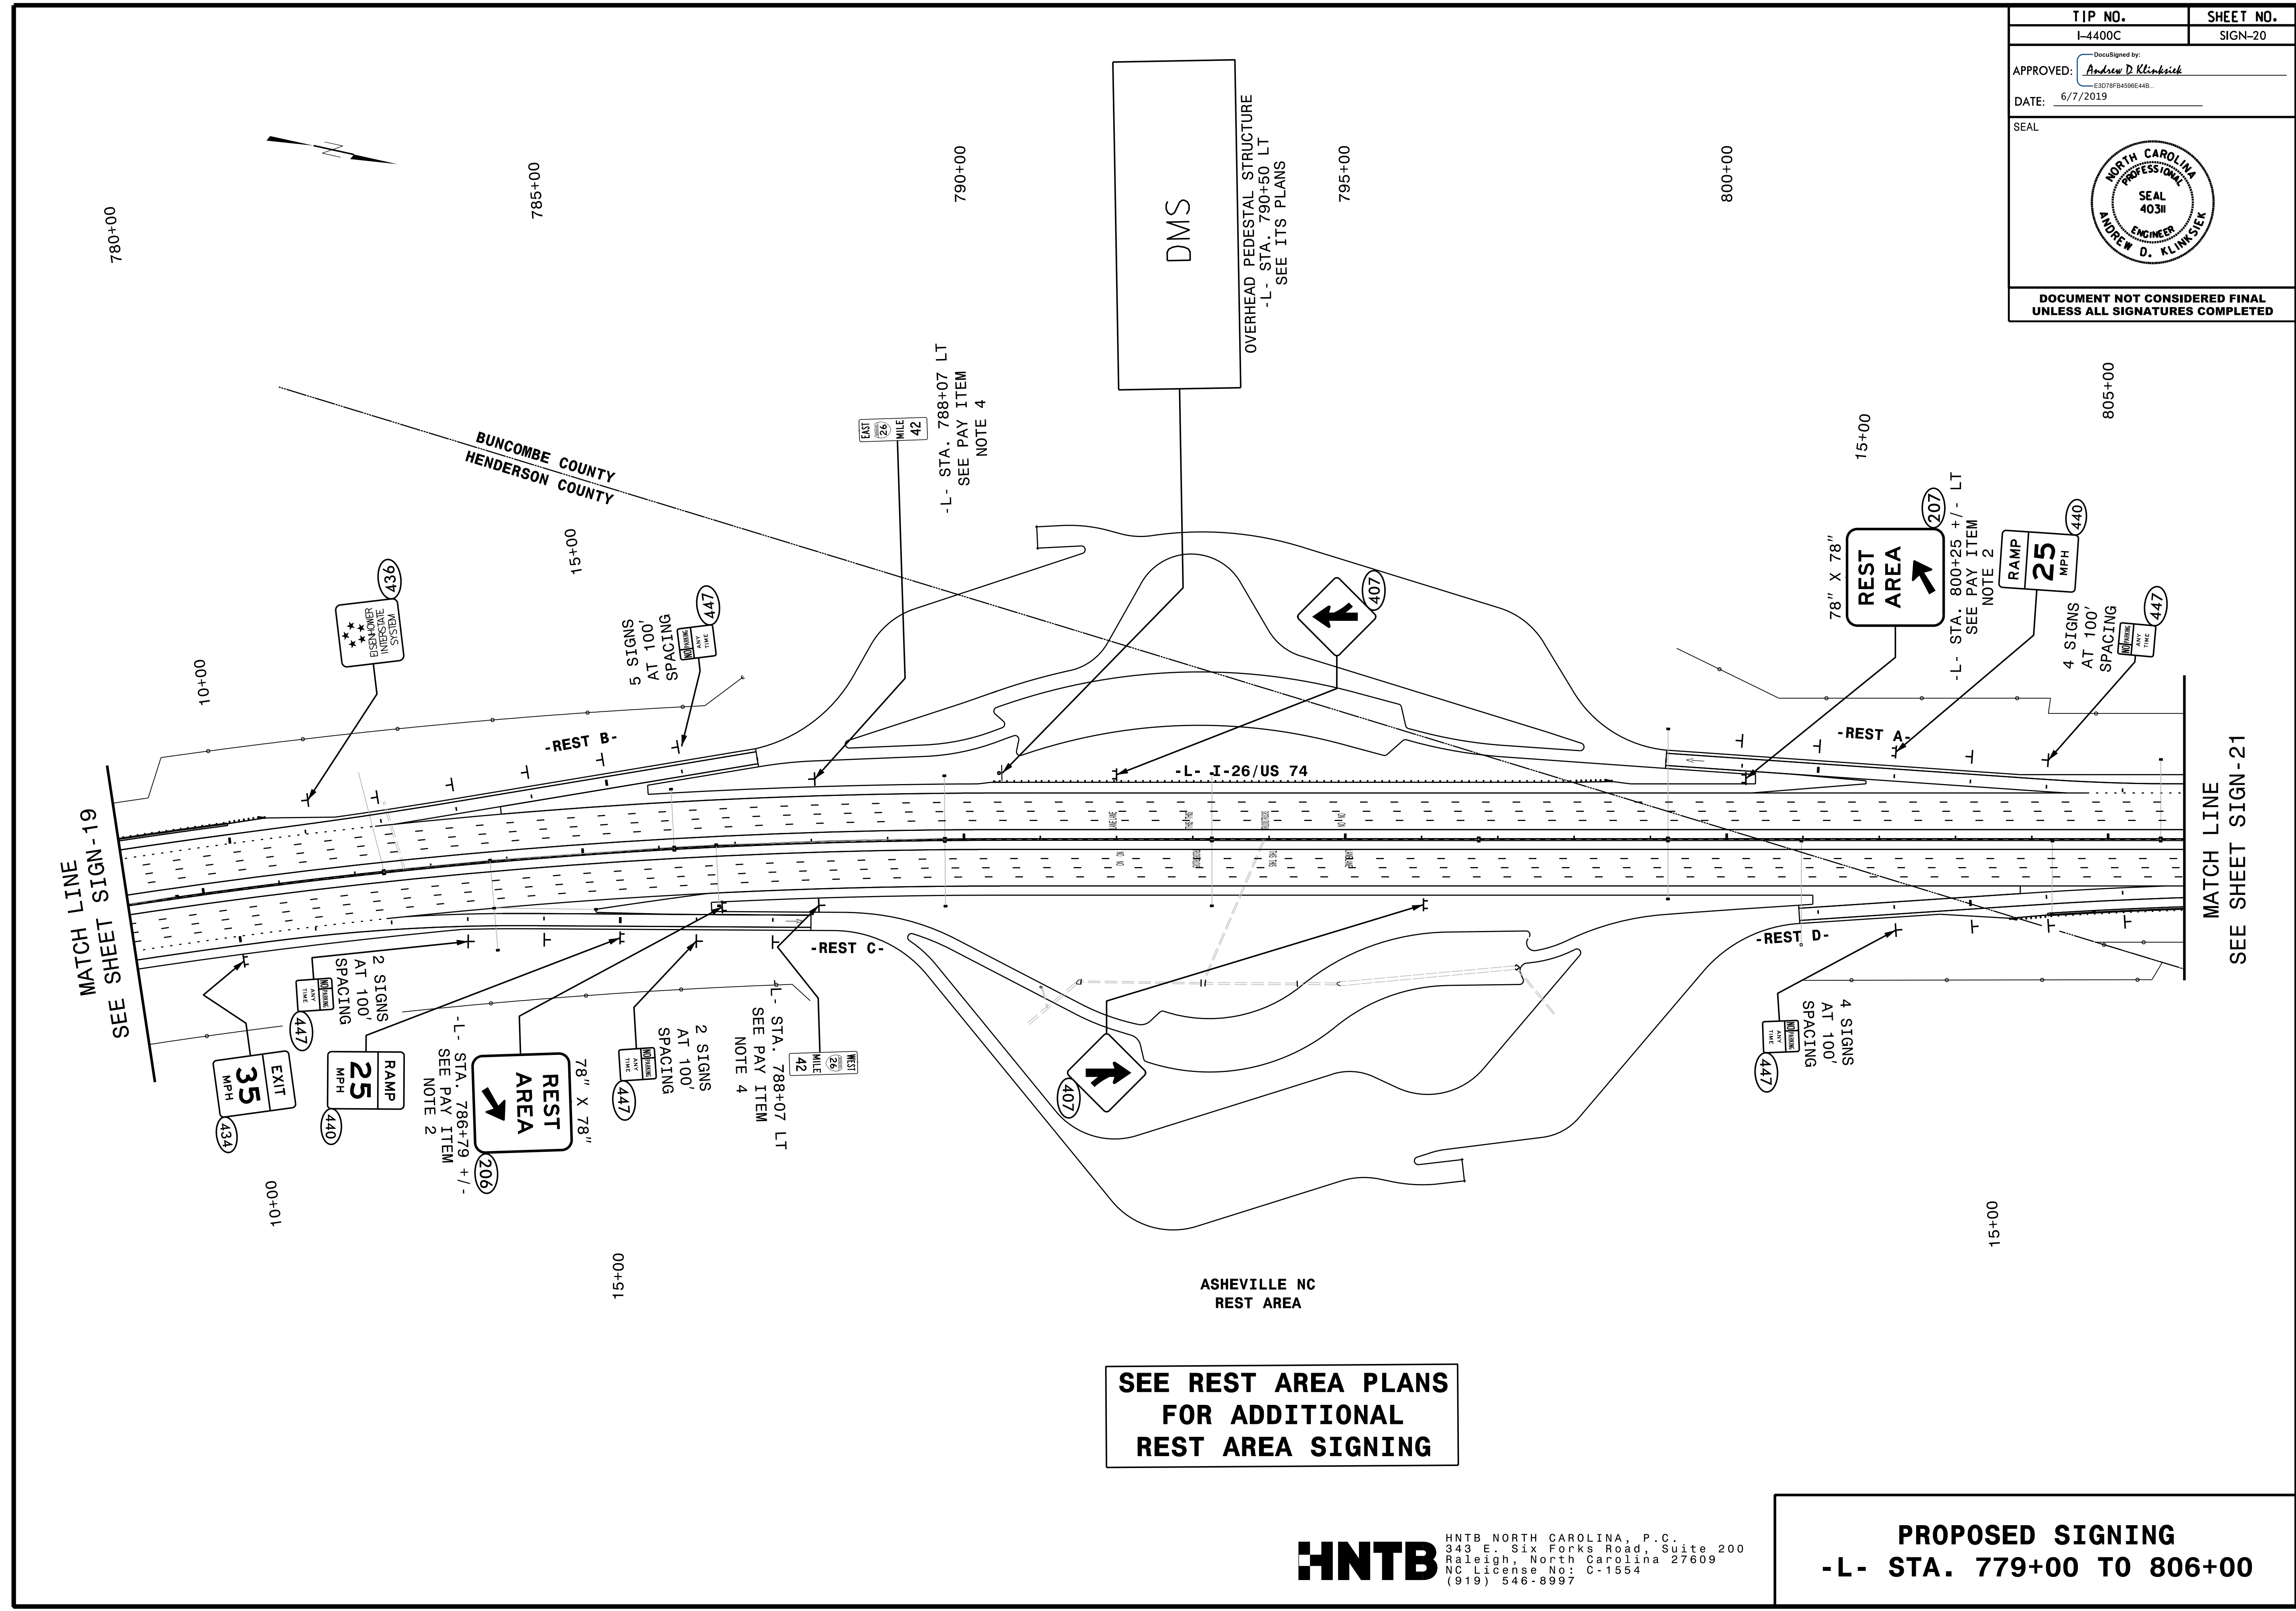


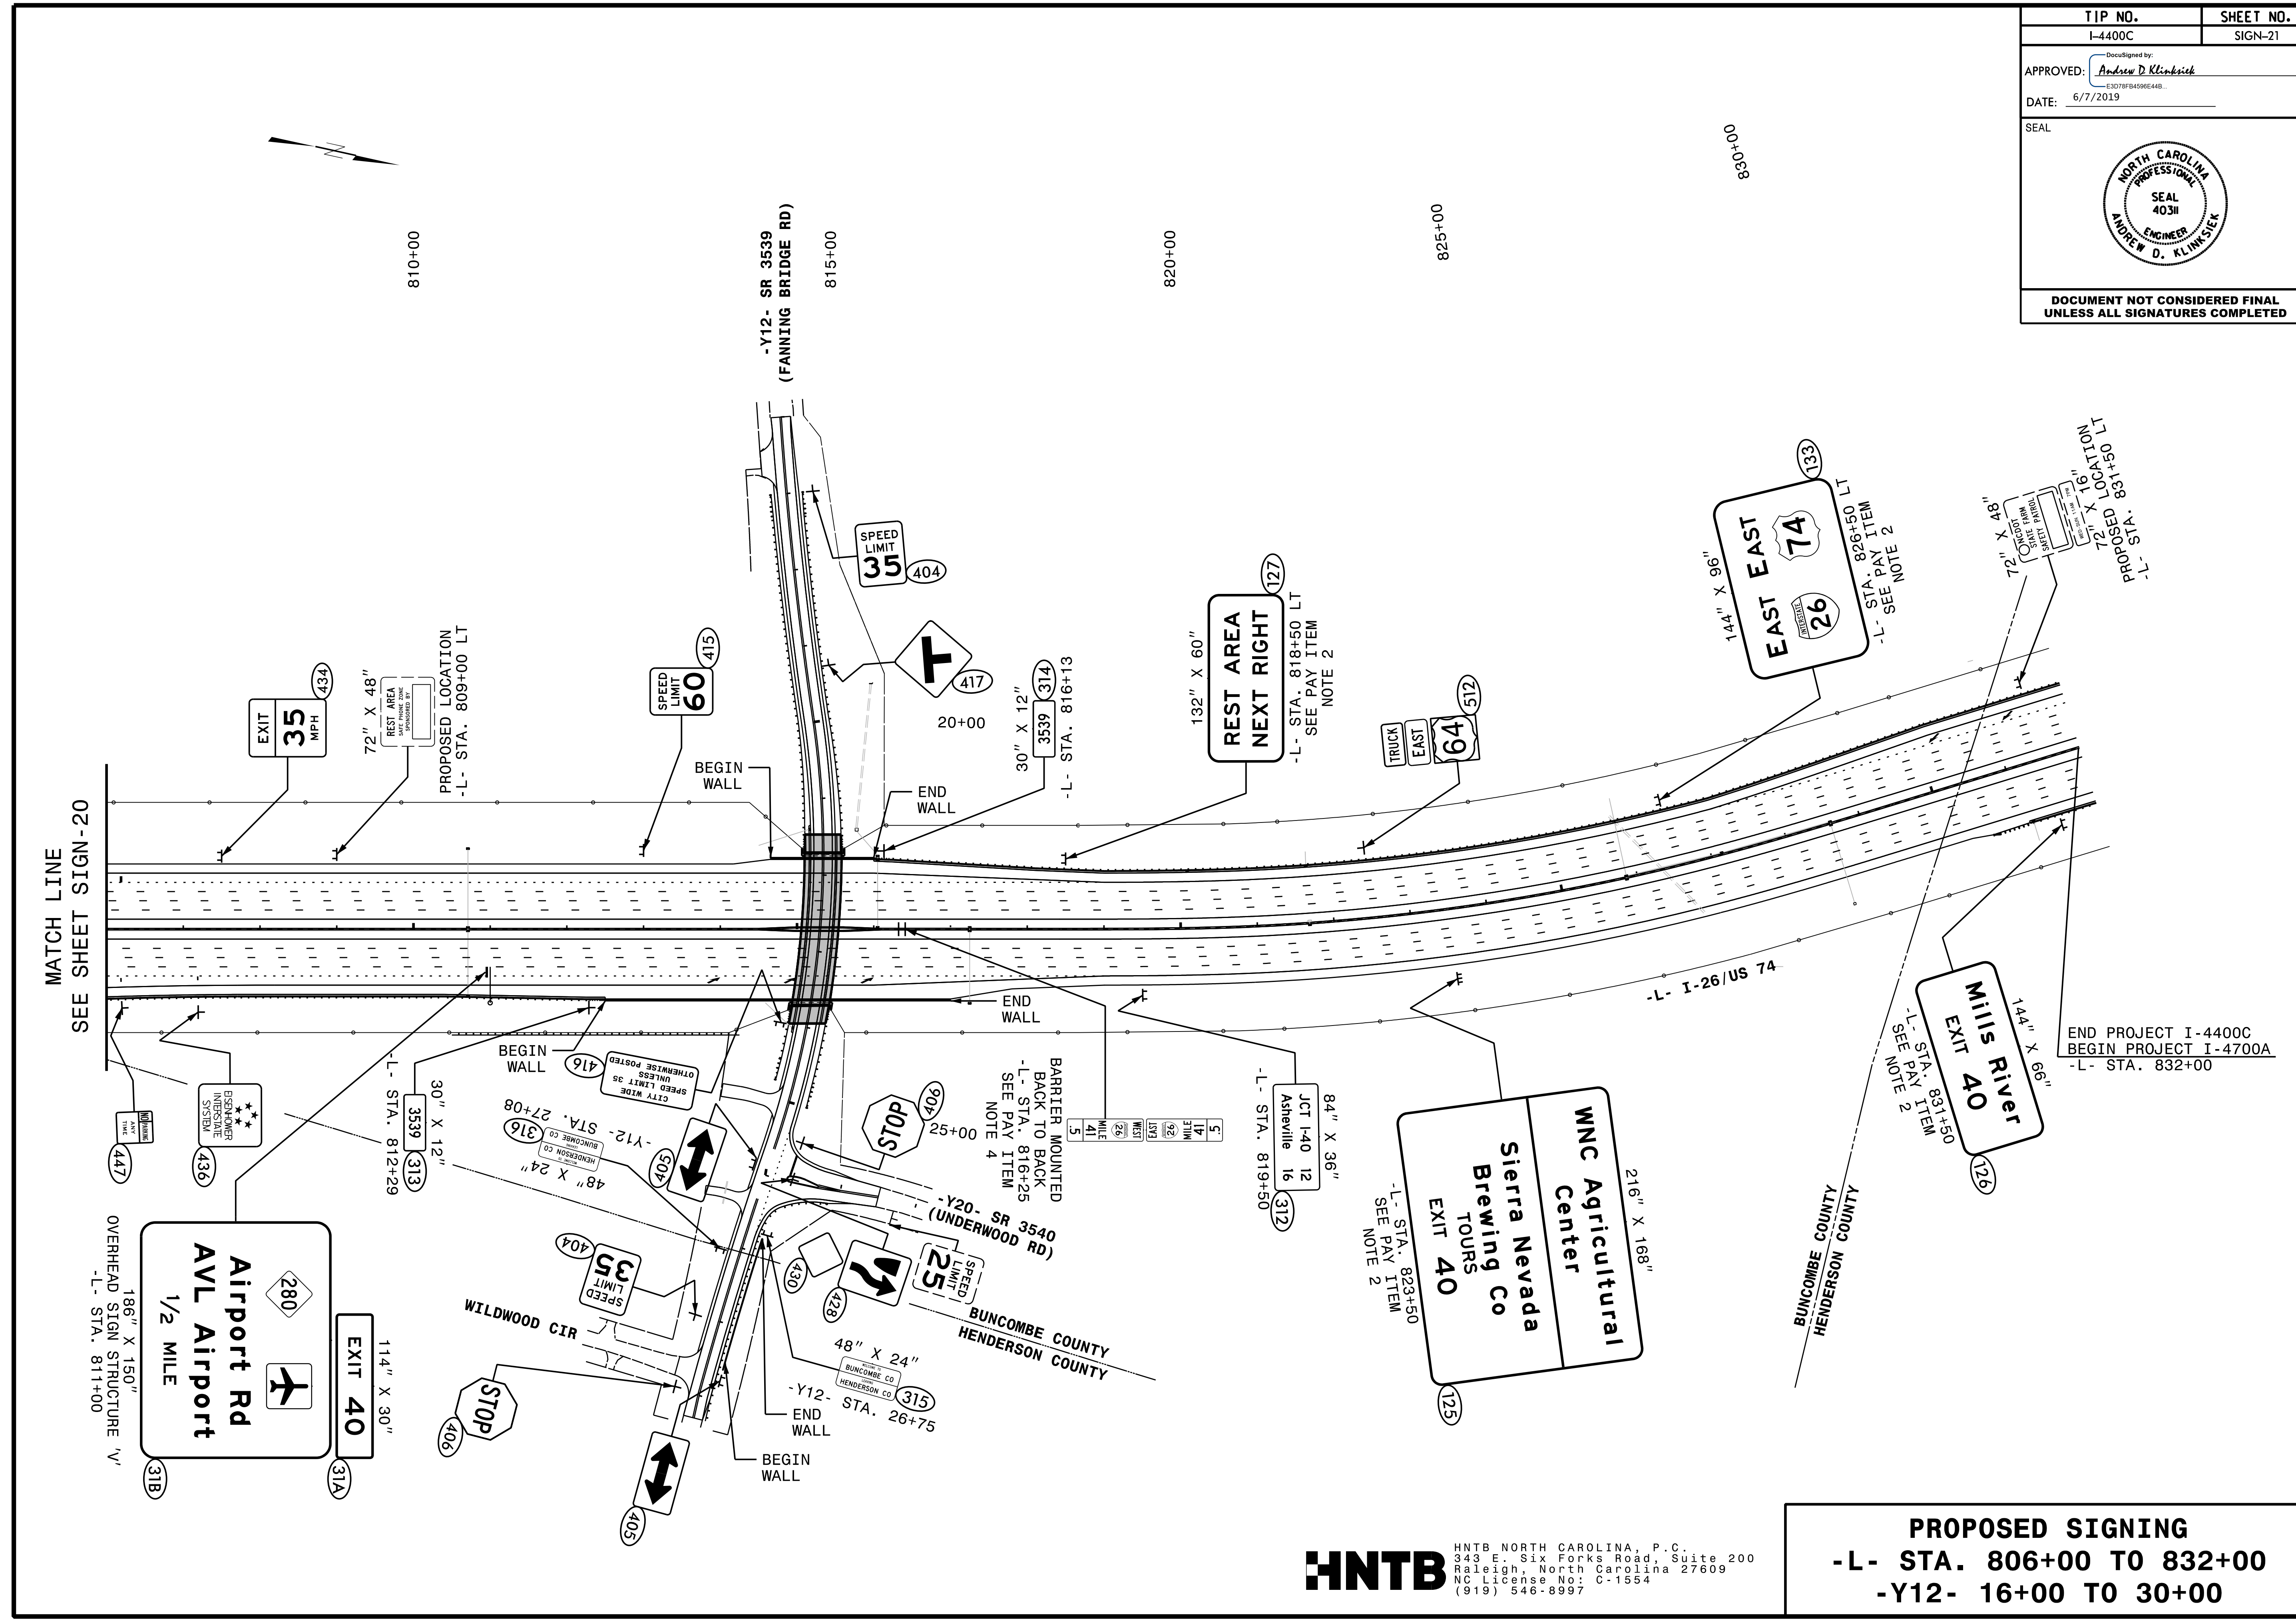
**SEE REST AREA PLANS  
FOR ADDITIONAL  
REST AREA SIGNING**

**HNTB**  
HNTB NORTH CAROLINA, P.C.  
343 E. Six Forks Road, Suite 200  
Raleigh, North Carolina 27609  
NC License No: C-1554  
(919) 546-8997

**PROPOSED SIGNING  
-L- STA. 779+00 TO 806+00**



TIP NO. I-4400C	SHEET NO. SIGN-21
APPROVED: <i>Andrew D. Klinck</i> E3078F849E44B	
DATE: 6/7/2019	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




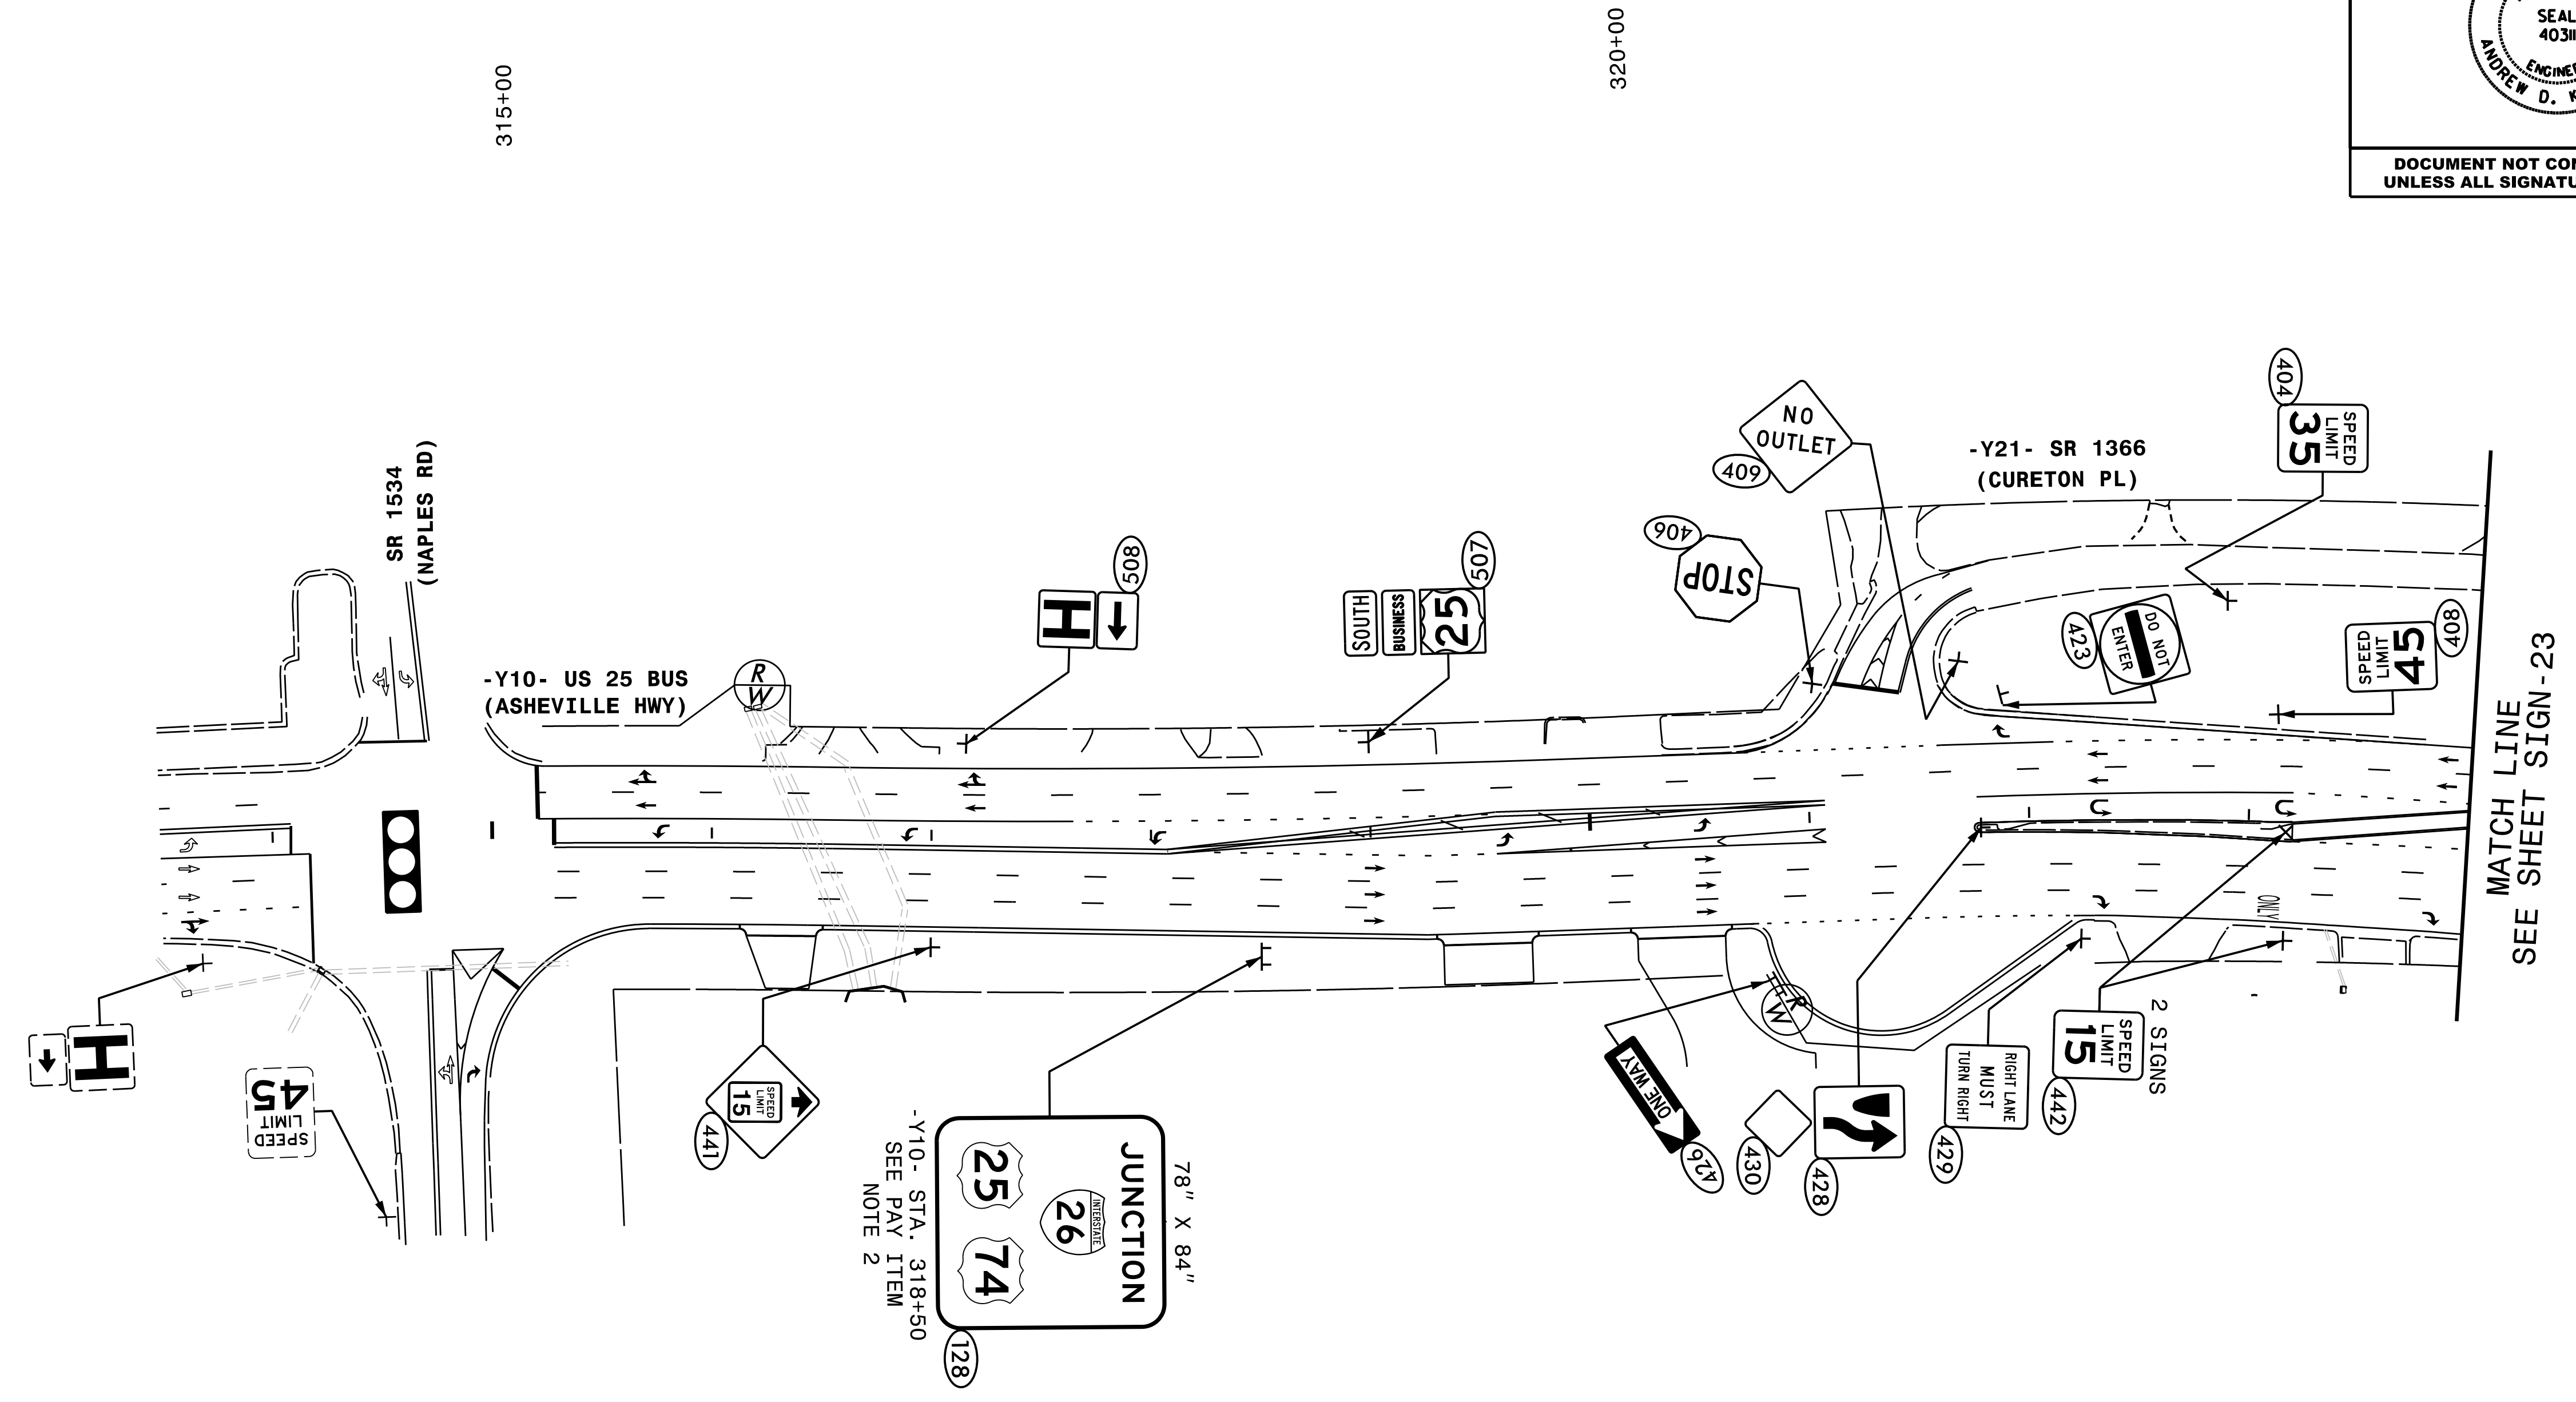
**PROPOSED SIGNING**  
**-L- STA. 806+00 TO 832+00**  
**-Y12- 16+00 TO 30+00**

**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

MATCH LINE  
SEE SHEET SIGN-20

END PROJECT I-4400C  
 BEGIN PROJECT I-4700A  
 -L- STA. 832+00


TIP NO. I-4400C	SHEET NO. SIGN-22
APPROVED: <u>Andrew D. Klinck</u> <small>E31078F8489E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




**HNTB**  
 HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997

**PROPOSED SIGNING**  
**-Y10- STA. 315+00 TO 324+00**



TIP NO. I-4400C	SHEET NO. SIGN-23
APPROVED: <u>Andrew D. Klinkisch</u> <small>E310789496448</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

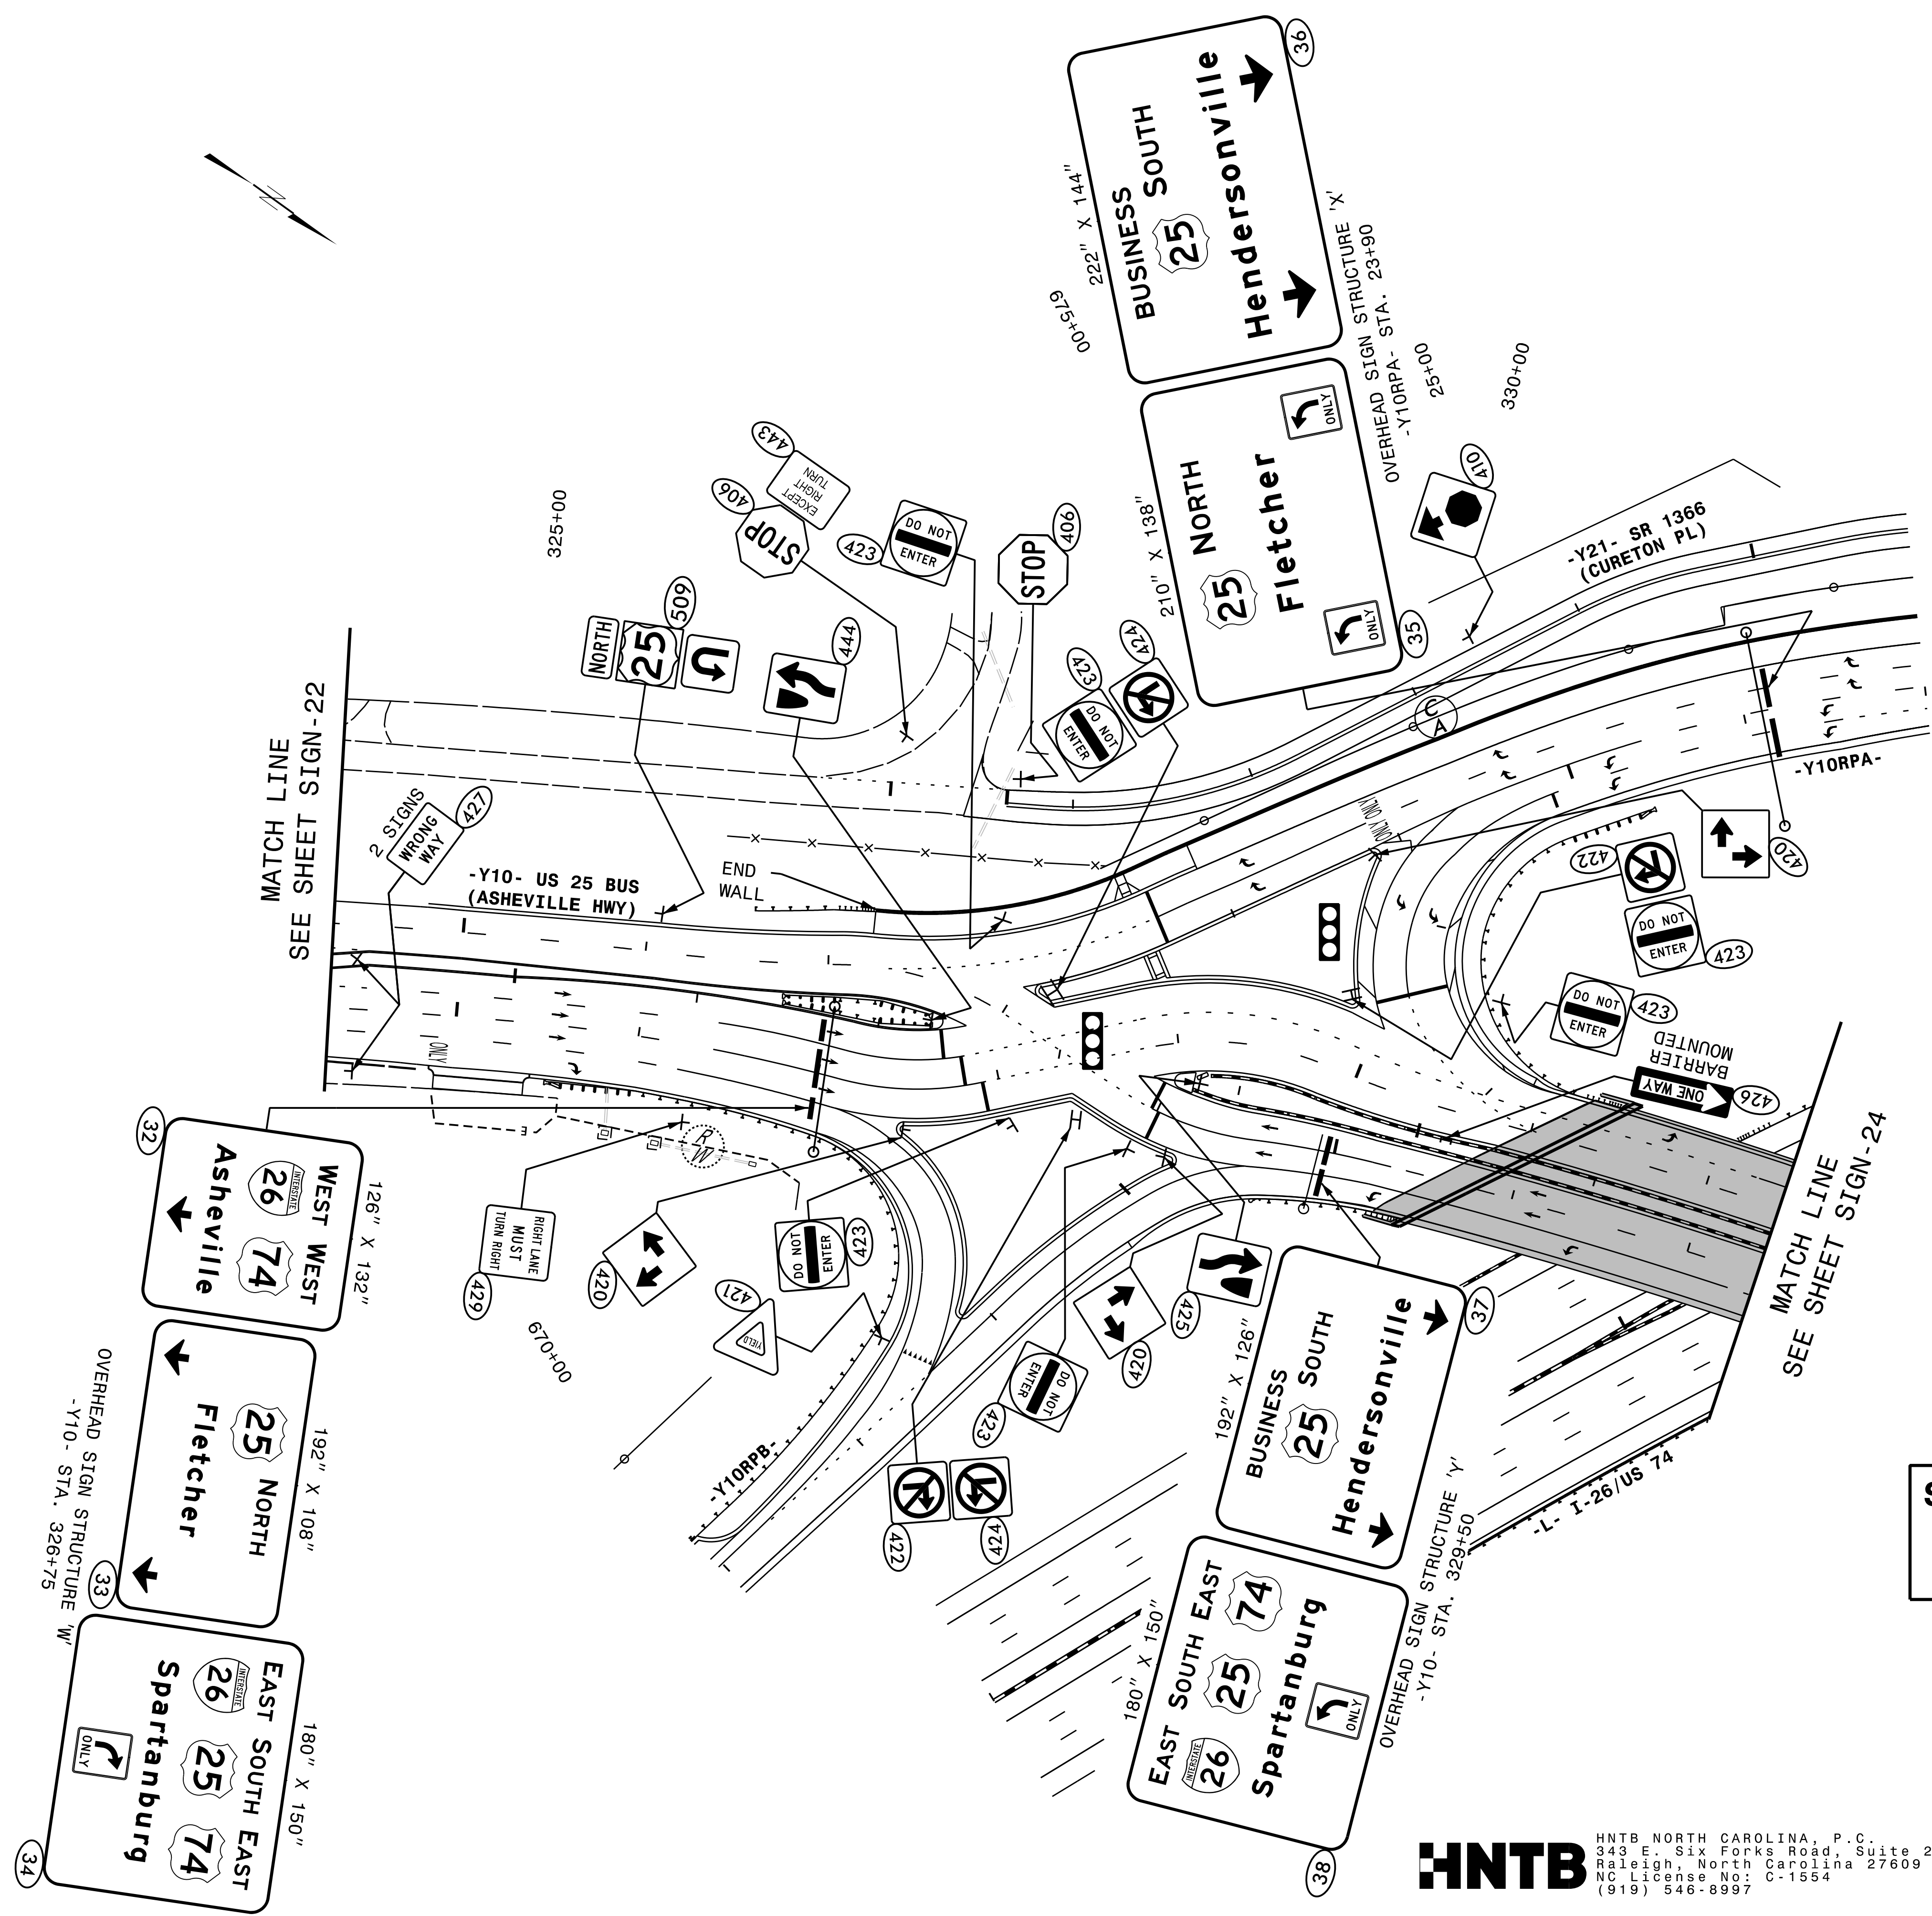


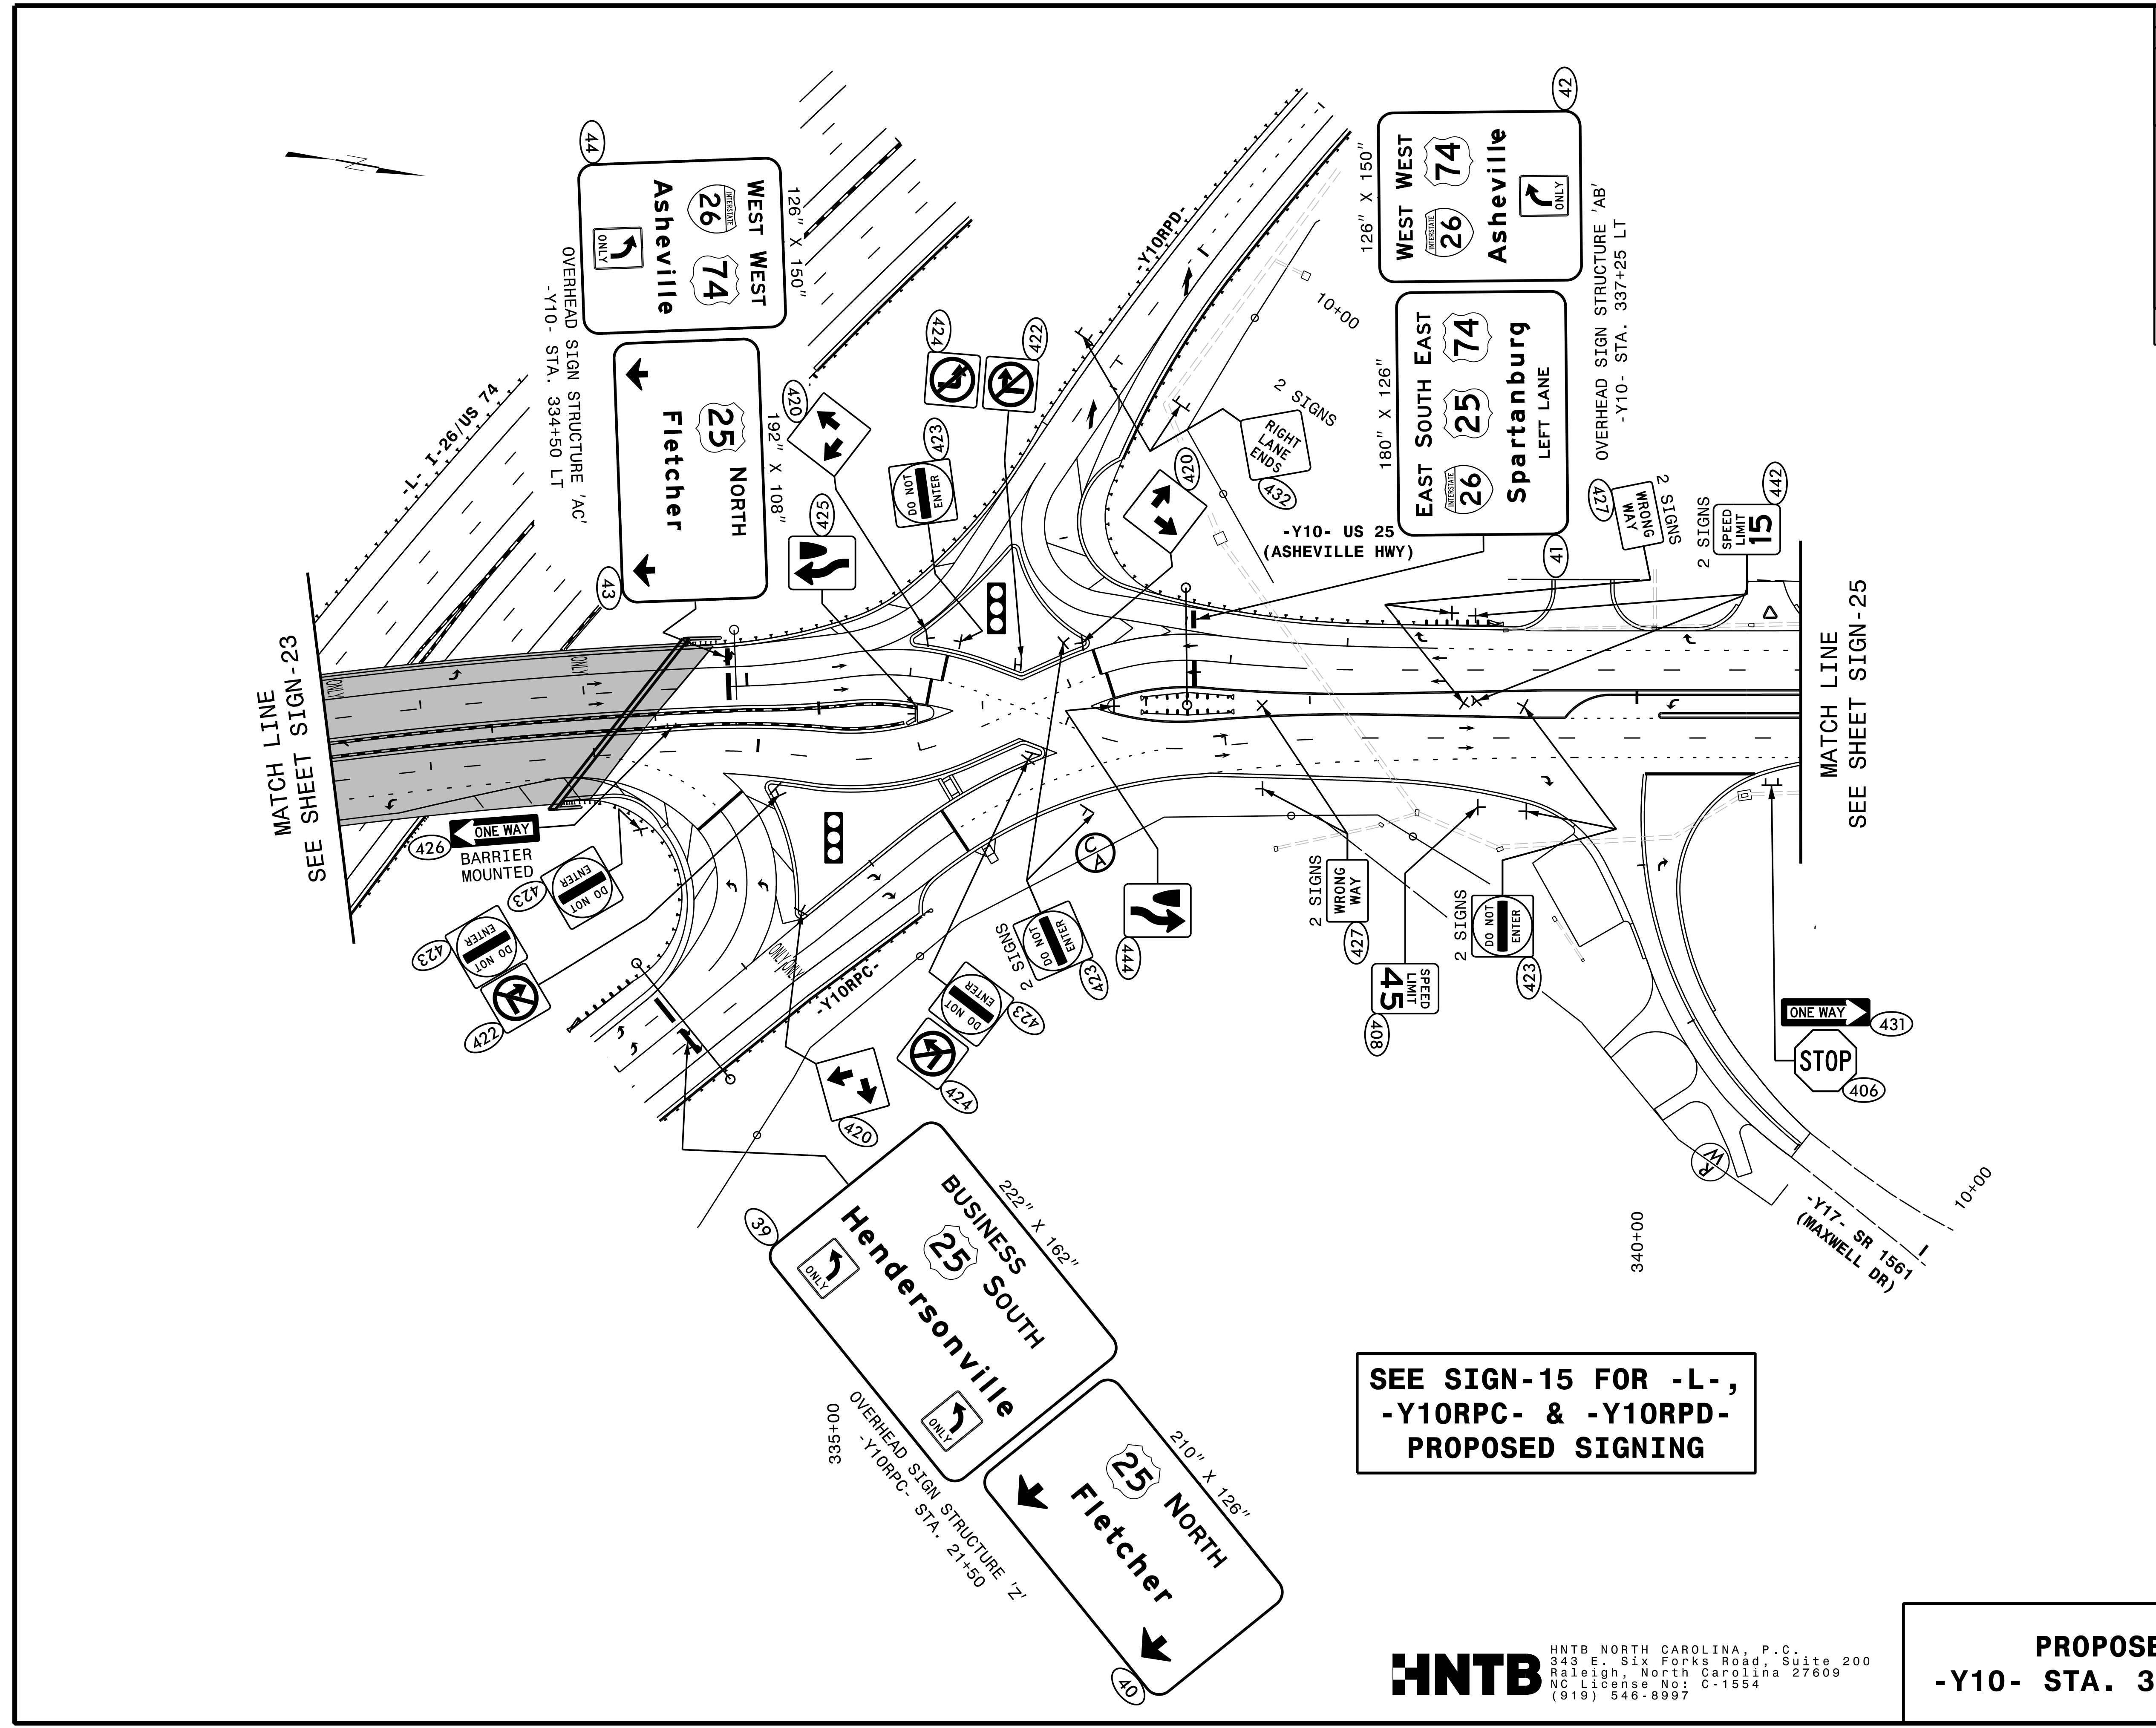
**SEE SIGN-15 FOR -L-,  
-Y10RPA- & -Y10RPB-  
PROPOSED SIGNING**

**PROPOSED SIGNING  
-Y10- STA. 324+00 TO 332+00**

**HNTB**  
HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554  
 (919) 546-8997




TIP NO. I-4400C	SHEET NO. SIGN-24
APPROVED: <i>Andrew D. Klinck</i> <small>E31078F8496E44B</small>	
DATE: 6/7/2019	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	




SEE SIGN-15 FOR -L-,  
-Y1ORPC- & -Y1ORPD-  
PROPOSED SIGNING

**PROPOSED SIGNING**  
**-Y10- STA. 332+00 TO 341+00**

**HNTB**  
HNTB NORTH CAROLINA, P.C.  
343 E. Six Forks Road, Suite 200  
Raleigh, North Carolina 27609  
NC License No: C-1554  
(919) 546-8997

TIP NO. I-4400C	SHEET NO. SIGN-25
APPROVED: <u>Andrew D. Klinckisch</u> <small>E3379F8498E44B</small>	
DATE: 6/7/2019	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

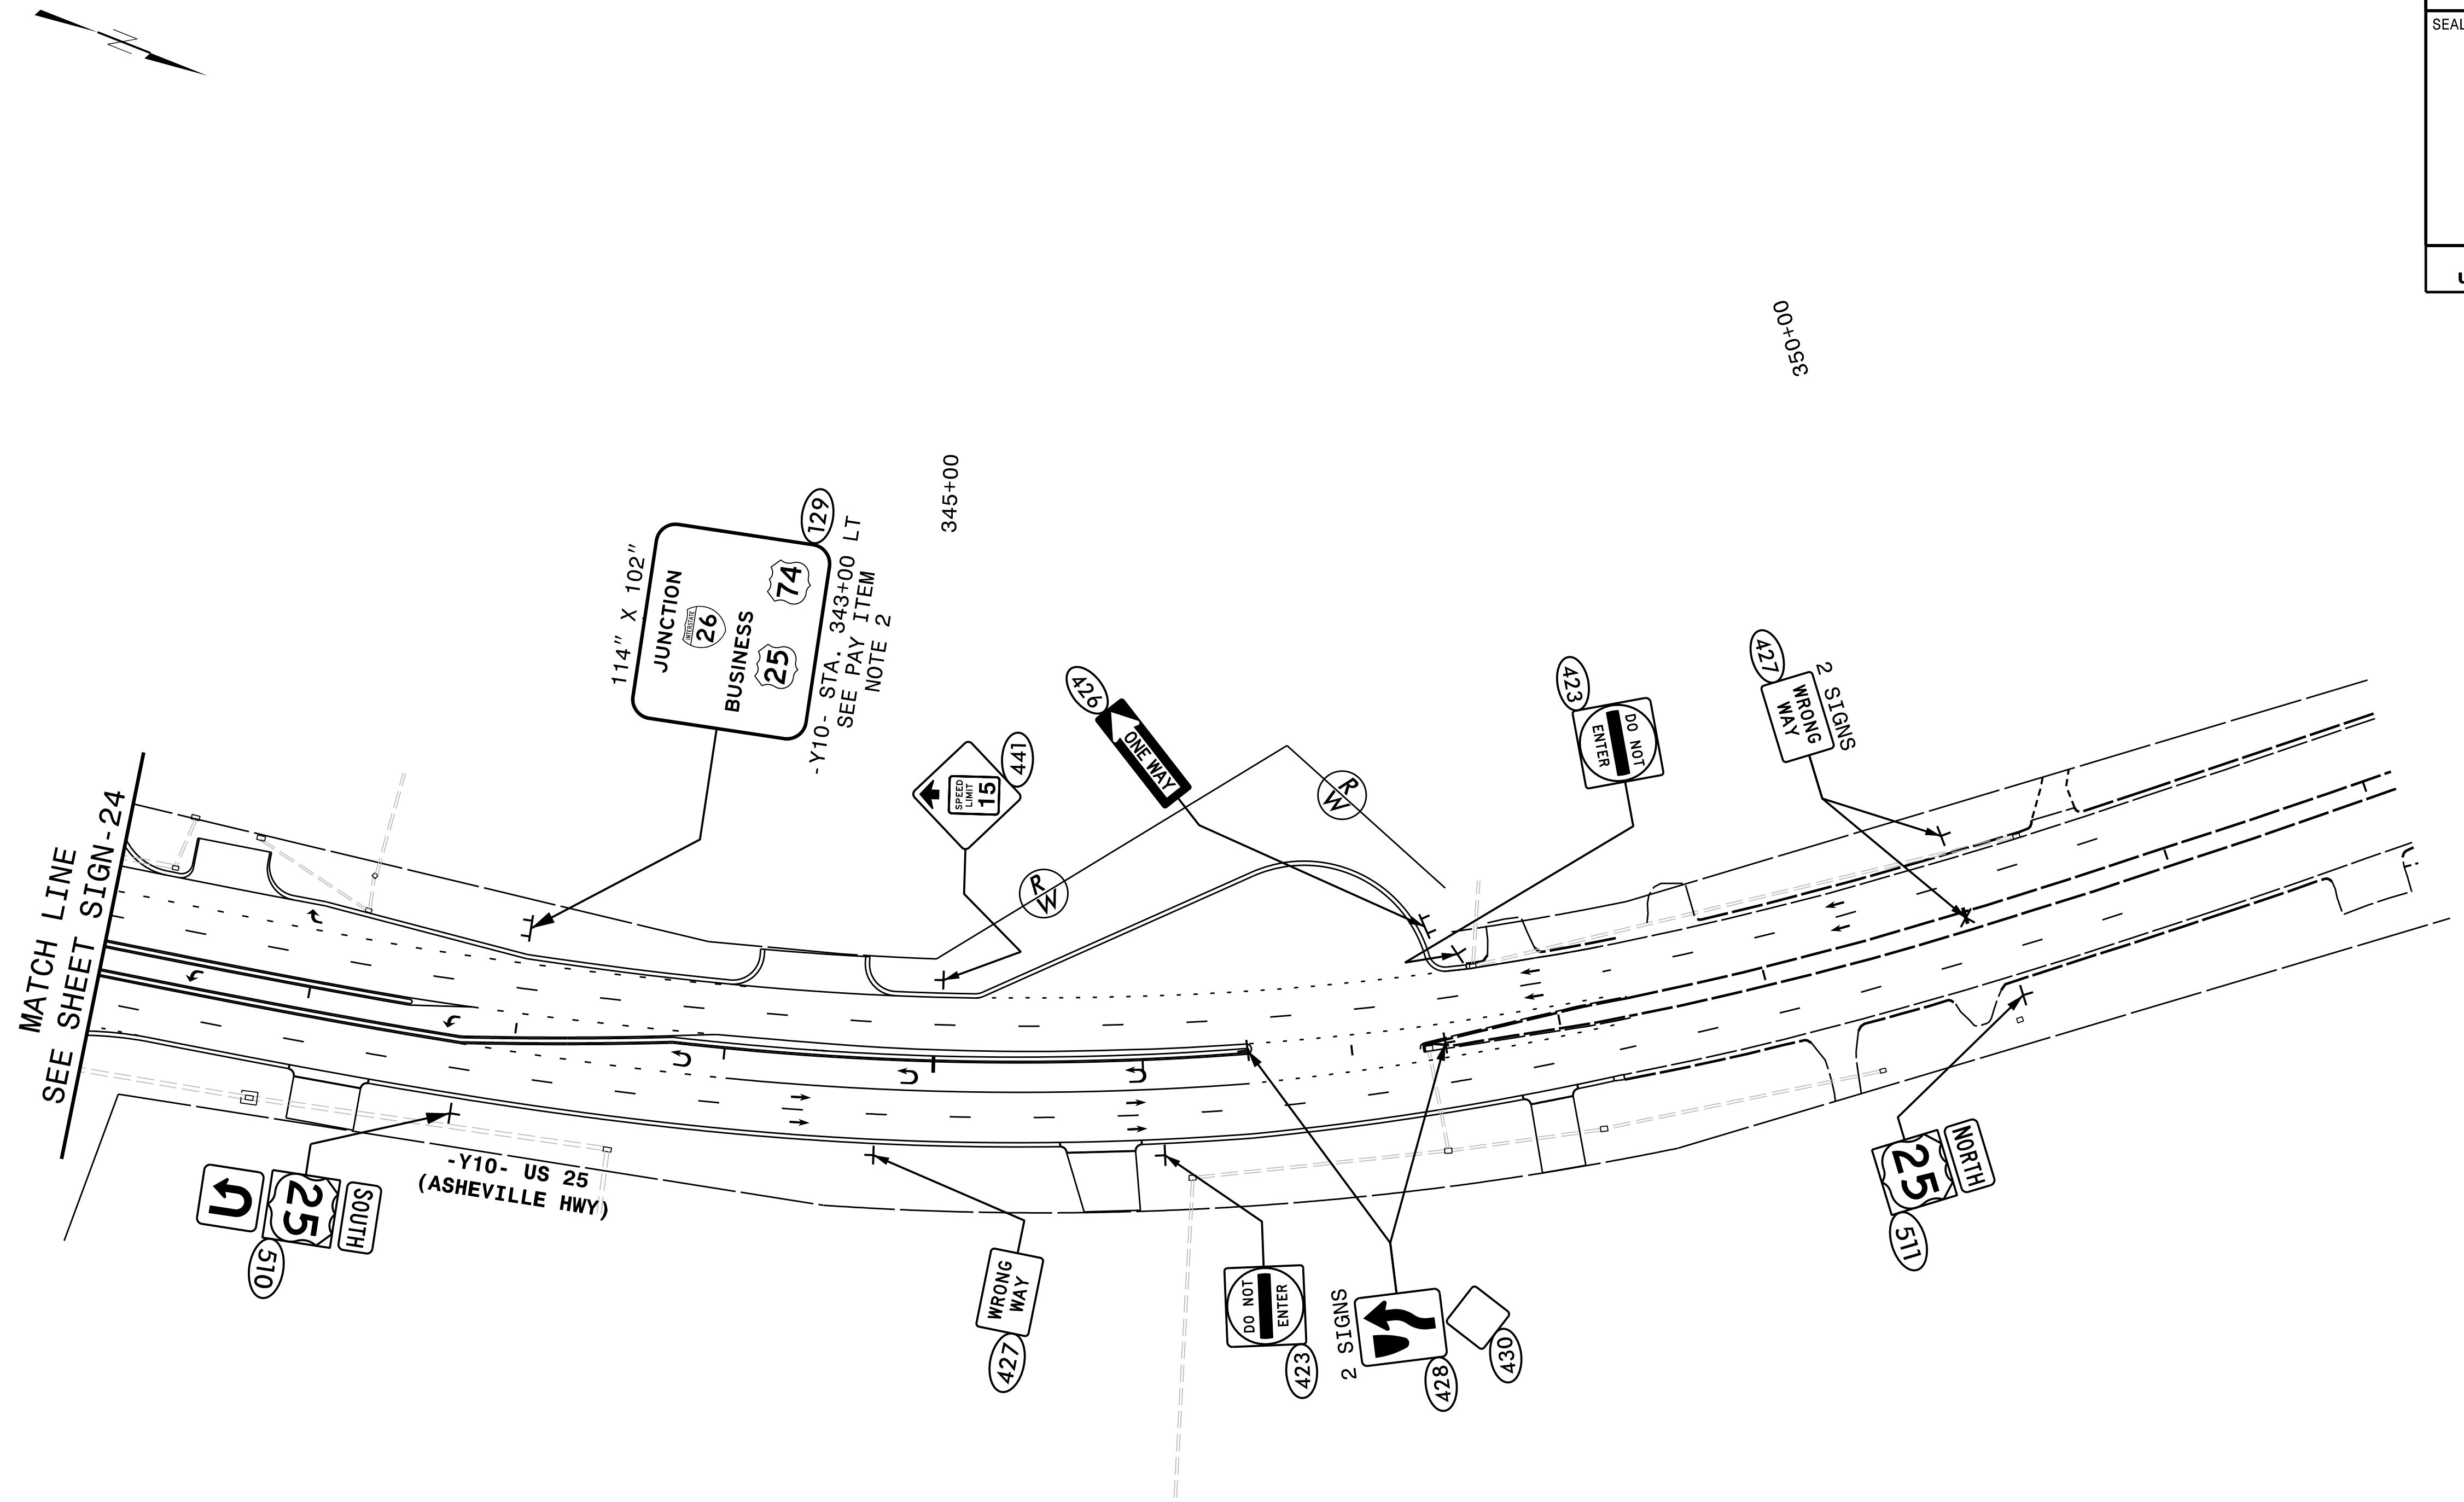

**HNTB** HNTB NORTH CAROLINA, P.C.  
343 E. Six Forks Road, Suite 200  
Raleigh, North Carolina 27609  
NC License No: C-1554  
(919) 546-8997

**PROPOSED SIGNING**  
**-Y10- STA. 341+00 TO 352+00**