| TIP NO. | SHEET NO. |
|---|-------------|
| A-0011C | SIGN-2 |
| APPROVED: | |
| DATE: | |
| SEAL | |
| SEAL 046300 DocuSigned by: Nicholas E. Burns IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII | 9/4/2019 |
| DOCUMENT NOT CONSID | DERED FINAL |

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED



| | | | | | | | | | | | | <u>'</u> | | | | | | | | | | | | | | | FIELD | | | | |
|--------|------|-------|-------|---------------|----------|---------|---------|---------|------------|----------|------------|----------|--------|--------|--------|-------|--------|---------|------|----------|---------|-------|--------|----------|---------|-----------|----------|-------|------------|--------|------------|
| | SIC | €N | | | NUMBER | | SUPPORT | | | | HORIZONTAL | | | LENGTH | (ft) | | | | | | | | | | SUPPORT | T WEIGHTS | | | 1 | | VERIFIED |
| | | SIZE | (in.) | ROADWAY | OF | BEAM | TYPE | OMNI | ATTACHMENT | MOUNTING | | SUPPORT | SNS HT | MTG HT | EMBED- | LEFT | SUPPOR | RT (ft) | CENT | ER SUPPO | RT (ft) | RIGH | TSUPPO | PRT (ft) | B/A | SIMPLE | DIAMETER | DEPTH | REINFORCED | PLAIN | |
| NUMBER | TYPE | W | h | STATION | SUPPORTS | SECTION | BA or S | COUPLER | METHOD | METHOD | (ft.) | SPACING | "H" | "C" | MENT | S | L | LENGTH | S | L | LENGTH | S | L | LENGTH | (lbs.) | (lbs.) | (ft.) | (ft.) | (c.y.) | (c.y.) | (mm/dd/yy) |
| 101 | Α | 126 x | 72 | -L- 217+00 RT | 2 | S4x7.7 | ВА | N/A | N/A | N/A | 30.00 | 6.15 | 6.00 | 13.89 | 3.0 | -6.14 | 13.75 | 16.75 | 0.00 | 0.00 | 0.00 | -6.89 | 13.00 | 16.00 | 292.18 | 0 | 1.0 | 3.5 | 0.00 | 0.20 | |


 TOTAL
 TOTAL
 TOTAL
 TOTAL


 292.18
 0.00
 0.00
 0.20

 USE:
 293.00
 0.00
 1.00

NOTES

- 1. DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF TRAVEL LANE.
- 2.FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3.
 FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1.
 (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
- 3. PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

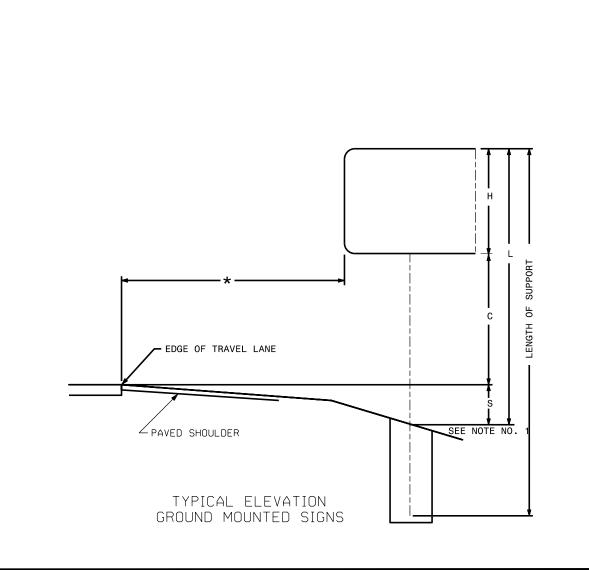

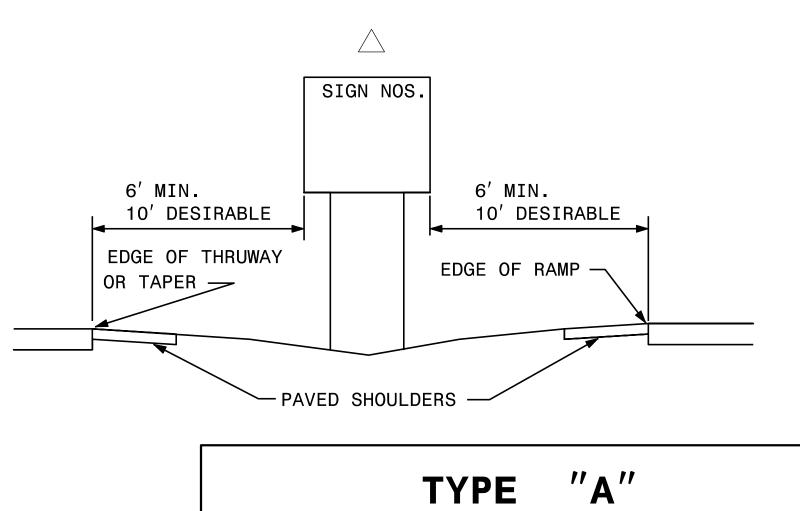

TYPE "A"
GROUND MOUNTED SIGNS