


PEDESTRIAN PUSH BUTTON WIRING DETAIL

(wire push buttons as shown)

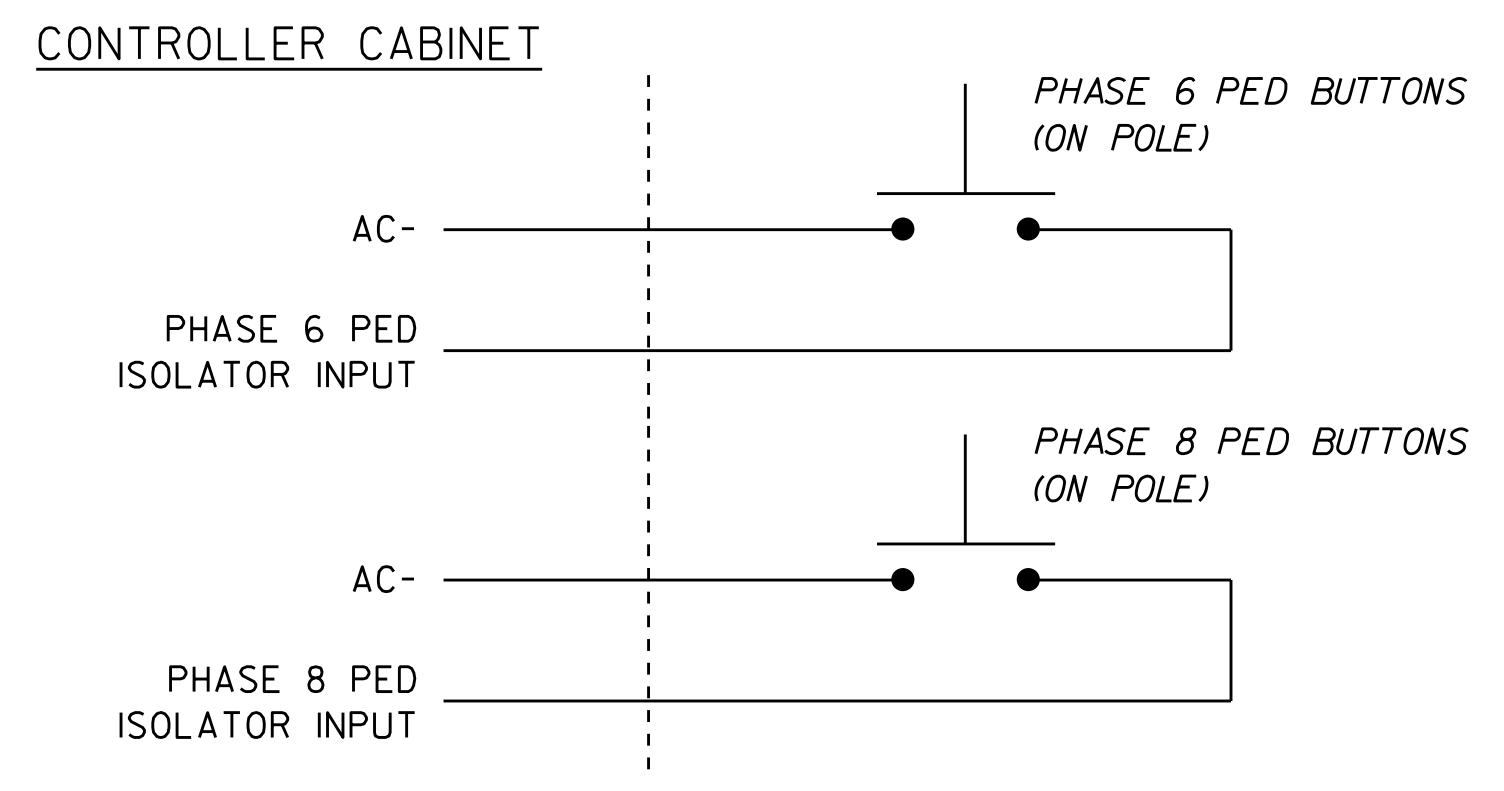

ECONOLITE ASC/3-2070 RESTORE PED 8 PROGRAMMING ASSIGNMENT DETAIL

(program controller as shown)

- From Main Menu select **6. DETECTORS**
- From DETECTOR Submenu select **3. PED DETECTOR INPUT ASSIGNMENT**

PED DET PHASE ASSIGNMENT MODE: NTCIP								
PHASE	1	2	3	4	5	6	7	8
DETECTOR	0	2	0	4	0	6	0	8
PHASE	9	10	11	12	13	14	15	16
DETECTOR	0	0	0	0	0	0	0	0

← NOTICE PED DETECTOR 8 RESTORED TO PHASE 8

- From Main Menu select **1. CONFIGURATION**
- From CONFIGURATION Submenu select **3. LOAD SW ASSIGN**

LD SWITCH ASSIGN	PHASE	/OVLP	TYPE	DIMMING			---FLASH---		
				R	Y	G	D	PWR	AUT
1	1	V	.	.	.	+	A	R	X
2	2	V	.	.	.	+	A	Y	.
3	3	V	.	.	.	+	A	R	X
4	4	V	.	.	.	+	A	R	.
5	5	V	.	.	.	-	A	R	.
6	6	V	.	.	.	-	A	Y	X
7	7	V	.	.	.	-	A	R	.
8	8	V	.	.	.	-	A	R	X
9	2	P	.	.	.	+	A	R	.
10	4	P	.	.	.	+	A	R	.
11	6	P	.	.	.	-	A	R	.
12	8	P	.	.	.	-	A	R	.
13	1	O	.	.	.	+	A	.	X
14	2	O	.	.	.	-	A	.	X
15	3	O	.	.	.	+	A	.	.
16	4	O	.	.	.	-	A	.	.

NOTICE PHASE 8 PED RESTORED TO LD SWITCH 12 →


COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown below)

ACCEPTABLE VALUES	
VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

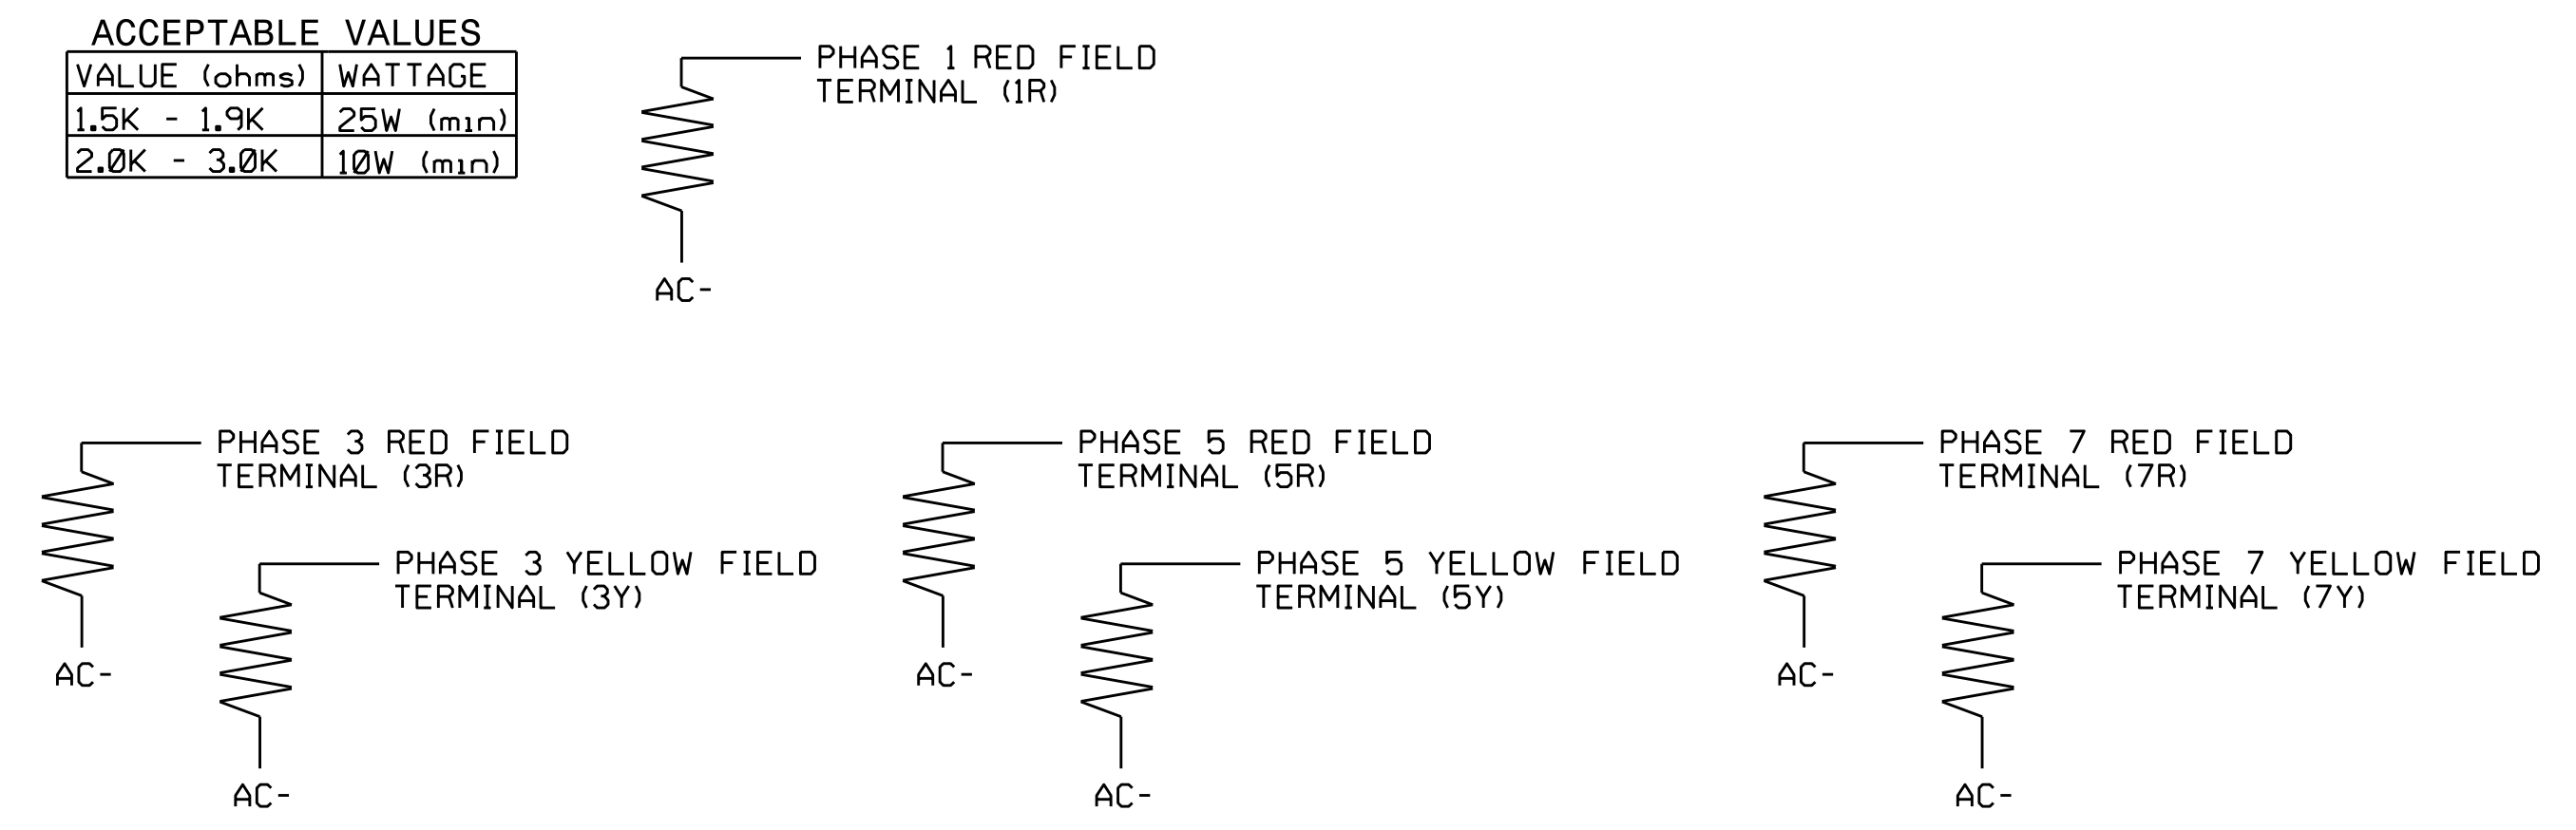

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 05-1726T4
DESIGNED: March 2019
SEALED: 7/24/2019
REVISED: N/A

Electrical Detail - Temp 4 (TMP Phase III, Step B)
Sheet 3 of 3

	DETAILS FOR: SR 3015 (Airport Blvd.) at Factory Shops Road/ Aerial Center Parkway		SEAL
	Prepared In the Offices of: STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION SIGNAL MANAGEMENT SECTION 750 N. Greenfield Pkwy, Garner, NC 27529	Division 5 Wake County Morrisville PLAN DATE: May 2019 REVIEWED BY: PREPARED BY: S. Armstrong REVIEWED BY:	

25-JUL-2019 10:26
 051726.dwg
 sarmstrong