STATE	PROJECT WBS	SHEET NUMBER
NC	12cr.10551.13	6
	12cr.20551.21	

Checked by:

Drawn by: GHB

DETAIL A
PATCHING EXISTING PAVEMENT

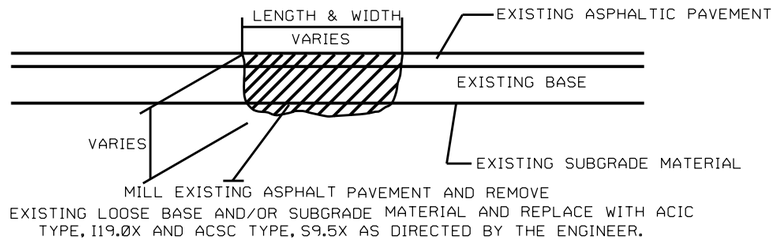

DETAIL B
ASPHALT CONCRETE SURFACE COURSE
TYPE S9.5B or S9.5C. (LEVELING COURSE)

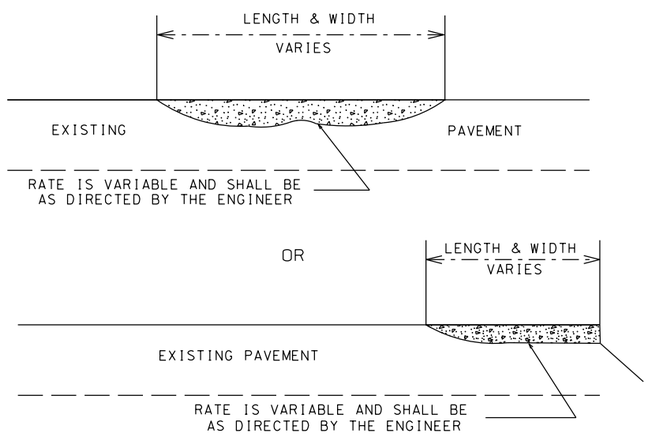

DETAIL C
MILLING BRIDGE APPROACHES

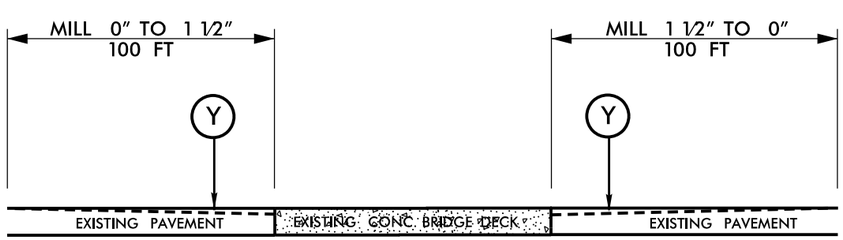

MAP # 1 (Mill S. Approaches)

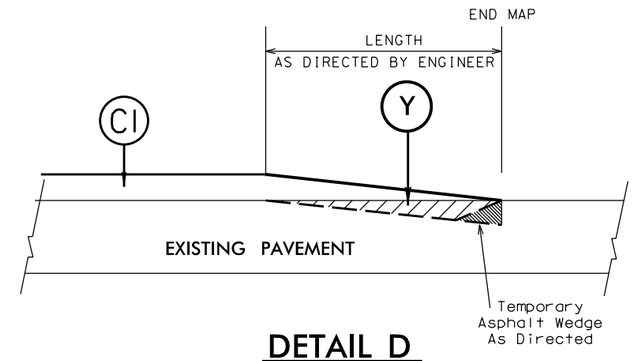

DETAIL D
TIE–IN (INCIDENTAL) MILLING DETAIL

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
E	PROP. APPROX. 8" OF ASPHALT BASE COURSE, TYPE B 25.0B, AT AN AVERAGE RATE OF 456 LBS PER SQ. YD. IN EACH OF TWO LIFTS
T	AGGREGATE SHOULDER BORROW (SHOULDER RECONSTRUCTION)
Y	INCIDENTAL MILLING
Y1	MILLED RUMBLE STRIPS
Z1	MILL EXST. ASPHALT PAVEMENT APPROX. 1½ " IN DEPTH

General Notes:

* Pavement edge slopes are 1:1 unless specified otherwise.

2015 - 2016
Resurfacing Program
Typical Sections
Lincoln County NC