
STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

TRANSPORTATION MANAGEMENT PLAN


YADKIN

COUNTY

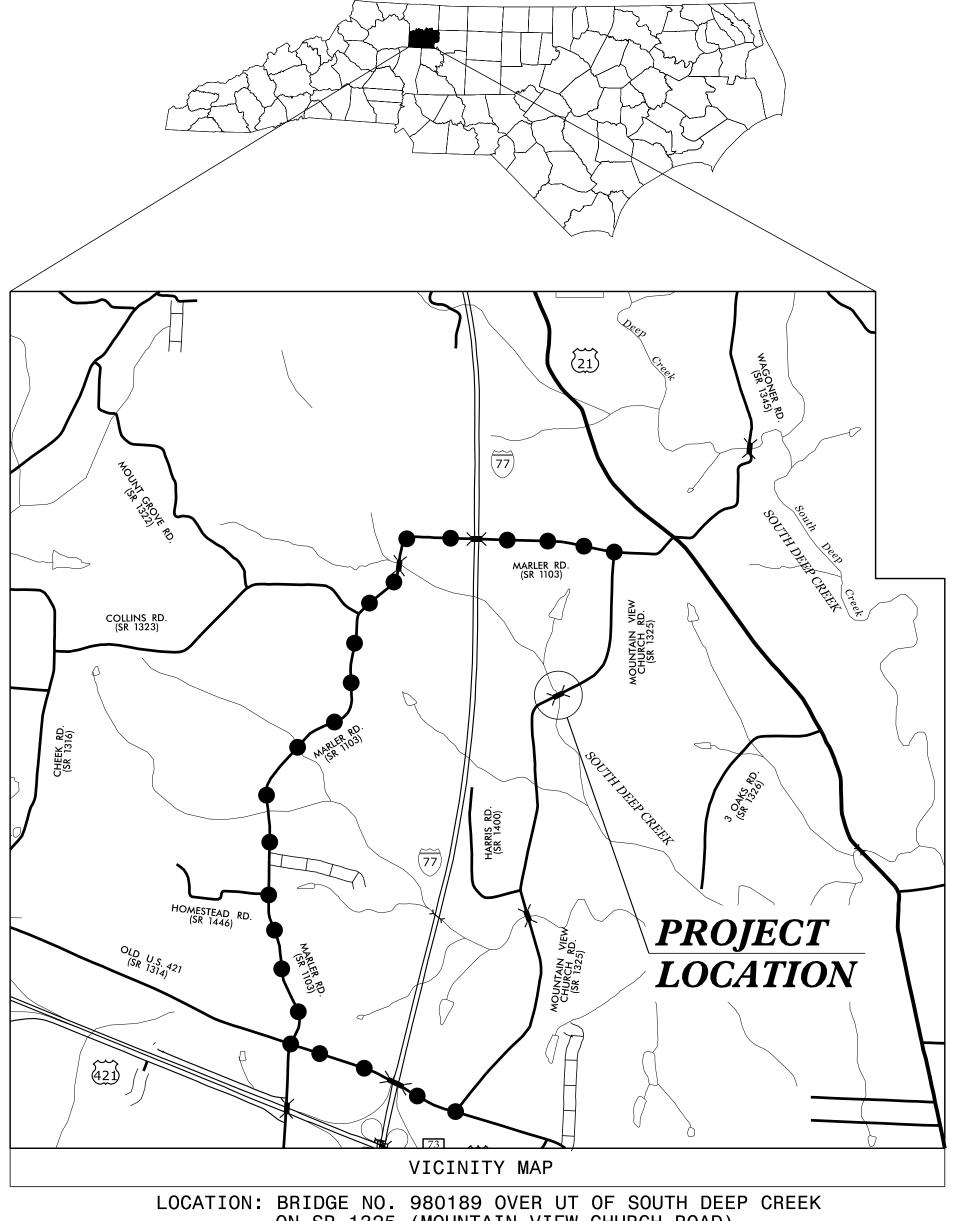

ON SR 1325 (MOUNTAIN VIEW CHURCH ROAD)

OFFSITE DETOUR ROUTE

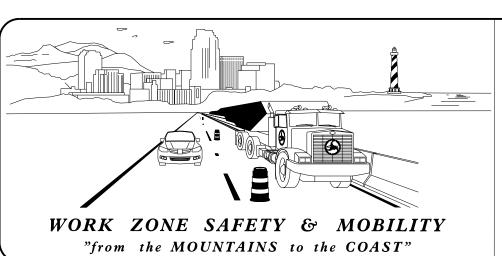


PLANS PREPARED BY:

M. A. AKLILU

NCDOT CONTACTS:

DON PARKER, P.E. PROJECT ENGINEER

R. M. GARRETT PROJECT DESIGN ENGINEER

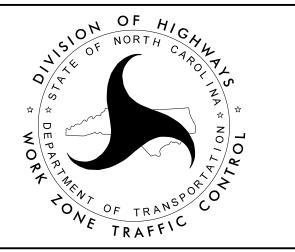

INDEX OF SHEETS

SHEET NO. TITLE TMP - 1 TITLE SHEET, VICINITY MAP, AND INDEX OF SHEETS TMP-1A

LIST OF APPLICABLE ROADWAY STANDARD DRAWINGS, AND LEGEND TRANSPORTATION OPERATIONS PLAN: (MANAGEMENT STRATEGIES, GENERAL NOTES, AND LOCAL NOTES) TMP-1B

CLOSURE AND OFFSITE DETOUR ROUTE TMP-2

SPECIAL SIGN DESIGN TMP-3

> DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

APPROVED: Don A. Parker DATE: _____

SEAL

TMP-1

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS SHOWN IN "ROADWAY STANDARD DRAWINGS" -N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.

TITLE

1101.01 1101.02 1101.03 1101.04 1101.05 1101.06 1101.11	WORK ZONE VEHICLE ACCESSES WARNING SIGNS FOR BLASTING ZONES TRAFFIC CONTROL DESIGN TABLES STATIONARY WORK ZONE SIGNS
1110.02	
1115.01	
1130.01	DRUMS
1135.01	CONES
1145.01 1150.01	BARRICADES FLAGGING DEVICES
1160.01	TEMPORARY CRASH CUSHION
1165.01	
1170.01	PORTABLE CONCRETE BARRIER
1180.01	SKINNY - DRUMS
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	
1205.03	PAVEMENT MARKINGS - EXITS AND ENTRANCE RAMPS
1205.04	PAVEMENT MARKINGS - INTERSECTIONS
1205.05	PAVEMENT MARKINGS - TURN LANES
1205.06	PAVEMENT MARKINGS - LANE DROPS
1205.07	PAVEMENT MARKINGS - PEDESTRIAN CROSSWALKS
1205.08	PAVEMENT MARKINGS - SYMBOLS AND WORD MESSAGES
1205.09	
	PAVEMENT MARKINGS - SCHOOL AREAS
	PAVEMENT MARKINGS - RAILROAD CROSSINGS
	PAVEMENT MARKINGS - BRIDGES
	PAVEMENT MARKINGS - LANE REDUCTIONS
	PAVEMENT MARKINGS - ROUNDABOUTS
	PAVEMENT MARKINGS - SUPERSTREETS RAISED PAVEMENT MARKERS - INSTALLATION SPACING
1251.01	
1261.01	,
1261.02	
	GUARDRAIL END DELINEATION
	OBJECT MARKERS - TYPES
	OBJECT MARKERS - INSTALLATION

PROJ. REFERENCE NO.	SHEET NO.
BR-0127	TMP-1A

LEGEND

GENERAL

DIRECTION OF TRAFFIC FLOW

DIRECTION OF PEDESTRIAN TRAFFIC FLOW

----- EXIST. PVMT.

─────── NORTH ARROW


PROPOSED PVMT.

TEMP. SHORING (LOCATION PURPOSES ONLY)


WORK AREA



SIGNALS







PAVEMENT MARKINGS

——EXISTING LINES ——TEMPORARY LINES

TRAFFIC CONTROL DEVICES

BARRICADE (TYPE III)

DRUM SKINNY DRUM O TUBULAR MARKER

TEMPORARY CRASH CUSHION

FLASHING ARROW BOARD

FLAGGER

LAW ENFORCEMENT

TRUCK MOUNTED ATTENUATOR (TMA)

CHANGEABLE MESSAGE SIGN

TEMPORARY SIGNING

PORTABLE SIGN

── STATIONARY SIGN

STATIONARY OR PORTABLE SIGN

PAVEMENT MARKERS

CRYSTAL/CRYSTAL

CRYSTAL/RED ◆ YELLOW/YELLOW

PAVEMENT MARKING SYMBOLS

PAVEMENT MARKING SYMBOLS

APPROVED: Don A. Parker DATE: _____



ROADWAY STANDARD DRAWINGS & LEGEND

DOCUMENT NOT CONSIDERED FINAL **UNLESS ALL SIGNATURES COMPLETED**

MANAGEMENT STRATEGIES

TRAFFIC WILL BE DETOURED OFF-SITE DURING THE CONSTRUCTION PERIOD.

THE OFF-SITE DETOUR WILL INCLUDE OLD U.S. 421 (SR 1314), MARLER RD. (SR 1103).

GENERAL NOTES / LOCAL NOTES

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS, AND ROADWAY DETAILS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS OR RESULT IN DUPLICATE OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING, OR REMOVAL OF DEVICES AS DIRECTED BY THE ENGINEER.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT EXCEPT WHEN OTHERWISE NOTED IN THE PLAN OR DIRECTED BY THE ENGINEER.

TRAFFIC PATTERN ALTERATIONS

A) NOTIFY THE ENGINEER THIRTY (30) CALENDAR DAYS PRIOR TO ANY TRAFFIC PATTERN ALTERATION.

SIGNING

B) PROVIDE SIGNING AND DEVICES REQUIRED TO CLOSE THE ROAD ACCORDING TO THE ROADWAY STANDARD DRAWINGS AND TRAFFIC CONTROL PLANS.

PROVIDE SIGNING REQUIRED FOR THE OFF-SITE DETOUR ROUTE AS SHOWN IN THE TRAFFIC CONTROL PLANS.

C) COVER OR REMOVE ALL SIGNS AND DEVICES REQUIRED TO CLOSE THE ROAD WHEN ROAD CLOSURE IS NOT IN OPERATION.

COVER OR REMOVE ALL SIGNS REQUIRED FOR THE OFF-SITE DETOUR WHEN THE DETOUR IS NOT IN OPERATION.

D) ENSURE ALL NECESSARY SIGNING IS IN PLACE PRIOR TO ALTERING ANY TRAFFIC PATTERN.


TRAFFIC CONTROL DEVICES

E) PLACE TYPE III BARRICADES, WITH "ROAD CLOSED" SIGN R11-2 ATTACHED, OF SUFFICIENT LENGTH TO CLOSE ENTIRE ROADWAY.


PROJ. REFERENCE NO. SHEET NO. BR - 0127 TMP - 1B

PHASING

- STEP 1. USING ROADWAY STANDARD DRAWINGS 1101.03, SHEET 1, AND TMP-2
 INSTALL OFFSITE DETOUR SIGNS AND TRAFFIC CONTROL DEVICES AND CLOSE
 MOUNTAIN VIEW CHURCH ROAD (SR 1325) TO THROUGH TRAFFIC.
- STEP 2. COMPLETE THE FOLLOWING WITHIN THE ROAD CLOSURE:
 - A) REMOVE THE EXISTING BRIDGE.
 - B) CONSTRUCT THE PROPOSED BRIDGE AND ROADWAY APPROACHES INCLUDING THE FINAL LAYER OF SURFACE COURSE AND FINAL PAVEMENT MARKINGS.
- STEP 3. REMOVE ALL TRAFFIC CONTROL DEVICES AND DETOUR SIGNS AND OPEN MOUNTAIN VIEW CHURCH ROAD (SR 1325) TO THROUGH TRAFFIC.

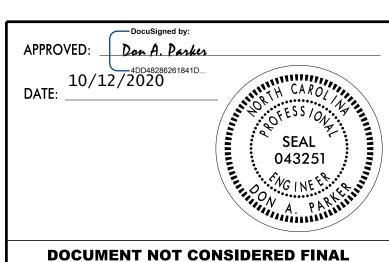


UNLESS ALL SIGNATURES COMPLETED

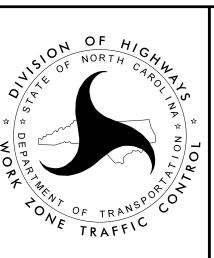


TRANSPORTATION
OPERATIONS
PLAN

PROJ. REFERENCE NO. SHEET NO. BR - 0127 TMP - 2

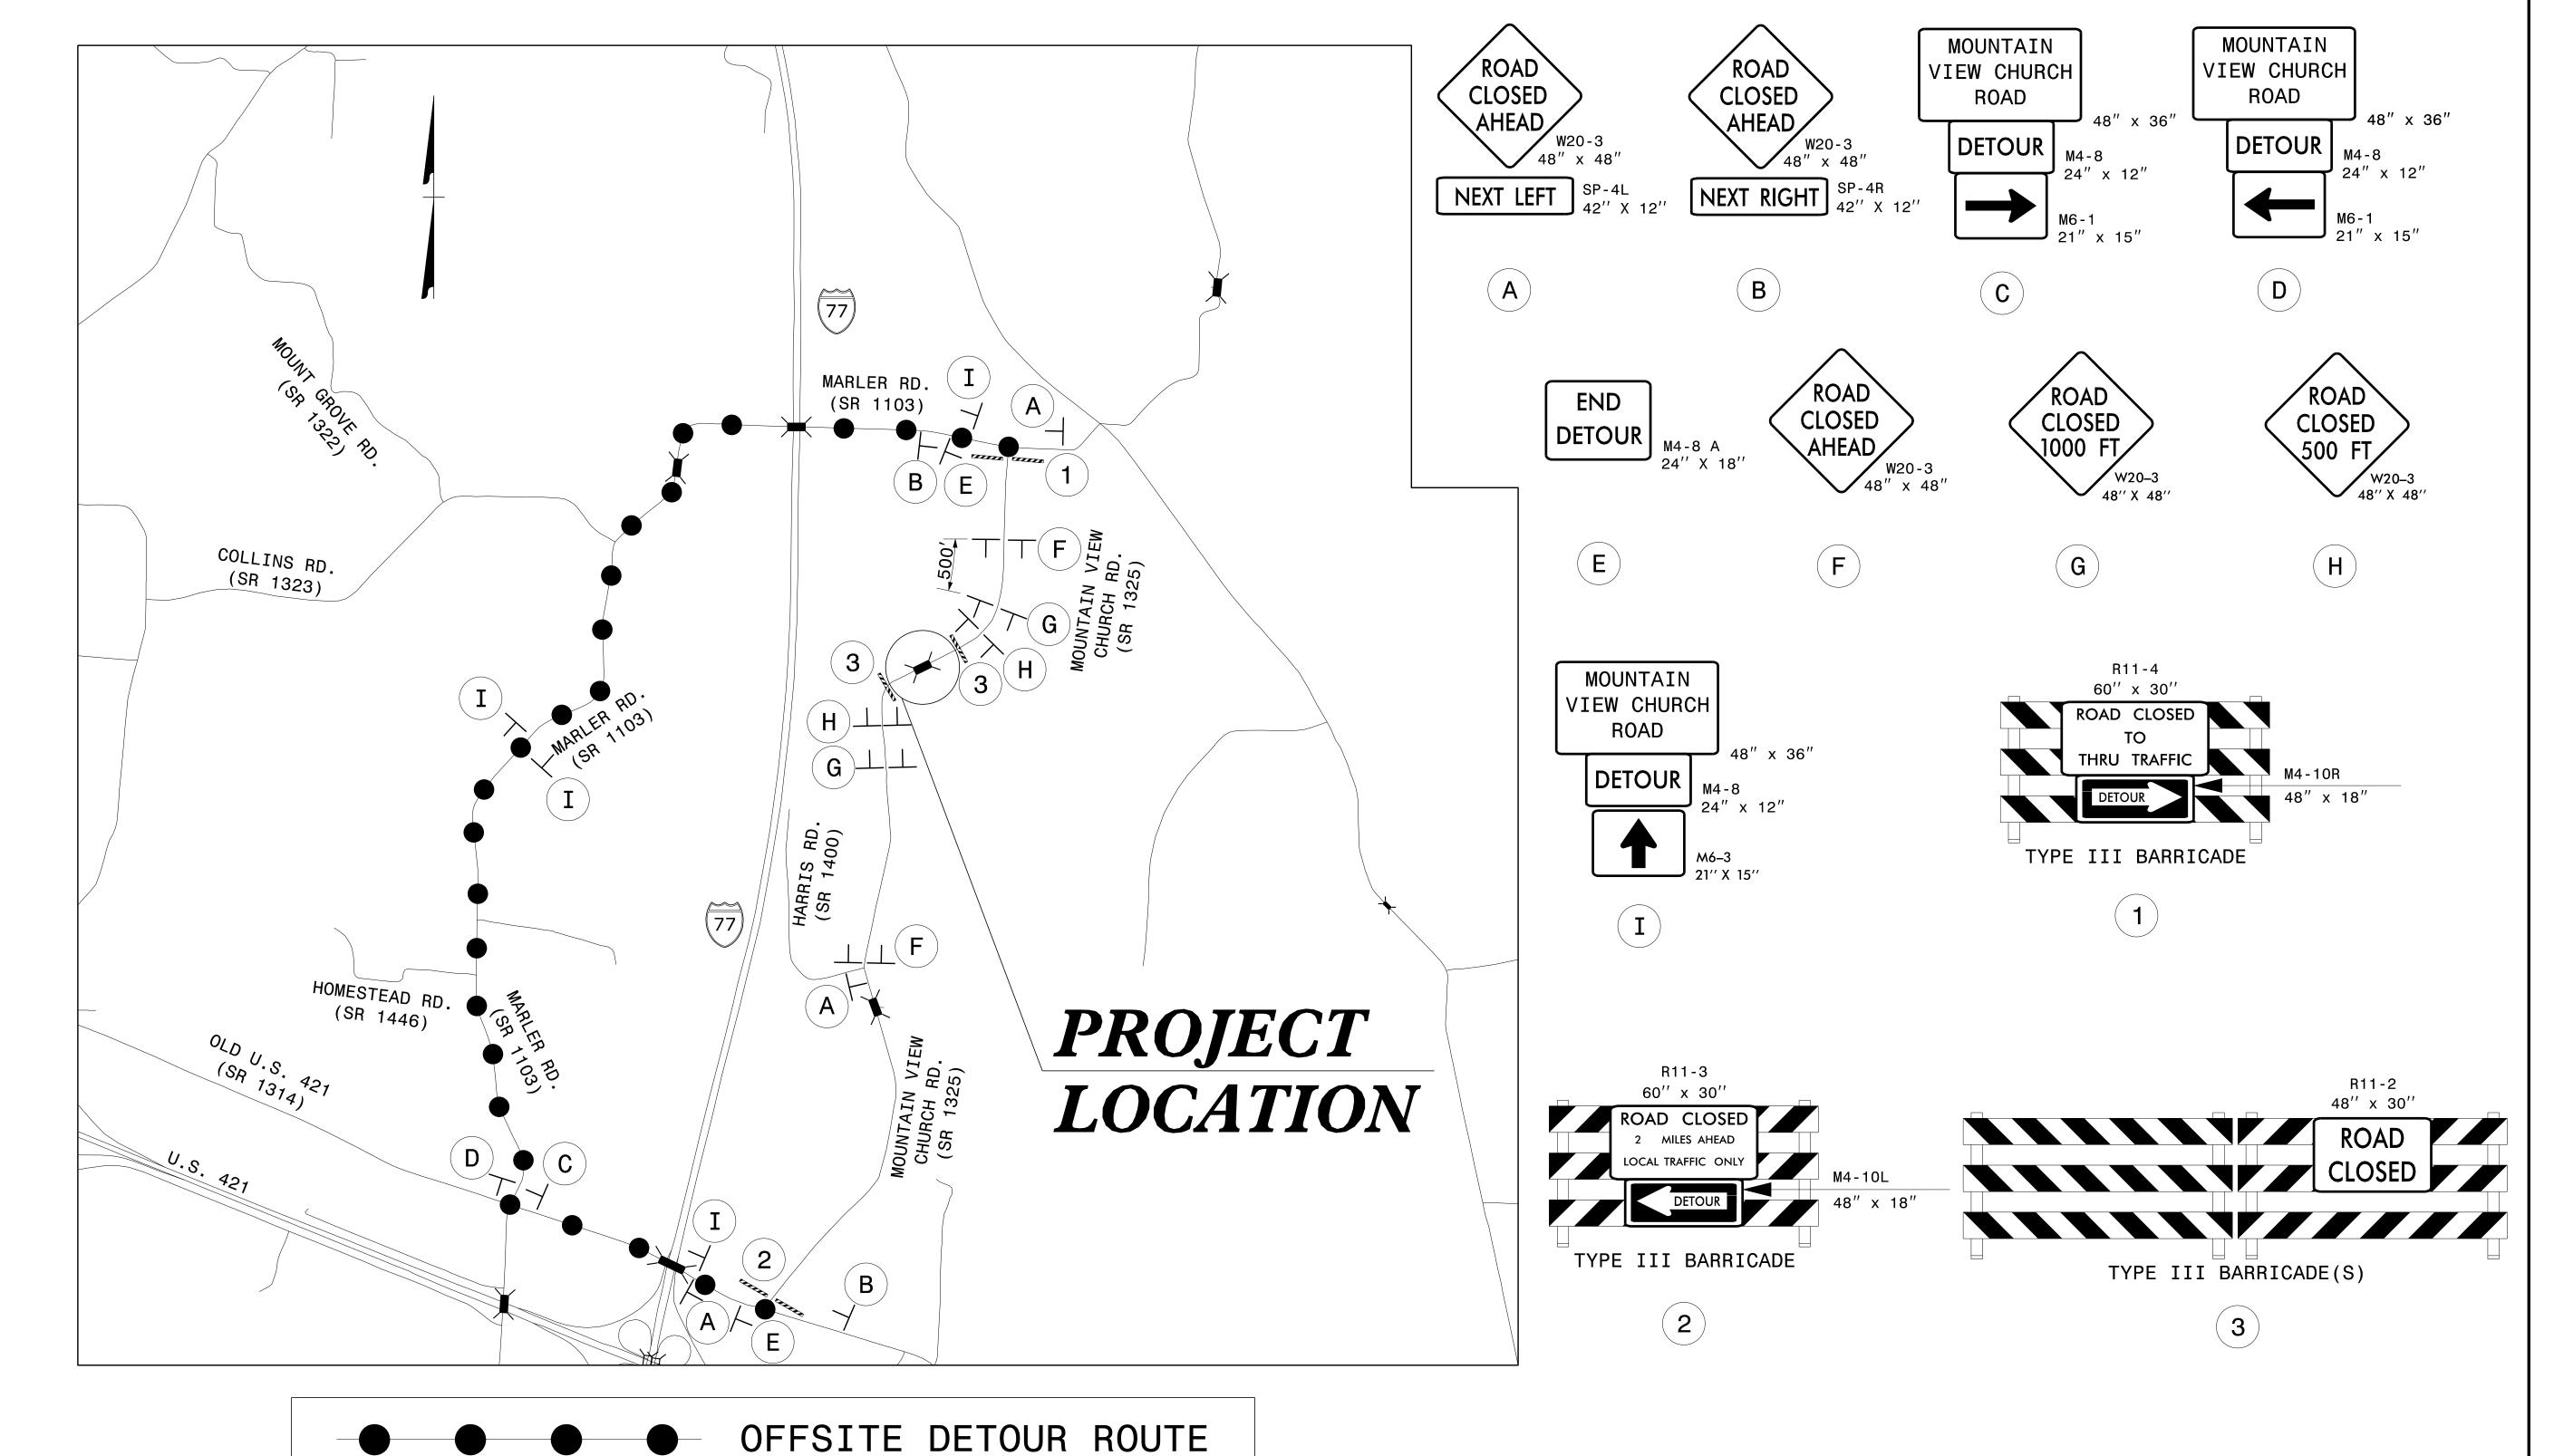

REFER TO RSD 1101.03, SHEET 1, FOR WORK ZONE SIGNS, AND SPACING, REQUIRED ALONG MOUNTAIN VIEW CHURCH RD

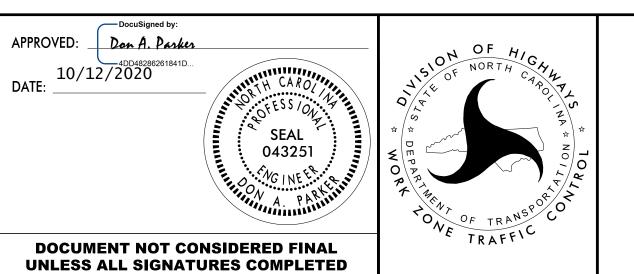

OFFSITE DETOUR
ROUTE AND
ROAD CLOSURE

P:\TIPProjects-B\BROI27\Traffic\TrafficCon

PROJ. REFERENCE NO. SHEET NO. BR - 0127 TMP - 3


SIGN NUMBER: SP20004 BACKG COLOR: Fluorescent Orange COPY COLOR: **Black** TYPE: STATIONARY QUANTITY: SEE PLANS SYMBOL WID HT SIGN WIDTH: 4'-0" **HEIGHT:** 3'-0" TOTAL AREA: 12.0 Sq.Ft. **BORDER TYPE: INSET RECESS:** 0.38" WIDTH: 0.63" **RADII:** 1.5" MAT'L: 0.080" (2.0 mm) ALUMINUM NO. Z BARS: LENGTH:

USE NOTES: 1,2

FILENAME: Oscar Calloway Rd_Mountain View Church Rd

- Legend and border shall be direct applied black non-reflective sheeting.
- 2. Background shall be NC GRADE B fluorescent orange retroreflective sheeting.

DESIGN BY: W. Johnson CHECKED BY:KLJ
PROJECT ID: ID LOCATION: DIV: DIV

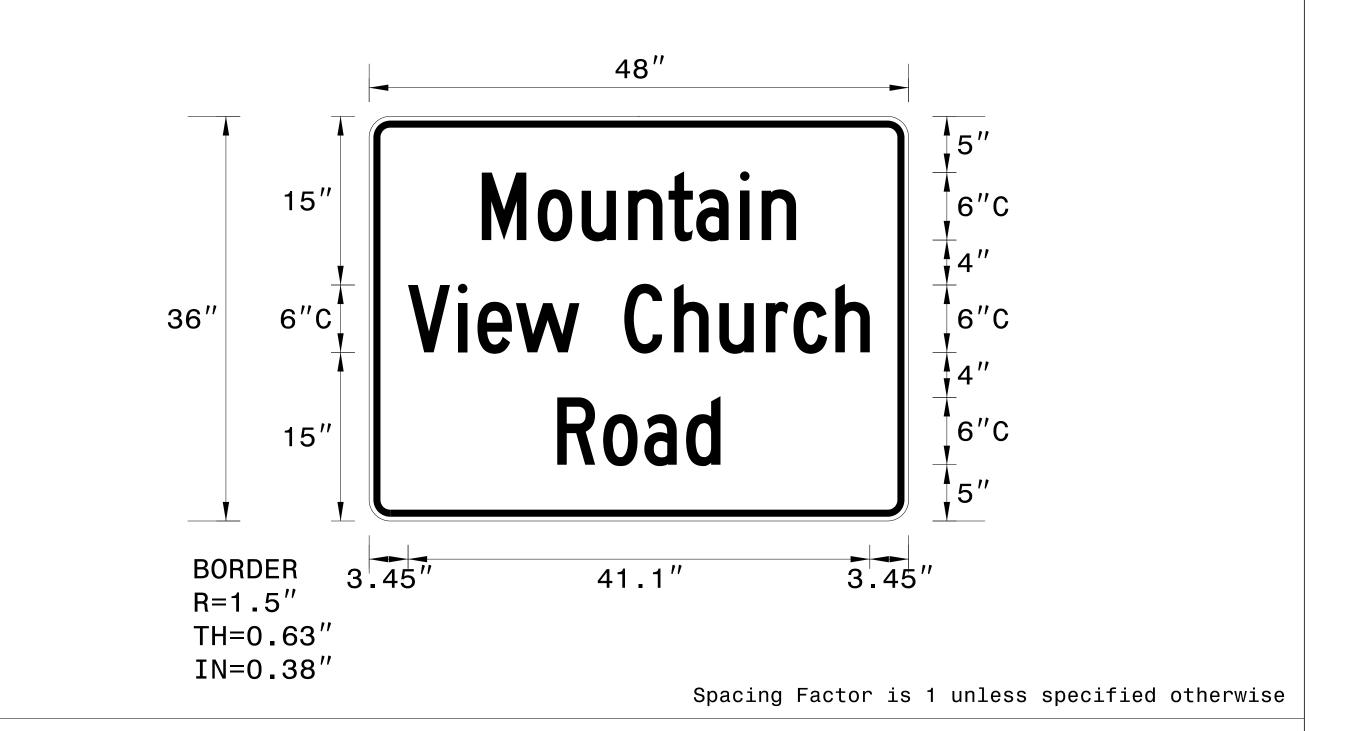

LETTER POSITIONS

Letter spacings are to start of next letter															Series/Size Text Length			
		M	0	u	n	t	а	i	n									C 2000
10)	5	3.9	4.1	3.6	2.5	3.9	1.9	3.1	10								28
		V	i	е	W		С	h	u	r	С	h						C 2000
3.9	5	4.4	1.7	3.4	5.6	4	4.4	4	4.1	2.5	3.7	3.1	3.5					41.1
		R	О	а	d													C 2000
16.	. 7	4.1	3.7	3.7	3.1	16.7												14.5

DOCUMENT NOT CONSIDERED FINAL

UNLESS ALL SIGNATURES COMPLETED

NORTH CAROLINA D.O.T. SIGN DETAIL

SPECIAL SIGN DESIGN