
| PROJECT REFERENCE NO. | | SHEET NO. |
|-----------------------|------------------|--------------|
| 2021CPT.14 | .06.10501 | 6 |
| STATE PROJECT | F.A. PROJECT NO. | DESCRIPTION |
| 2021CPT.14.06.10501 | | CONSTRUCTION |
| | | |
| | | |

TYPICAL 3

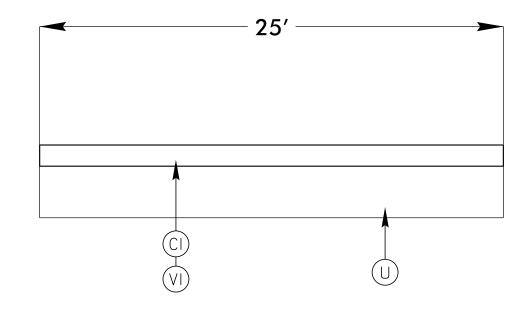

SURFACING SCHEDULE

| ITEM NO. | DESCRIPTION | |
|-------------|---|--|
| C1 | PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. | |
| Х | PROP. APPROX. 3/4" ASPHALT CONCRETE ULTRA THIN BOND WEAR COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD. | |
| R | MILLED RUMBLE STRIPS | |
| D1 | PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. | |
| U | EXISTING ASPHALT | |
| V1 | MILLED ASPHALT PAVEMENT 1 1/2" IN DEPTH IN DISTRESSED AREAS AS DIRECTED BY PROJECT ENGINEER. | |
| V2 | MILLED ASPHALT PAVEMENT 4" IN DEPTH IN DISTRESSED AREAS AS DIRECTED BY PROJECT ENGINEER. | |