



FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ.YD.IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1.5" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.OC, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5.5" IN DEPTH.
J1	6" AGGREGATE BASE COURSE
R	3'-0" CONCRETE SHOULDER BERM GUTTER
Т	EARTH MATERIAL
U	EXISTING PAVEMENT
V	INCIDENTAL MILLING
W	PAVEMENT WEDGING (SEE WEDGING DETAIL)

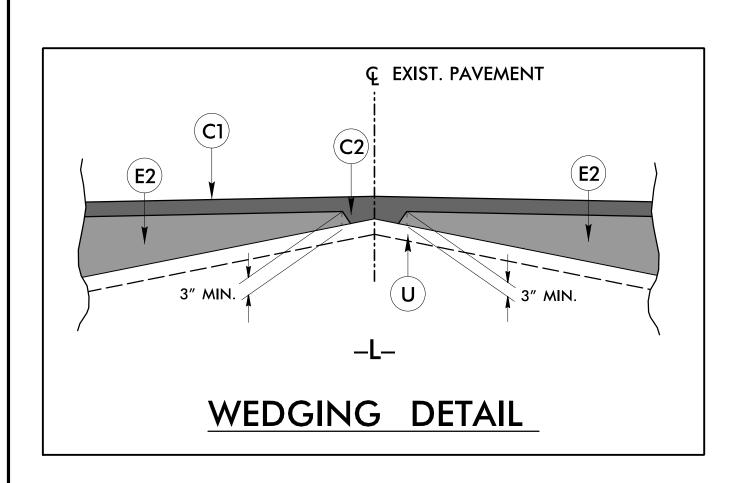


ALL PAVEMENT SLOPES 1:1 UNLESS NOTED OTHERWISE

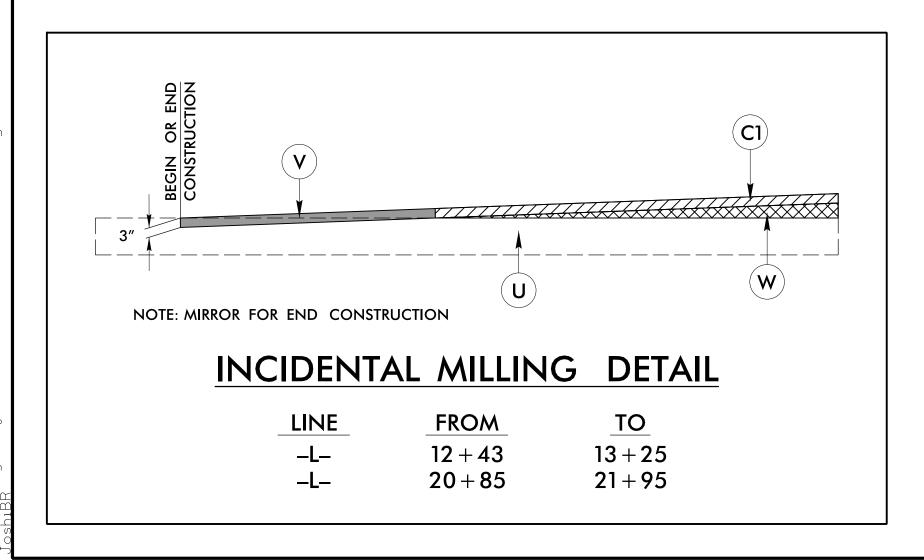

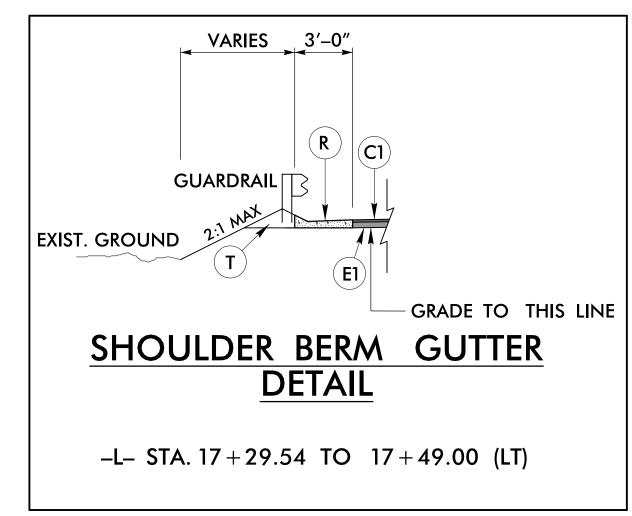

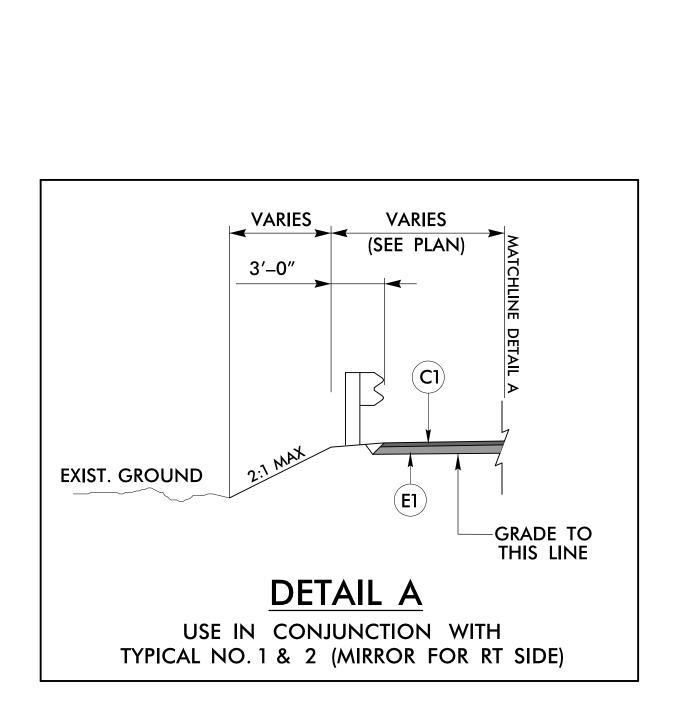

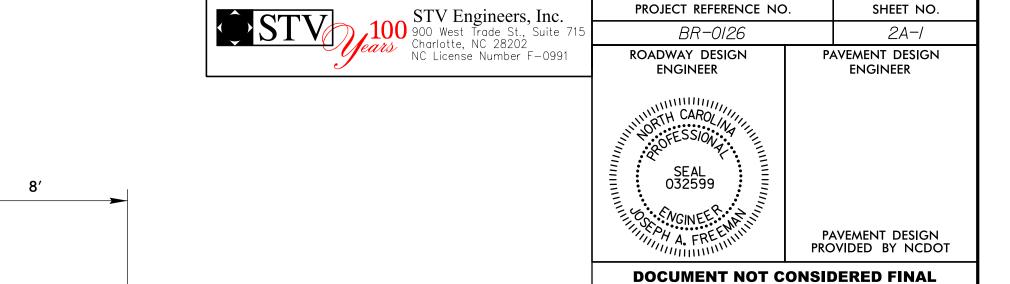

UNLESS ALL SIGNATURES COMPLETED

EXIST. GROUND

TYPICAL SECTION NO. 1


VARIES

GRADE TO THIS LINE

GRADE POINT

-L- STA. 12 + 43.00 TO 15 + 84.00 -L- STA. 17 + 40.00 TO 21 + 95.00

VARIES

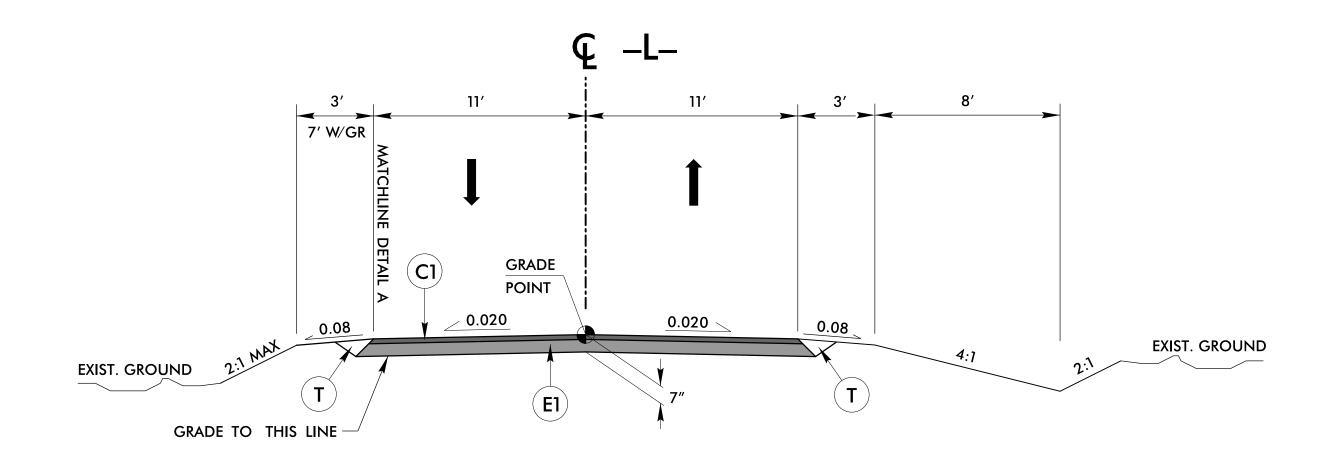

GRADE TO THIS LINE

TYPICAL SECTION NO. 2

L- STA. 15 + 84.00 TO 16 + 05.81 (BEGIN BRIDGE)
L- STA. 17 + 18.19 (END BRIDGE) TO 17 + 40.00