



BEGIN TIP PROJECT B-4484
-LI- POC STA. 17+00.00

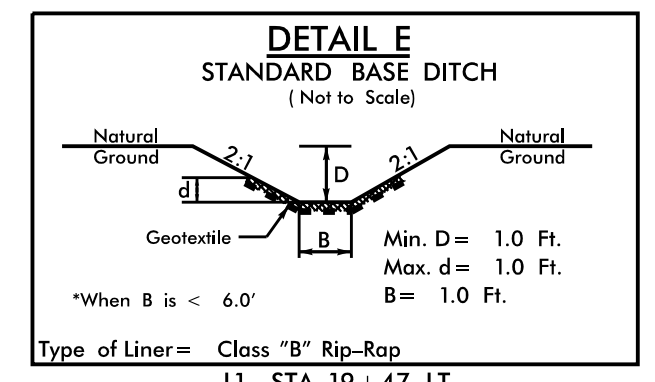

BEGIN CONSTRUCTION B-4484
-LI- POT STA. 14+34.65

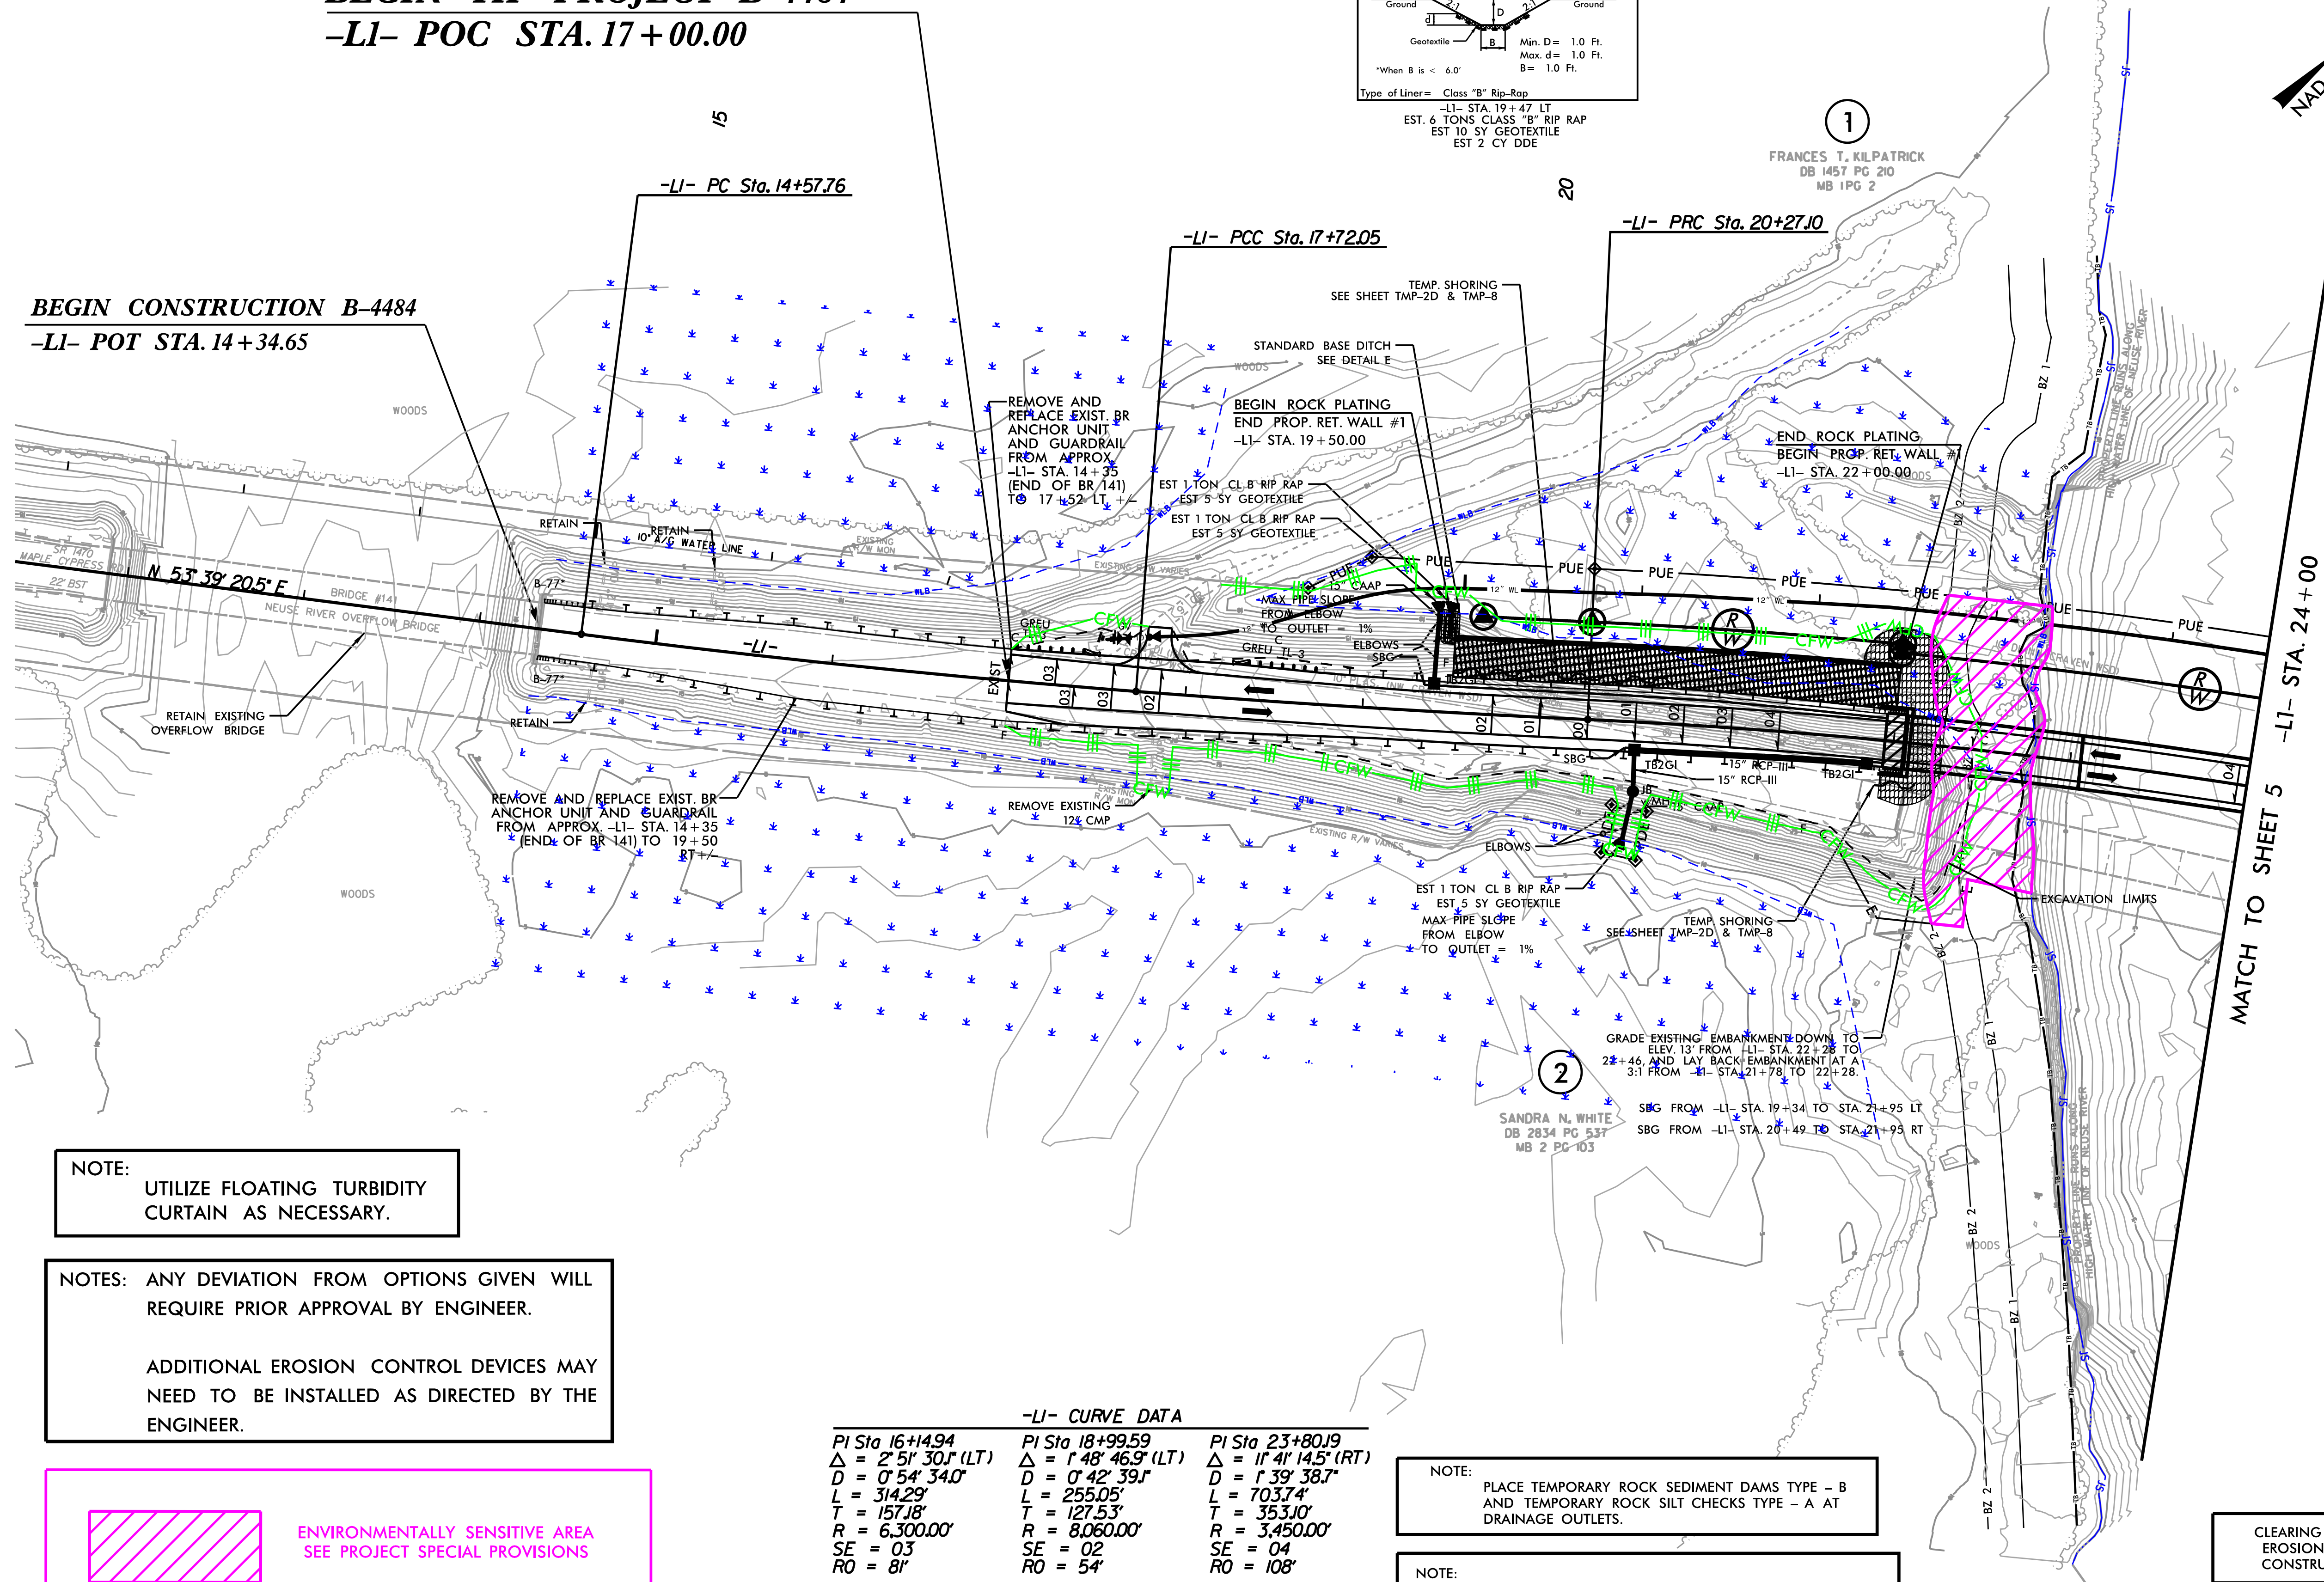

NOTE:
UTILIZE FLOATING TURBIDITY CURTAIN AS NECESSARY.

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

 ENVIRONMENTALLY SENSITIVE AREA
SEE PROJECT SPECIAL PROVISIONS

-LI- CURVE DATA

PI Sta 16+14.94 Δ = 2° 51' 30.1" (LT) D = 0° 54' 34.0" L = 314.29' T = 157.18' R = 6,300.00' SE = 03 RO = 81'	PI Sta 18+99.59 Δ = 1° 48' 46.9" (LT) D = 0° 42' 39.1" L = 255.05' T = 127.53' R = 8,060.00' SE = 02 RO = 54'	PI Sta 23+80.19 Δ = 11° 41' 14.5" (RT) D = 1° 39' 38.7" L = 703.74' T = 353.10' R = 3,450.00' SE = 04 RO = 108'
--	--	--

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE:
UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

8/17/99
 REVISIONS
 2/4/2020
 R:\Environmental\Design\Plan Sheets\B-4484\EC_pah_04.dgn
 Environmental