
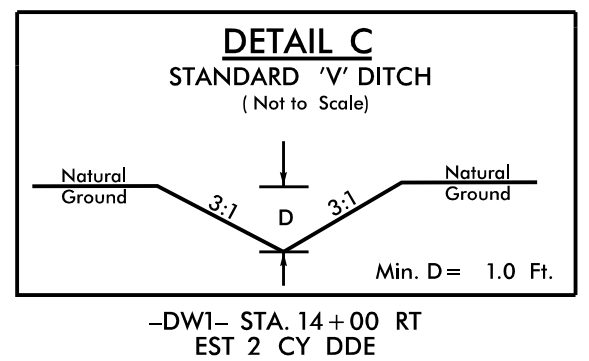
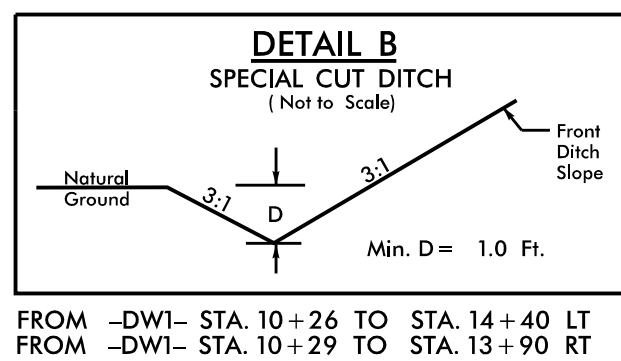
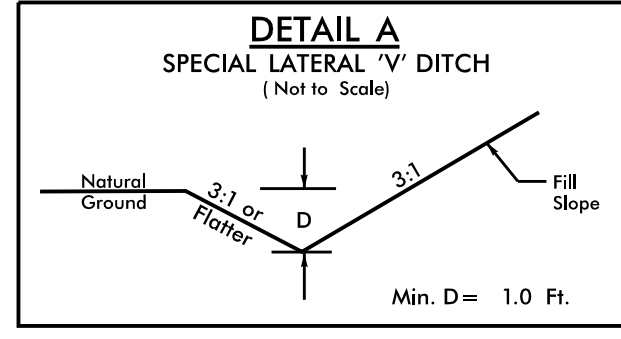


8/17/99

REVISIONS

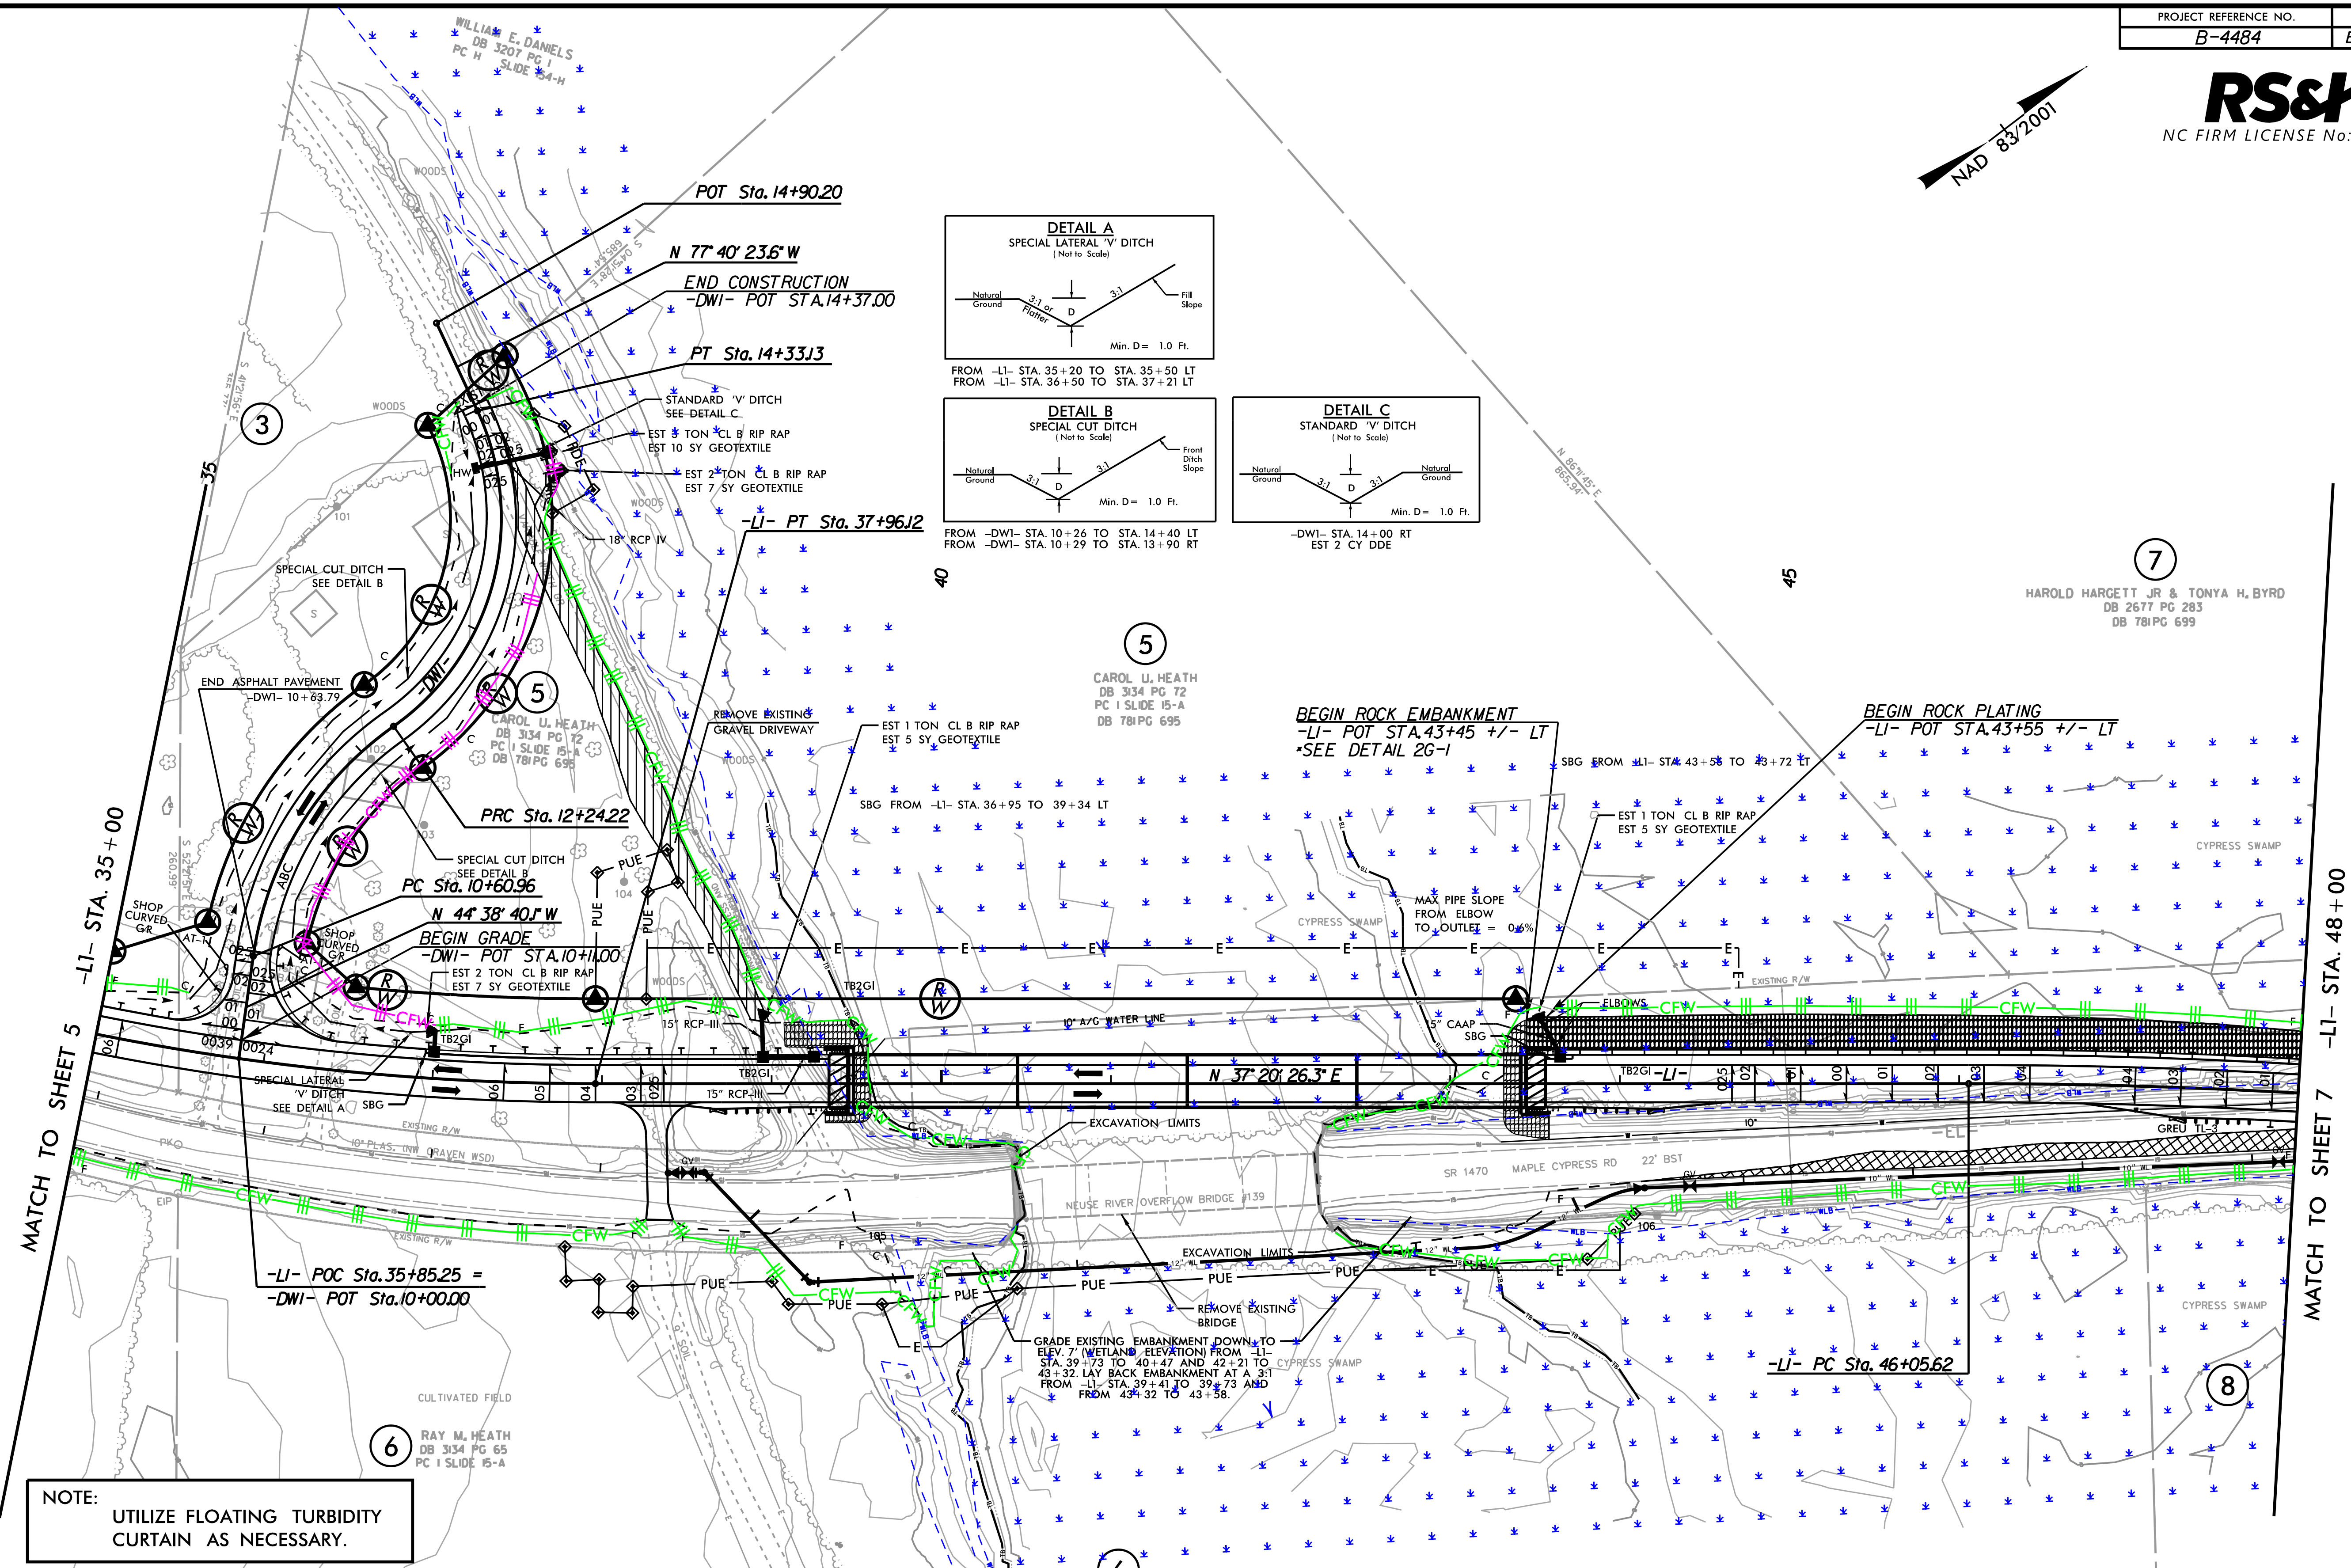

NOTE:  
UTILIZE FLOATING TURBIDITY CURTAIN AS NECESSARY.

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

NOTE:  
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE:  
UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

RAY M. HEATH  
DB 3134 PG 65  
PC 1 SLIDE 15-A

**-DWI- CURVE DATA**

PI Sta 11+47.45	PI Sta 13+49.63
$\Delta = 45^{\circ} 46' 08.1''$ (RT)	$\Delta = 79^{\circ} 47' 51.6''$ (LT)
$D = 28^{\circ} 38' 52.4''$	$D = 38^{\circ} 11' 49.9''$
$L = 163.25'$	$L = 208.91'$
$T = 86.48'$	$T = 125.41'$
$R = 200.00'$	$R = 150.00'$
SE = NC	SE = NC
RO = N/A	RO = N/A

**-LI- CURVE DATA**

PI Sta 47+08.74
$\Delta = 3^{\circ} 28' 28.7''$ (RT)
$D = 1^{\circ} 41' 06.6''$
$L = 206.93'$
$T = 103.13'$
$R = 3,400.00'$
SE = 04
RO = 108'

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 6

3/5/2020  
E:\Environmental\Design\Plan Sheets\B-4484\EC-pah\_06.dgn