


## TEMPORARY BERM AND SLOPE DRAIN DETAILS

(TO BE USED WHEN SHOULDER BERM GUTTER IS REQUIRED)

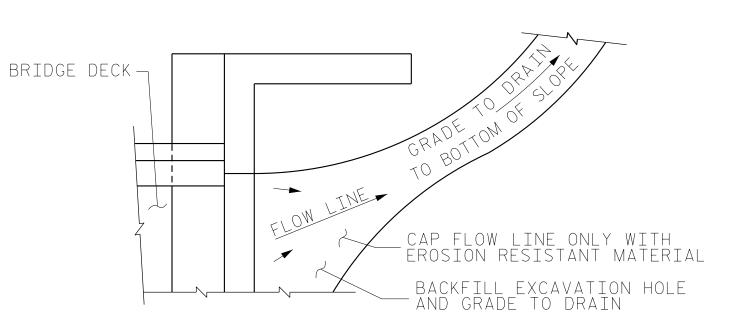

NOTE: IF THE APPROACH SLAB IS NOT CONSTRUCTED IMMEDIATELY AFTER THE BACKFILLING OF THE END BENT EXCAVATION, GRADE TO DRAIN TO THE BOTTOM OF THE SLOPE AND PROVIDE EROSION RESISTANT MATERIAL, SUCH AS FIBERGLASS ROVING OR AS DIRECTED BY THE ENGINEER TO PREVENT SOIL EROSION AND TO PROTECT THE AREA ADJACENT TO THE STRUCTURE. THE CONTRACTOR WILL BE REQUIRED TO REMOVE THESE MATERIALS PRIOR TO CONSTRUCTION OF THE APPROACH SLAB. TEMPORARY DRAINAGE DETAIL

> B-4484 PROJECT NO. CRAVEN COUNTY

STATION: 41+45.00 -L1-

REPLACES BRIDGE NO. 24013 SHEET 2 OF 2

STATE OF NORTH CAROLINA

DEPARTMENT OF TRANSPORTATION

Justino ME Skolony So BD37039EDCDC44B SEAL 039313 MARK ROBI 3/27/2020

RALEIGH STANDARD

BRIDGE APPROACH SLAB DETAILS

OCUMENT NOT CONSIDERED FINAL UNLESS ALL www.rsandh.com SIGNATURES COMPLETE North Carolina License Nos. 50073 \* F-0493 \* C-28

NOTES

THE STANDARD SPECIFICATIONS SECTION 1056.

APPROACH SLAB.

DRAWINGS.

FOR TEMPORARY GEOTEXTILE WALL INCLUDING GEOTEXTILE, 6" Ø

GEOTEXTILE (TYPE 1 OR TYPE 5) SHALL BE IN ACCORDANCE WITH

SELECT MATERIAL BACKFILL (CLASS V OR CLASS VI) SHALL BE

FACE OF BACKWALL FROM OUTSIDE EDGE TO OUTSIDE EDGE OF

AREA BETWEEN THE WINGWALL AND APPROACH SLAB SHALL BE

THE JOINT OPENING AT THE APPROACH SLAB/DECK INTERFACE

SLAB IS CAST. THE JOINT SHALL BE CLEANED OF ALL DEBRIS

THE BRIDGE AND SHALL BE PAVED. SEE ROADWAY PLANS.

IN ACCORDANCE WITH STANDARD SPECIFICATIONS SECTION 1016.

RS&H Architects-Engineers-Planners, Inc. 8521 Six Forks Road, Suite 400 919-926-4100 FAX 919-846-9080

SHEET NO REVISIONS S2-31 BY: DATE: DATE: 10. BY: TOTAL SHEETS