

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

NOTE: THE OUTSIDE BUFFER, WETLAND, OR WATER BOUNDARY SHALL BE CLEARLY MARKED BY HIGHLY VISIBLE FENCING (ORANGE SAFETY FENCE).

NOTE: IMPERVIOUS DIKES MAY BE MODIFIED AND/OR ELIMINATED AS DIRECTED.

-L-		
PI Sta 16+37.50	PI Sta 23+85.79	PI Sta 26+73.45
$\Delta = 26^{\circ} 22' 00.6" (RT)$	$\Delta = 10^{\circ} 59' 17.3" (RT)$	$\Delta = 10^{\circ} 59' 17.3" (LT)$
D = 3' 28" 20.9"	D = 3' 49" 11.0"	D = 3' 49" 11.0"
L = 759.31'	L = 287.67'	L = 287.67'
T = 386.50'	T = 144.28'	T = 144.28'
R = 1,650.00'	R = 1,500.00'	R = 1,500.00'
SE = 0.04	SE = 0.04	SE = 0.04
RO = 108'	RO = 108'	RO = 108'

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.





NOTE: UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

NOTE: USE 1.0 FT WEIR HEIGHT FOR TEMPORARY ROCK SILT CHECKS TYPE - A THAT ARE NOT LABELED.

PROJECT REFERENCE NO.	SHEET NO.
B-5534	EC-4/CONST.4

Kimley Horn
 421 FAYETTEVILLE STREET, SUITE 600
 RALEIGH, N.C. 27601

CLEARING AND GRUBBING
 EROSION CONTROL FOR
 CONSTRUCTION SHEET 4

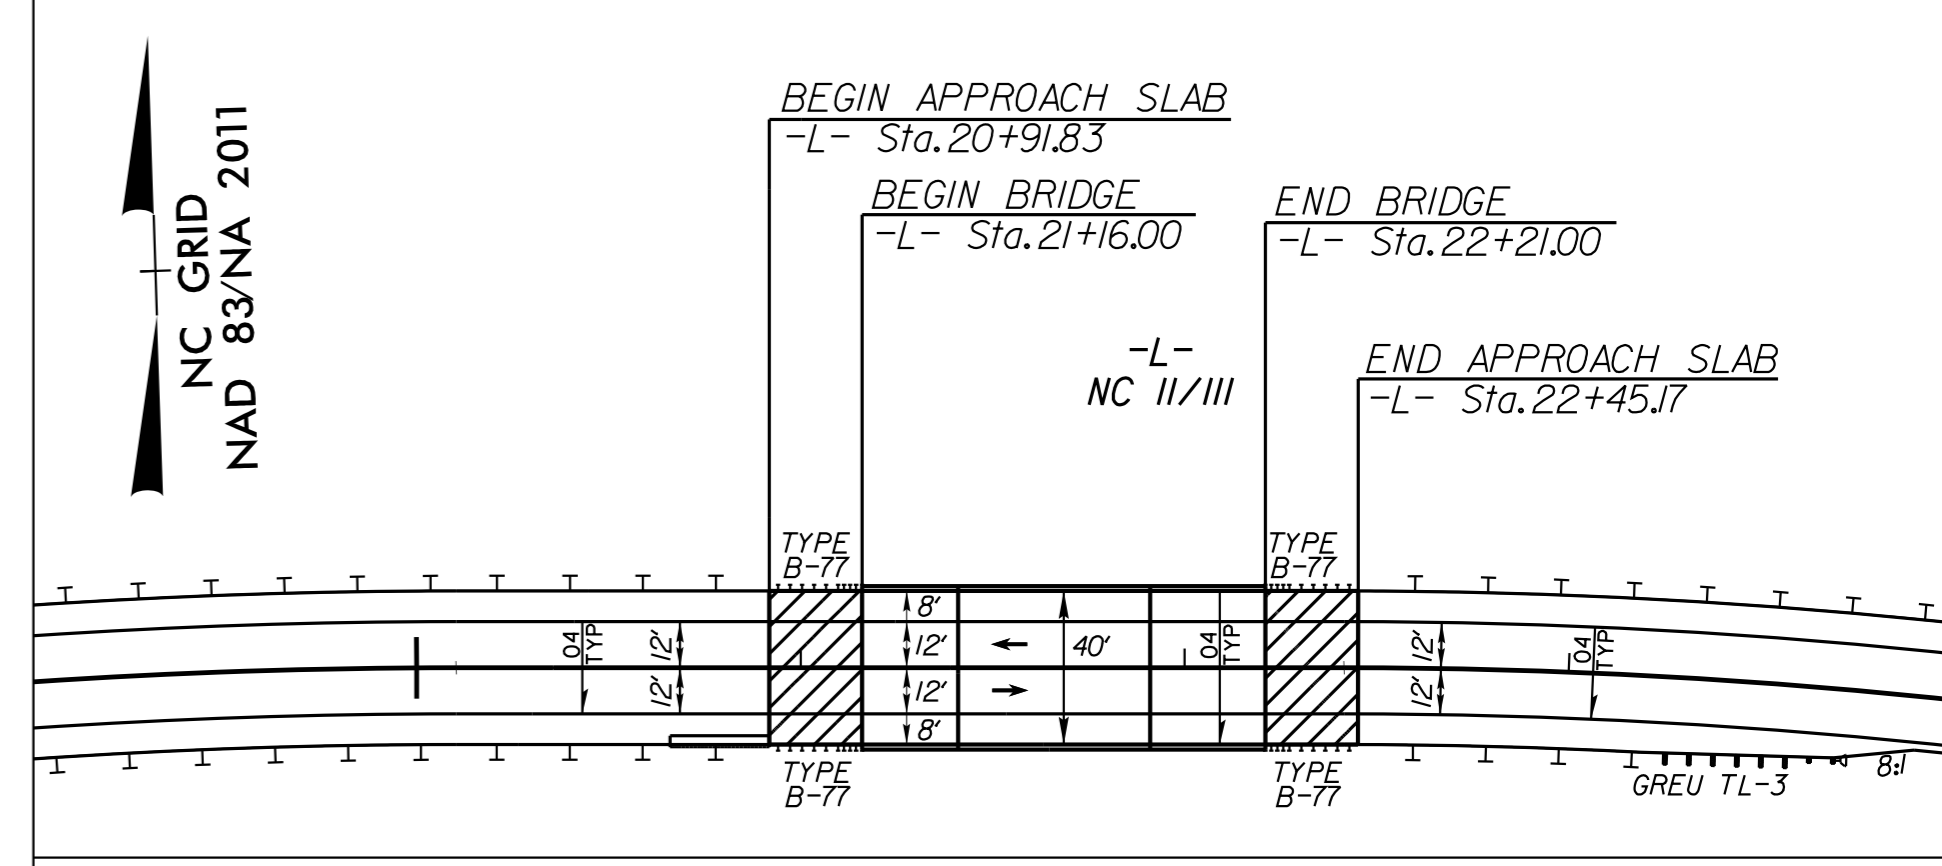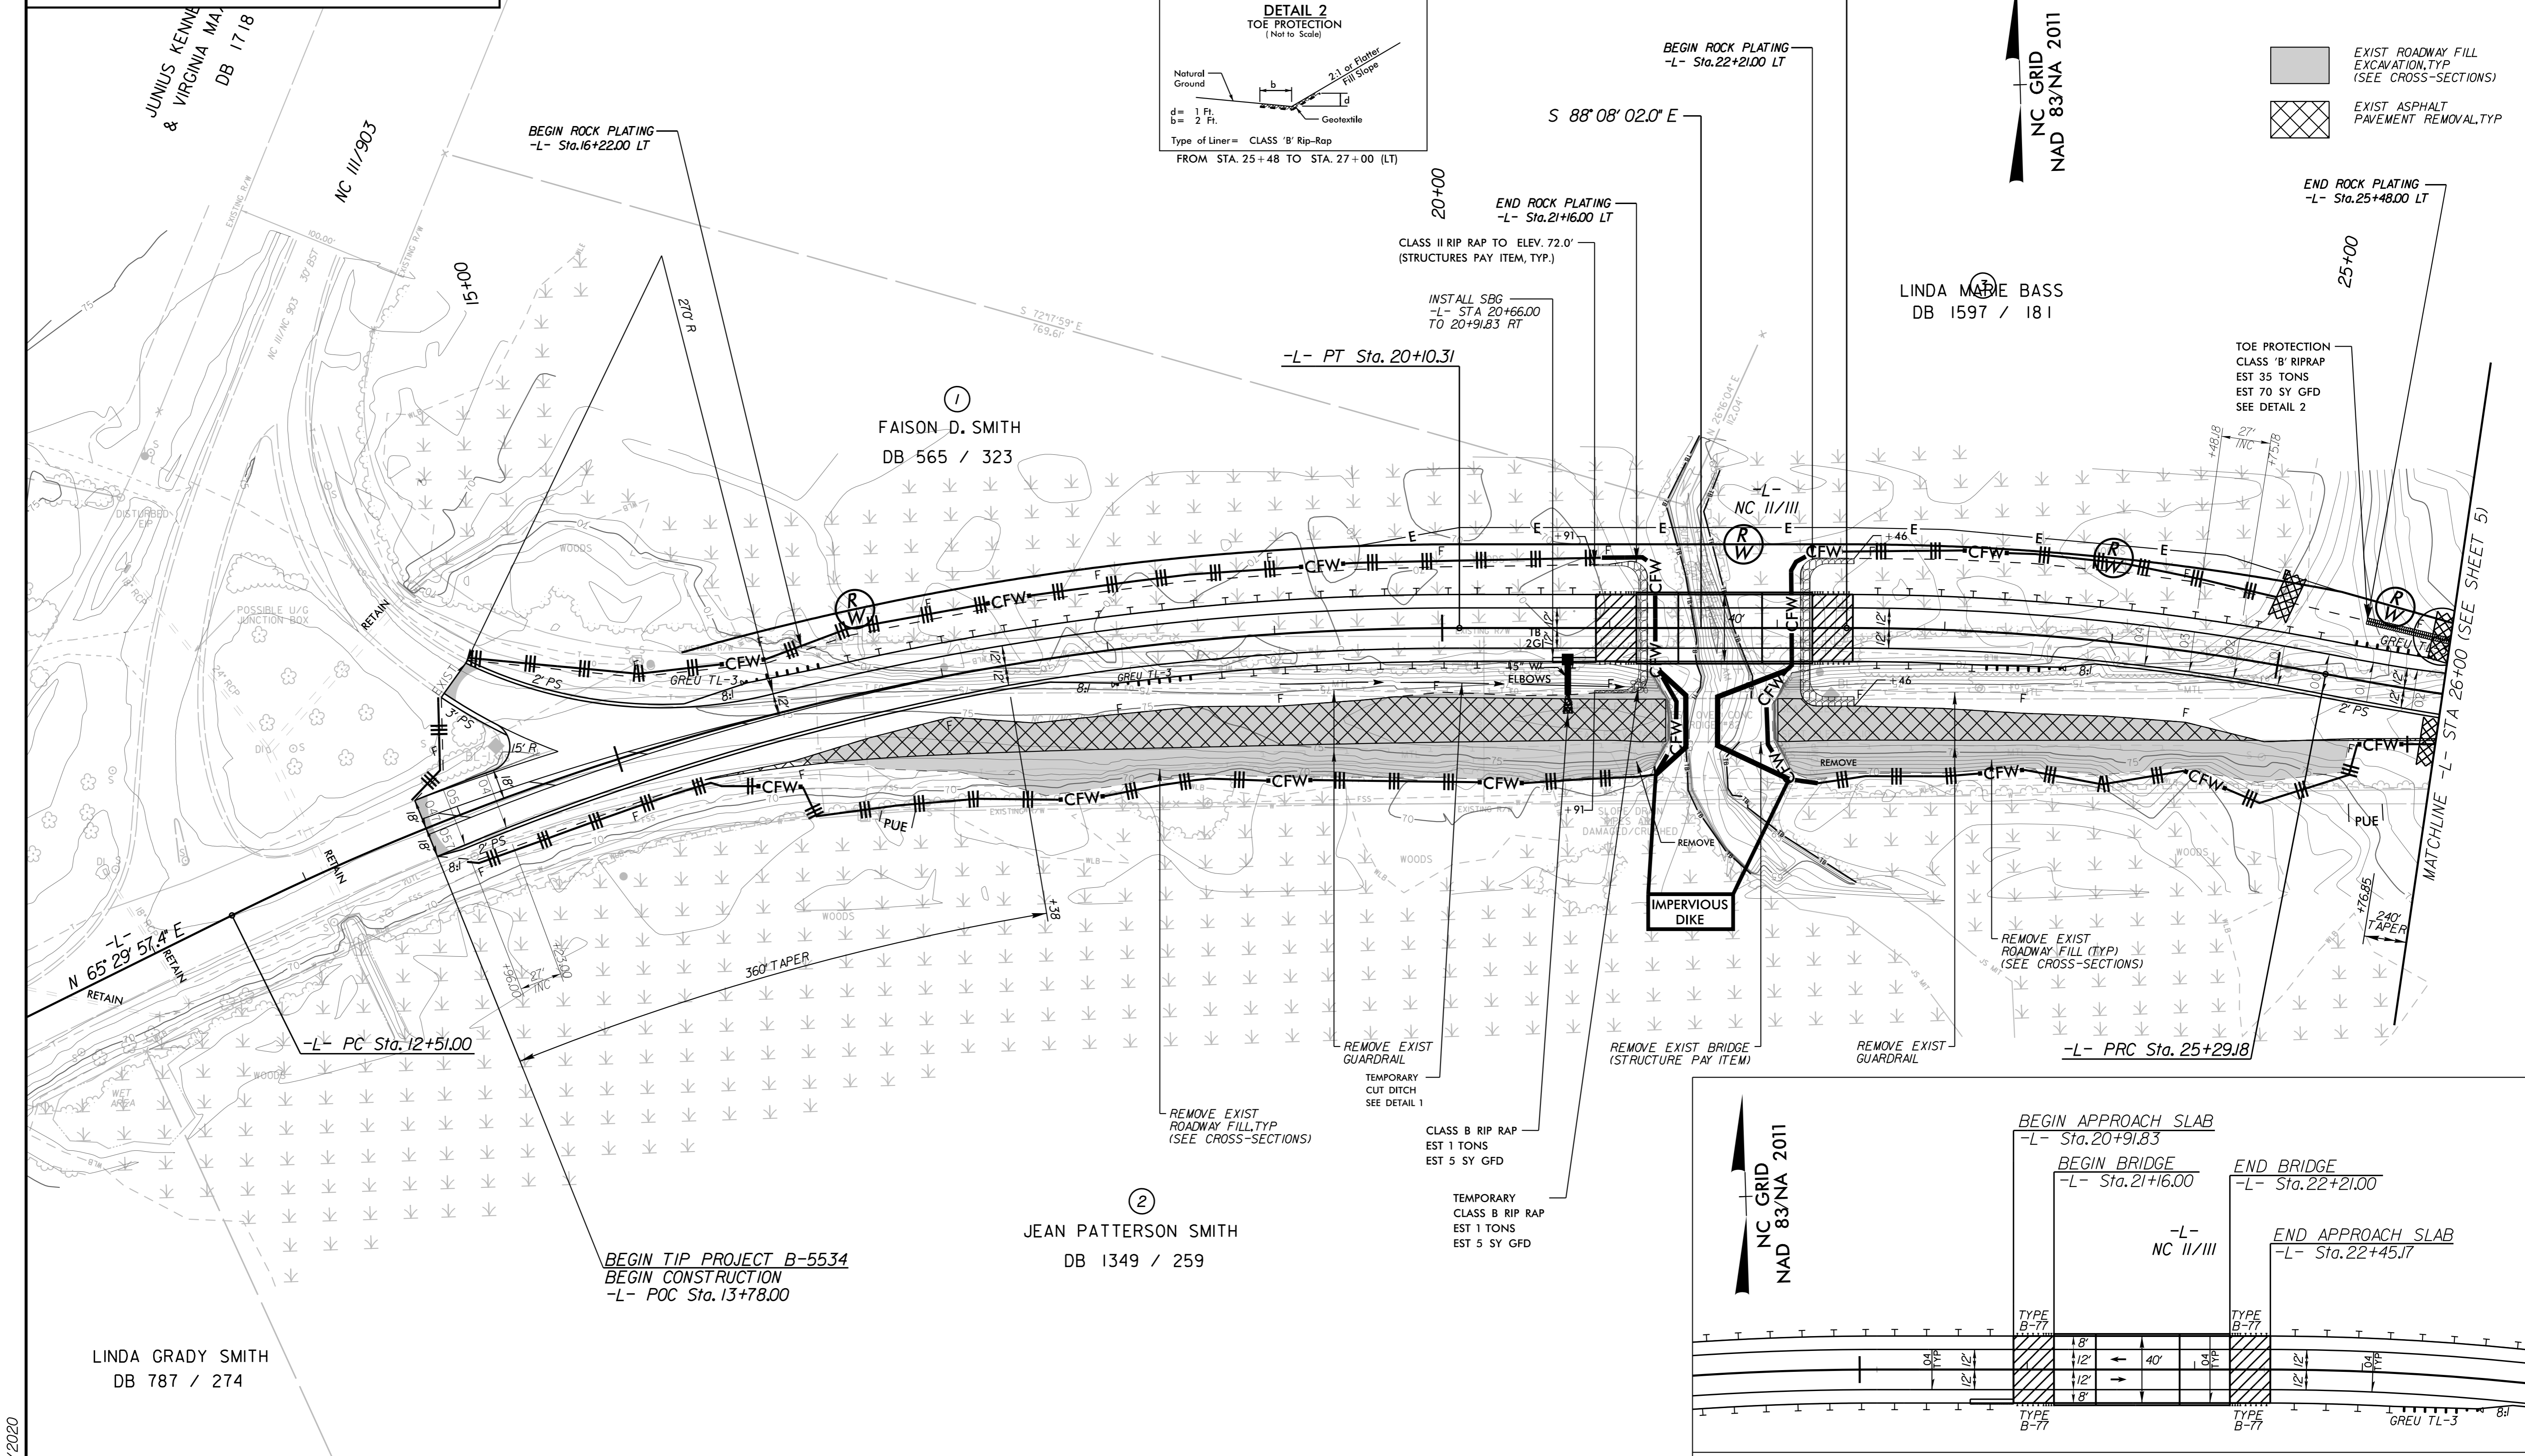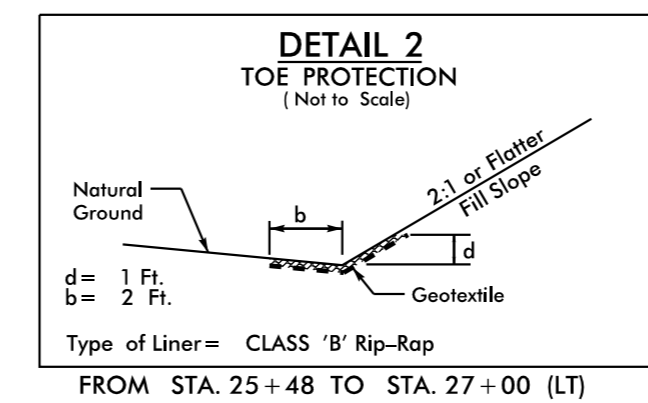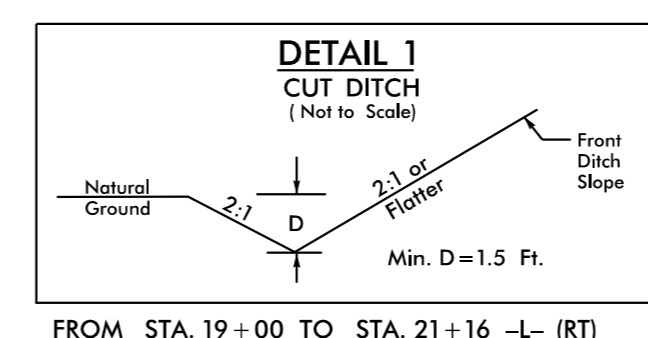

SEE SHEET 6 FOR -L- PROFILE

DETAIL SHOWING BRIDGE / PAVEMENT RELATIONSHIP

3/13/2020