

5/14/1999

-L-  
 PI Sta 26+73.45  
 $\Delta = 10^{\circ} 59' 17.3''$  (LT)  
 $D = 3^{\circ} 49' 11.0''$   
 $L = 287.67'$   
 $T = 144.28'$   
 $R = 1,500.00'$   
 $SE = 0.04$   
 $RO = 108'$

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.


NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE: USE 1.0 FT WEIR HEIGHT FOR TEMPORARY ROCK SILT CHECKS TYPE - A THAT ARE NOT LABELED.

**Kimley & Horn**  
 421 FAYETTEVILLE STREET, SUITE 600  
 RALEIGH, N.C. 27601

CLEARING AND GRUBBING  
 EROSION CONTROL FOR  
 CONSTRUCTION SHEET 5

PROJECT REFERENCE NO.	SHEET NO.
B-5534	EC-5/CONST.5

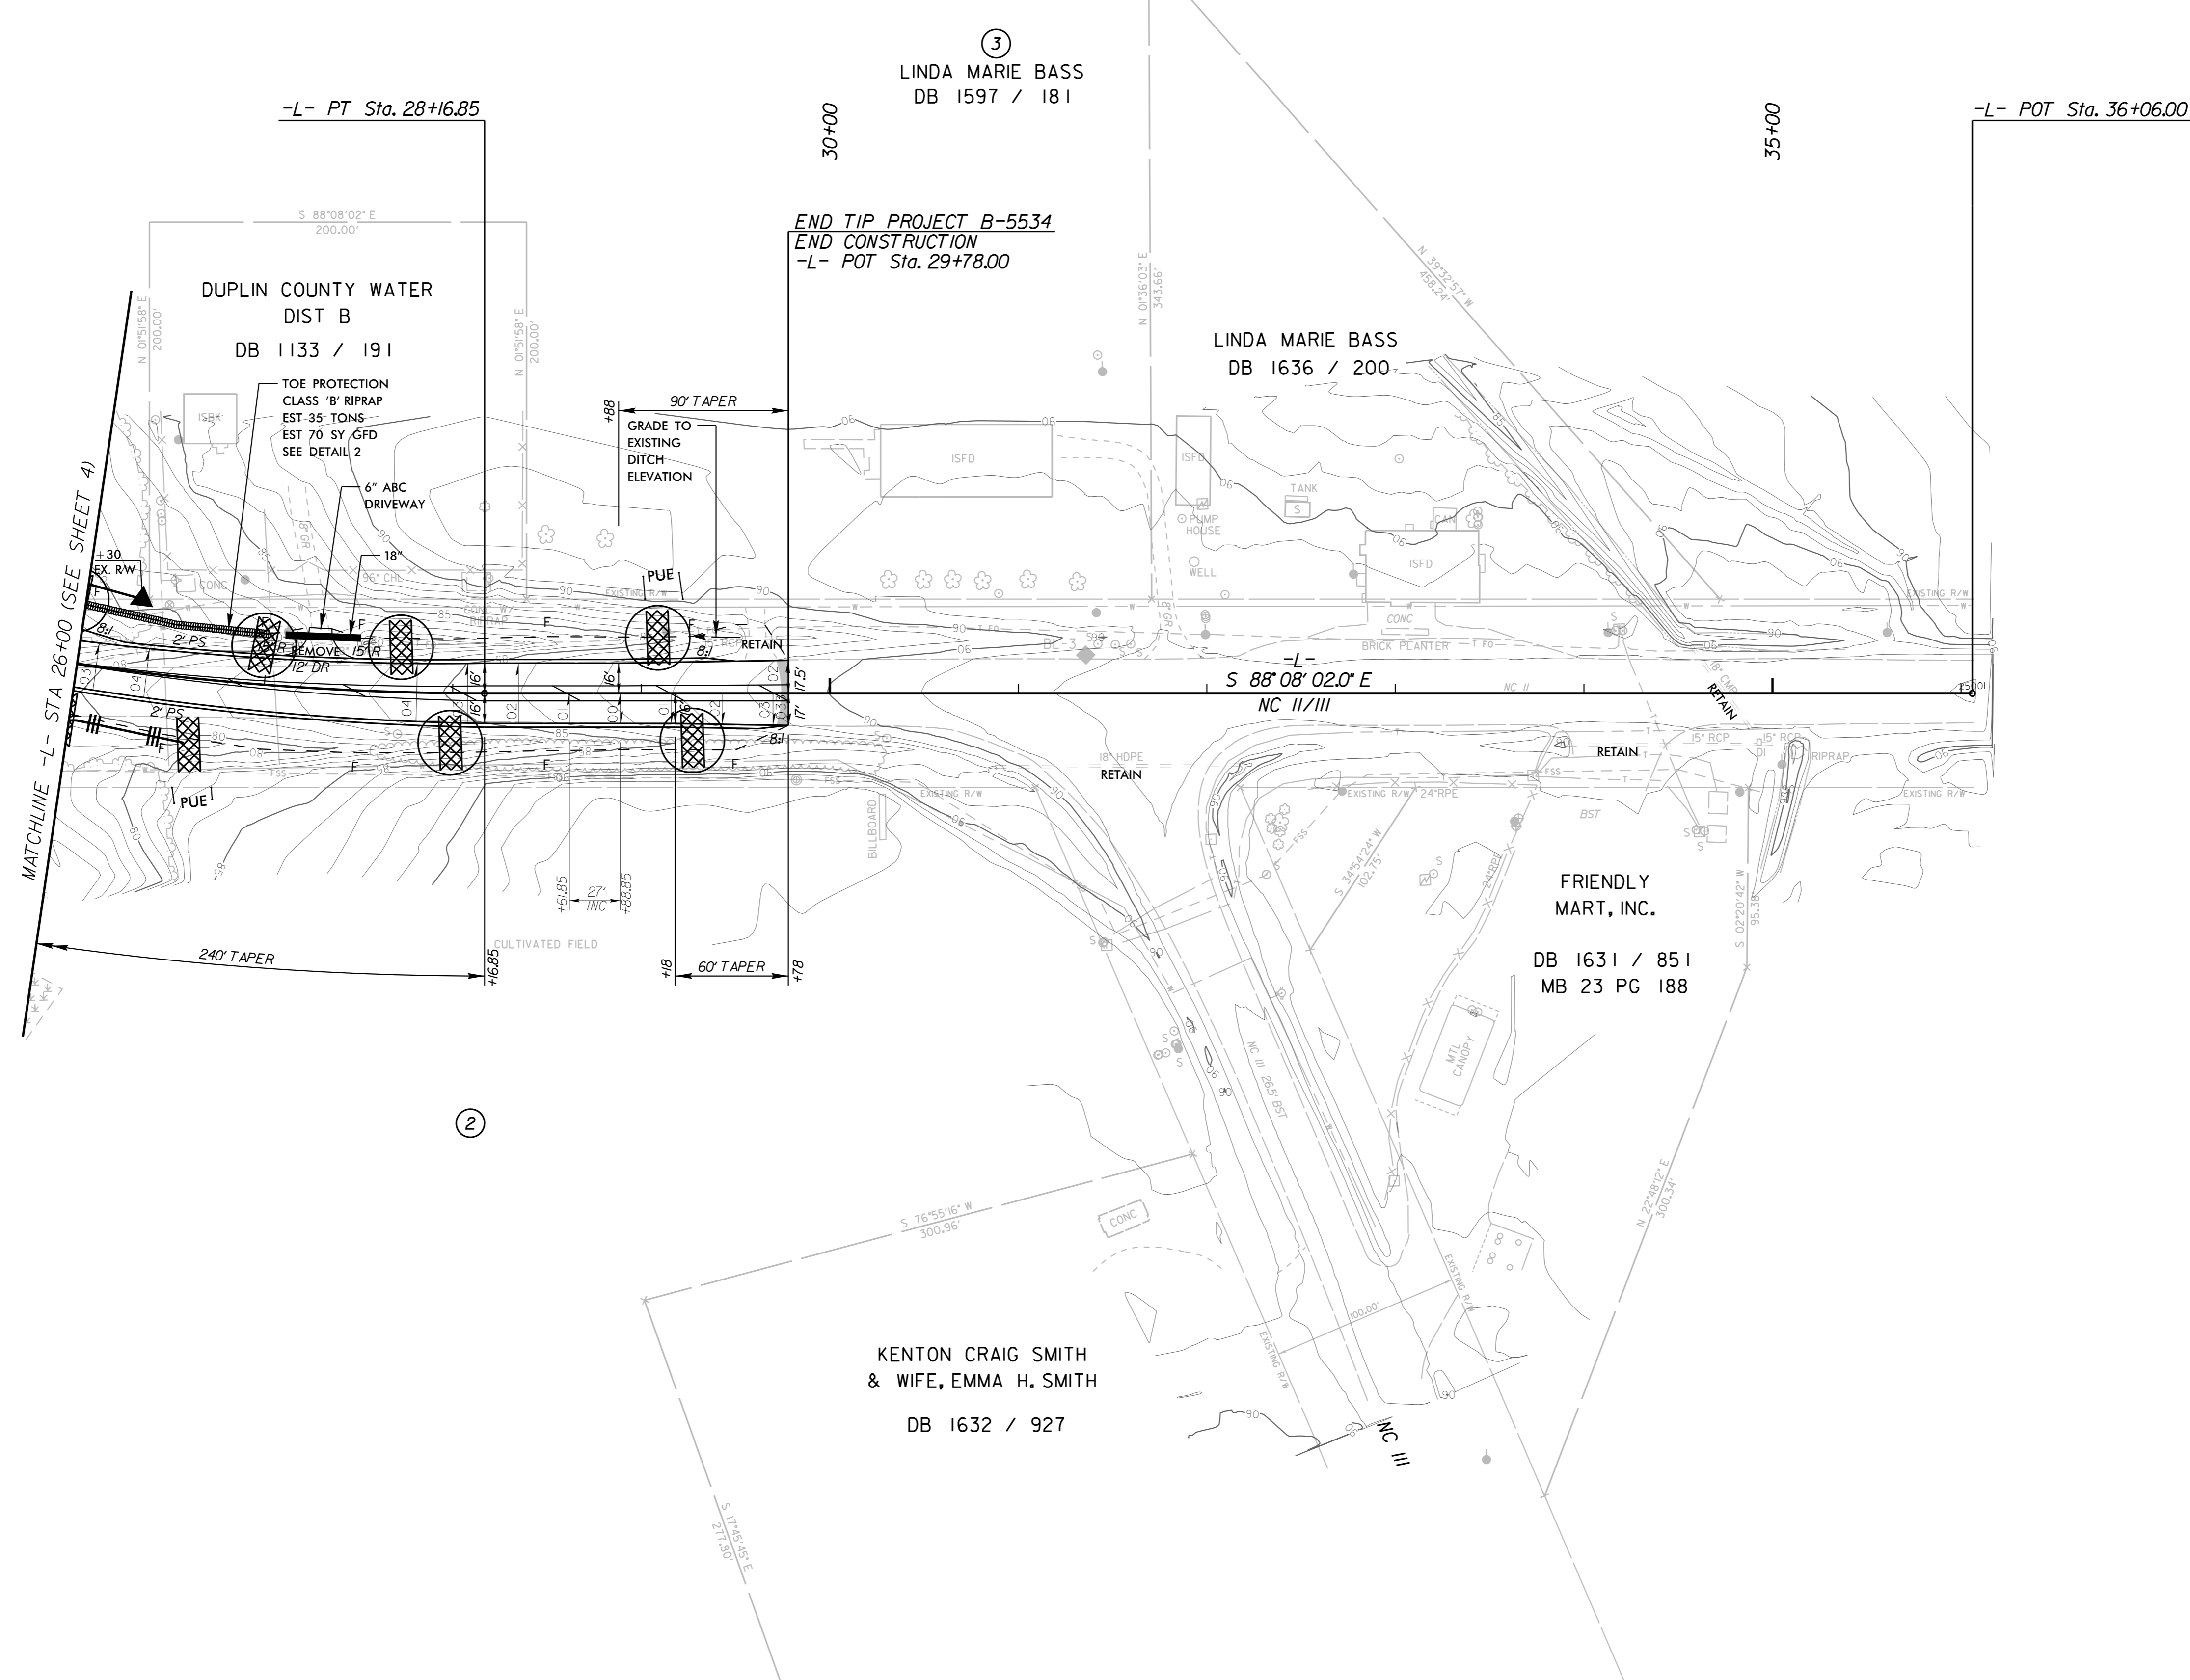

NAD 83/NA 2011

SEE SHEET 6 FOR -L- PROFILE

3/13/2020