

Curve EBL2	Curve EBL3	Curve EBL4
PI = 134+59.51	PI = 139+11.56	PI = 146+74.34
DELTA = 5° 24' 53.18" (LT)	DELTA = 26° 03' 57.20" (LT)	DELTA = 17° 40' 29.07" (LT)
D = 2' 15' 48"	D = 3' 59' 19"	D = 2' 00' 59"
T = 119.71'	T = 332.51'	T = 441.79'
L = 239.24'	L = 653.51'	L = 876.55'
R = 2,531.50'	R = 1,436.50'	R = 2,841.50'
PC = 133+39.80	PCC = 135+79.04	PCC = 142+32.56
PCC = 135+79.04	PCC = 142+32.56	PT = 151+09.11
V = 60 MPH	V = 60 MPH	V = 60 MPH


NOTE:
 PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

Utilize Fabric Insert Inlet Protection Devices in Lieu of Rock Inlet Sediment Traps, Type -C as Directed to Avoid Impoundment of Runoff in Roadway Open to Traffic.

END CONSTRUCTION
 -L- STA 53+47.91

REQUEST VIDEO OF PIPES PROPOSED TO RETAIN AS NOTED CHECK FOR STRUCTURAL INTEGRITY.

MATCHLINE - SEE SHEET EC-056
 EBL STA 131+50
 WBL STA 231+50

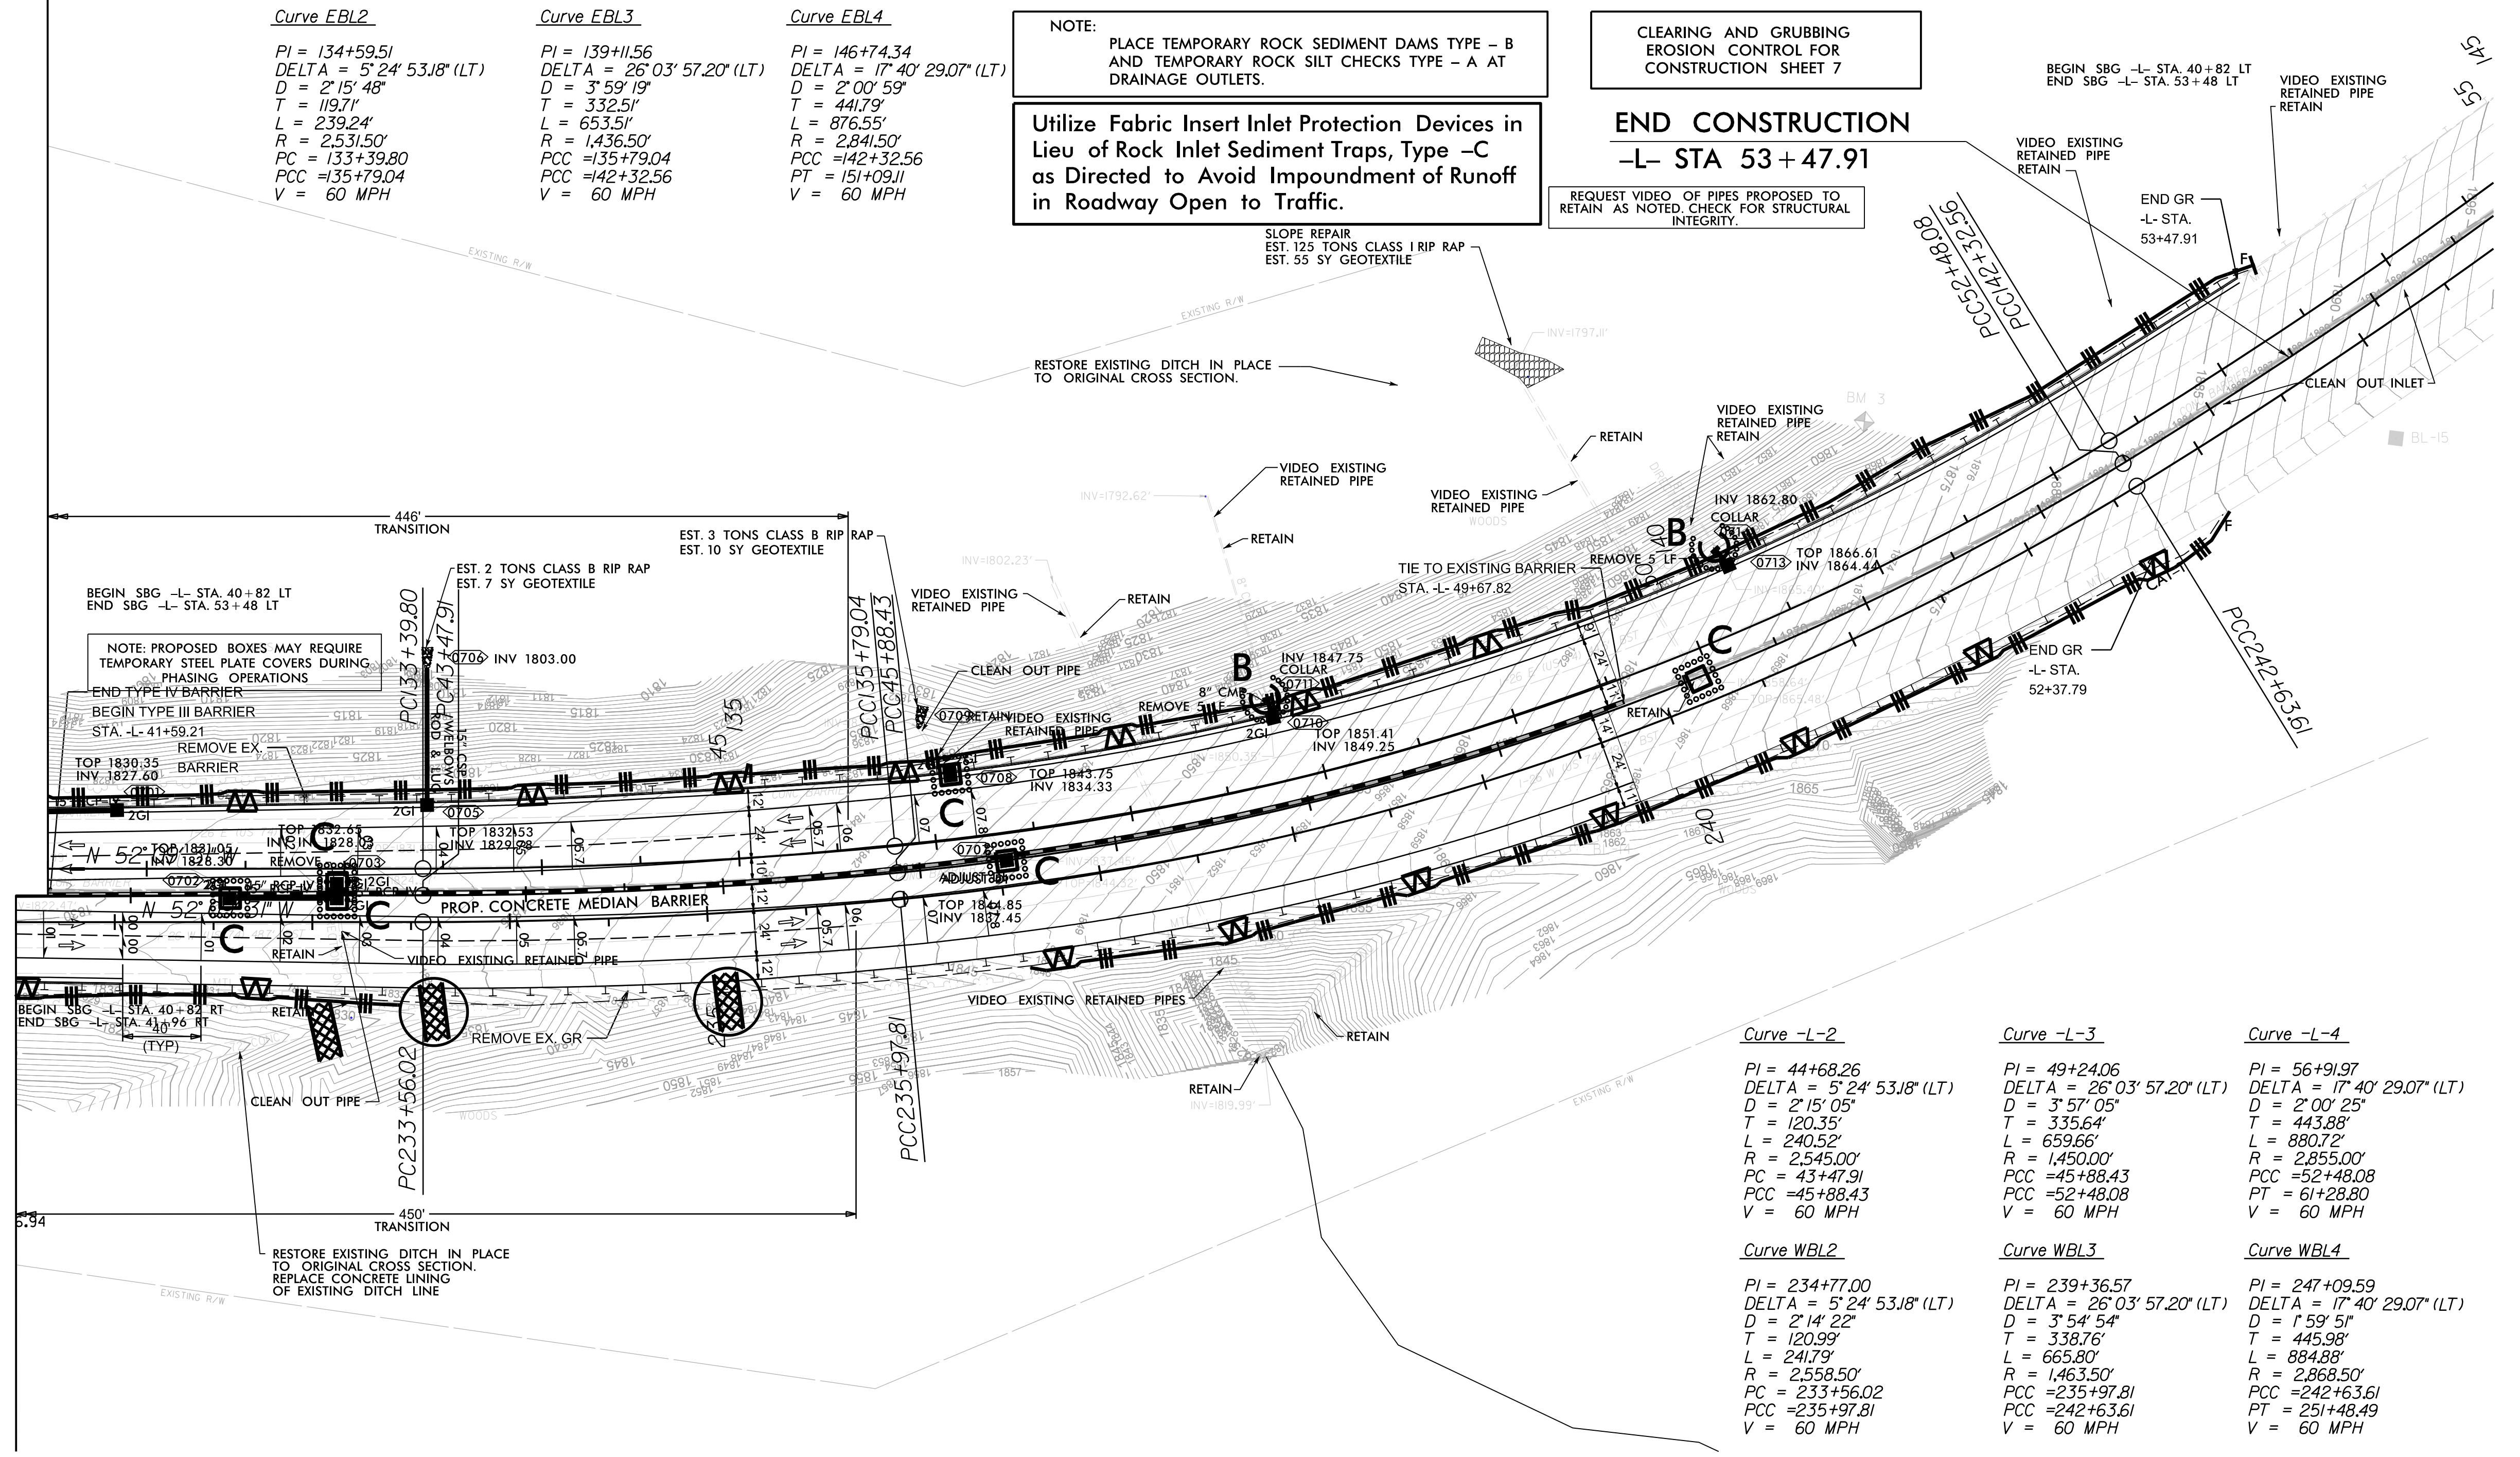

FOR EBL PROFILE SEE SHEET 9
 FOR WBL PROFILE SEE SHEET 9