


NOTES:  
 1. THE CONTRACTOR SHALL INSTALL SPECIAL SEDIMENT CONTROL FENCE OR COIR FIBER WATTLES IN LOW AREAS OF SILT FENCE AND UNDER THE BRIDGE, AS NEEDED OR DIRECTED BY THE ENGINEER.  
 2. THE OUTSIDE BUFFER, WETLAND OR WATER BOUNDARY SHALL BE CLEARLY MARKED BY HIGHLY VISIBLE FENCING (ORANGE SAFETY FENCE)

-L-  
 PI Sta 15+110.3  
 $\Delta = 6' 24'' 00.0''$  (LT)  
 $D = 2' 00'' 00.0''$   
 $L = 320.00'$   
 $T = 160.17'$   
 $R = 2,864.79'$   
 $SE = 4\%$   
 $RO = 88'$


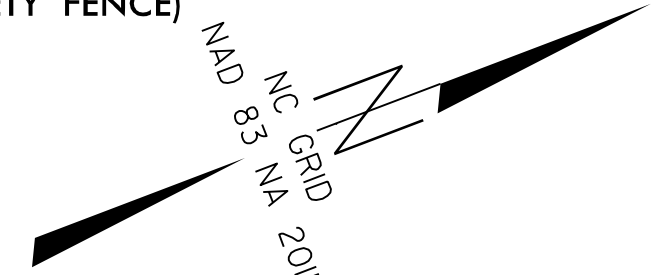


CLEARING AND GRUBBING  
 EROSION CONTROL FOR  
 CONSTRUCTION SHEET 4

NOTE:  
 PLACE TEMPORARY ROCK SILT CHECKS TYPE - A AT  
 DRAINAGE OUTLETS.

ENVIRONMENTALLY SENSITIVE AREA  
 SEE PROJECT SPECIAL PROVISIONS

8/17/99  
 REVISIONS  
 17-DEC-2019 15:40  
 G:\4201720\XX-SMU-Build Grant\BR-0119\_D2\_P1.ttt  
 109\Hydraulics\CADD\Erosion Control\BR-0119\_EC.psh.dgn  
 mcnulty AT KCA0287

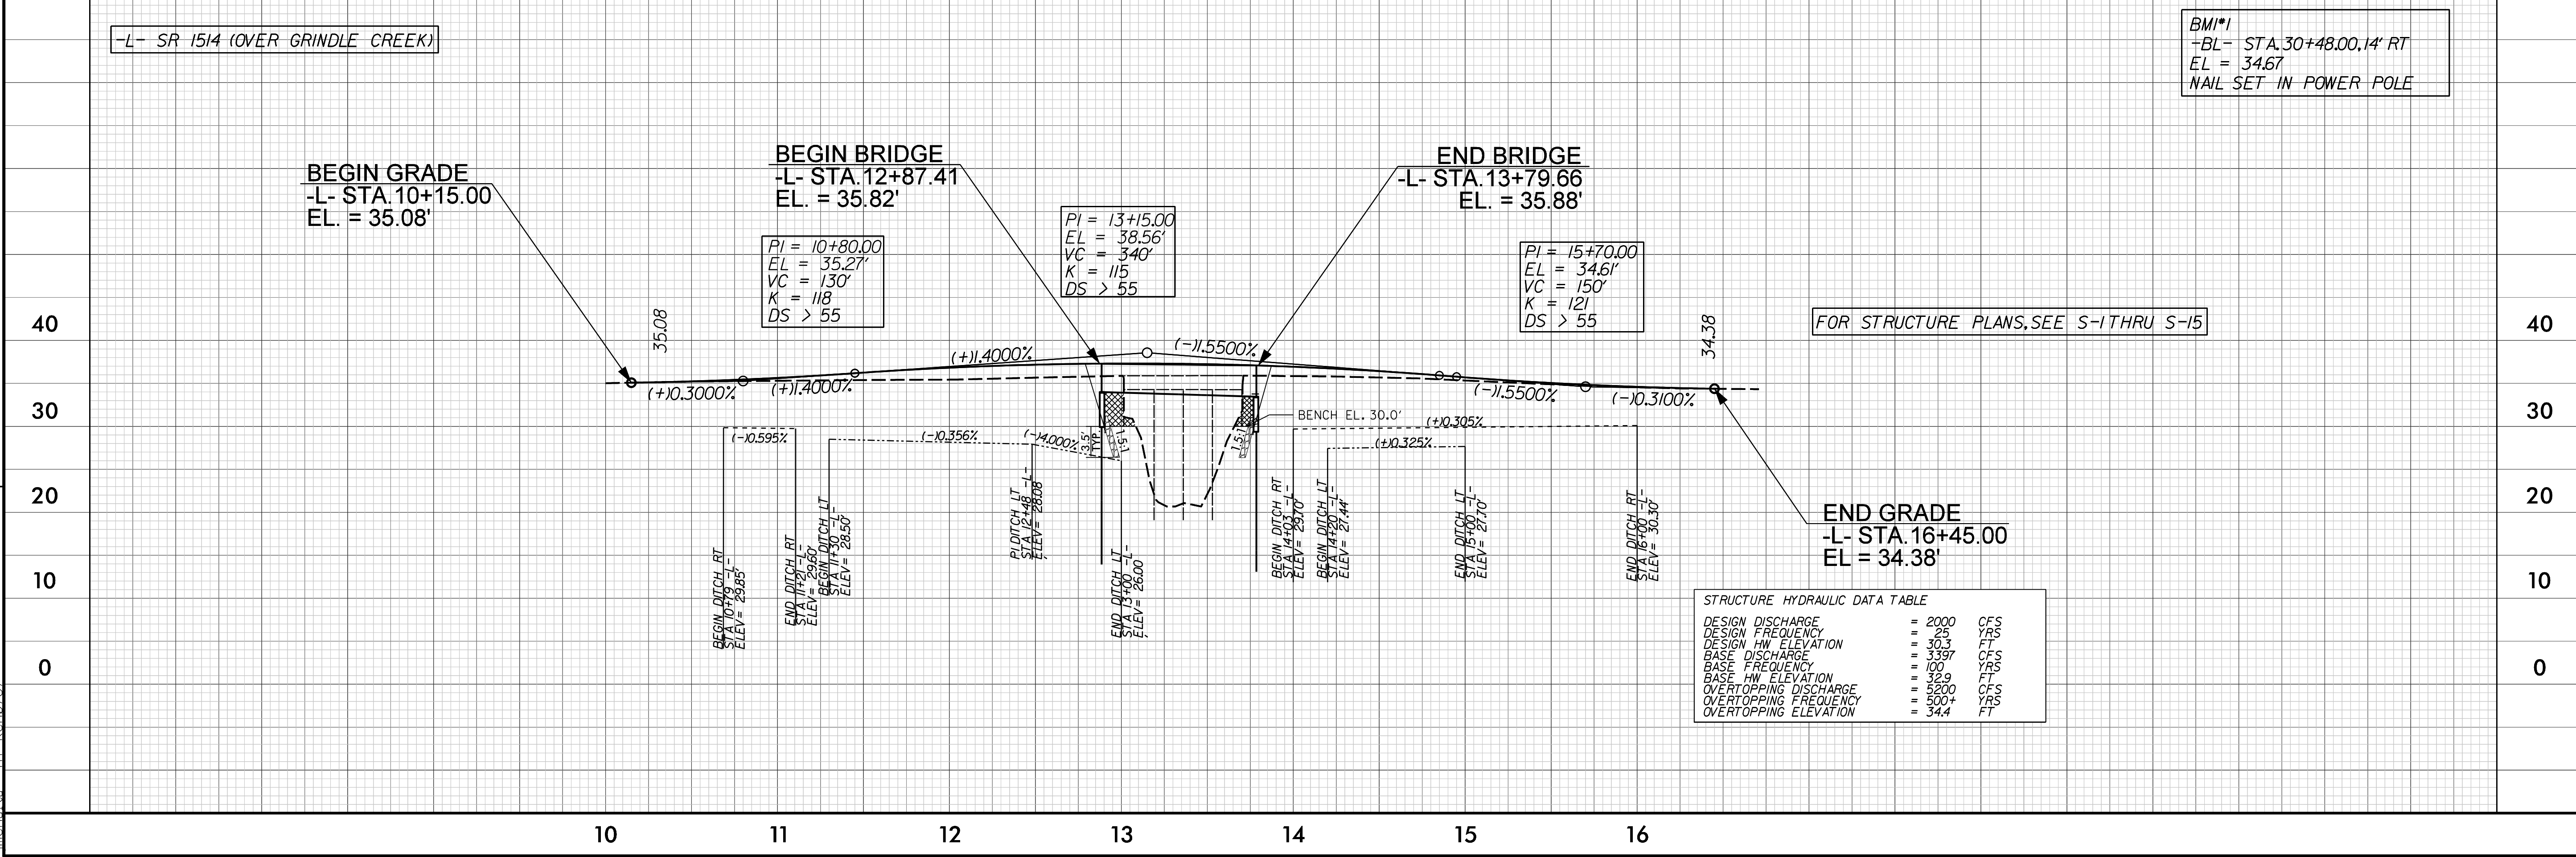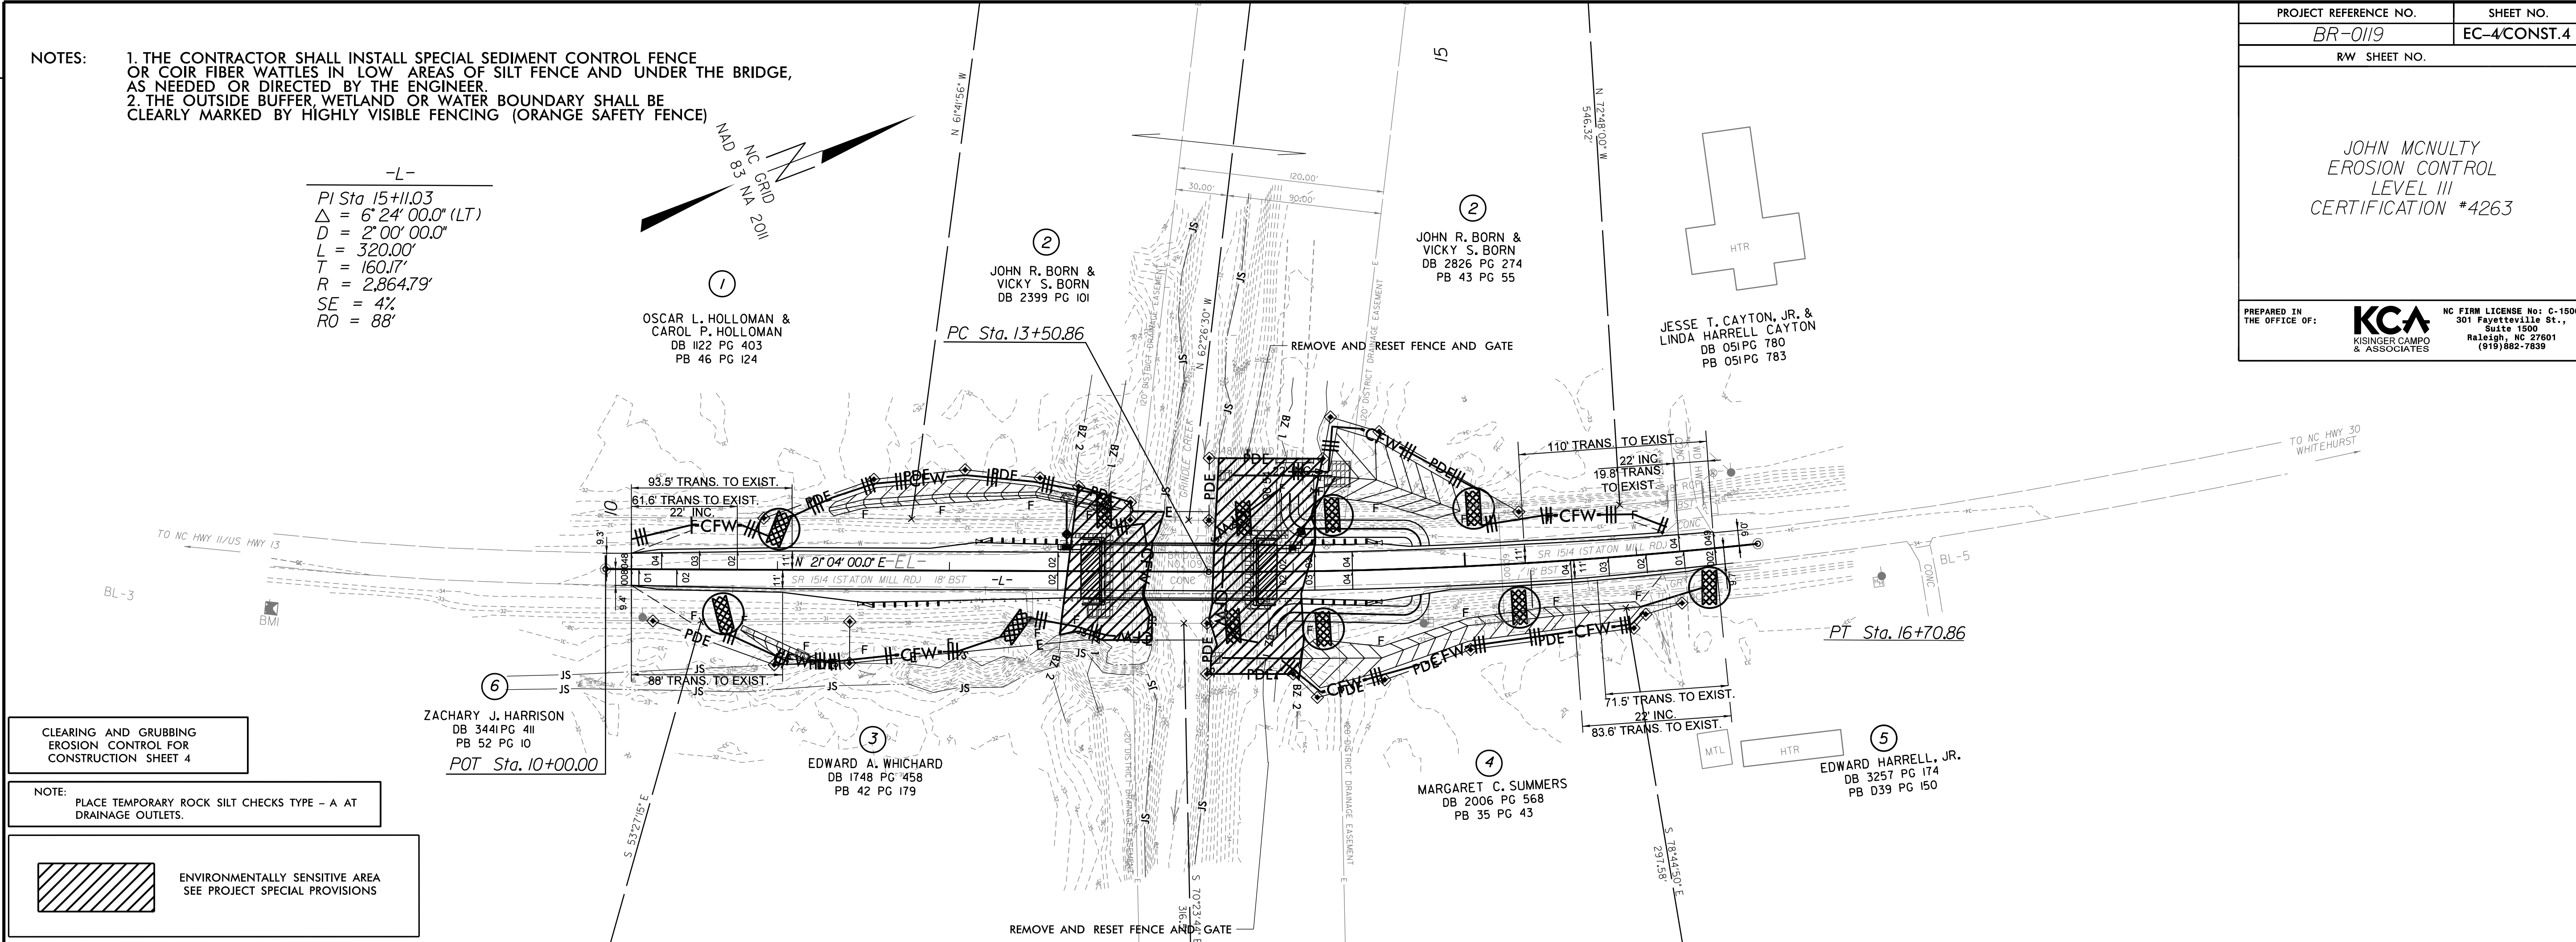

BMI\*1  
 +BL- STA. 30+48.00, 14' RT  
 EL. = 34.67  
 NAIL SET IN POWER POLE