TIP NO.	SHEET NO.
I-0914BB	SIGN-2B

APPROVED: DocuSigned by: Charles A. Johnson, III 59A1565B47F54A6...

DATE: 11/3/2014

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 20675 ENGINEER CHARLES A. JOHNSON III

SIGN NO.	SIGN TYPE	SIGN SIZE (in.) w	x	h	ROADWAY STATION	NO. OF SUP.	BEAM SECTION	SUPPORT TYPE BA or S	ATTACH METHOD	MOUNTING METHOD	HORIZ CLR.* (ft.)	LENGTH (ft) SNS HT H	MTG HT C	EMBED-MENT	LEFT SUPPORT (ft) S	L	TOTAL LENGTH	CENTER SUPPORT (ft) S	L	TOTAL LENGTH	RIGHT SUPPORT (ft) S	L	TOTAL LENGTH	FOOTING DIAMETER (ft.)	FOOTING DEPTH (ft.)	B/A SUPPORT WEIGHTS (lbs.)	SIMPLE SUPPORT WEIGHTS (lbs.)	REINF. FTGS. (c.y.)	PLAIN FTGS. (c.y.)	FIELD VERIFIED SEE NOTE 2 (mm/dd/yy)
201	A	96	X	60	123+20 -NBL-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	4	3.00	15.00	19.00	0.00	0.00	0.00	3.00	15.00	19.00	1	4.5	252.60	0.00	0.00	0.26	
202	A	96	X	60	136+72 -SBL-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	0.50	12.50	16.00	0.00	0.00	0.00	0.50	12.50	16.00	1	4	218.40	0.00	0.00	0.23	
203	A	96	X	60	271+36 -NBL-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	0.50	12.50	16.00	0.00	0.00	0.00	0.50	12.50	16.00	1	4	218.40	0.00	0.00	0.23	
204	A	96	X	60	288+07 -SBL-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	0.50	12.50	16.00	0.00	0.00	0.00	0.50	12.50	16.00	1	4	218.40	0.00	0.00	0.23	
205	A	78	X	78	417+75 -SBL-	2	S3x5.7	BA	N/A	N/A	△	6.50	7.00	4	0.50	14.00	18.00	0.00	0.00	0.00	0.50	14.00	18.00	1	4.5	241.20	0.00	0.00	0.26	
206	A	96	X	90	489+00 -NBL-	2	S3x5.7	BA	N/A	N/A	△	7.50	7.00	4.5	0.50	15.00	19.50	0.00	0.00	0.00	0.50	15.00	19.50	1	5	258.30	0.00	0.00	0.29	
207	A	96	X	60	503+58 -SBL-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	0.50	12.50	16.00	0.00	0.00	0.00	0.50	12.50	16.00	1	4	218.40	0.00	0.00	0.23	
901	B	90	X	48	-Y3RPC- 16+50	2	S3x5.7	BA	N/A	N/A	18.00	4.00	7.00	3.5	1.40	12.40	15.90	0.00	0.00	0.00	2.50	13.50	17.00	1	4	223.53	0.00	0.00	0.23	
902	B	90	X	48	-Y3RPA- 16+00	2	S3x5.7	BA	N/A	N/A	18.00	4.00	7.00	3.5	1.40	12.40	15.90	0.00	0.00	0.00	2.50	13.50	17.00	1	4	223.53	0.00	0.00	0.23	
903	A	180	X	72	-SBL- 309+00	2	W6x9	BA	N/A	N/A	30.00	6.00	7.63	4.5	1.95	15.58	20.08	0.00	0.00	0.00	-0.63	13.00	17.50	1.5	5	402.22	0.00	0.65	0.00	
904	A	90	X	84	-Y4RPC- 16+00 LT	2	S4x7.7	BA	N/A	N/A	18.00	7.00	7.00	4.5	1.40	15.40	19.90	0.00	0.00	0.00	2.50	16.50	21.00	1.00	5	354.93	0.00	0.00	0.29	
905	A	90	X	84	-Y4RPA- 16+50 LT	2	W6x9	BA	N/A	N/A	18.00	7.00	7.00	4	3.88	17.88	21.88	0.00	0.00	0.00	2.78	16.78	20.78	1.50	4.5	447.94	0.00	0.59	0.00	
906	A	180	X	138	-SBL- 518+00	2	W8x18	BA	N/A	N/A	30.00	11.50	7.00	5.5	3.30	21.80	27.30	0.00	0.00	0.00	3.03	21.53	27.03	2.00	6	1117.94	0.00	1.40	0.00	
907	B	96	X	48	-SBL- 442+00	2	S3x5.7	BA	N/A	N/A	30.00	4.00	7.00	3.5	2.20	13.20	16.70	0.00	0.00	0.00	0.48	11.48	14.98	1.00	4	216.58	0.00	0.00	0.23	
																										TOTAL 24154.12	TOTAL 9379.36	TOTAL 42.06	TOTAL 2.97	
																									USE:	24155	9380	43	3	

NOTES:

1. DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF PAVEMENT.
2. FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1. (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
3. PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

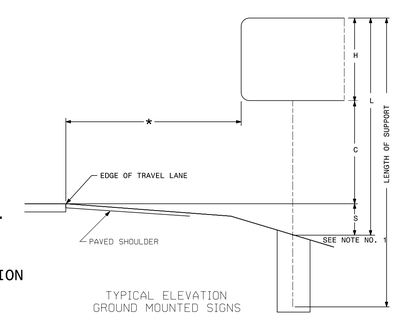

TYPICAL ELEVATION
GROUND MOUNTED SIGNS

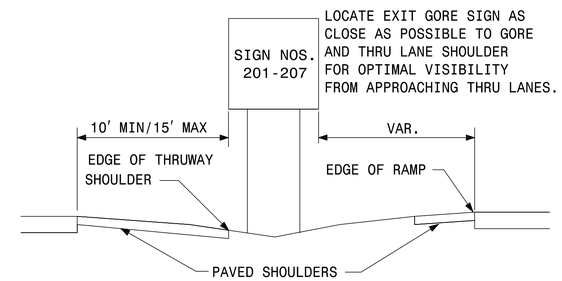

HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609
NC License No: C-1554

TYPE "A" AND TYPE "B" GROUND MOUNTED SIGNS