
* VARIABLE OUTSIDE SHOULDER – PARTIAL C&G, PARTIAL EARTH SHOULDER

PAVEMENT SCHEDULE


C1	PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.	C5	PROP. APPROX. $1\frac{1}{2}$ " ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	U	EXISTING PAVEMENT
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.	C6	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	V1	MILL ASPHALT PAVEMENT, 1½" DEPTH
С3	PROP. APPROX. 1 ½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	R	EXISTING CURB AND GUTTER/ VALLEY CURB	V2	MILL ASPHALT PAVEMENT, 0-1½" DEPTH
C4	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 220 LBS. PER SQ. YD.	S	SHOULDER GRADING, ASB REQUIRED (EXCEPT AT RESIDENTIAL AREAS)	V3	MILL ASPHALT PAVEMENT, 2" DEPTH

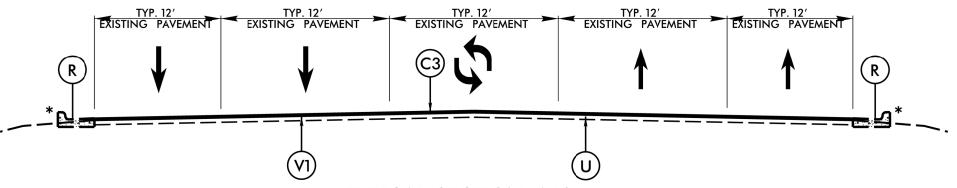

TYPICAL SECTION NO. 1

MILL & RESURFACE \$9.5B

MAP NO. 1 (E. CORNWALLIS RD)

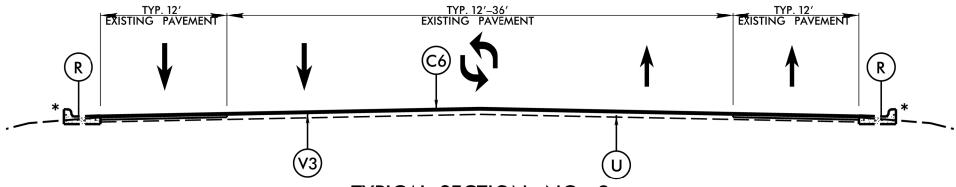

TYPICAL SECTION NO. 2

MILL & RESURFACE \$9.5C

ALL PATCHES ARE TO BE MILLED AT A DEPTH OF 6"

MAP NO. 2 (ERWIN RD)