STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	10CR.10131.38, etc.	8	
F.A. PROJECT NO.			

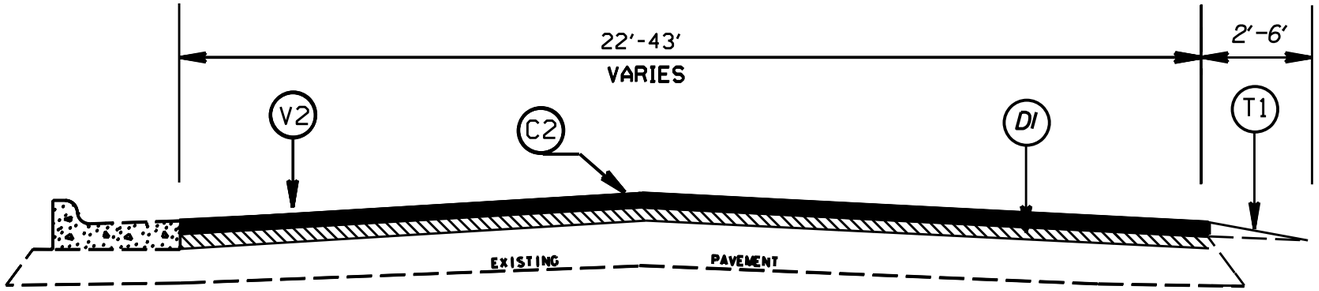

TYPICAL SECTION NO. 14

NOTE: 4.0" MILLING FROM PAVEMENT JOINT SOUTHWEST OFF US 601 FOR 500' +/- OR AS DIRECTED BY THE ENGINEER

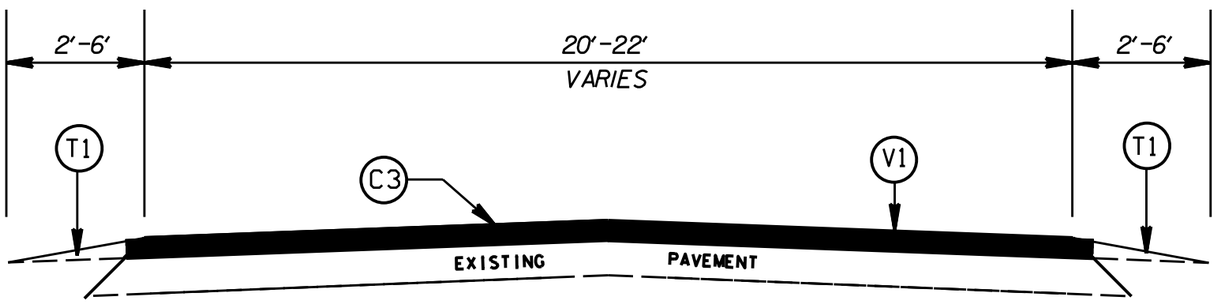

TYPICAL SECTION NO.13

NOTE: 1.5" MILLING FROM 500' +/- SOUTHWEST OF US 601 TO OLD CHARLOTTE ROAD OR AS DIRECTED BY THE ENGINEER

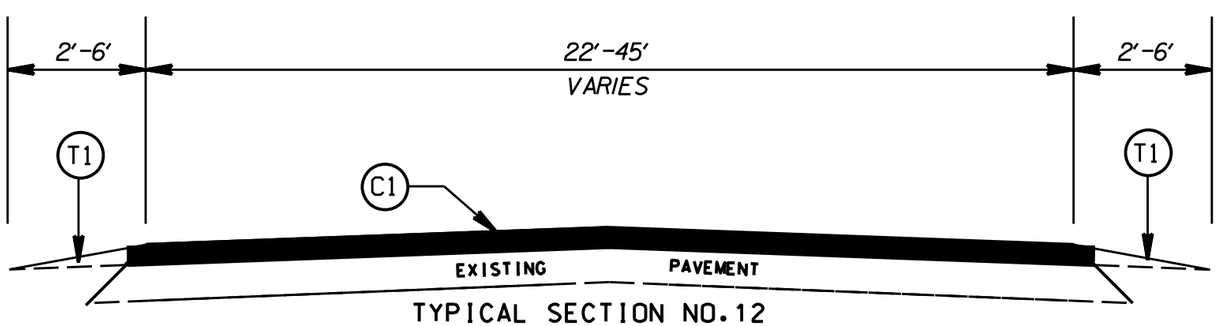

TYPICAL SECTION NO.12



DETAIL FOR PROFILE MILLING (0" TO 1.5")

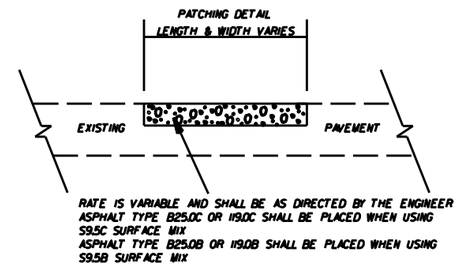

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 3.0" ASPHALT CONCRETE SURFACE COURSE,TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS
C4	PROP. APPROX. 1.0" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
C5	PROP. ASPHALT SURFACE TREATMENT TO BE PLACED AT THE END OF EACH DAY'S PRODUCTION
C6	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIAATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
D2	PROP. APPROX. 3.0"ASPHALT CONCRETE INTERMEDIAATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 342 LBS PER SQ.YD.
T1	SHOULDER RECONSTRUCTION
V1	MILLING BITUMINOUS PAVEMENT 1.5"DEPTH. AS DIRECTED BY THE ENGINEER
V2	MILLING BITUMINOUS PAVEMENT 4.0"DEPTH.
X1	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 1.5"DEPTH. AS DIRECTED BY THE ENGINEER
Z	FULL DEPTH RECLAMATIOM

CABARRUS COUNTY
RESURFACING 2015-2016

SCALE	-NA-
DATE	2/15
DWG. BY	JDA
DESIGN BY	JDA
APPROVED	MPW

REVISIONS