



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	I-5905	17	
WBS NO. 45888.3.GVI			

PAVEMENT SCHEDULE	
A1	PROP. 11" PORTLAND CEMENT CONCRETE PAVEMENT
B1	PROP. APPROX. 5/8" ULTRA-THIN BONDED WEARING COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD.
C1	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 3.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, IN 2 SEPARATE 1.5" LIFTS AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. APPROX. 8.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, IN 2 SEPARATE 4" LIFTS AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
R1	PROP. 2'6" CONCRETE CURB AND GUTTER 11" THICK
T	SHOULDER CONSTRUCTION
U	EXISTING PAVEMENT
V2	MILLING 1.5" DEPTH
V3	MILLING, 2.0" DEPTH
Y	MILLED RUMBLE STRIPS
Z	EXISTING STABILIZED SUBGRADE

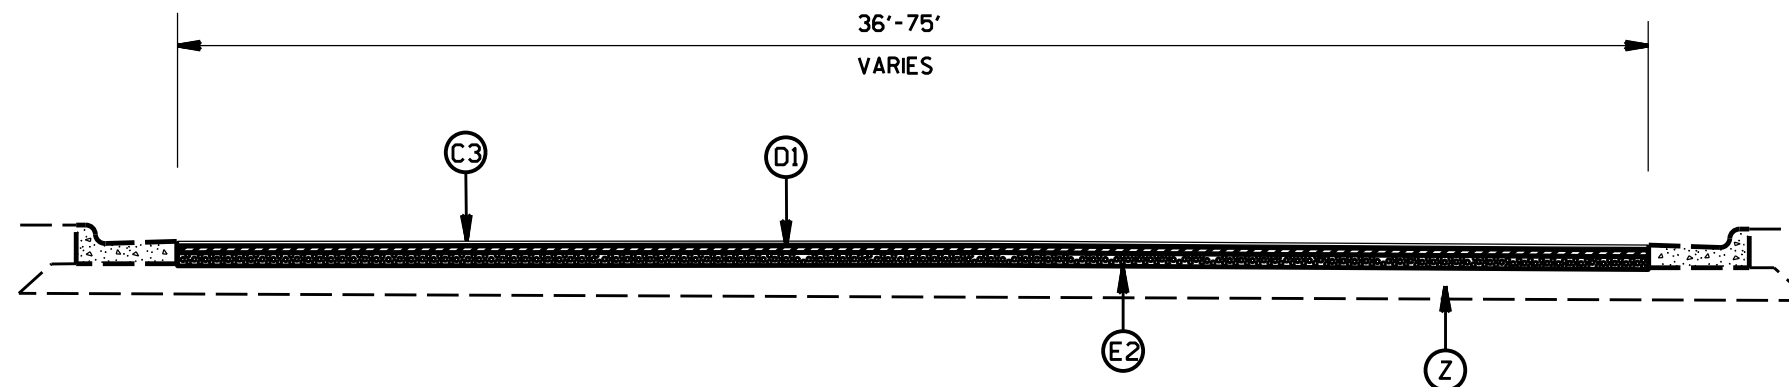

TYPICAL SECTION NO.19
ON RAMP FROM STATESVILLE ROAD

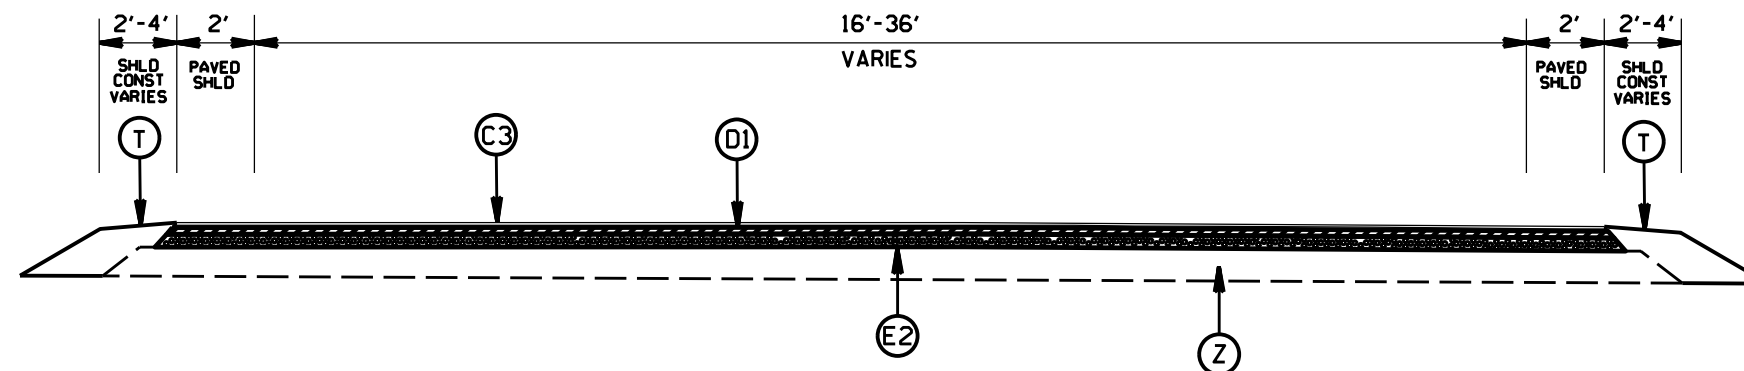


TYPICAL SECTION NO.20
ON RAMP FROM STATESVILLE ROAD

SUMMARY OF EARTHWORK		
DESCRIPTION	MAP #15	MAP #19
UNCLASSIFIED EXCAVATION	2146 CY	1282 CY
BORROW EXCAVATION	100 CY	100 CY
REMOVAL OF EXISTING ASPHALT PAVEMENT	8360 SY	5186 SY
SHOULDER CONSTRUCTION	0.72 SMI	0.45 SMI

NOTE: QUANTITIES ARE APPROXIMATE, AND ARE ONLY TO BE USED FOR THE PURPOSE OF BIDDING THIS CONTRACT. PAYMENT FOR EARTH WORK QUANTITIES WILL BE COVERED UNDER COMPREHENSIVE GRADING AS A LUMP SUM PAY ITEM AS DETERMINED BY THE RESIDENT ENGINEER.

PATCHING DETAIL

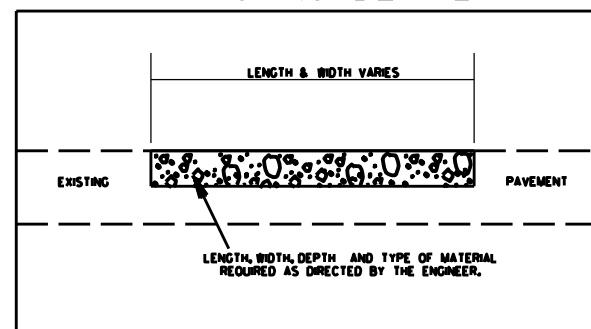

I-5905
I-85 PAVEMENT PRESERVATION
MECKLENBURG COUNTY

SCALE	-NA-		REVISIONS
DATE	3/19		
DWG. BY	JHE		
DESIGN BY	JHE		
APPROVED			