


**-L- CURVE DATA**


PI Sta. 38+69.15 Δ = 5' 37" 47.3" (LT) D = 1' 41" 24.5" L = 333.10' T = 166.68' R = 3390.00' SE = .04 Ds = 60 mph	PI Sta. 41+55.74 Δ = 2' 45" 19.5" (RT) D = 1' 08" 47.8" L = 240.31' T = 120.18' R = 4996.93' SE = .03 Ds = 60 mph	PI Sta. 48+77.96 Δ = 10' 25" 56.0" (LT) D = 1' 28" 29.3" L = 707.37' T = 354.66' R = 3885.00' SE = .04 Ds = 60 mph
--	--	---

**-Y2- CURVE DATA**

PI Sta. 11+92.44 Δ = 20' 03" 12.8" (LT) D = 28' 38" 52.4" L = 70.00' T = 35.36' R = 200.00'
--

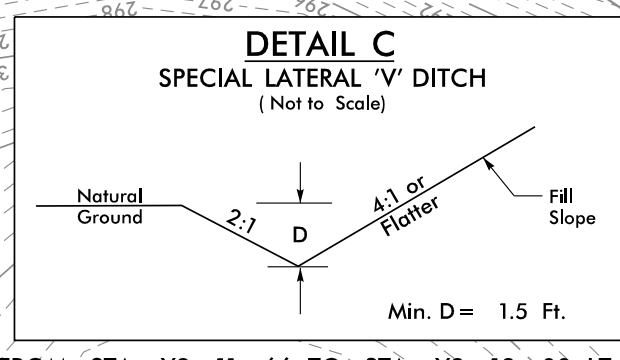

FROM STA. -Y3- 11+66 TO STA. -Y3- 13+00 LT

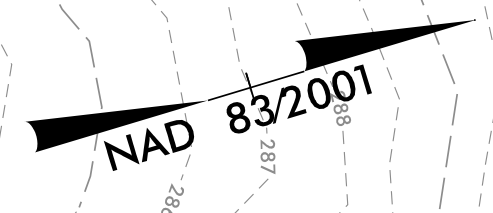

MATCH LINE -L- STA. 35 + 50.00 SEE SHEET 5

120 x 20 x 3  
2.0 inch Skimmer  
with 1.625 inch  
Orifice Diameter  
17 ft. weir  
(See Tiered Skimmer  
Basin Detail)  
ID 6.1B

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 6

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.