
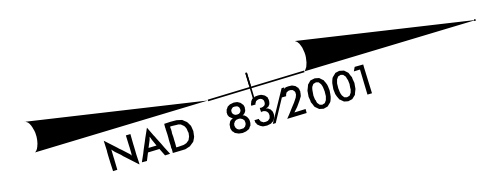


-L- CURVE DATA

PI Sta 38+69.15	PI Sta 41+55.74	PI Sta 48+77.96
$\Delta = 5' 37' 47.3''$ (LT)	$\Delta = 2' 45' 19.5''$ (RT)	$\Delta = 10' 25' 56.0''$ (LT)
D = 1' 41' 24.5"	D = 1' 08' 47.8"	D = 1' 28' 29.3"
L = 333.10'	L = 240.31'	L = 707.37'
T = 166.68'	T = 120.18'	T = 354.66'
R = 3,390.00'	R = 4,996.93'	R = 3,885.00'
SE = .04	SE = .03	SE = .04
Ds = 60 mph	Ds = 60 mph	Ds = 60 mph

-Y2- CURVE DATA

PI Sta 11+92.44
$\Delta = 20' 03' 12.8''$ (LT)
D = 28' 38' 52.4"
L = 70.00'
T = 35.36'
R = 200.00'

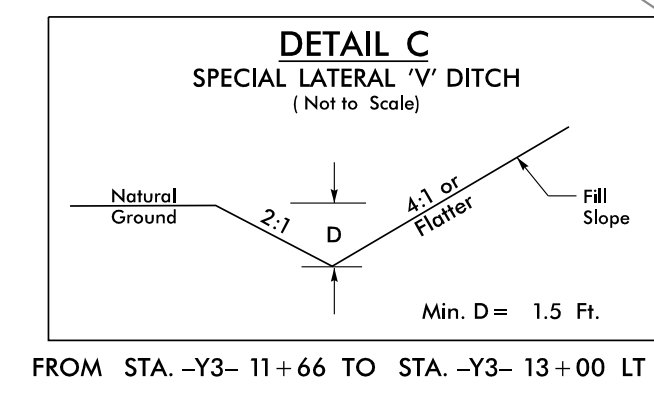

MATCH LINE -L- STA. 35 + 50.00 SEE SHEET 8

120 x 20 x 3
2.0 inch Skimmer
with 1.625 inch
Orifice Diameter
17 ft. weir
(See Tiered Skimmer
Basin Detail)
ID 6.1B

60 x 30 x 3
1.5 inch Skimmer
with 1.250 inch
Orifice Diameter
7 ft. weir
ID 6.1F

Place Matting for Erosion Control
on Slope as Work Allows.

2/10/2021 4:01:45 AM V:\Ashville\Transportation\31730-09 B-4407\Environment\B4407_ENV_EC-9.dgn

