


**PAVEMENT SCHEDULE**


**PROJECT REFERENCE NO.**  
2021CPT.05.04.10391.1, etc.

**SHEET NO.**  
13

		U	EXISTING PAVEMENT
C1	1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	V1	0"-1½" MILLING
C2	3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	V2	1½" MILLING
S	SHOULDER GRADING ASB REQUIRED (EXCEPT AT RESIDENTIAL AREAS)	V3	1½"-3" MILLING

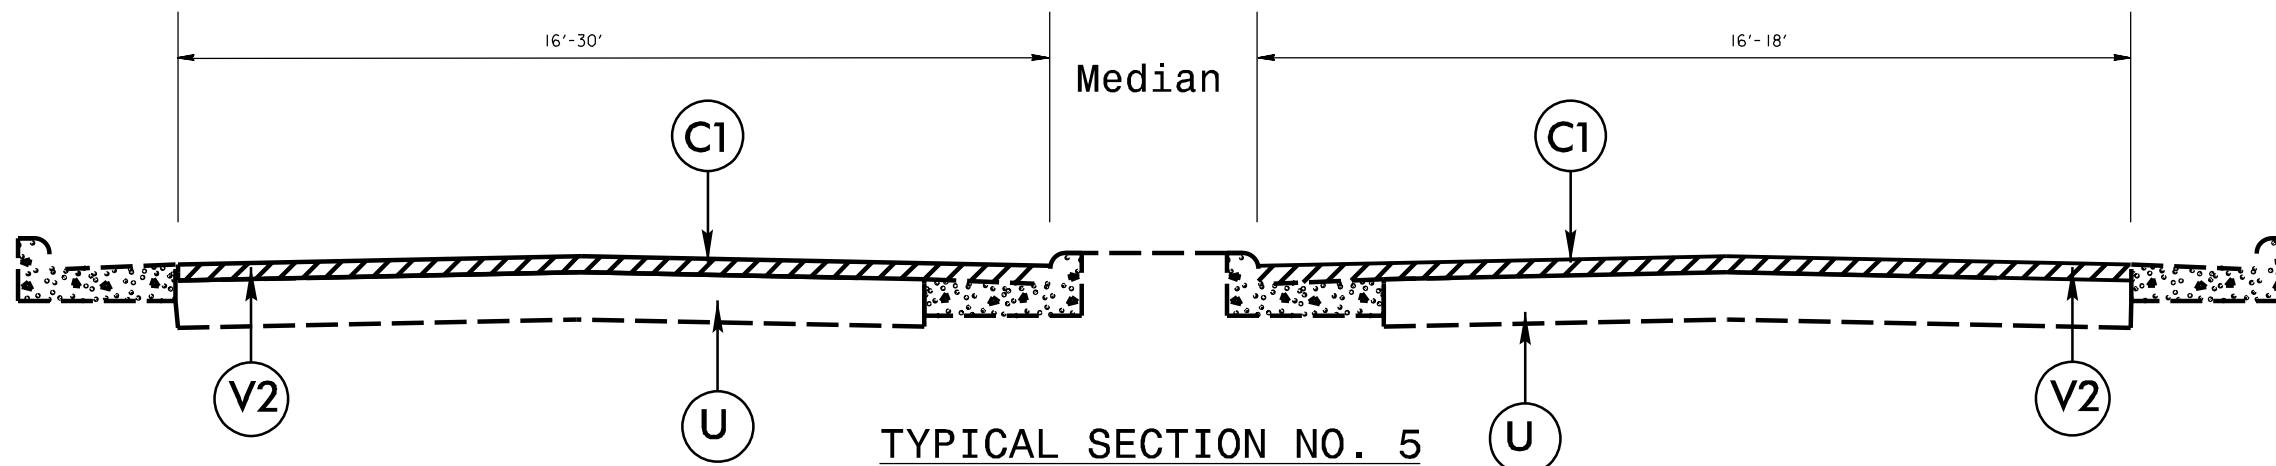

\*\* CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ANY EXISTING ASPAHLT IN GUTTER

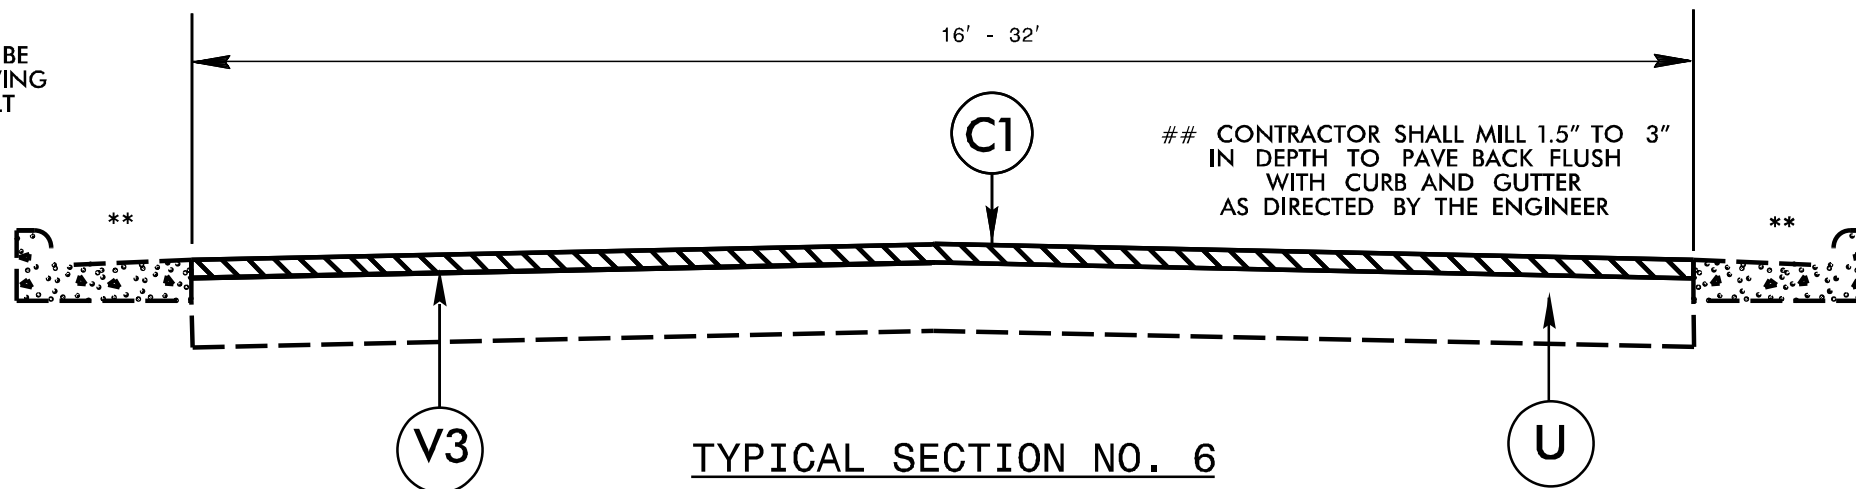

## CONTRACTOR SHALL MILL 1.5" TO 3" IN DEPTH TO PAVE BACK FLUSH WITH CURB AND GUTTER AS DIRECTED BY THE ENGINEER

\*\* CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ANY EXISTING ASPAHLT IN GUTTER