


8/17/99


REVISIONS

PROJECT REFERENCE NO. U-5887	SHEET NO. 2A-1
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

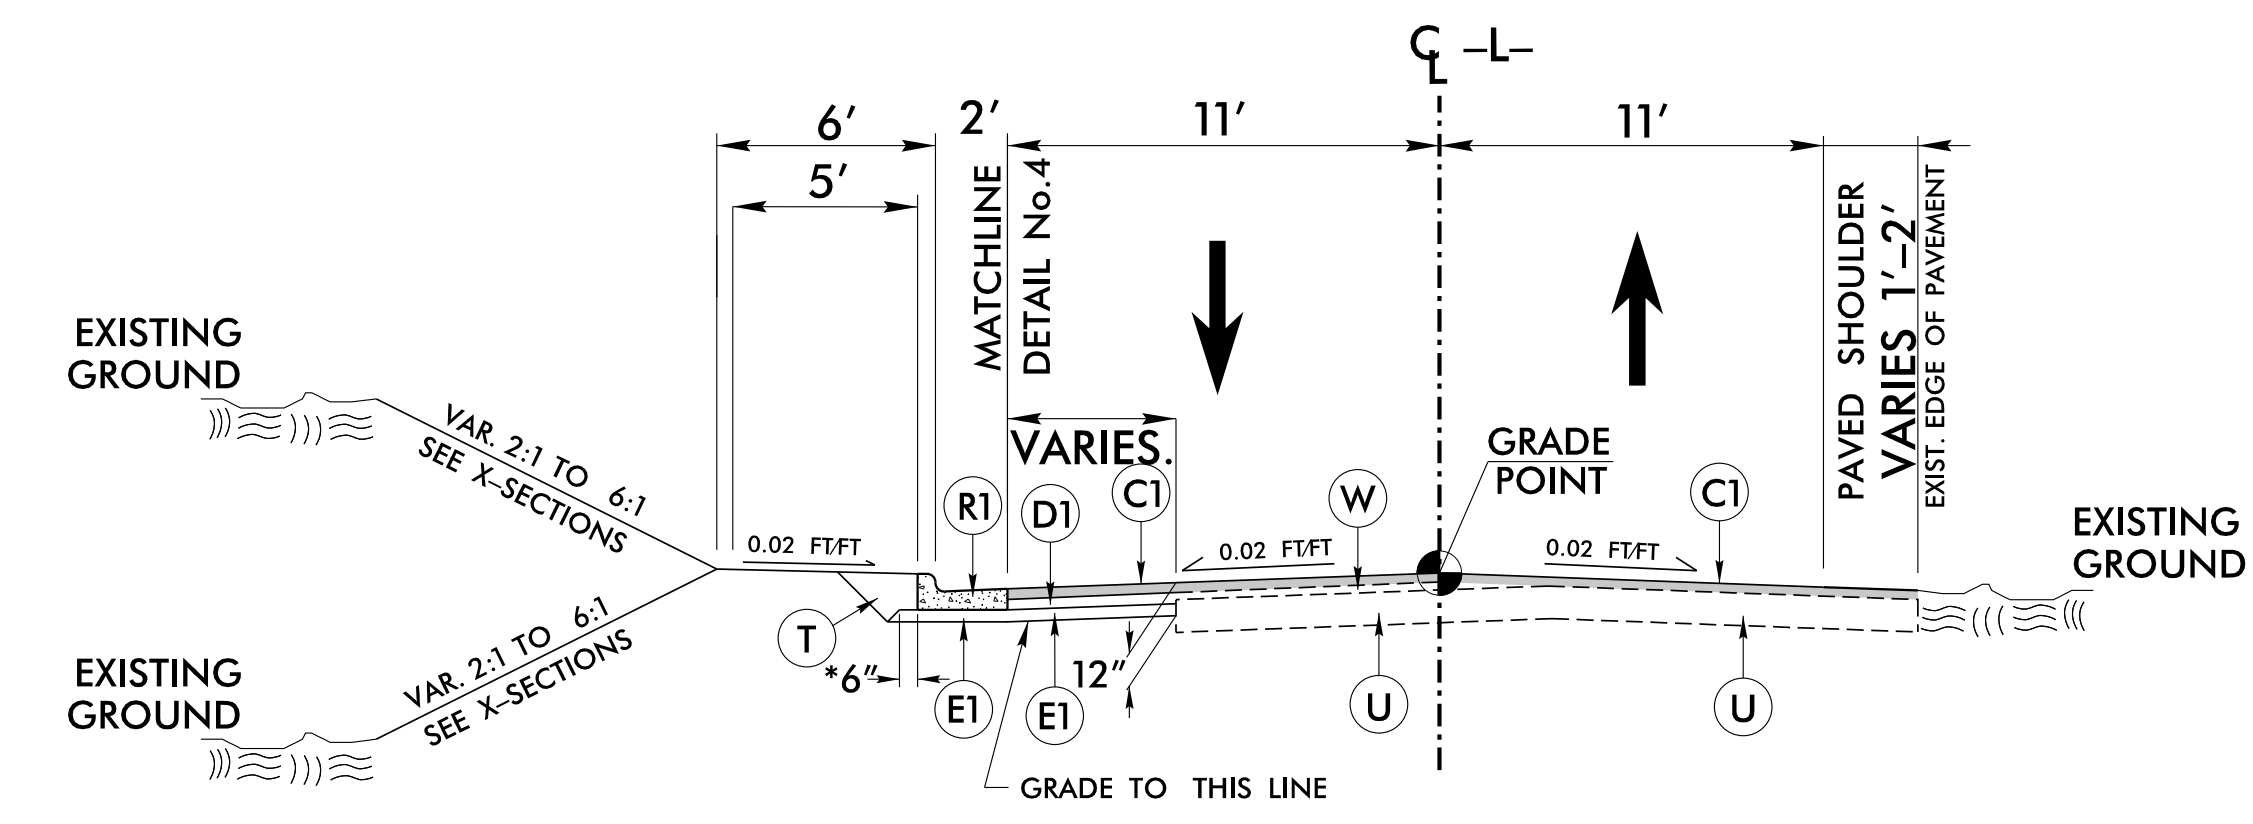


**TYPICAL SECTION NO. 1**  
-L- STA. 10+00.00 TO 15+59.71  
\* NOTE: 1' IF USING J1

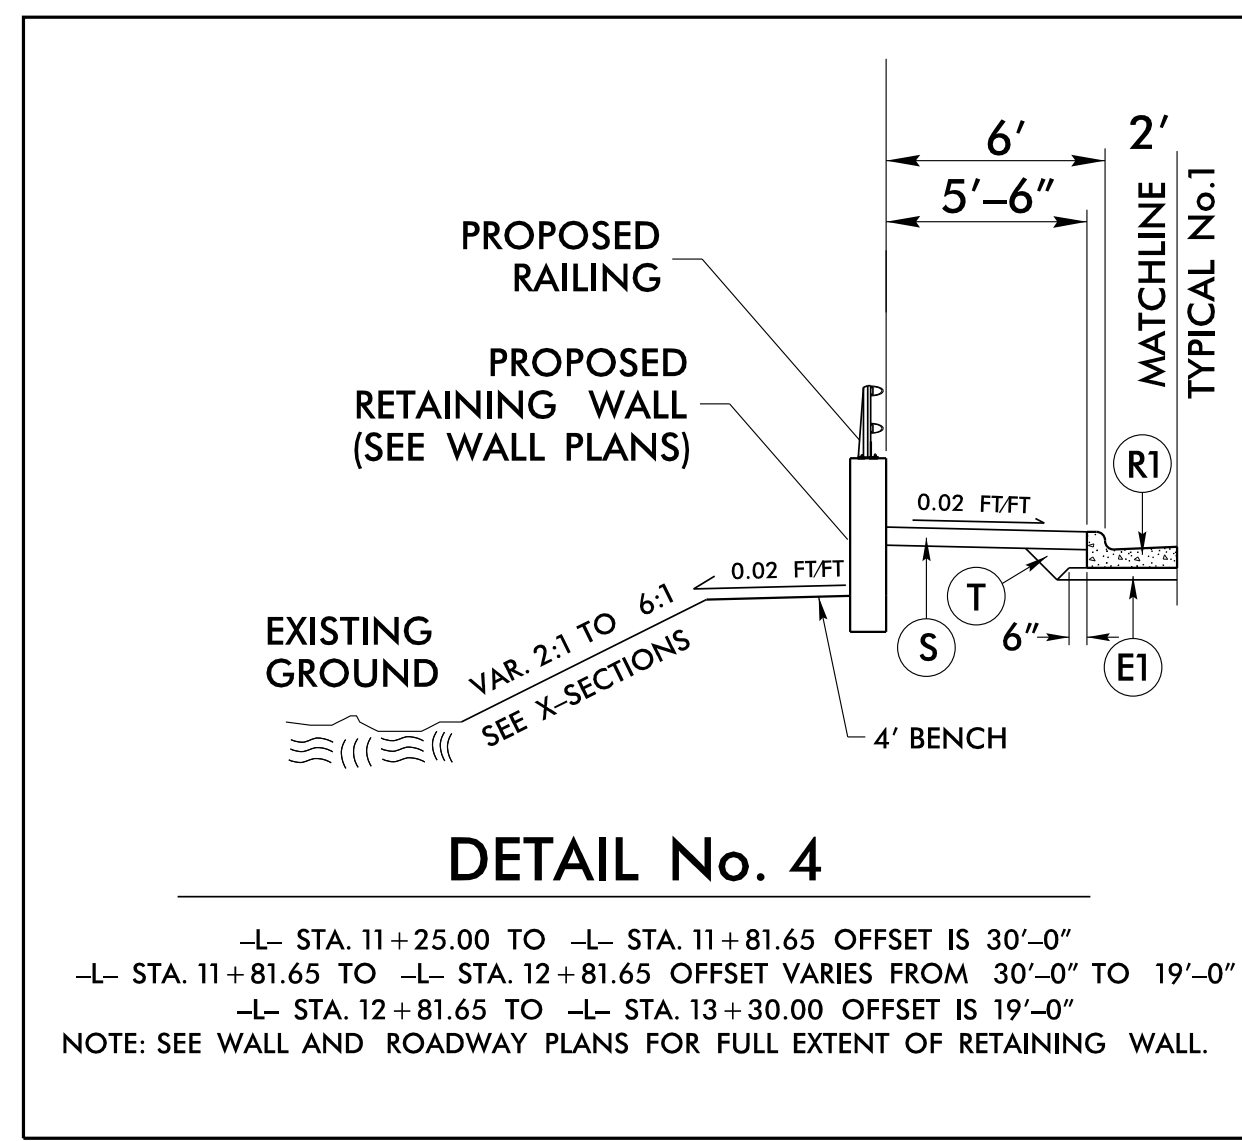


**DETAIL No. 4**  
-L- STA. 11+25.00 TO -L- STA. 11+81.65 OFFSET IS 30'-0"  
-L- STA. 11+81.65 TO -L- STA. 12+81.65 OFFSET VARIES FROM 30'-0" TO 19'-0"  
-L- STA. 12+81.65 TO -L- STA. 13+30.00 OFFSET IS 19'-0"  
NOTE: SEE WALL AND ROADWAY PLANS FOR FULL EXTENT OF RETAINING WALL.


NOTE: WHEN NEW FULL DEPTH PAVEMENT IS ADJACENT TO EXISTING PAVEMENT AND WIDTH OF E1 IS 6' OR GREATER, USE (J1) IN LIEU OF (E1)

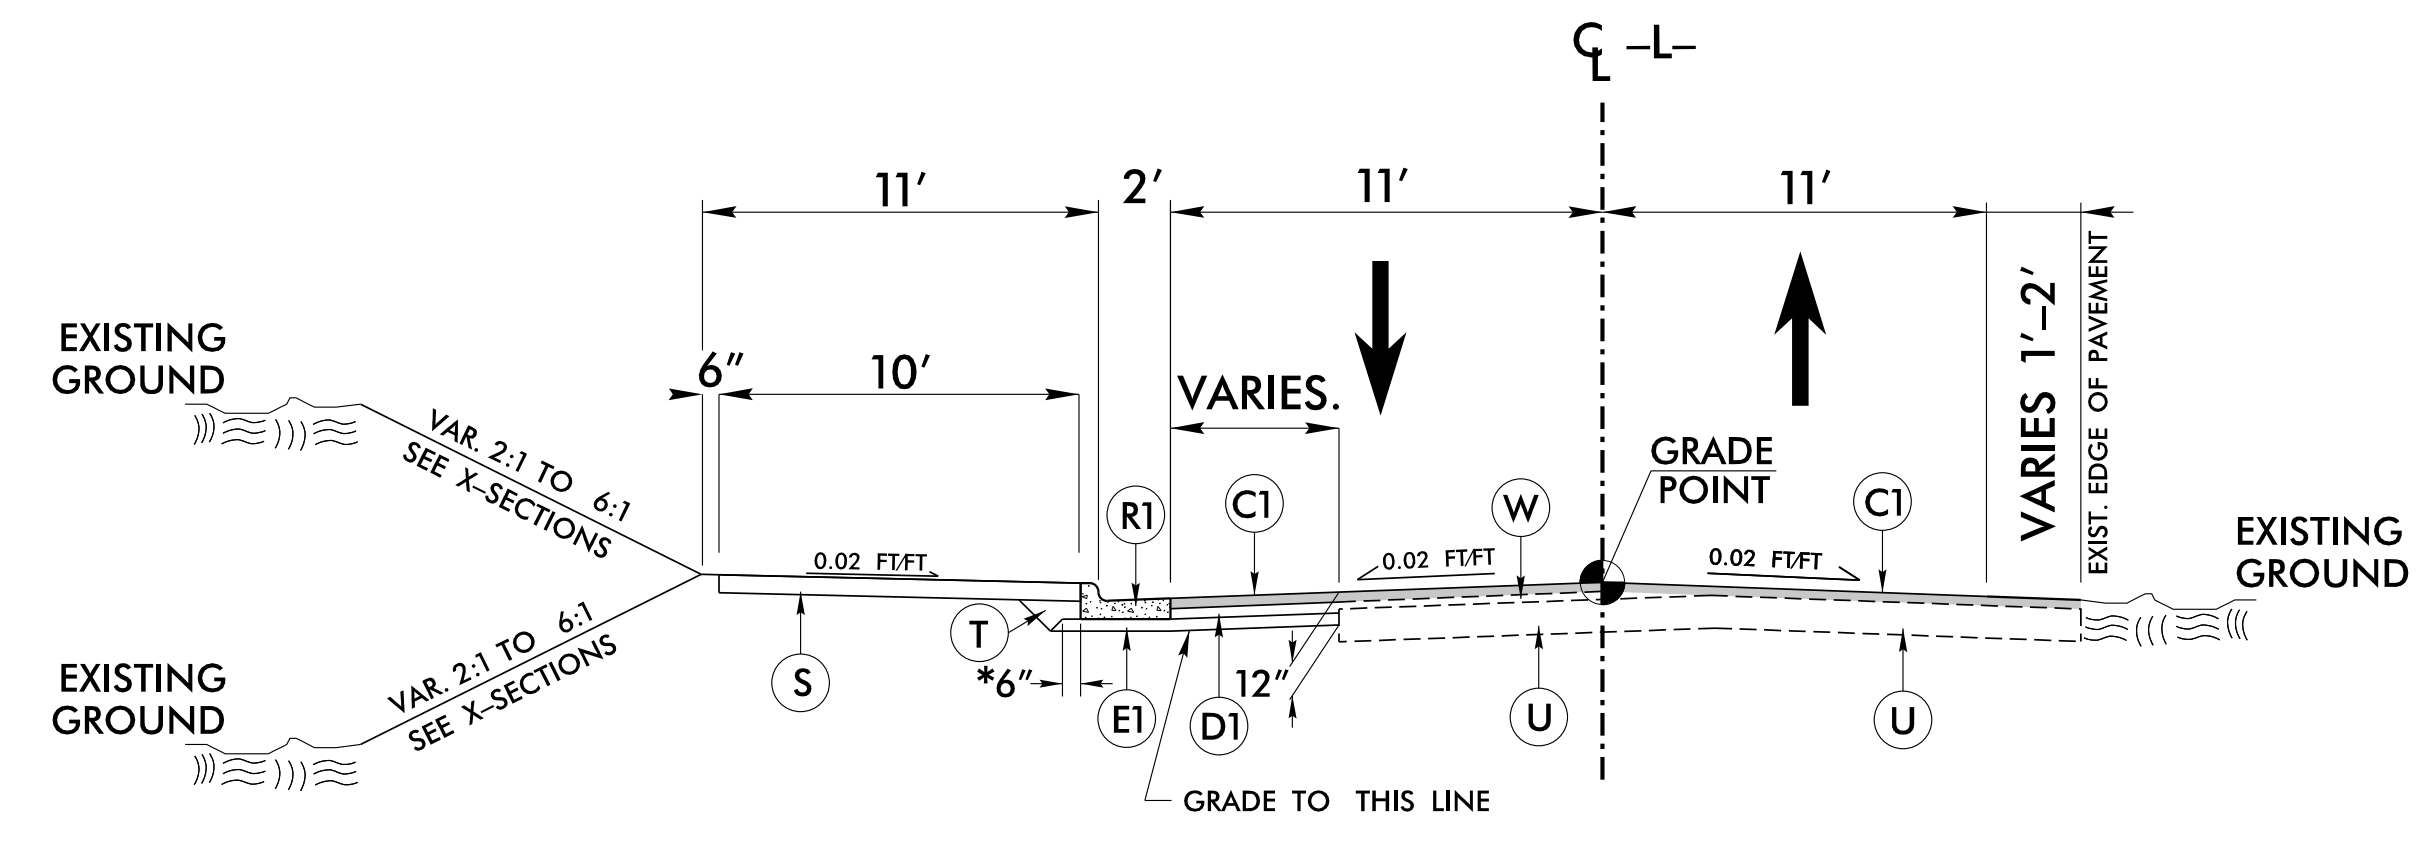


**TYPICAL SECTION NO. 2**  
-L- STA. 15+59.71 TO 22+75.00  
SIDEWALK THROUGH -L- STA. 22+29.49 TO 22+75.00 LT. ONLY  
\* NOTE: 1' IF USING J1

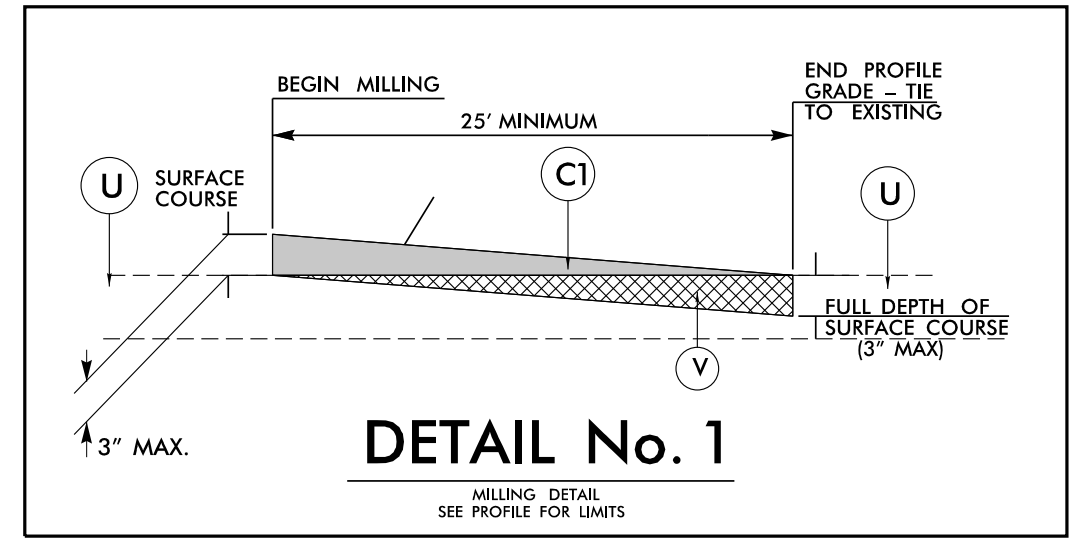


**DETAIL No. 1**

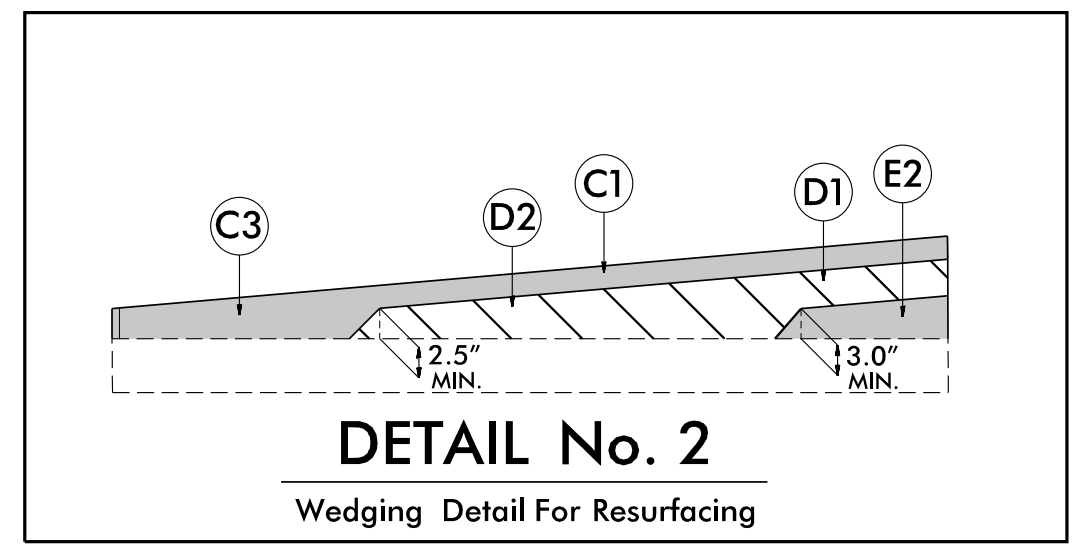

**DETAIL No. 2**

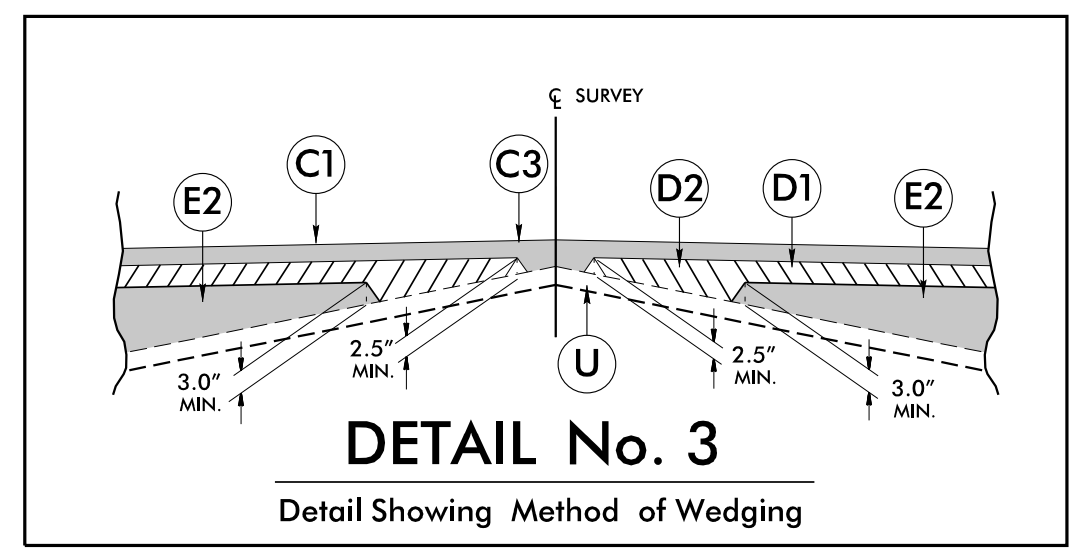

**DETAIL No. 3**

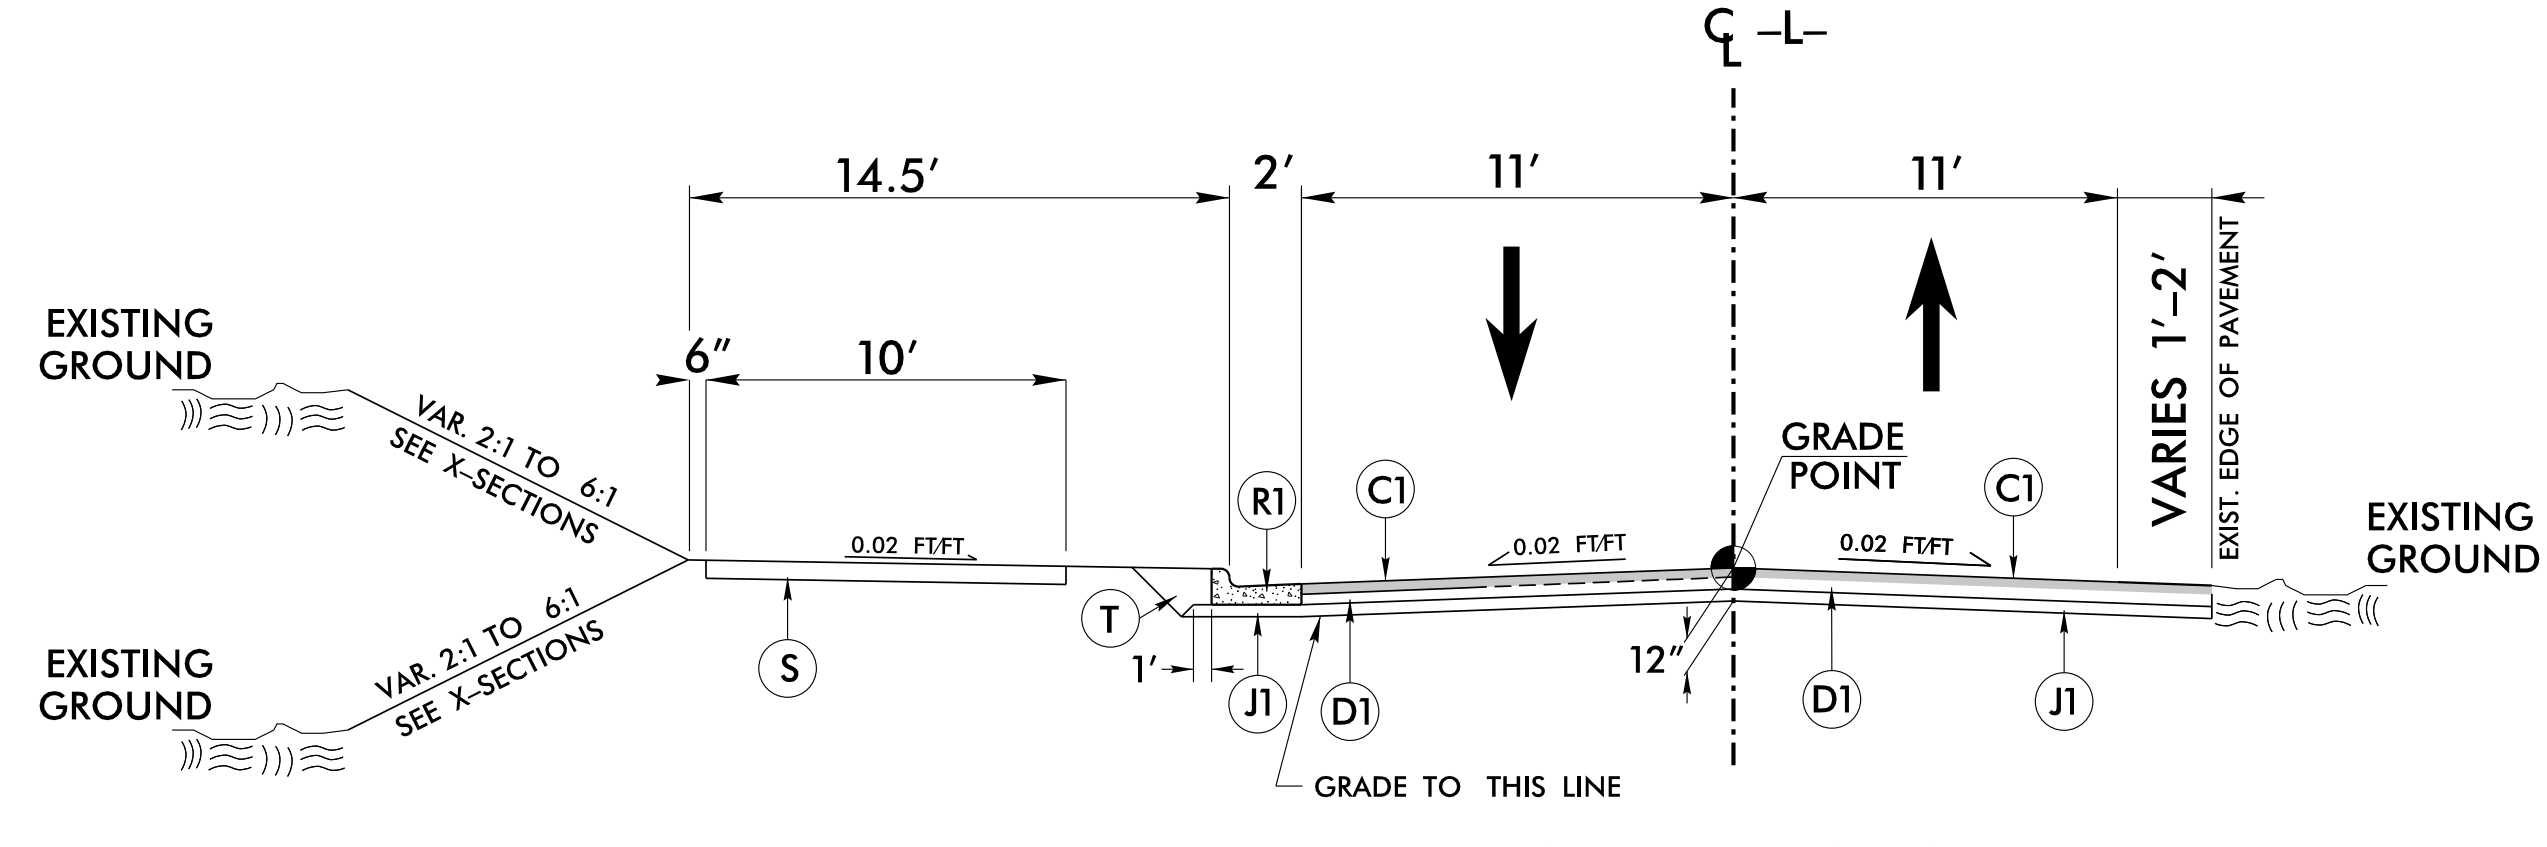

**TYPICAL SECTION NO. 3**  
-L- STA. 22+75.00 TO 24+86.34

FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF THE TWO LAYERS.
C2	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J1	5" AGGREGATE BASE COURSE.
K	1" SELECT GRANULAR MATERIAL, CLASS III
N	GEOTEXTILE FOR SOIL STABILIZATION (TYPE IV)
R1	2'-6" CONCRETE CURB AND GUTTER.
R2	5" MONOLITHIC CONCRETE ISLAND.
S	4" CONCRETE SIDEWALK.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V	VAR. MILLING BITUMINOUS PAVEMENT, 0" TO 3".
V1	MILLING BITUMINOUS PAVEMENT, 2" DEPTH.
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAILS).

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

3/24/2021 2:00:35 PM  
\\Roadway\Proj\U5887\_rdy\_tjy.dgn  
User: jacob.tjy