

-PATH- CURVE DATA				
PI Sta 15+80.21 Δ = 14° 29' 52.0" (RT) D = 28° 38' 52.4" L = 50.61' T = 25.44' R = 200.00'	PI Sta 18+86.15 Δ = 31° 10' 20.1" (RT) D = 15° 15' 24.5" L = 204.32' T = 104.76' R = 375.54'	PI Sta 20+76.38 Δ = 5° 27' 37.7" (RT) D = 3° 00' 49.4" L = 181.9' T = 90.66' R = 1,901.16'	PI Sta 24+40.99 Δ = 0° 39' 37.4" (RT) D = 0° 26' 33.2" L = 149.22' T = 74.61' R = 12,946.48'	PI Sta 25+50.50 Δ = 35° 04' 14.3" (LT) D = 51° 52' 40.9" L = 67.60' T = 34.90' R = 110.44'


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 06

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

NOTE:
PERIMETER EROSION CONTROL MEASURES SHALL BE
INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE:
UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING
BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

NAD 83/2011

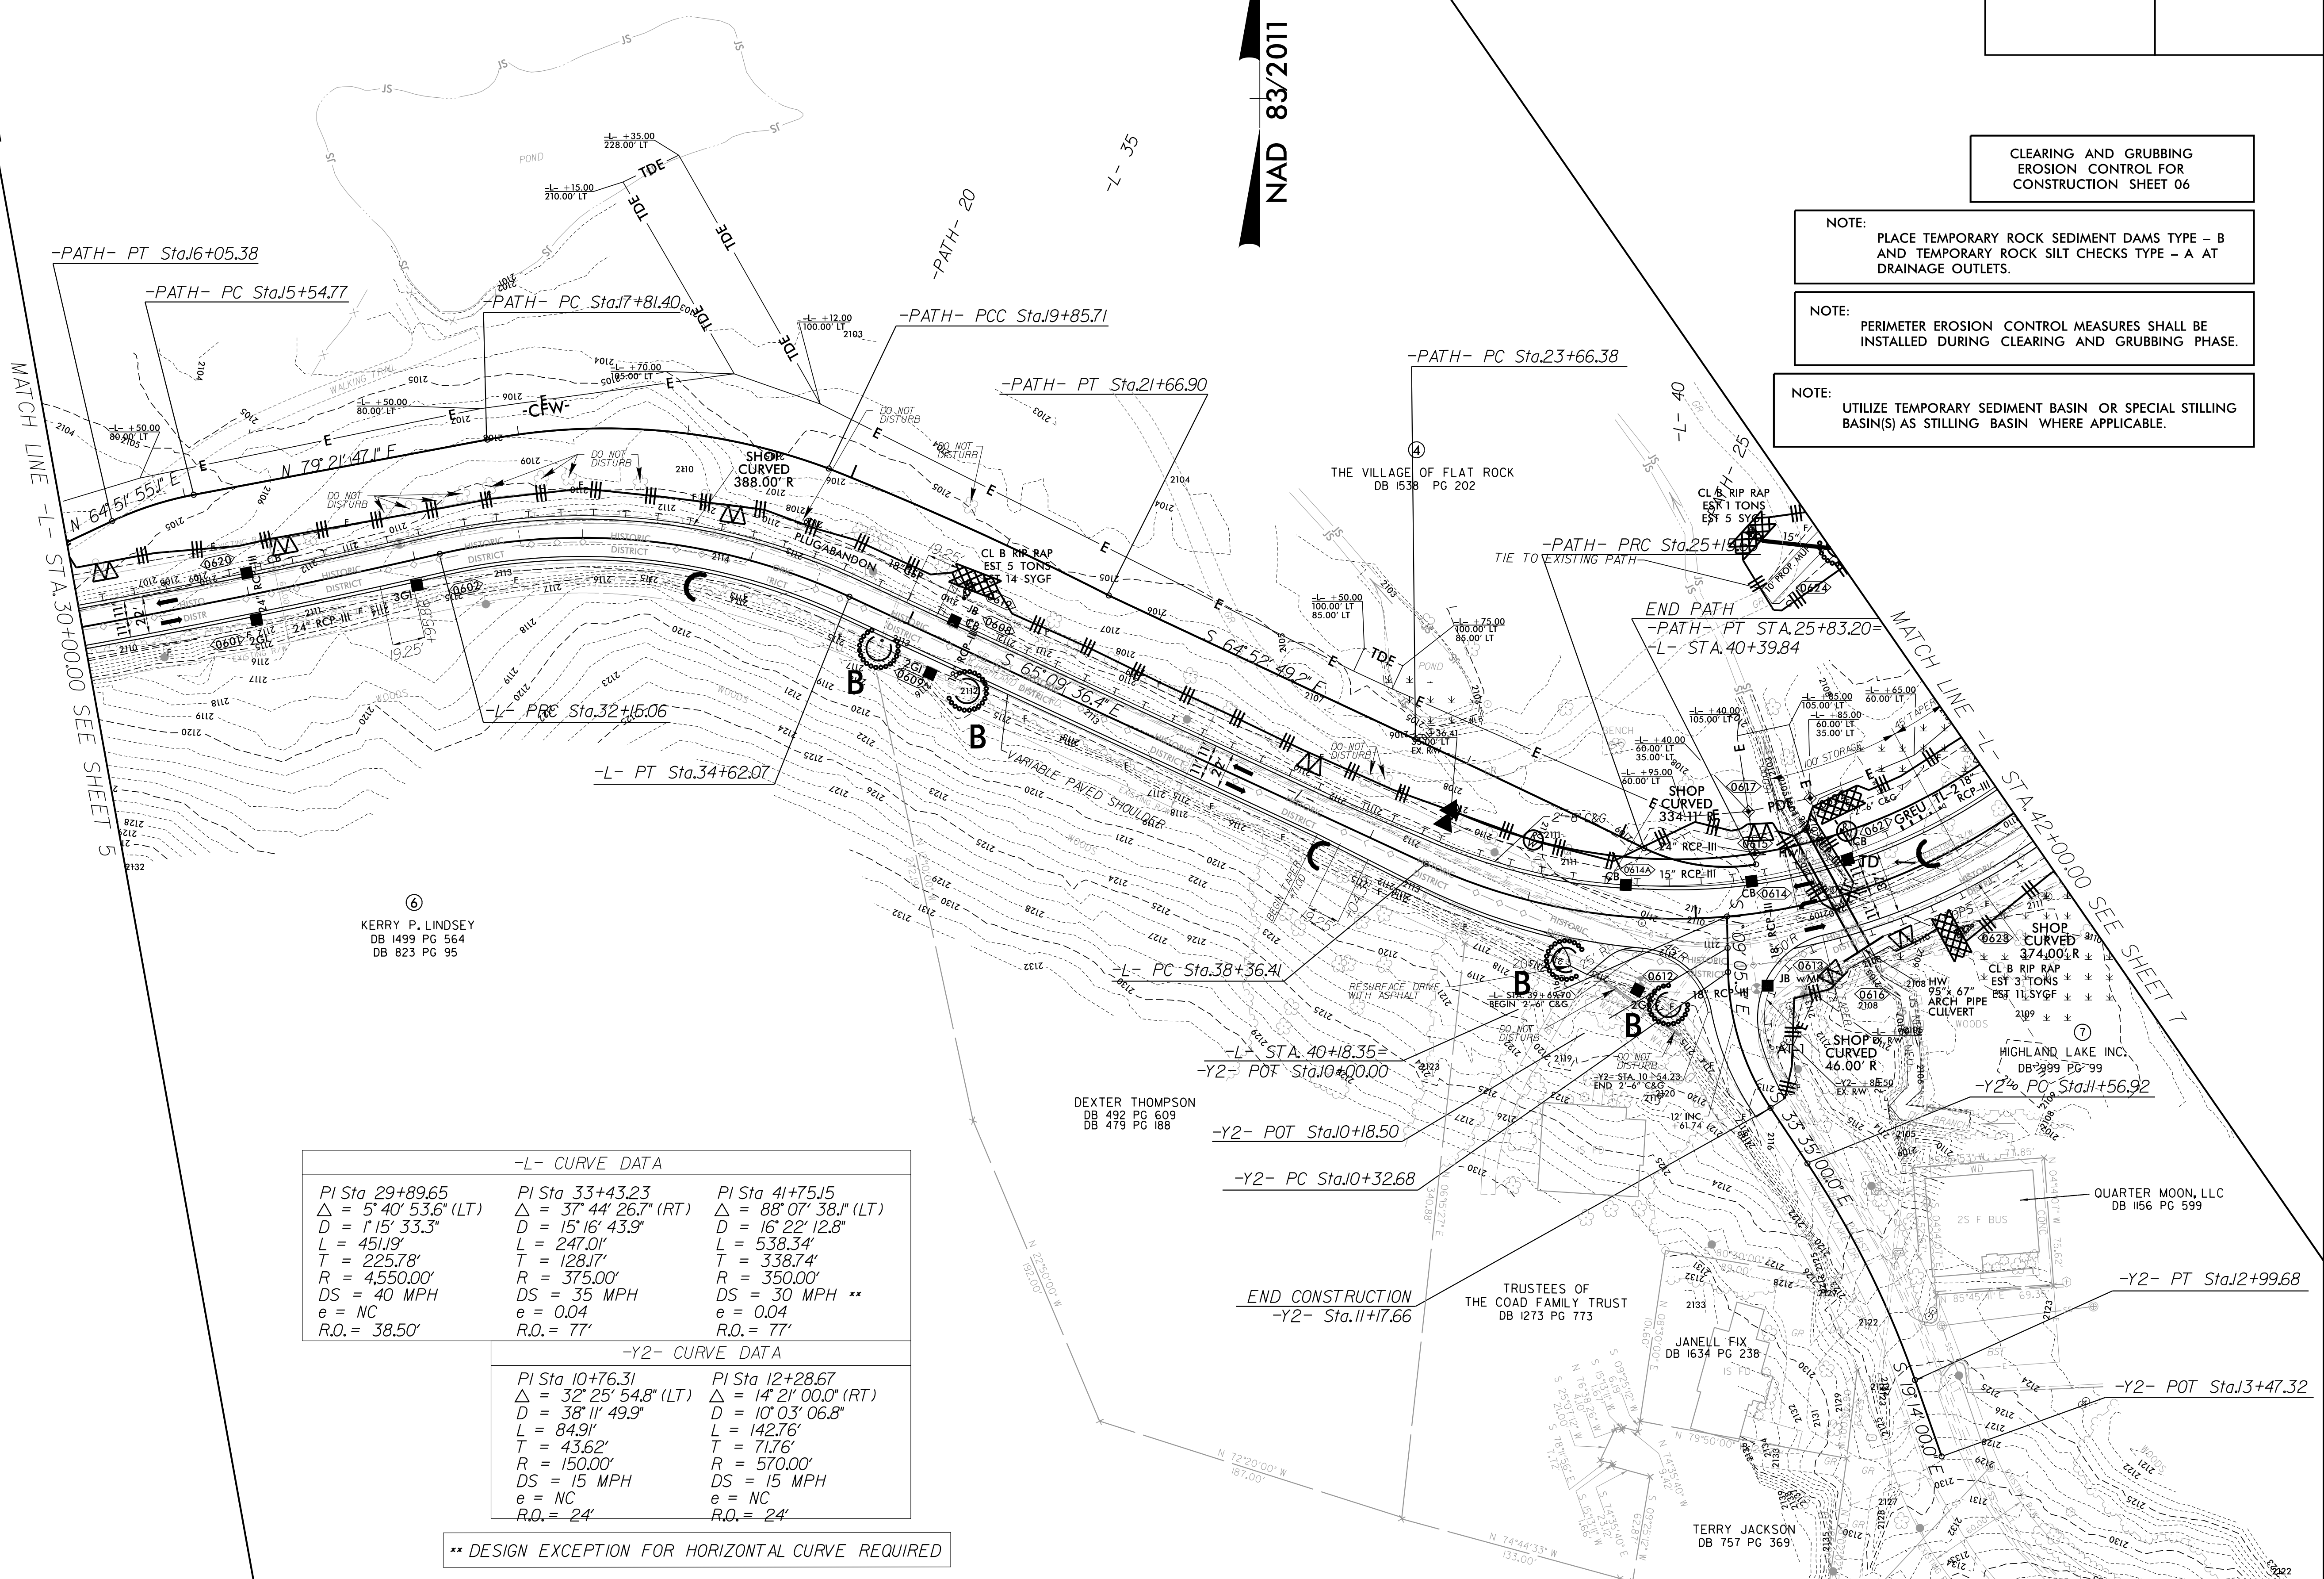

-L- CURVE DATA		
PI Sta 29+89.65 Δ = 5° 40' 53.6" (LT) D = 1° 15' 33.3" L = 451.19' T = 225.78' R = 4,550.00' e = NC R.O. = 38.50'	PI Sta 33+43.23 Δ = 37° 44' 26.7" (RT) D = 15° 16' 43.9" L = 247.01' R = 375.00' DS = 35 MPH e = 0.04 R.O. = 77'	PI Sta 41+75.15 Δ = 88° 07' 38.1" (LT) D = 16° 22' 12.8" L = 538.34' T = 338.74' R = 350.00' DS = 30 MPH ** e = 0.04 R.O. = 77'

-Y2- CURVE DATA	
PI Sta 10+76.31 Δ = 32° 25' 54.8" (LT) D = 38° 11' 49.9" L = 84.91' T = 43.62' R = 150.00' DS = 15 MPH e = NC R.O. = 24'	PI Sta 12+28.67 Δ = 14° 21' 00.0" (RT) D = 10° 03' 06.8" L = 142.76' T = 71.76' R = 570.00' DS = 15 MPH e = NC R.O. = 24'

** DESIGN EXCEPTION FOR HORIZONTAL CURVE REQUIRED

3/11/2023 15:09:31 \\A\5887_Env_EC6.dgn