

-PATH- CURVE DATA				
PI Sta 15+80.21 Δ = 14° 29' 52.0" (RT) D = 28° 38' 52.4" L = 50.61' T = 25.44' R = 200.00'	PI Sta 18+86.15 Δ = 31° 10' 20.1" (RT) D = 15° 15' 24.5" L = 204.32' T = 104.76' R = 375.54'	PI Sta 20+76.38 Δ = 5° 27' 37.7" (RT) D = 3° 00' 49.4" L = 181.19' T = 90.66' R = 1,901.16'	PI Sta 24+40.99 Δ = 0° 39' 37.4" (RT) D = 0° 26' 33.2" L = 149.22' T = 74.61' R = 12,946.48'	PI Sta 25+50.50 Δ = 35° 04' 14.3" (LT) D = 51° 52' 40.9" L = 67.60' T = 34.90' R = 110.44'


NOTE:  
INSTALL FABRIC INSERT INLET PROTECTION DEVICE IN LIEU OF ROCK INLET SEDIMENT TRAP TYPE 'C' AS DIRECTED.

FINAL GRADE  
EROSION CONTROL FOR  
CONSTRUCTION SHEET 06

Place Matting for Erosion Control  
on Slopes as Work Allows.

Place Matting for Erosion Control  
on Slopes Adjacent to Permitted  
Wetlands as Work Allows.

INSTALL MATTING FOR  
EROSION CONTROL IN THE  
PROPOSED DITCH LINE.

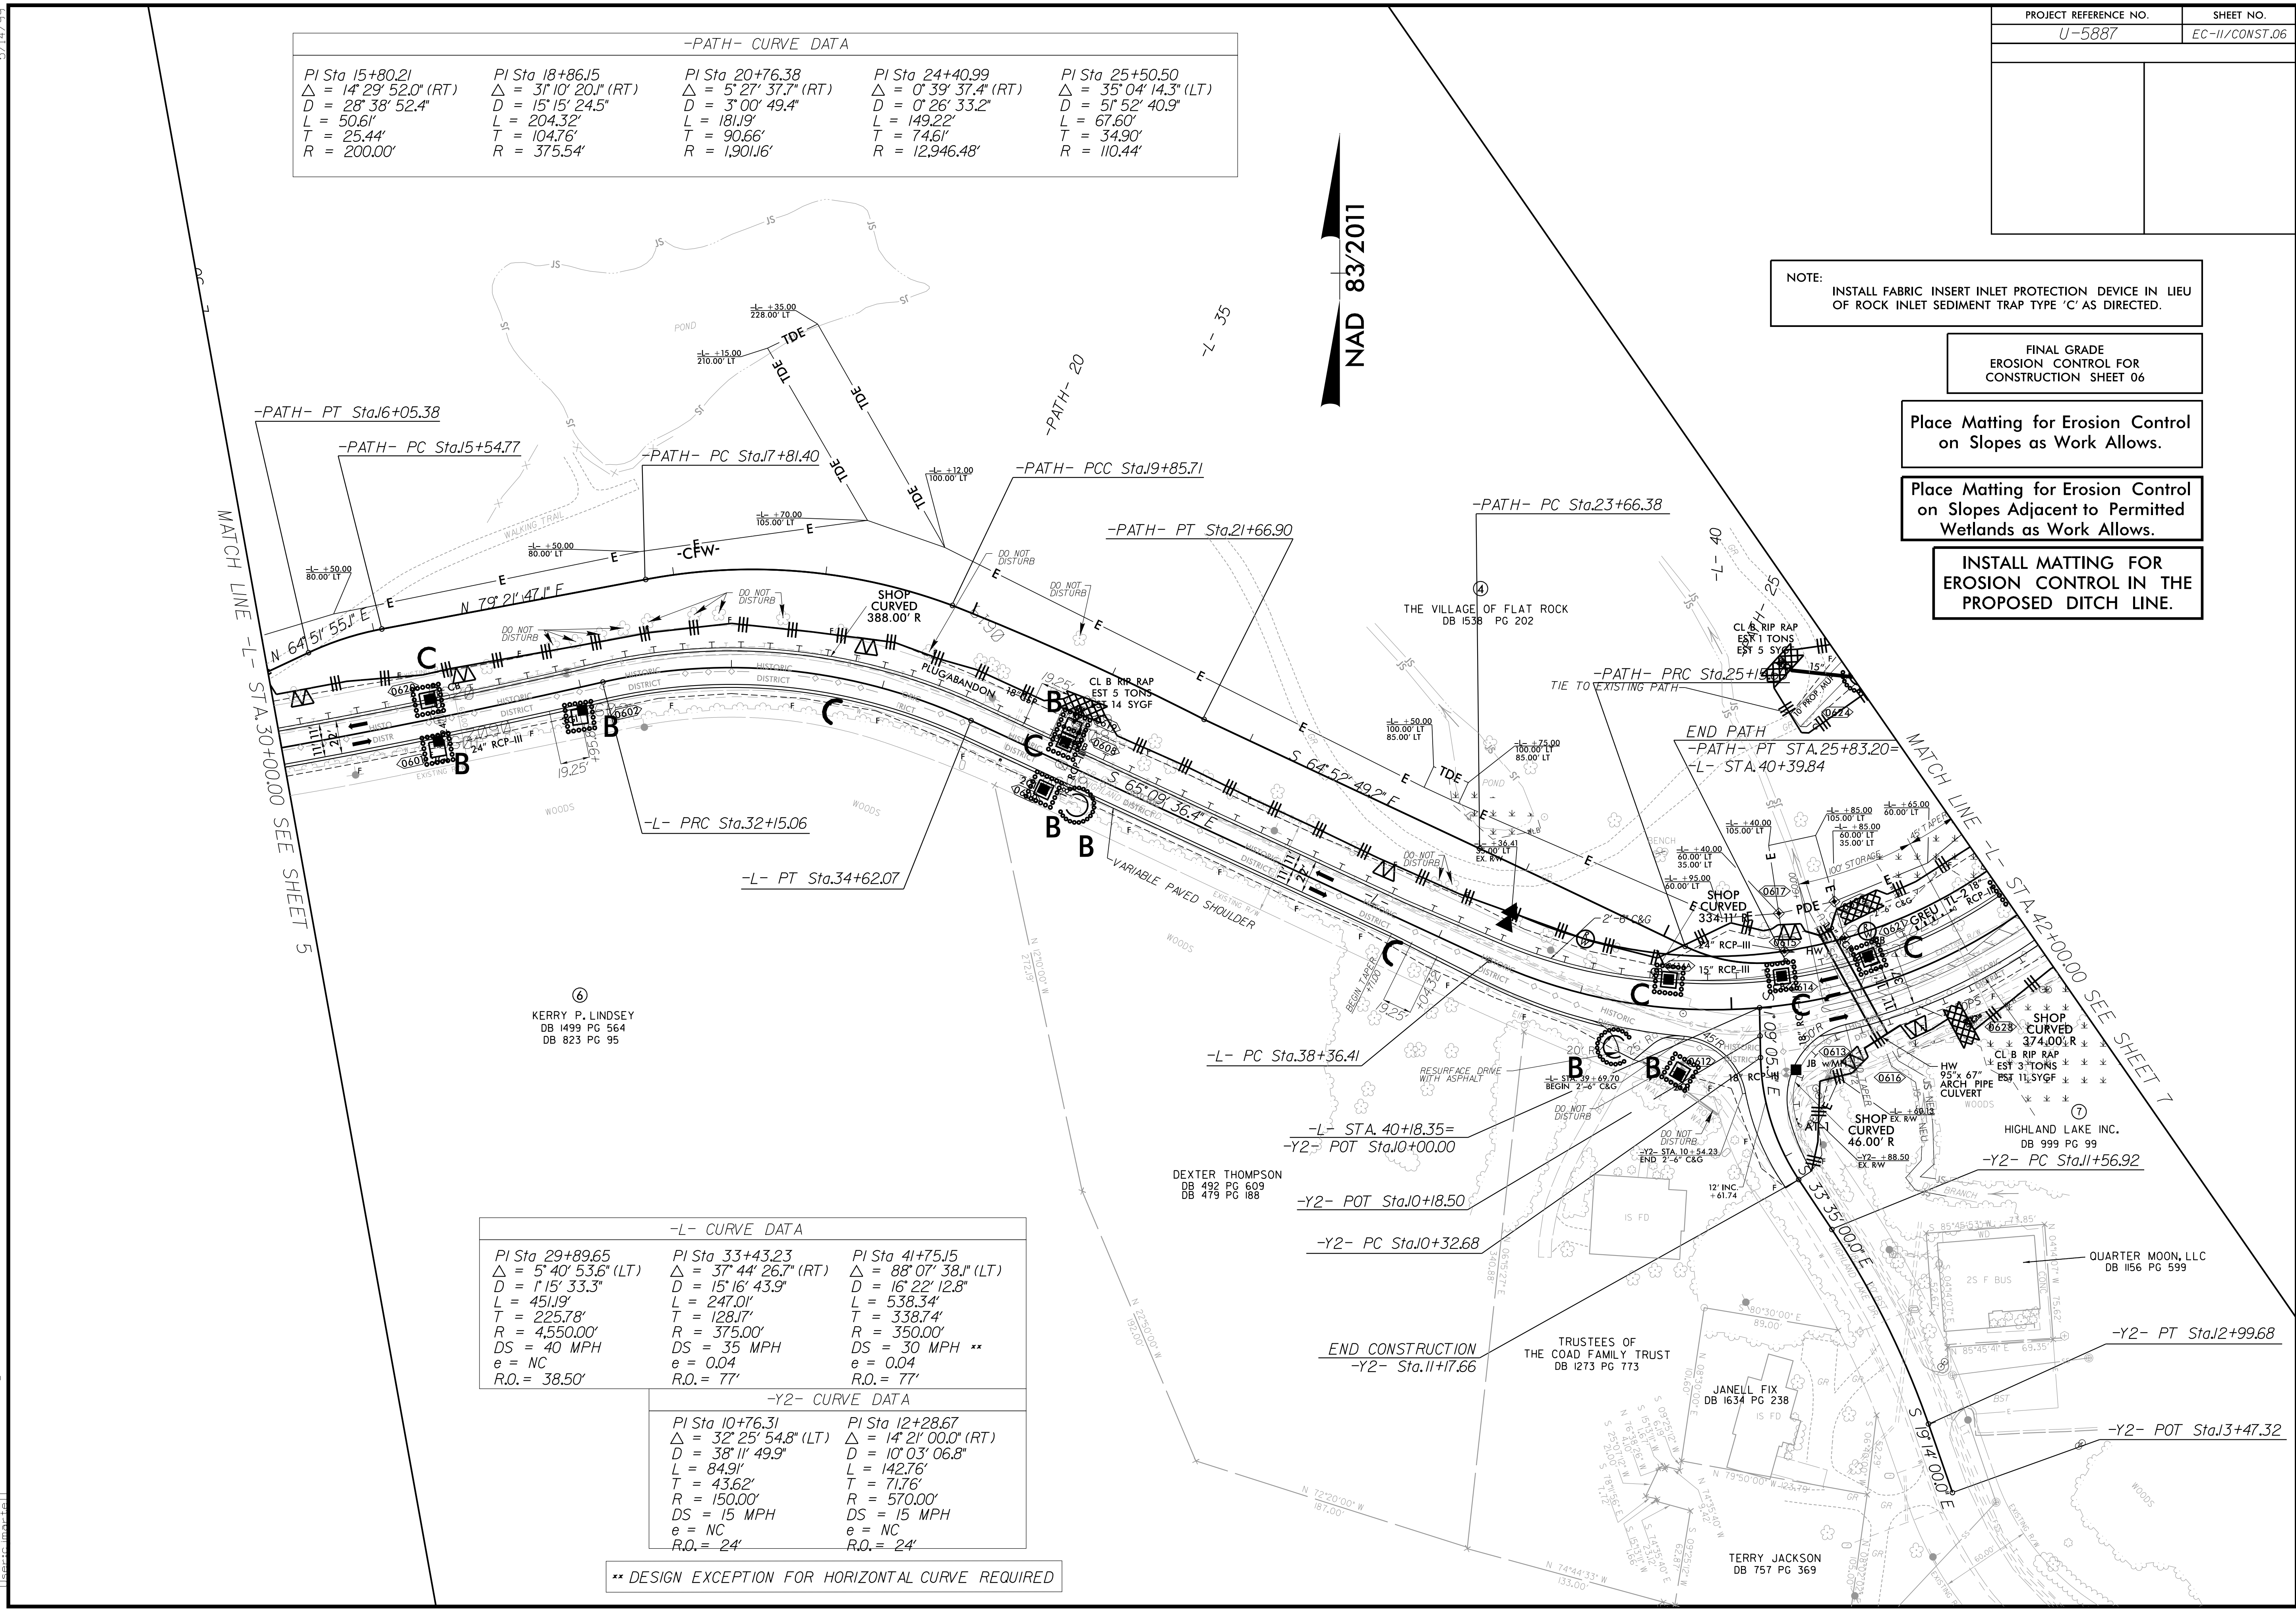

-L- CURVE DATA		
PI Sta 29+89.65 Δ = 5° 40' 53.6" (LT) D = 1° 15' 33.3" L = 451.19' T = 225.78' R = 4,550.00' e = NC R.O. = 38.50'	PI Sta 33+43.23 Δ = 37° 44' 26.7" (RT) D = 15° 16' 43.9" L = 247.01' T = 128.17' R = 375.00' DS = 35 MPH e = 0.04 R.O. = 77'	PI Sta 41+75.15 Δ = 88° 07' 38.1" (LT) D = 16° 22' 12.8" L = 538.34' T = 338.74' R = 350.00' DS = 30 MPH ** e = 0.04 R.O. = 77'

-Y2- CURVE DATA	
PI Sta 10+76.31 Δ = 32° 25' 54.8" (LT) D = 38° 11' 49.9" L = 84.91' T = 43.62' R = 150.00' DS = 15 MPH e = NC R.O. = 24'	PI Sta 12+28.67 Δ = 14° 21' 00.0" (RT) D = 10° 03' 06.8" L = 142.76' T = 71.76' R = 570.00' DS = 15 MPH e = NC R.O. = 24'

\*\* DESIGN EXCEPTION FOR HORIZONTAL CURVE REQUIRED

5/18/2020 8:46:29 AM U-5887\_Env\_EC11.dgn