



### PAVEMENT TIE-IN DETAIL

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5 " ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.0 " ASPHALT CONC. SURFACE COURSE, TYPE S4.75A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
F1	PROPOSED LATEX MODIFIED MICROSUFACING, TYPE III, AT A RATE OF 22 TO 26 LBS. PER SQ. YD.
EM	EXISTING MILLED RUMBLE STRIPS
U	EXISTING PAVEMENT

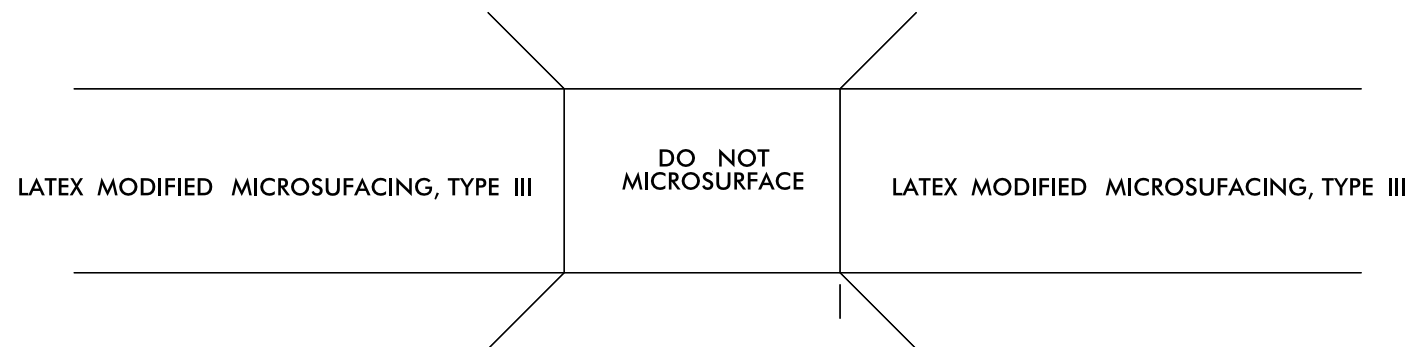

### BRIDGE DRAWING FOR MAP NO 1,2 US HWY 74 EBL/WBL (BRIDGE NO 97,98)

\* TIE IN LATEX MODIFIED MICROSUFACING, TYPE III TO THE BRIDGE.

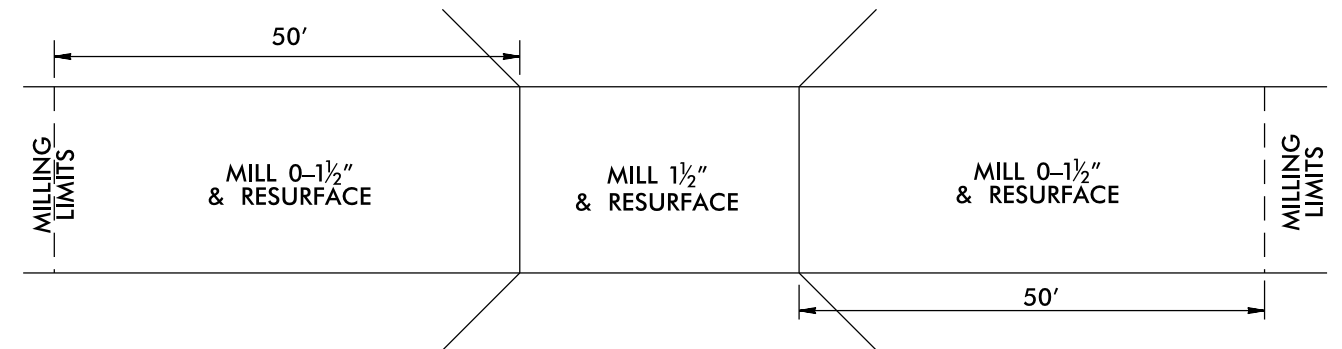

### BRIDGE DRAWING FOR MAP NO 5 DAVIS BRIDGE RD (BRIDGE NO 47)

\* MILLING SHALL BE PAID FOR UNDER INCIDENTAL MILLING