


DocuSign Envelope ID: 5827B963-9A58-4E78-AA5A-0259BDCA65F0

	PAVEMENT SCHEDULE (FINAL PAVEMENT DESIGN)	
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	
С3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	ORIGINAL GROUND
C4	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1½" IN DEPTH OR GREATER THAN 2" IN DEPTH.	ORIGINAL ~ - GROUND ~ -
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN $2\frac{1}{2}$ " IN DEPTH OR GREATER THAN 4" IN DEPTH.	
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	
J1	2½" AGGREGATE BASE COURSE.	
J2	8" AGGREGATE BASE COURSE.	
J3	VARIABLE DEPTH AGGREGATE BASE COURSE.	
Р	PRIME COAT.	
R1	SHOULDER BERM GUTTER.	
т	EARTH MATERIAL.	ORIGINAL GROUND
U	EXISTING PAVEMENT.	ORIGINAL ~ - GROUND ~ -
V1	INCIDENTAL MILLING (SEE INCIDENTAL MILLING DETAIL SHEET 2A-3).	
V2	MILLING, O" - 3" (SEE MILLING DETAIL SHEET 2A-3).	
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAIL SHEET 2A-3).	
Y	PERMEABLE PAVER GRID SYSTEM.	
NOTE:	ALL PAVEMENT SLOPES AND TRENCH SLOPES 1:1 UNLESS NOTED	OTHERWISE
	10' 6' 12'	8′



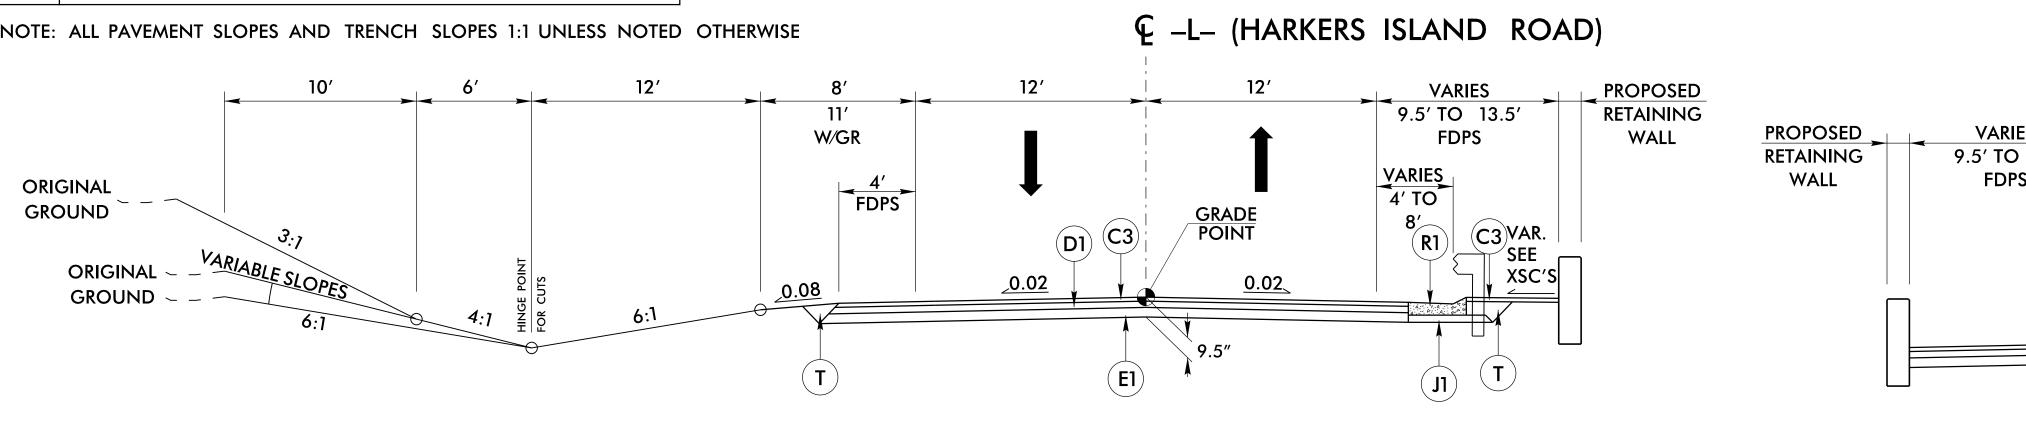

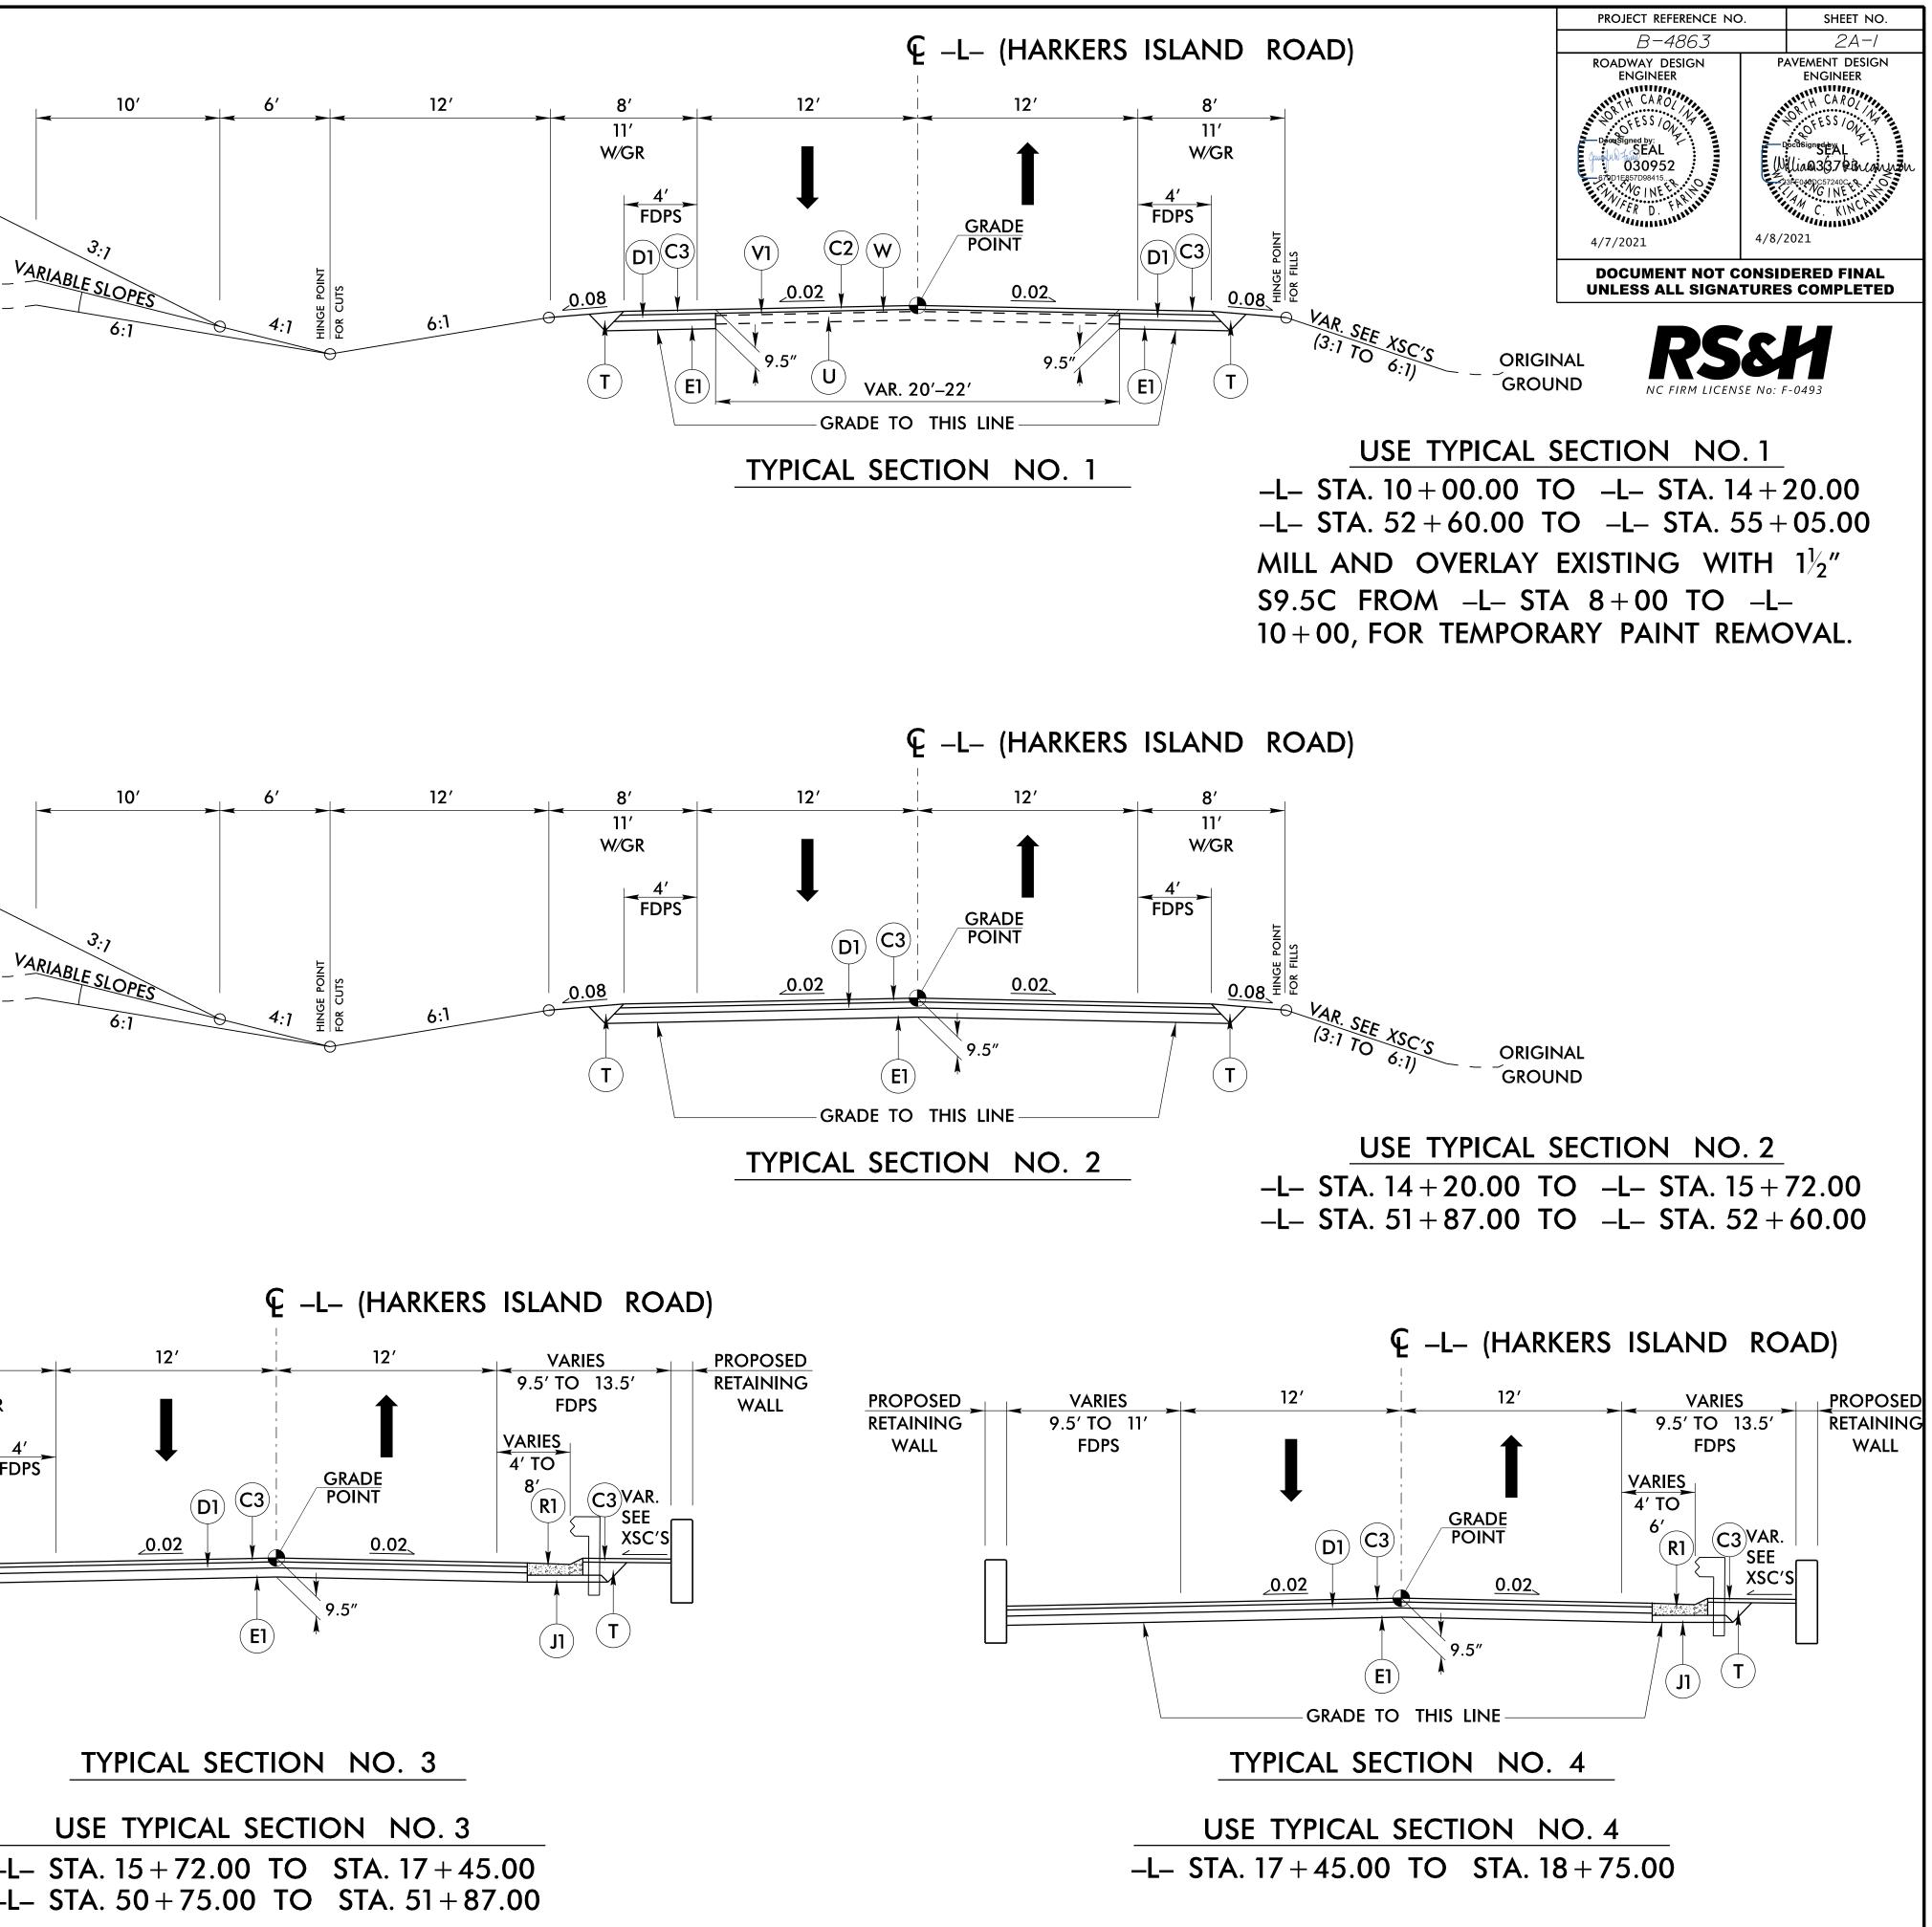

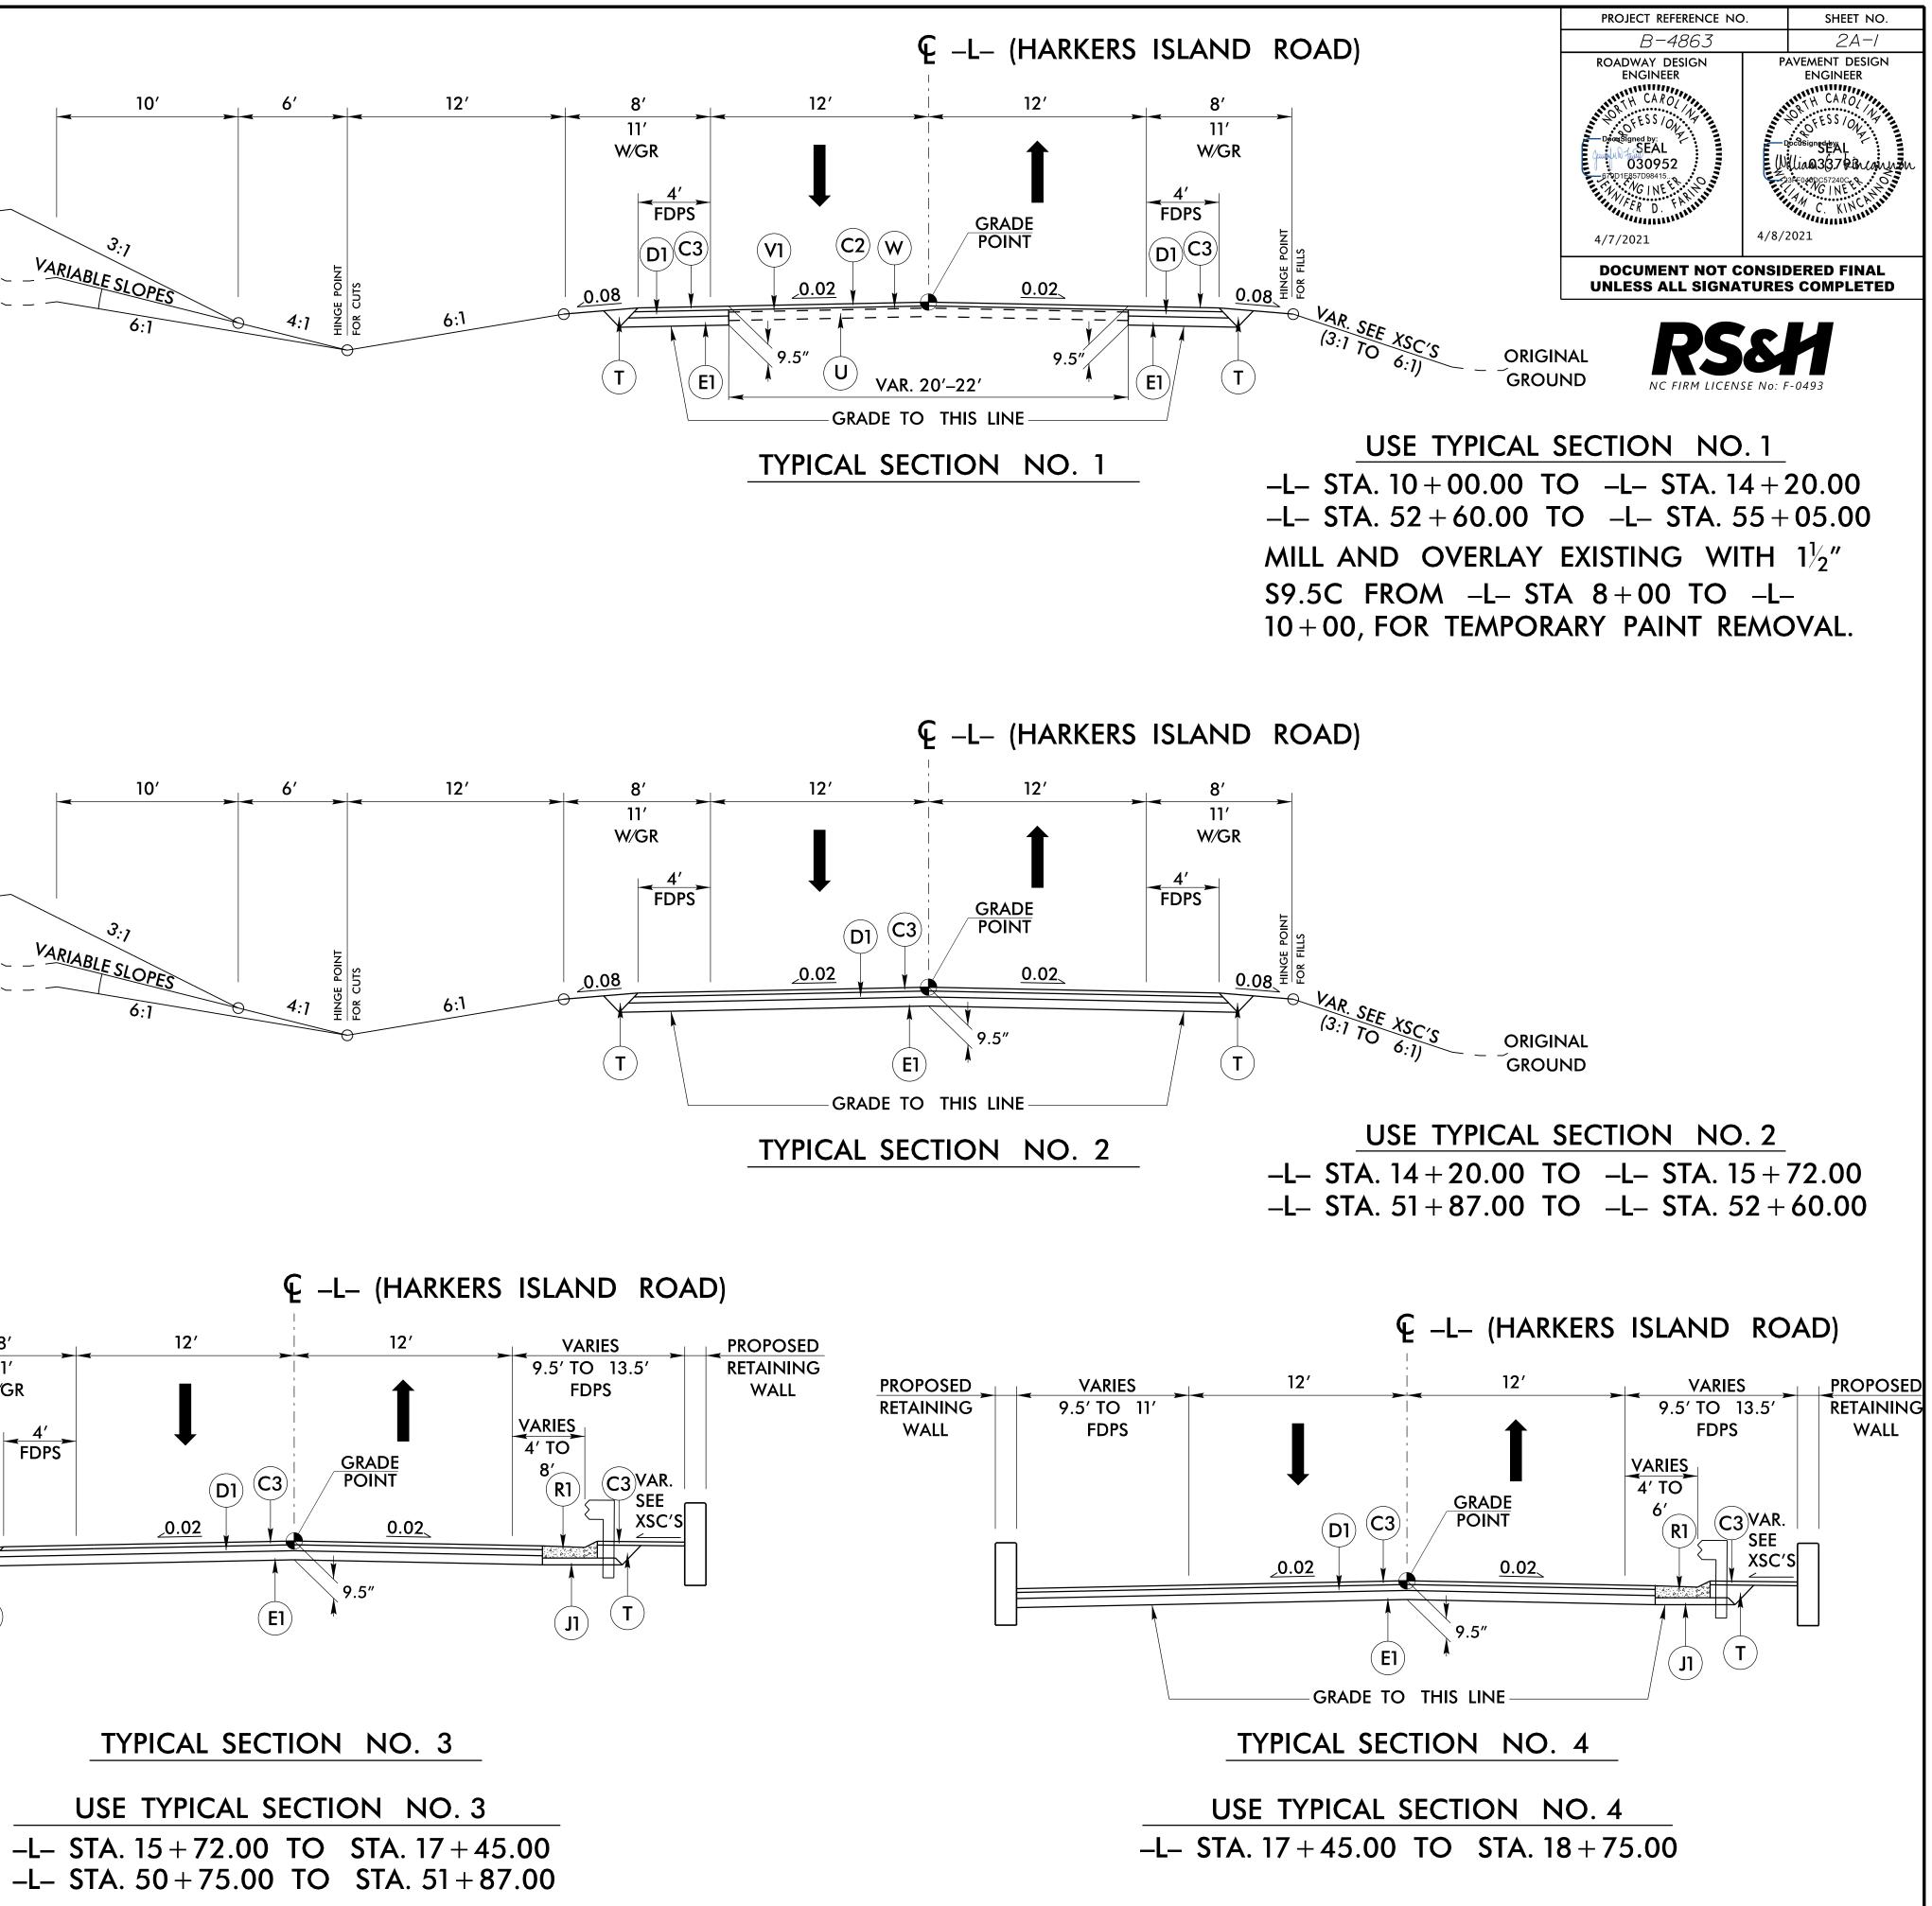

USE TYPICAL SECTION NO. 3			
-L- STA. 15 + 72.00 TO S	TA. 17 + 45.00		
-L- STA. 50+75.00 TO S	TA. 51+87.00		