

## **PROJE**

		I <b>-</b> 5878	UC-3A
		DESIGNED BY: DMP	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
ECT		DRAWN BY: DMP	TH CARO
	TVDTOAL DETAILO	CHECKED BY: DMP	Docuginned by: 0
	TYPICAL DETAILS	APPROVED BY:	Kandy Manille =
		REVISED:	
		NORTH CAROLINA DEPARTMENT OF TRANSPORTATION	MCWGINEER MCWGING MCWG
		UTILITIES ENGINEERING SEC PHONE: (919)707-6690 FAX: (919)250-4151	


BEAR	ING ARE	(HORIZONTAL) A OF THRUS	BLOC	KS IN S	SQ. FT.	VOLUME	OF YDS.	THR (VERTIC	UST (	BLOCK
FITTING	TEE	90° BEND	45*	22 1/2*	11 1/4°	FITTING	BEND ANGLE			
SIZE			BEND	BEND	BEND	SIZE	45*	22.5*	11,25*	
4	1.3	1.8	1,0	1.0	1.0	4	1,1	0.4	0.2	
6	2.8	4.0	2.2	1,1	1,0	6	2.7	1,0	0.4	]
8	5.0	7,1	3.8	2.0	1.0	8	4.0	1,5	0.6	
12	11,3	16.0	8.7	4,4	2.2	12	8.5	3.2	1.3	]
16	20.1	28.4	15,4	7.8	3.9	16	14,8	5.6	2.3	]
20	31,1	44,4	24.0	12.3	6.2					-
24	45.2	64.0	34.6	17,7	8.9					

## VALUES BASED ON 200 PSI WATER PRESSURE AND 2000 PSF SOIL BEARING CAPACITY.






TEE



VERTICAL BEND

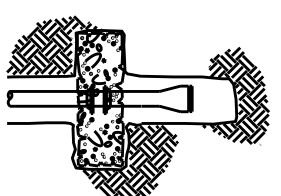


STRADDLE BLOCK


SEE DETAIL No. 200




- 1) CONCRETE BLOCKING TO BE POURED AGAINST UNDISTURBED EARTH
- 2) ALL CONCRETE TO BE CLASS 3000
- 3) INSTALL 12 MIL TOTAL THICKNESS POLYETHENE SHEET AROUND FITTING. SECURE SHEET ENDS TO PREVENT INFILTRATION OF DIRT BETWEEN SHEET AND PIPE FITTING PRIOR TO POURING THRUST BLOCKING
- 4) PROTECT MECHANICAL JOINT FOLLOWERS AND BOLTS FROM CONCRETE WITH TEMPOARY FORMS AND POLYETHENE SHEETING SEE NOTE No. 3

## THRUST BLOCKING DETAILS

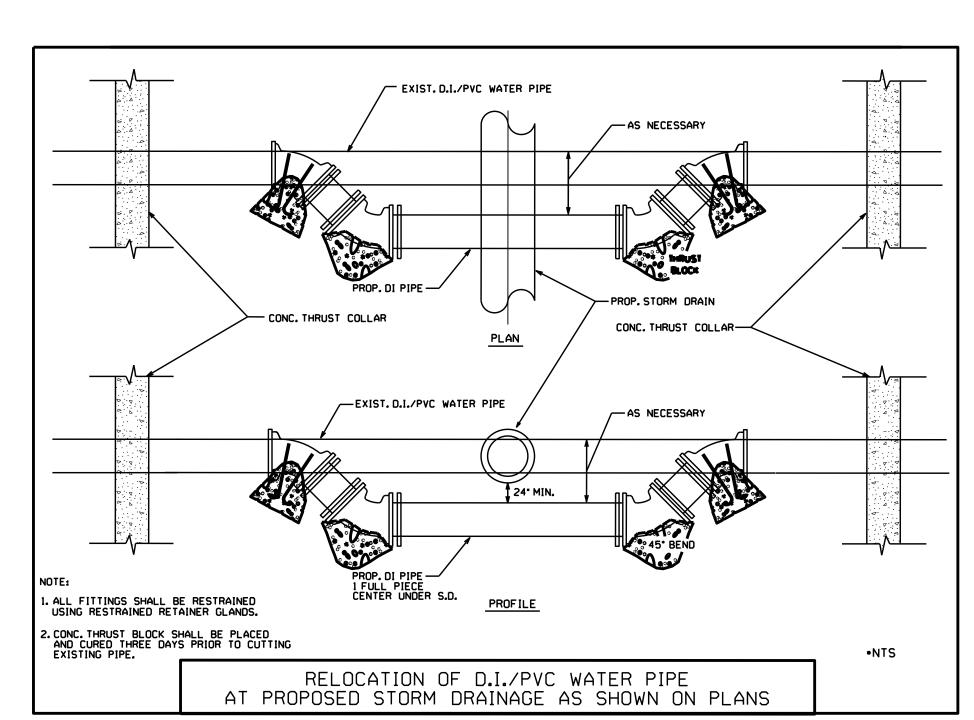

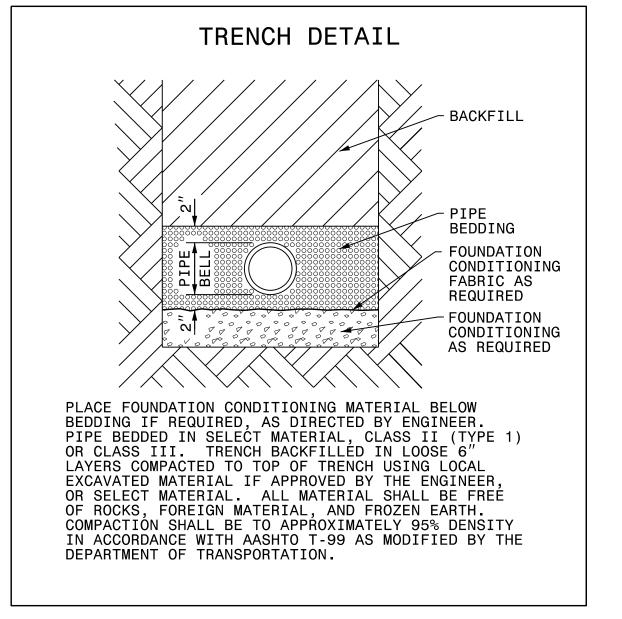


MAXIMUM TRENCH WIDTH AT TOP OF PIPE						
NOMINAL PIPE SIZE (INCHES)	TRENCH WIDTH (INCHES)	NOMINAL PIPE SIZE (INCHES)	TRENCH WIDTH (INCHES)			
4	28	20	44			
6	30	24	48			
8	32	30	54			
10	34	36	60			
12	36	42	66			
14	38	48	72 70			
16	40	54	78			
18	42					

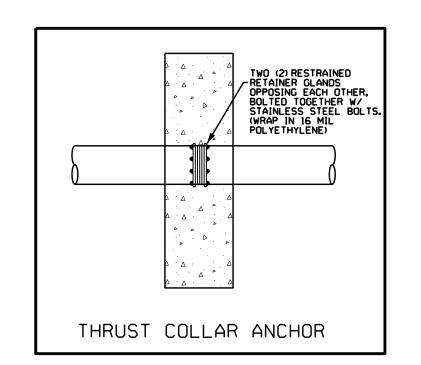



PROJECT REFERENCE NO. SHEET NO.

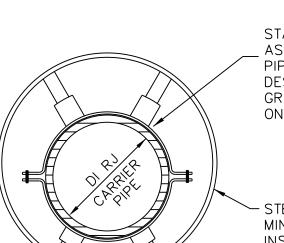

STAINLESS STEEL SPIDER ASSEMBLY TWO PER LENGTH OF PIPE MINIMUM ADEQUATELY DESIGNED TO MAINTAIN PROPER GRADE & ALIGNMENT INDICATED ON PLANS

STEEL ENCASEMENT PIPE (DIAMETER, MINIMUM WALL THICKNESS, AND INSTALLATION METHOD NOTED ON PLANS FOR EACH ENCASEMENT)

NOTES:

1. ENCLOSE ENDS WITH BRICK MASONRY.

CLASS III, IV, OR V SELECT MATERIALS.

2. PROVIDE 1" WEEP HOLE AT LOW END OF ENCASEMENT. 3. DO NOT FILL ENCASEMENTS SMALLER THAN 24". FOR ENCASEMENTS 24" AND LARGER, FILL ONLY WITH

TYPICAL ENCASEMENT PIPE SECTION

N.T.S.

DAVIS • MARTIN • POWELL

SIIR V E Y O R S 6415 OLD PLANK RD, HIGH POINT, NC 27265 PHONE: (336)886-4821 FAX: (336)886-4458

WWW.DMP-INC.COM LICENSE: F-0245